

50Hz



GENERAL CATALOGUE


www.pentax-pumps.it

**Where there's water
there's Pentax**



PENTAX s.p.a.


Viale dell'Industria, 1
37040 Veronella (VR) - Italia
Tel. +39 0442 489500
Fax +39 0442 489510
com@pentax-pumps.it
www.pentax-pumps.it





HISTORY

For many years **Pentax** has held a large share of the world market for motorized pumps. The sales department is constantly working to better serve existing customers and to open up new markets. This is possible thanks to the wide range of products available which allows to cover most of the applications in the pump field. Special attention is also paid to market surveys, so that any new requirements can be immediately transferred to the research and development department: the best way to properly develop and forecast future scenarios.

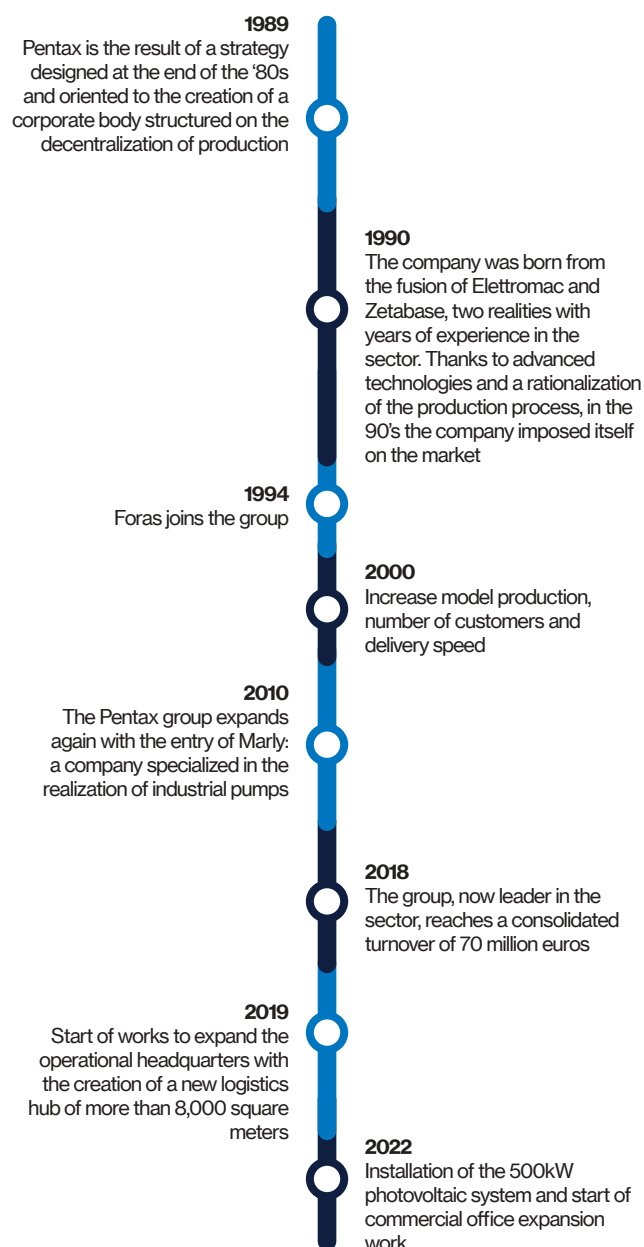

MISSION

After more than **20 years of activity** we can finally trace the guidelines that have governed and directed the industrial development of **Pentax Industries SpA**. Actions and processes that have intersected with the obvious aim of creating value, benefits to be redistributed to the various components of the production and distribution process.

A rational allocation of available resources, together with a refined program of production decentralization have allowed the company to adapt to changing market conditions, each time with extreme rapidity.

Maximum attention to the markets, therefore, with the commitment to respond in real time to the specific needs of the different markets, paying particular attention to technological progress. All this in the perspective of a careful policy for **customer satisfaction**.



“Creating value is our main goal”

Gianluigi Pedrollo, Chair man

VALUES



Reliability

Choosing Pentax means choosing safety at every stage

Quality

Where there is control, there is reliability: the basis for success

Speed

Impeccable delivery time

Flexibility

Pentax studies each case thoroughly, identifies the best solution and then takes action with security

Variety

The best service: a wide range of Pentax products, one for every need



OFFICIAL JOURNAL OF THE EUROPEAN UNION

Regulation UE 547/2012

ANNEX II

«The benchmark for most efficient water pumps is $MEI \geq 0,70$ ».

«The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter».

«The operation of this water pump with variable duty points may be more efficient and economic when controlled, for example, by the use of a variable speed drive that matches the pump duty to the system».

Information on benchmark efficiency is available at:

www.europump.org/efficiencycharts.









INDEX

PERIPHERALS

17

PM

20

CP

22

MD

24

SELF-PRIMING

27

CAM

30

INOX

35

ULTRA A

38

ULTRA SA

40

AP

42

CAB

44





MP/A 47



MPX 49

THREADED CENTRIFUGAL 53



CM 56



MB 61



CB 64



CR 69



CS 72



CH 80

CENTRIFUGAL FLANGED 85



CM 94



CMG-CMGX 95



CA-CAX - 4CA-4CAX

96



CMS

136

MULTISTAGE HORIZONTAL 143



ULTRA

146



ULTRA S

151

MULTISTAGE VERTICAL 159



ULTRA V/L

162



ULTRA LG

163

ULTRA SV/SL/SLX

171

ULTRA SLG/SLXG

178



ULTRA HX

183

ULTRA HS/HX

189

IE3-IE4 MOTORS

207



80-132

208



160-355

209

BOOSTER SETS

215



AQUADOMUS

216



SUPERDOMUS

218



SUPERDOMUS+VSD

219



SELF-PRIMING

220



THREADED CENTRIFUGAL

223



CENTRIFUGAL FLANGED

226



MULTISTAGE

229



MULTISTAGE + VSD

230

DRAINAGE AND SEWAGE 239



DP/DPV 242

DPM 245

DH 247

DC 249

DB 255

DM 257

DM4 262

DTR 101 266

DTR/DTRT 268

DG 273

	DX	276
<hr/>		
	DV	278
<hr/>		
	DV4	282
<hr/>		
	DEEPWELL BOREHOLE	287
<hr/>		
	5PES	292
<hr/>		
	4E	294
<hr/>		
	6E	305
<hr/>		
	6-8-10LMG lines	314
<hr/>		
	6LR & 6LM lines	344
<hr/>		
	8LR & 8LM lines	377
<hr/>		
	10-12LM & E14 lines	414
<hr/>		

DEEPWELL BOREHOLE MOTORS 447



4MPE/6MPE 449



4MPC/6MPC 452



6R/8R/10R 456



PTR12/PTR14 462

SWIMMING POOL 465



POOL1 466



POOL1 EASY 468



POOL2 470










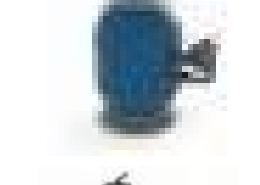


POOL2 EASY 472



POOL2-I 474



POOL2-IM 476

	POOL3	478
	POOL4	480
	V-POOL4	482
	POOL4-I	484
	POOL4-IM	486
	POOL5	488
	POOL6	490
	DOMESTIC FILTER	492
	FILTRATION KIT	492
INDUSTRIAL LINE		493
	MSV-4MSV	495

	MSH-4MSH	503
<hr/>		
	HP SERIES	511
<hr/>		
	PSC	514
<hr/>		
	VP SERIES	517
<hr/>		
ACCESSORIES		521
<hr/>		
	ELECTRONIC FLOW CONTROL	522
<hr/>		
	VARIABLE SPEED DRIVE	523
<hr/>		
	PROTECTION/CONTROL PANEL	527
<hr/>		
	TANKS	532
<hr/>		
	MEMBRANES	532
<hr/>		
	PRESSURE SWITCHES	533
<hr/>		



PRESSURE GAUGES 533



FLEXIBLE HOSES 533



CONNECTORS 534



VALVES 534



FLOAT SWITCHES 534




CABLES JOINTS 535



LEVEL PROBES 535


GENERAL SALES CONDITIONS 537



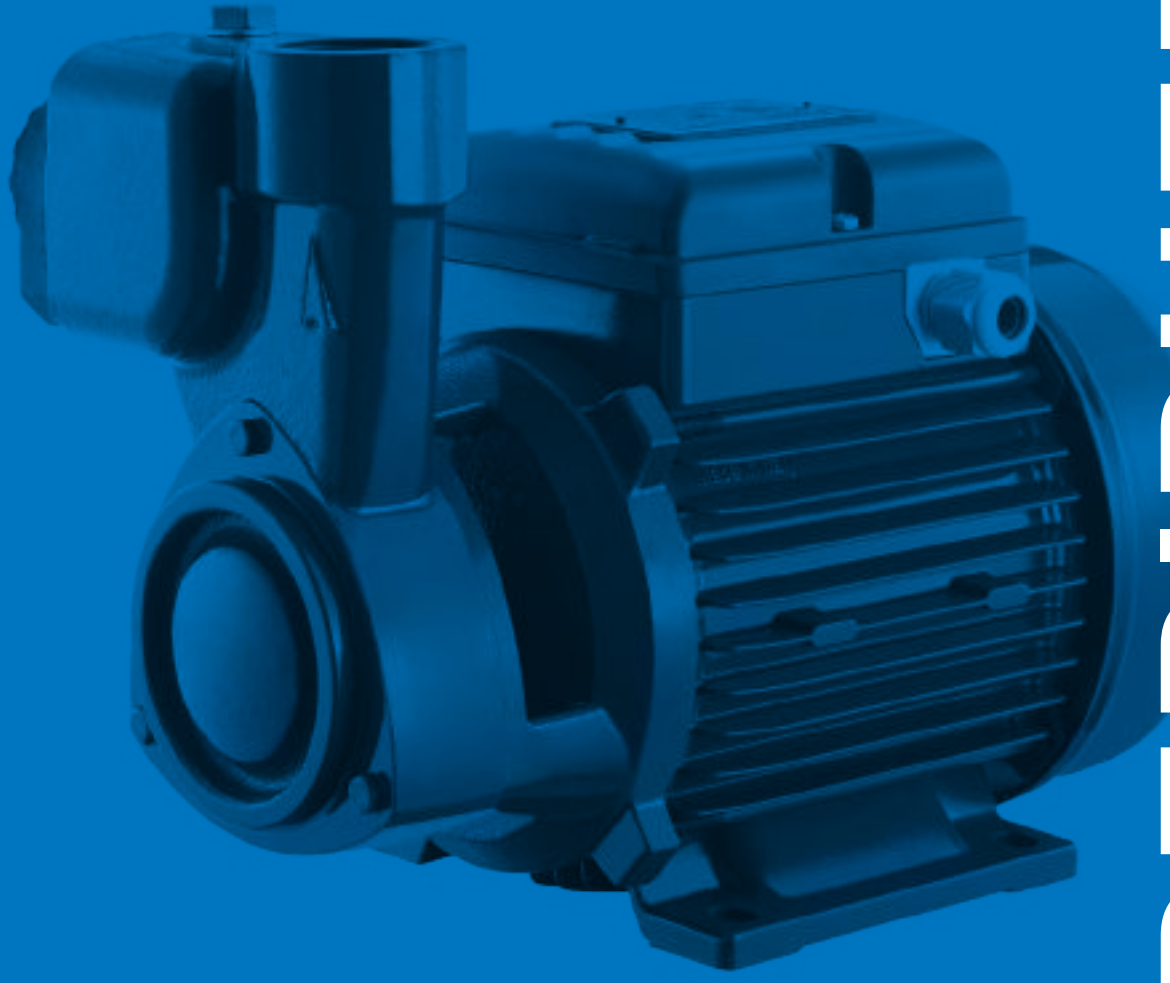

PERIPHERALS

PERIPHERAL PUMPS

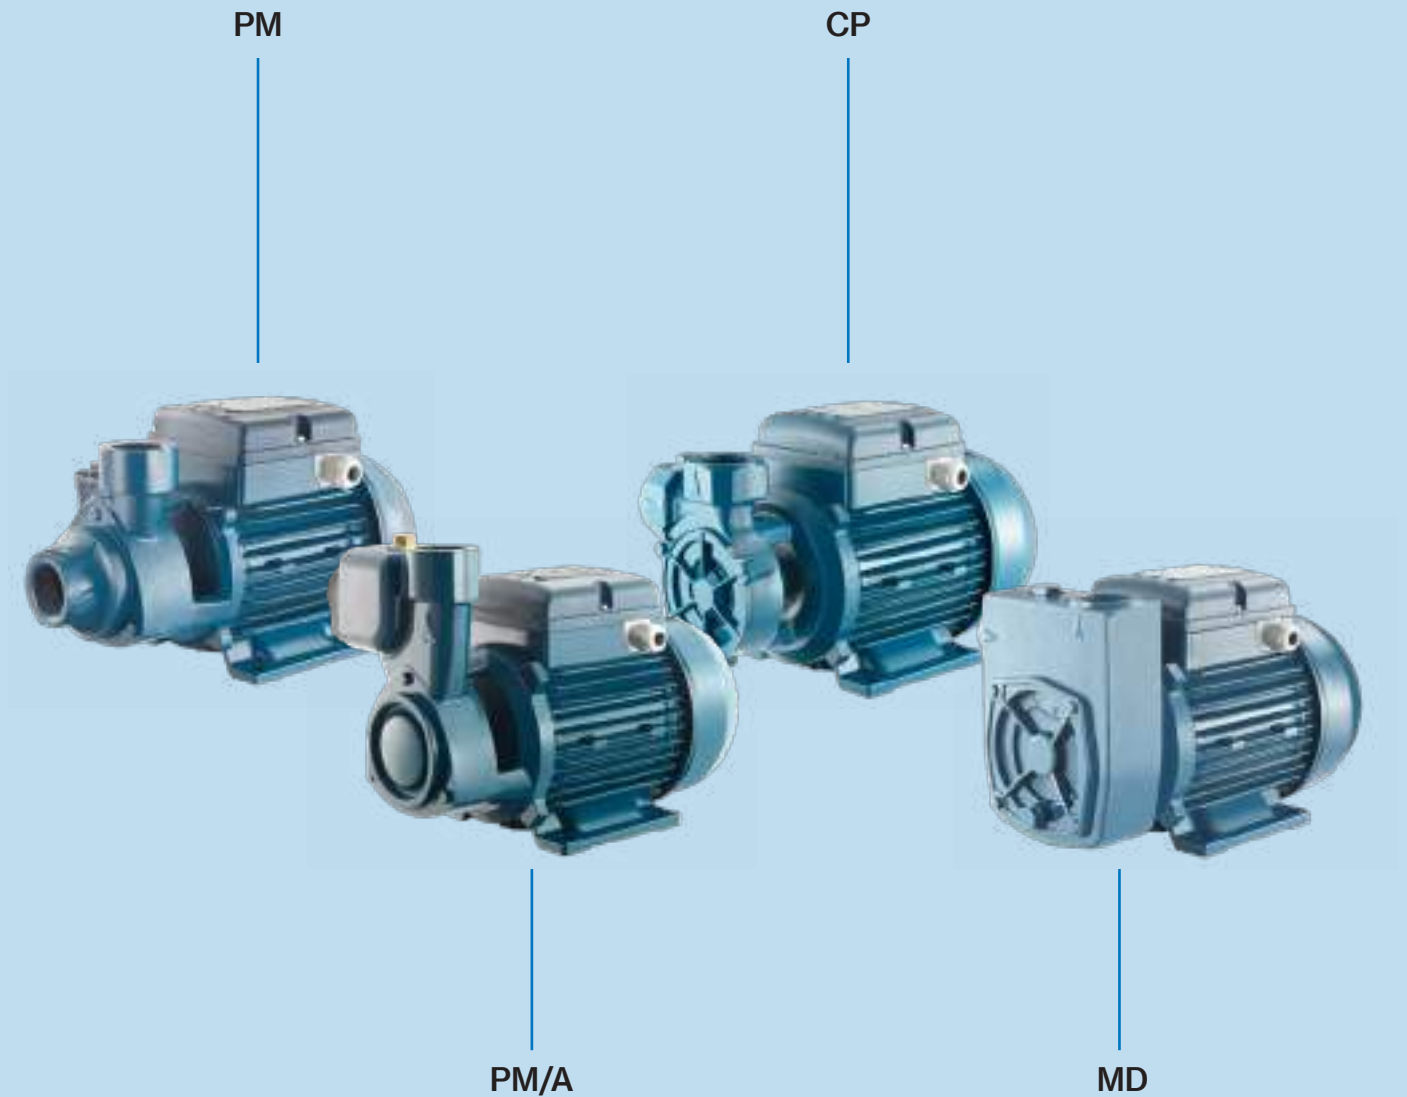


Range of peripheral and liquid ring type positive displacement pumps; they are characterized by the high ratio between the performances offered and the power required.

Applications:

- Small domestic installations
- Boiler feeding
- For washing
- Pressurization of industrial plants
- Small autoclaves
- Transfer of liquids

PERIPHERAL PUMPS

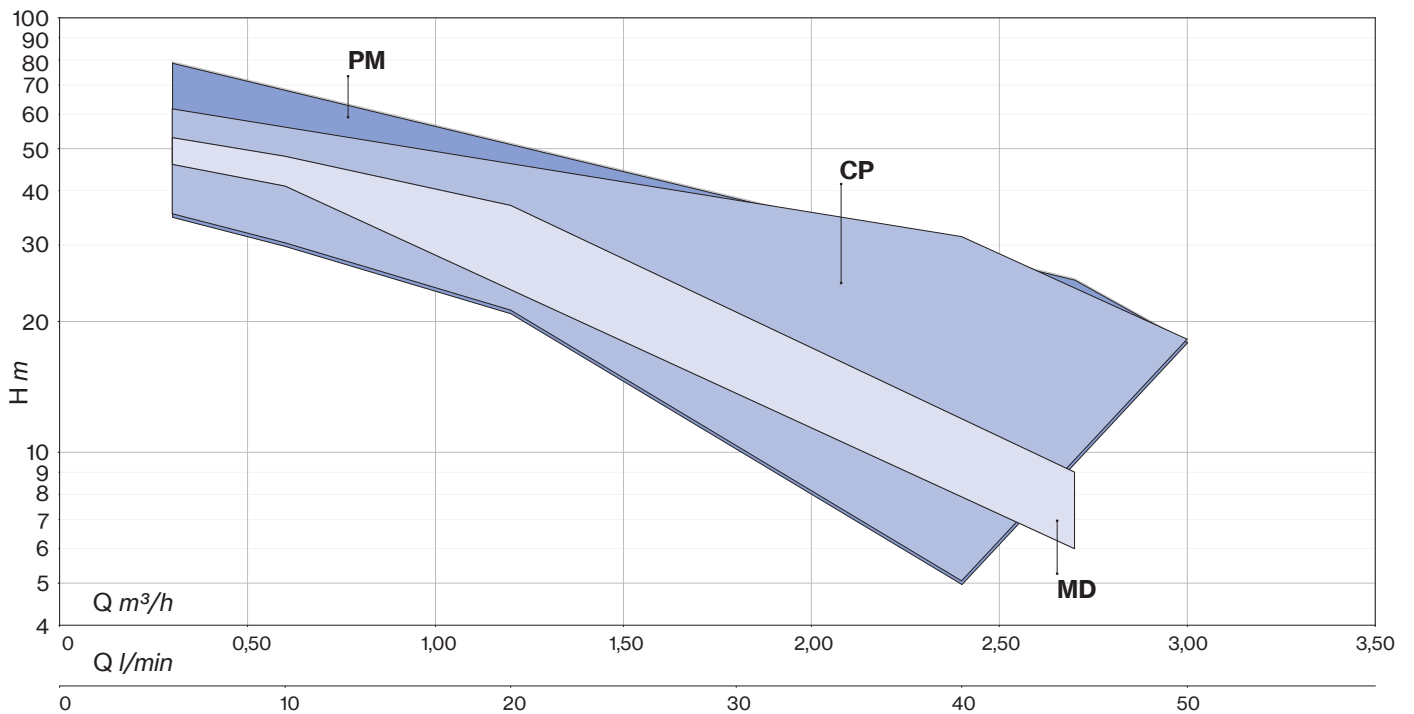



PM



PM A

Peripheral positive displacement pumps with front suction (PM) and side suction with self-priming system (PM A) for small household systems and simple industrial applications; characterised by a considerable ratio between performance and required output.


Construction features

Pump body	cast iron, bronze (45BR)
Motor bracket	cast iron, cast iron or bronze (45BR)
Impeller	brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 90 °C
Operating pressure	max 6 bar (45) max 8 bar (65, 80) max 9 bar (90)

Motor


	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

PMT 45 A

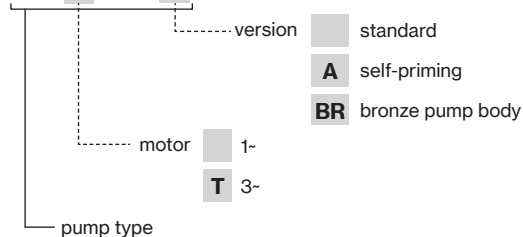


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
PM 45(BR)	85×110×170	198	85×110×190	220
	80×120×170	207	80×120×190	230
PM 45A	80×110×170	105	85×110×190	135
PM 65A			85×120×170	136
PM 80-90	80×120×160	171	80×120×190	190
	85×100×160	180	85×100×190	200
PM 80A	80×120×145	102	80×120×190	136



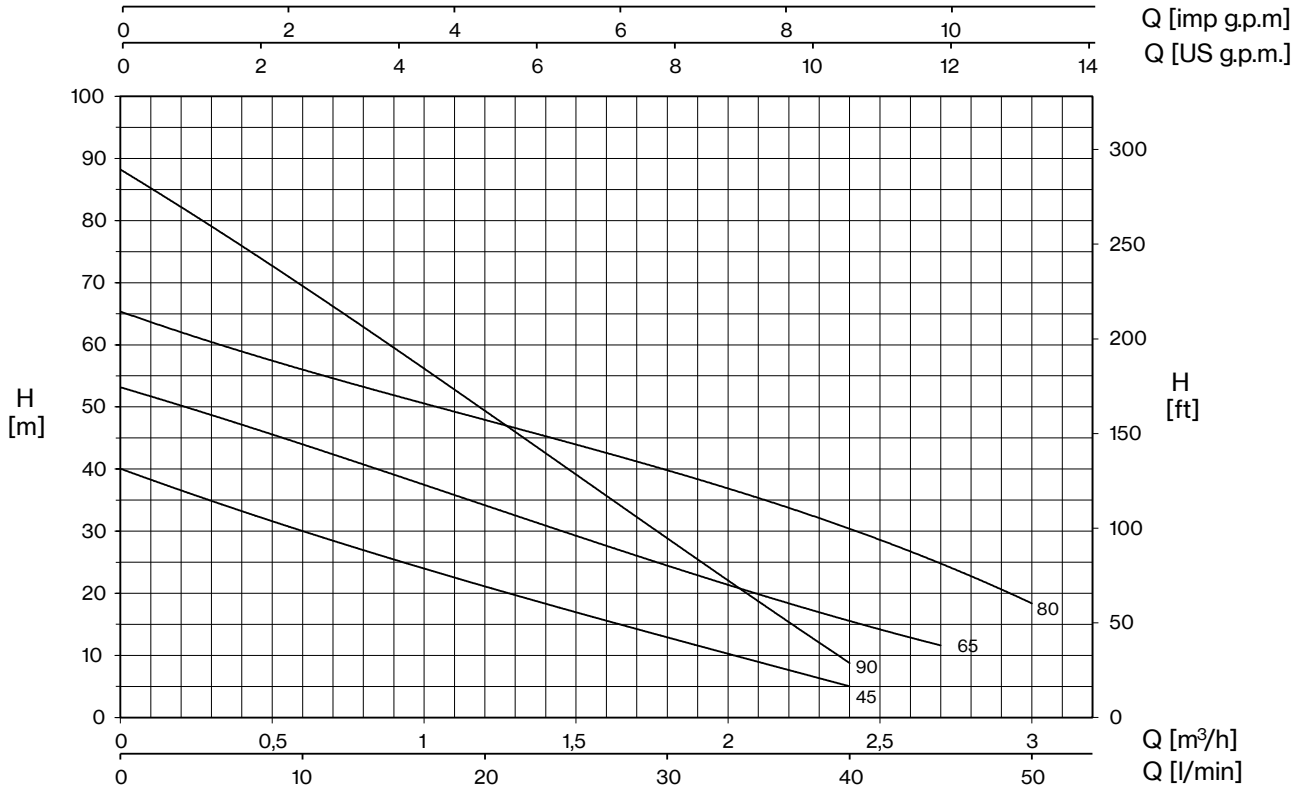

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,3	0,6	1,2	1,8	2,4	2,7	3
								0	5	10	20	30	40	45	50
H (m)															
PM 45	PMT 45	0,5	0,37	0,5	0,5	2,3	1,0	40,0	35,0	30,0	21,0	13,0	5,0		
PM 45BR	PMT 45BR	0,5	0,37	0,5	0,5	2,3	1,0	40,0	35,0	30,0	21,0	13,0	5,0		
PM 45A	PMT 45A	0,5	0,37	0,5	0,5	2,3	1,0	40,0	35,0	30,0	21,0	13,0	5,0		
PM 65	PMT 65	0,7	0,5	0,9	0,9	4,0	1,7	53,1	48,8	44,1	33,8	24,7	15,5	11,6	
PM 65A	PMT 65A	0,7	0,5	0,9	0,9	4,0	1,7	53,1	48,8	44,1	33,8	24,7	15,5	11,6	
PM 80	PMT 80	1	0,74	1,1	1,1	5,2	2,0	65,0	61,0	56,0	48,0	39,0	31,0	25,1	18,0
PM 80A	PMT 80A	1	0,74	1,1	1,1	5,2	2,0	65,0	61,0	56,0	48,0	39,0	31,0	25,1	18,0
PM 90	PMT 90	1	0,74	1,2	1,1	5,6	2,0	88,2	79,2	69,3	49,5	28,8	8,8		

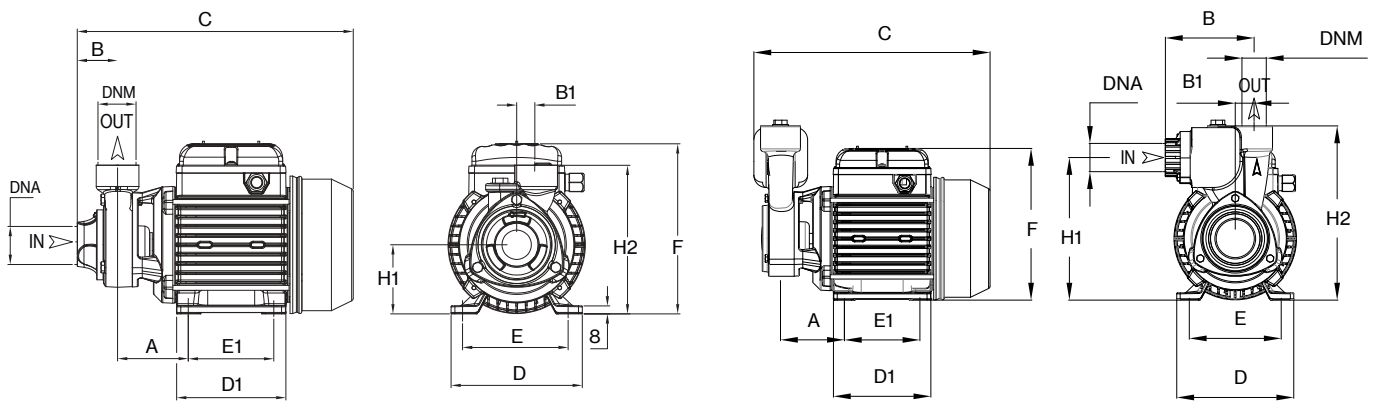

TYPE	DIMENSIONS (mm)																Kg
	A	B	B1	C	D	D1	E	E1	F	H1	H2	DNA	DNM	I	L	M	
PM 45	63	50	20	260	120	101	100	80	158	63	143	1" G	1" G	265	150	175	6,5
PM 45BR	63	50	20	260	120	101	100	80	158	63	143			265	150	175	7
PM 45A	63	89	20	240	120	101	100	80	158	150	184			300	170	195	7,5
PM 65	71,5	42	20	256	120	101	100	80	158	63	145			285	150	180	8,5
PM 65A	71,5	101	20	248	120	101	100	80	158	157	193			300	170	195	9
PM 80	72,5	41	20	280	135	112	112	89	172	71	152			300	170	195	10,5
PM 80A	71,5	101	20	271	135	112	112	89	172	165	201			290	170	230	11
PM 90	74,5	50	20	286	135	112	112	89	172	71	158			310	185	195	11





Peripheral positive displacement pumps with side suction for small household systems and simple industrial applications; characterised by a considerable ratio between performance and required power; frontal brass insert avoiding the risk of blockage.


Construction features

Pump body	cast iron and brass
Motor bracket	cast iron
Impeller	brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 90 °C
Operating pressure	max 8 bar


Motor


	3- 230/400V - 50Hz
2 Poles induction motor	1- 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

CPT 45

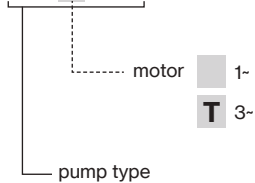


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CP 45	85×110×170	207	85×110×190	220
	80×120×170	198	80×120×190	230
CP 75	85×110×170	105	85×110×190	135
			80×120×170	136

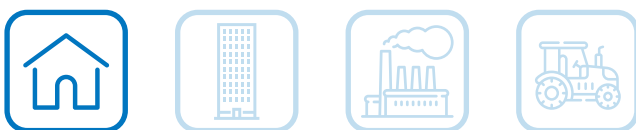


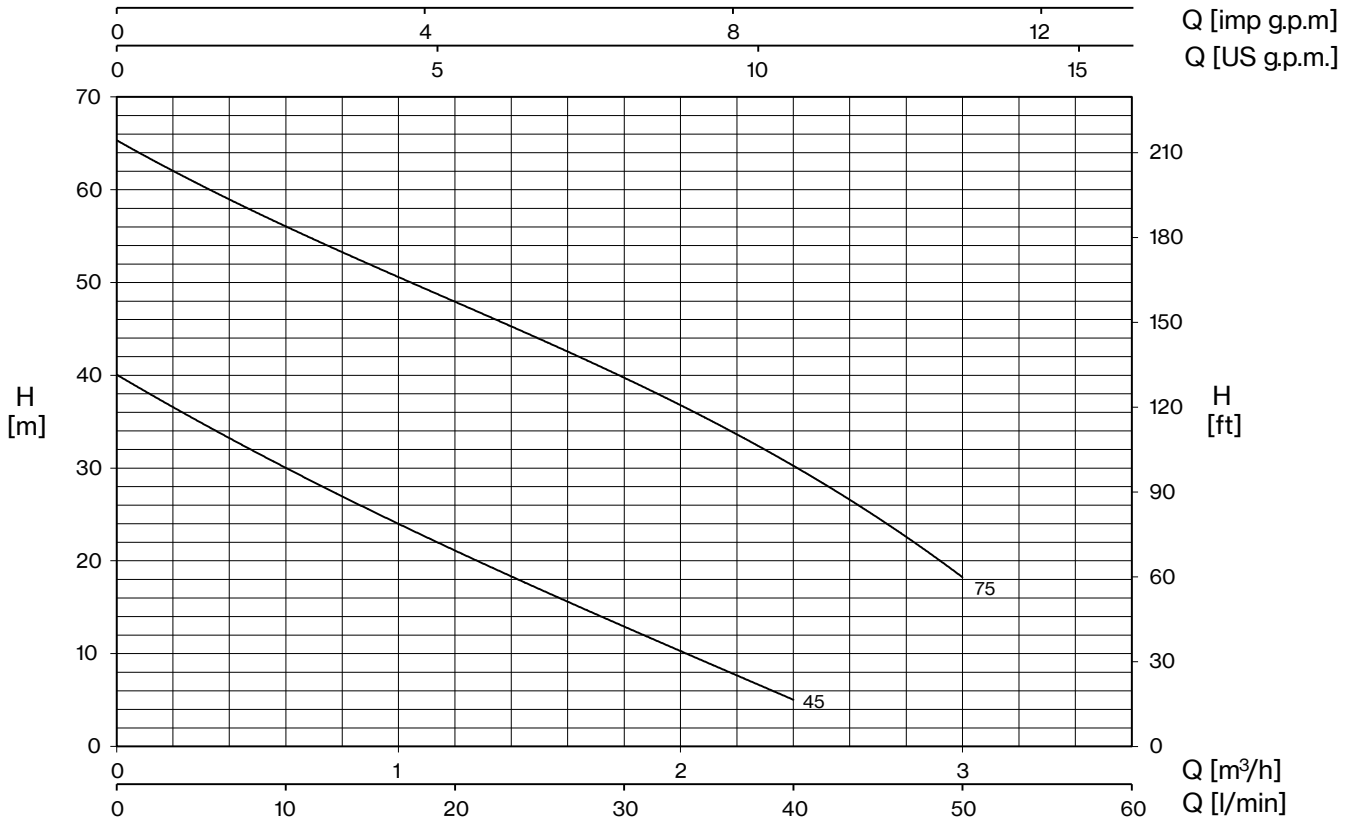

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)					
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0,3	0,6	1,2	1,8	2,4	3
								5	10	20	30	40	50
								H (m)					
CP 45	CPT 45	0,5	0,37	0,5	0,5	2,3	1,0	35,0	30,0	21,0	13,0	5,0	
CP 75	CPT 75	1	0,74	1,11	1,13	5,2	2,0	61,0	56,0	48,0	39,0	31,0	18,0

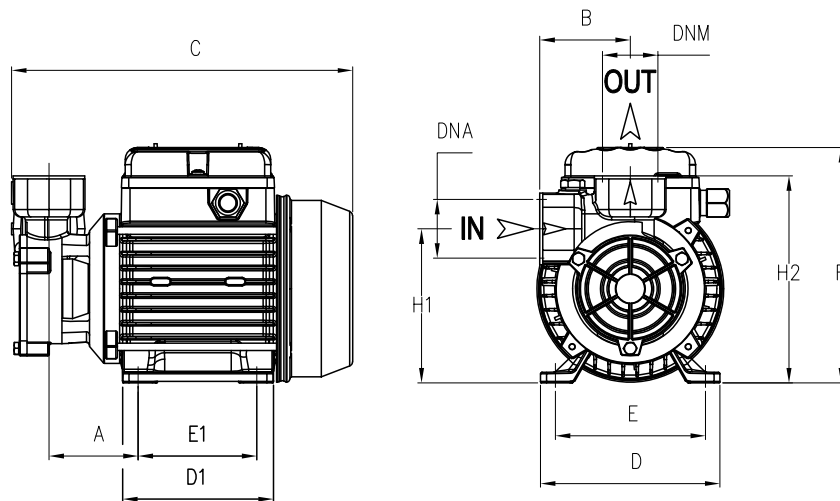

TYPE		DIMENSIONS (mm)															
~1	~3	A	B	C	D	D1	E	E1	F	H1	H2	DNA	DNM	I	L	M	Kg
CP 45	CPT 45	67	60	235	120	101	97	80	165	105	140	1" G	1" G	265	145	165	5,7
CP 75	CPT 75	71,5	60	263	135	112	112	89	172	124	156	1" G	1" G	310	185	195	9,2

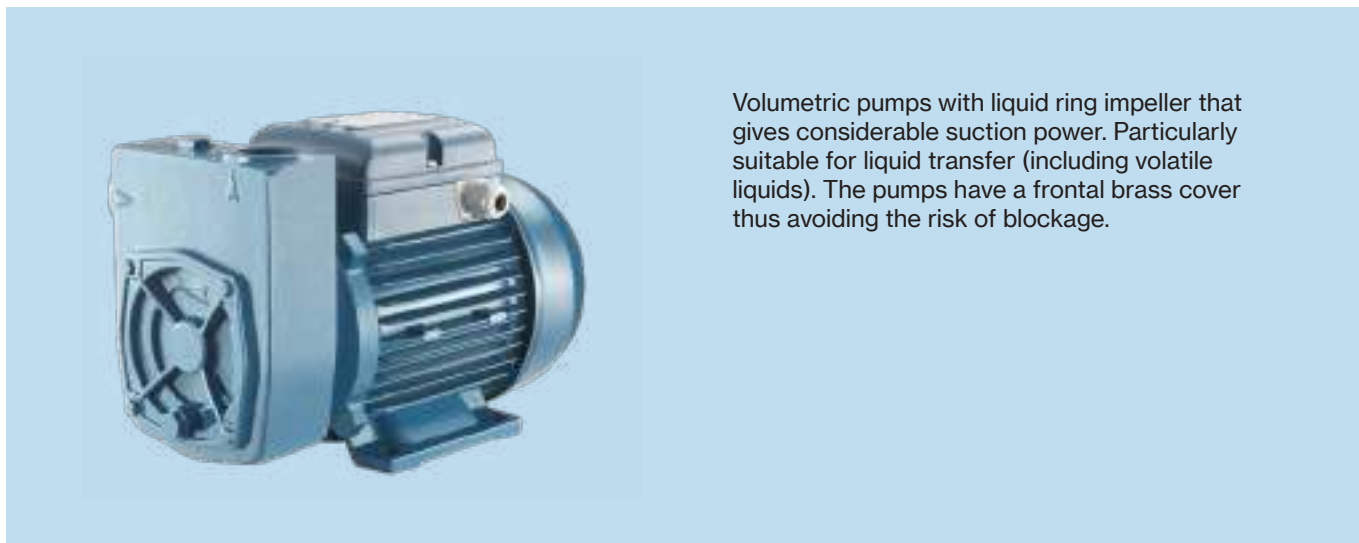


Volumetric pumps with liquid ring impeller that gives considerable suction power. Particularly suitable for liquid transfer (including volatile liquids). The pumps have a frontal brass cover thus avoiding the risk of blockage.

Construction features

Pump body	cast iron and brass
Motor bracket	cast iron
Impeller	brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 90 °C
Operating pressure	max 8 bar


Motor

	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

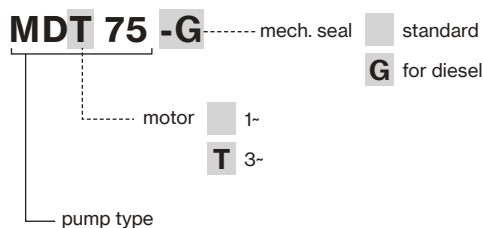


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
MD 75-100	85×110×170	105	85×110×190 80×120×170	135 136




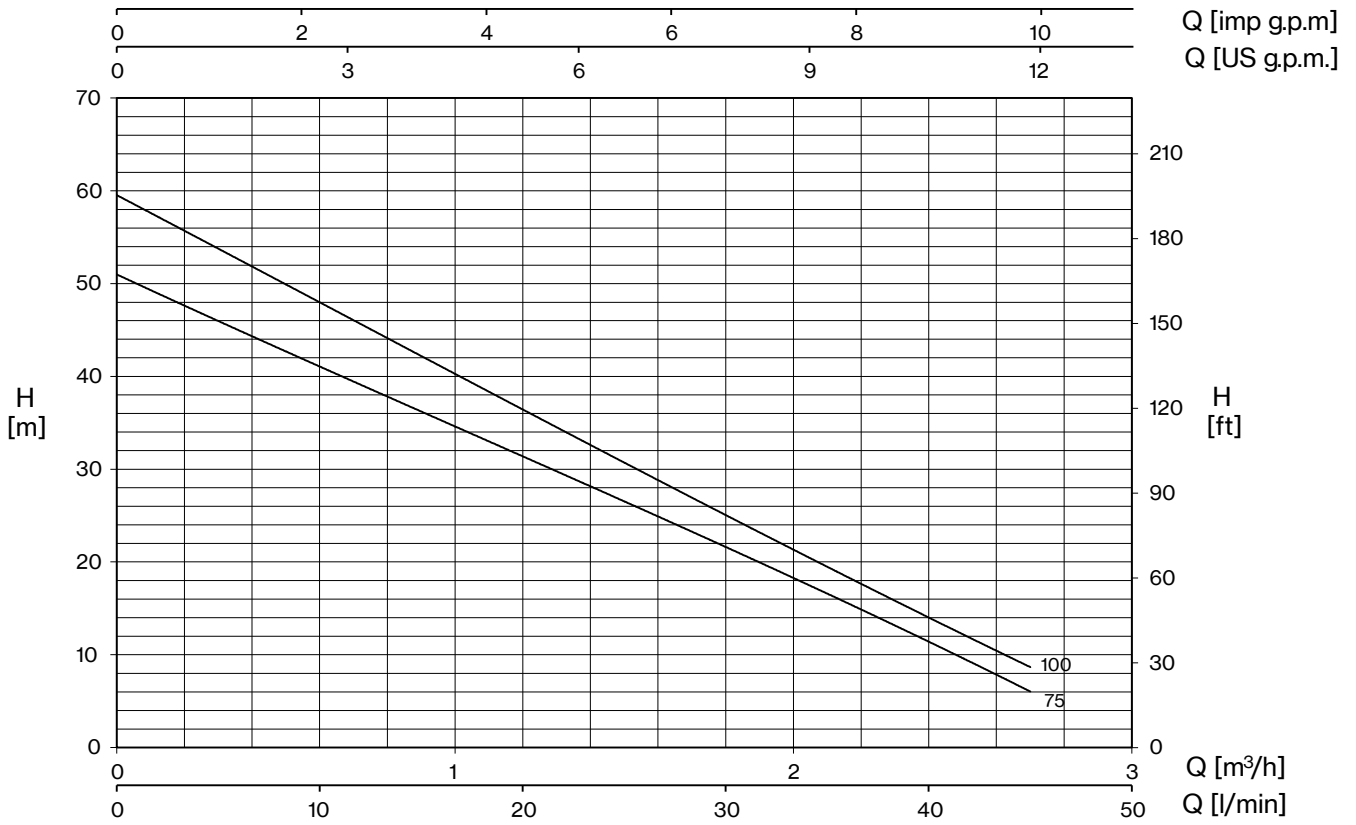


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)					
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0,3	0,6	1,2	1,8	2,4	2,7
								5	10	20	30	40	45
MD 75	MDT 75	0,8	0,59	1,03	0,94	5,0	1,7	46,0	41,0	31,5	21,5	11,5	6,0
MD 100	MDT 100	1	0,74	1,17	0,98	5,4	2,1	53,0	48,0	37,0	25,0	13,5	9,0

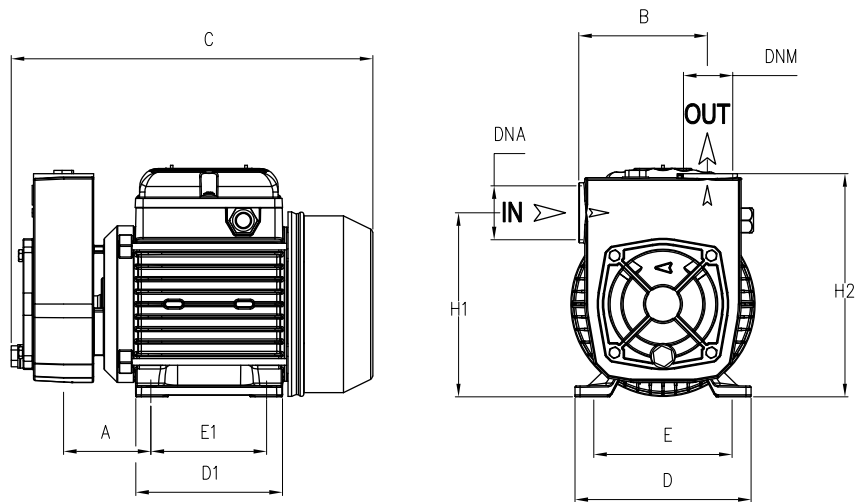


TYPE		DIMENSIONS (mm)														Kg
~1	~3	A	B	C	D	D1	E	E1	H1	H2	DNA	DNM	I	L	M	
MD 75	MDT 75	70	98,5	270	135	112	112	89	141	170	1"	1"	310	185	195	11,1
MD 100	MDT 100	70	98,5	270	135	112	112	89	141	170	1"	1"	310	185	195	11,8



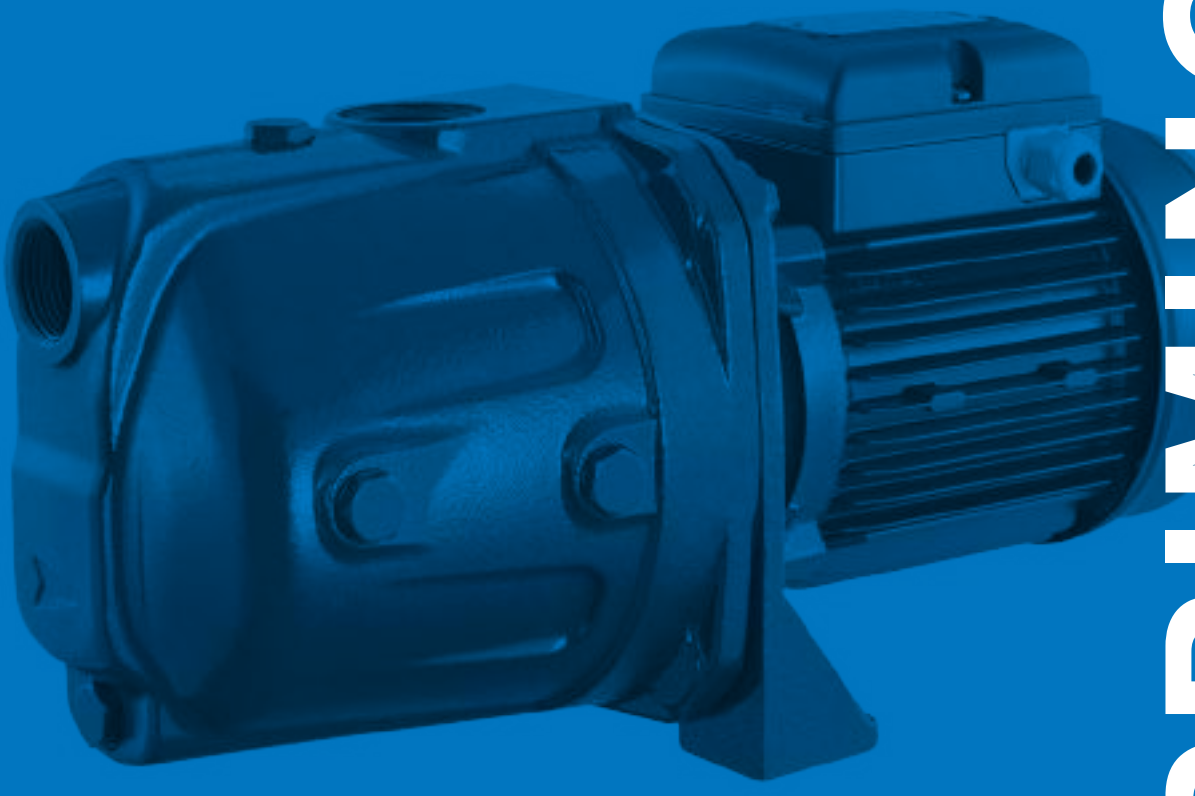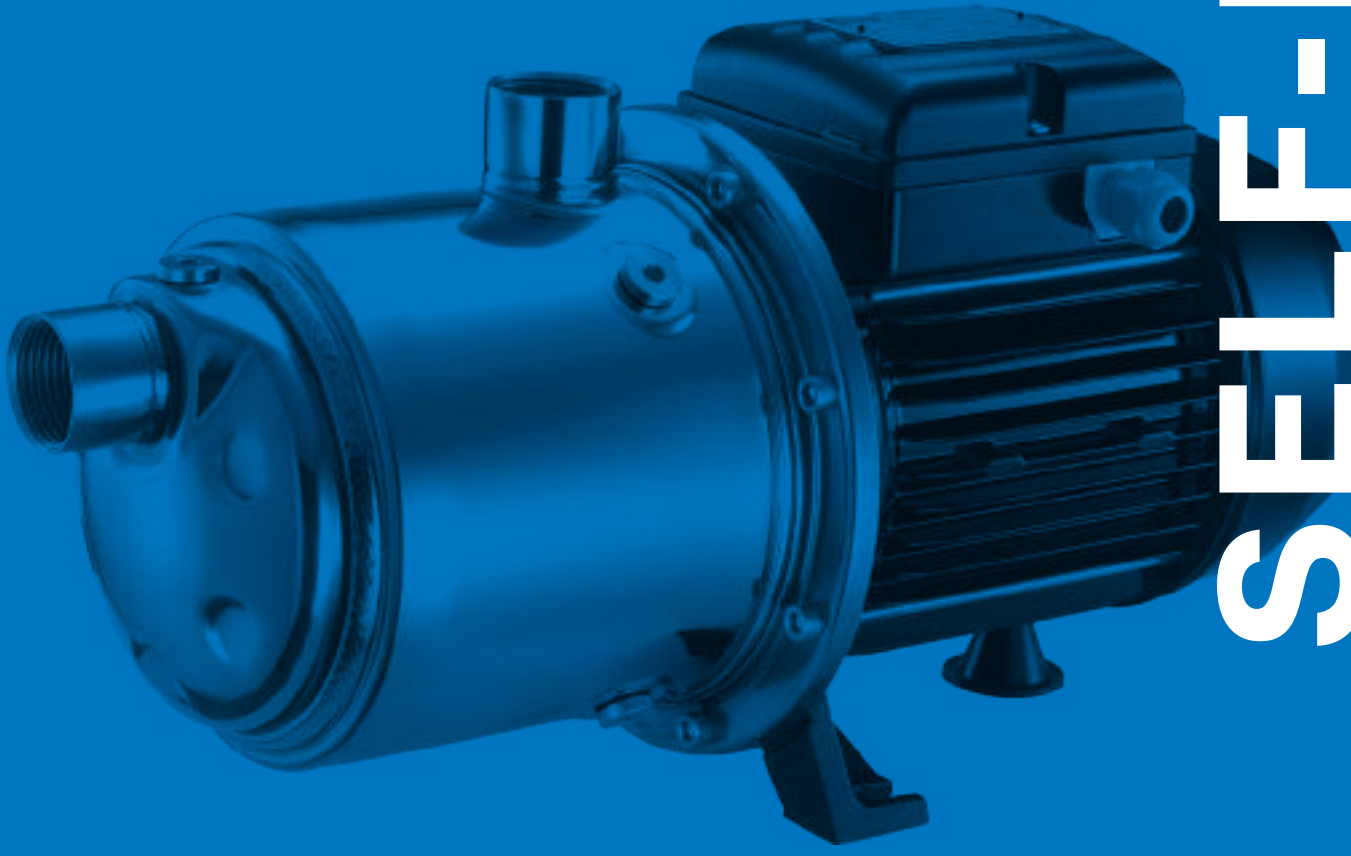

SELF-PRIMING

SELF-PRIMING PUMPS

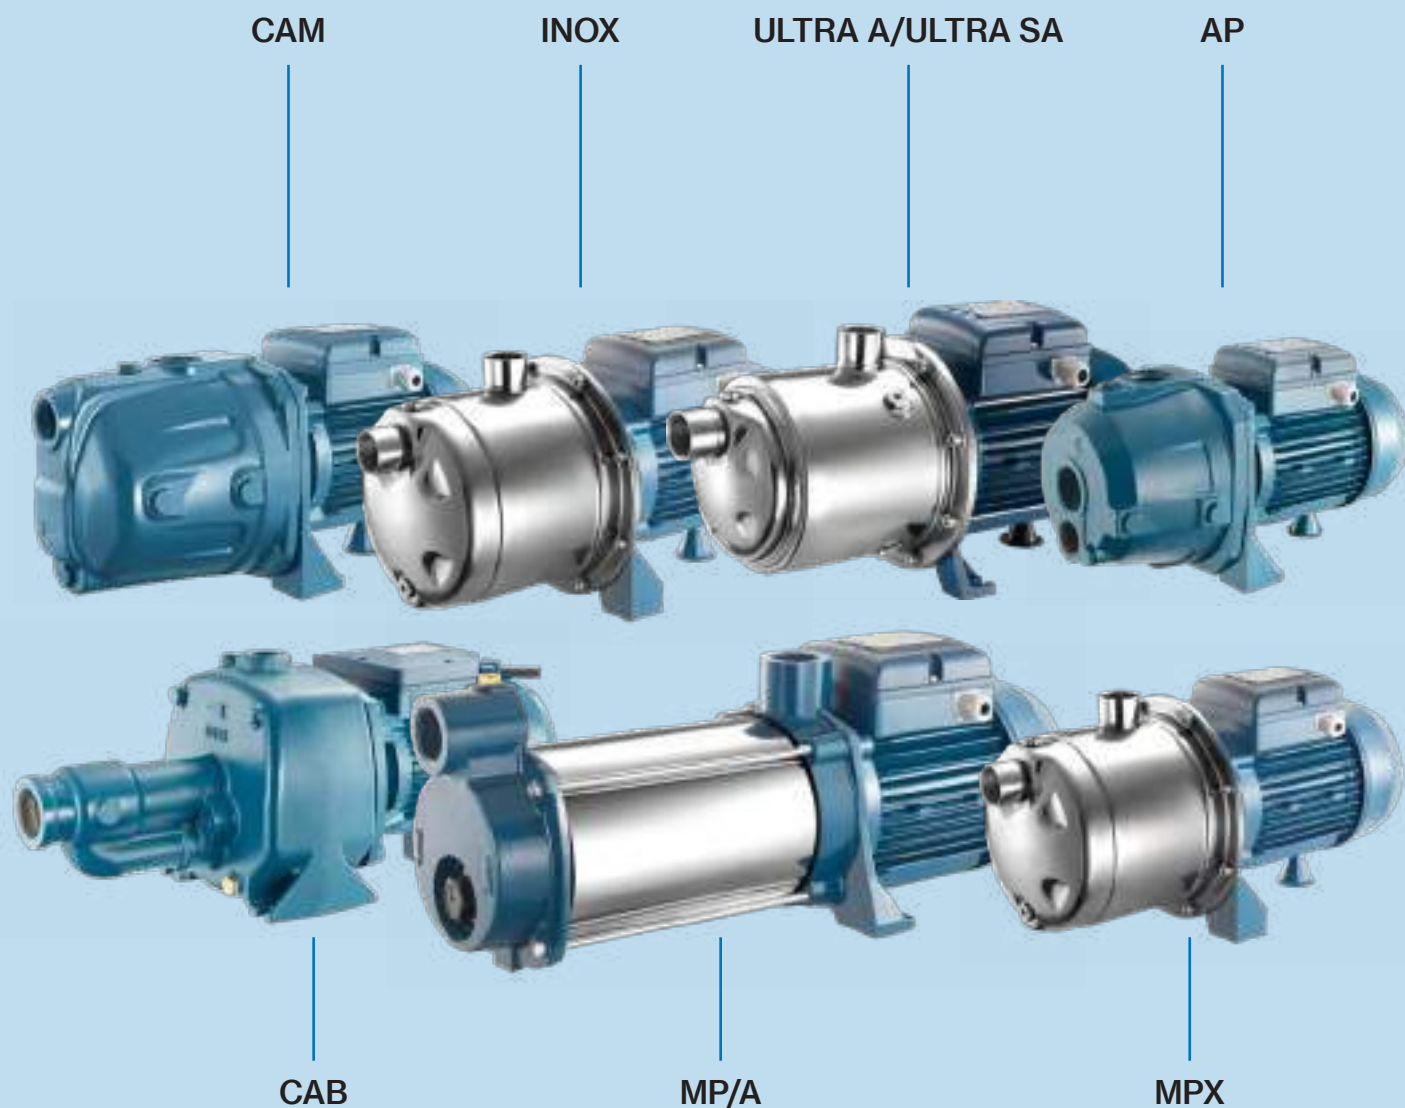

Wide range of single and multistage self-priming pumps, characterized by the fact of being able to handle liquids in the presence of dissolved gases.


Applications:

- Water supply
- Pressurization
- Liquid transfer
- Irrigation and tank emptying
- Small automatic systems of pressure increase




SELF-PRIMING PUMPS

Stainless steel

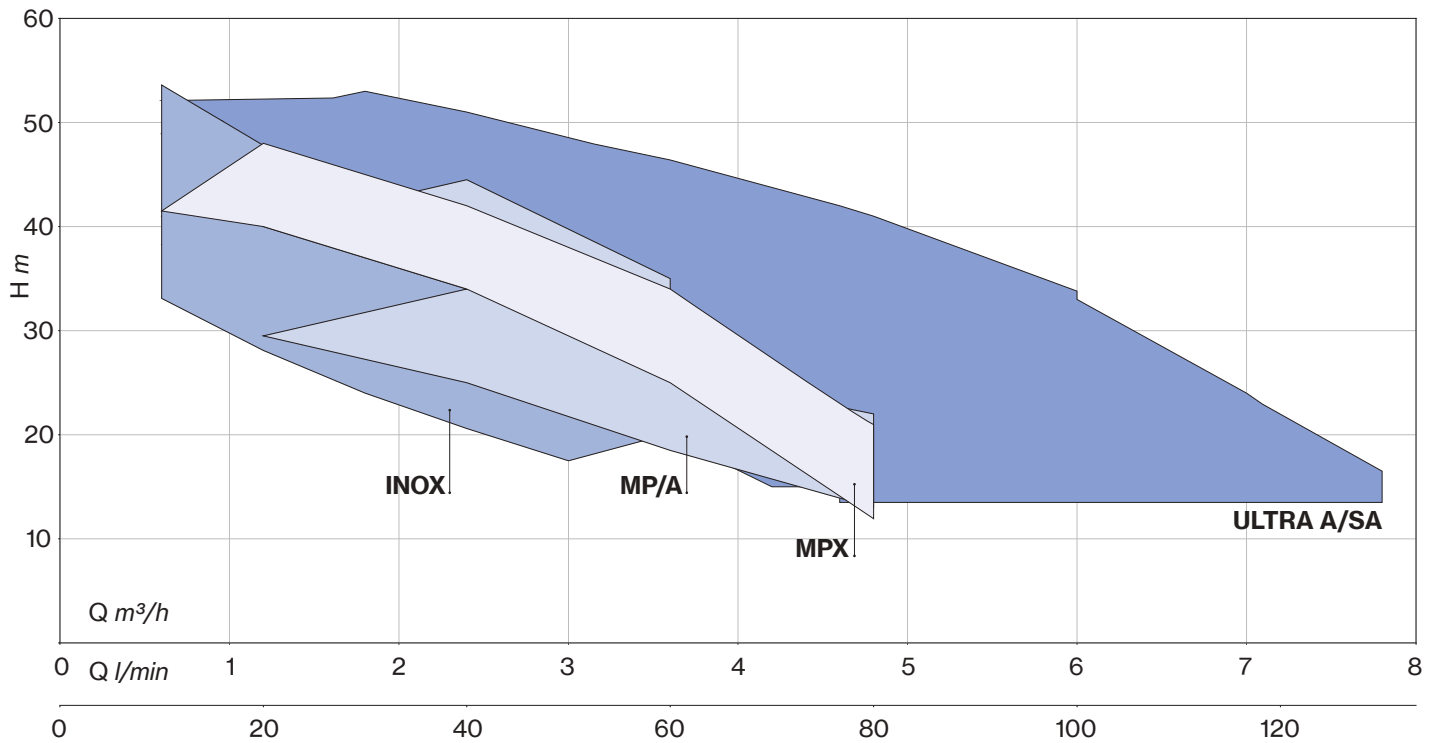

Cast iron

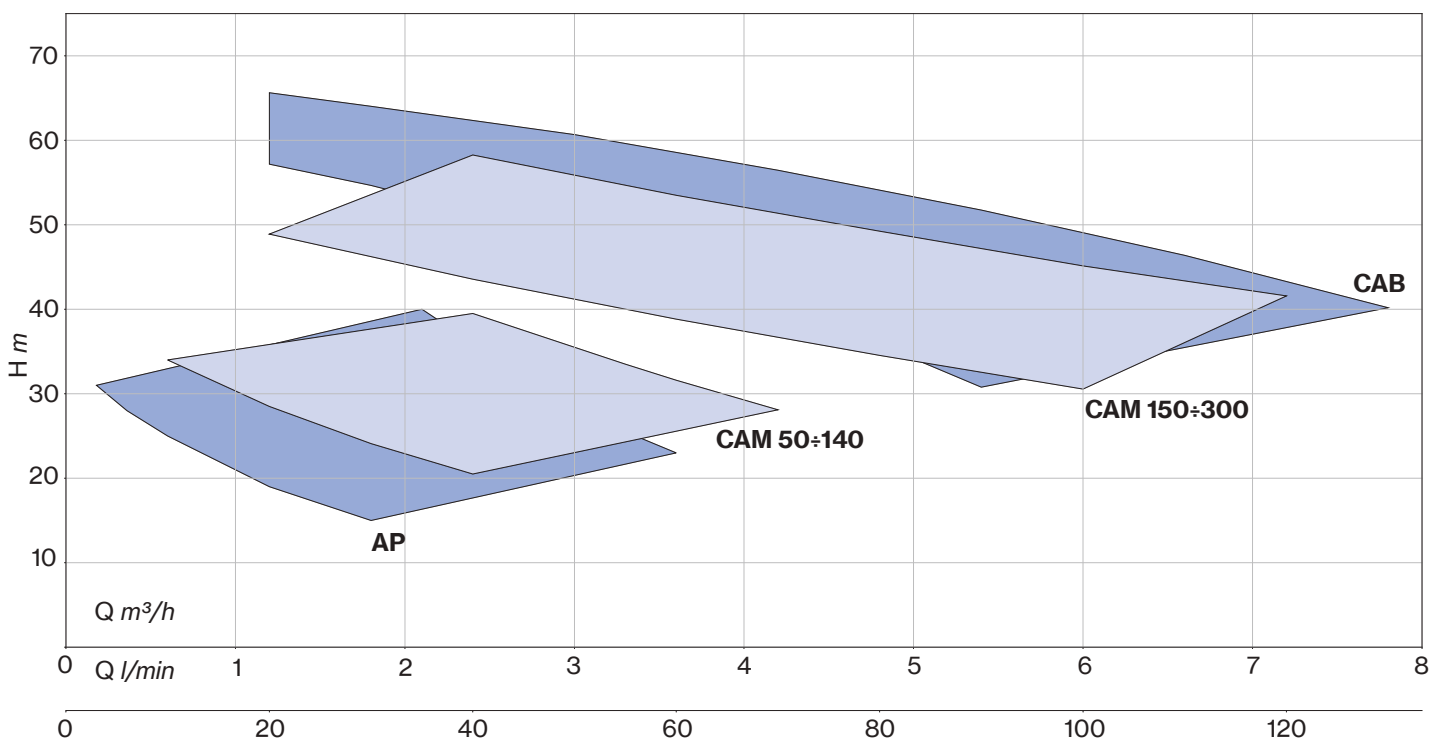

Self-priming centrifugal pumps for water supplies (even if mixed with gas) in small household systems, connected to autoclave tanks, for transferring liquids and emptying tanks; also used for gardening.



CAM 50N÷140





CAM 150÷300

Construction features


Pump body	cast iron
Motor bracket	aluminum (50N÷140) cast iron (150÷300)
Impeller	Noryl®, brass AISI 304, Noryl®, brass (100N÷140)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 50 °C
Operating pressure	max 6 bar (50N÷75N) max 7 bar (100N÷140) max 8 bar (150÷300)

Motor

	3- 230/400V - 50Hz
2 Poles induction motor	1- 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

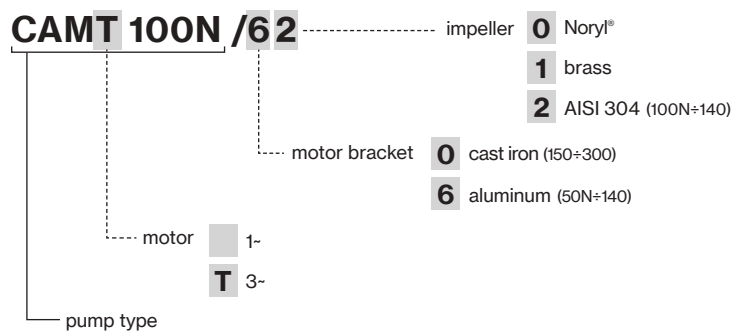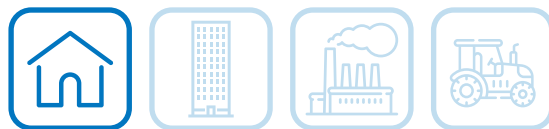


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CAM 50N÷140	85×110×145	60	85×110×190	80
			80×120×190	64
CAM 150÷300	80×120×145	35	80×120×180	49

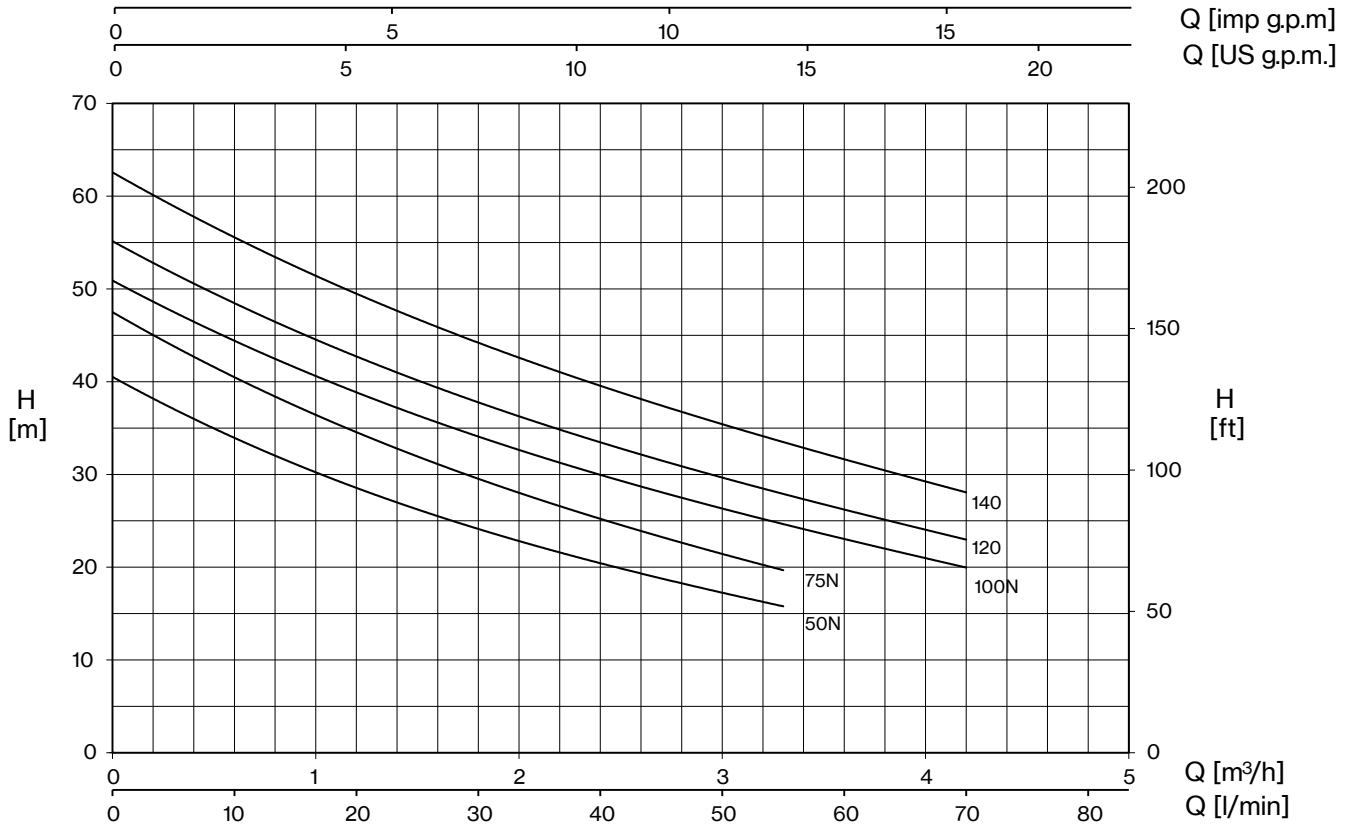


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)									
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,6	1,2	1,8	2,4	3	3,3	3,6	4,2	
								0	10	20	30	40	50	55	60	70	
								H (m)									
CAM 50N	CAMT 50N	0,6	0,44	0,7	0,67	3,1	1,3	40,5	34,0	28,5	24,1	20,5	17,2	15,8			
CAM 75N	CAMT 75N	0,8	0,59	0,82	0,78	3,6	1,4	47,5	40,5	34,5	29,6	25,2	21,4	19,7			
CAM 100N	CAMT 100N	1	0,74	1,04	0,92	4,7	1,7	50,9	44,3	38,9	34,1	30,1	26,3	24,6	23,0	20,0	
CAM 120	CAMT 120	1,2	0,88	1,14	1,07	5,2	1,9	55,1	48,5	42,6	37,8	33,5	29,7	27,9	26,2	23,0	
CAM 140	CAMT 140	1,5	1,1	1,3	1,25	6,0	2,5	62,5	55,7	49,4	44,2	39,5	35,5	33,5	31,6	28,1	



CAM

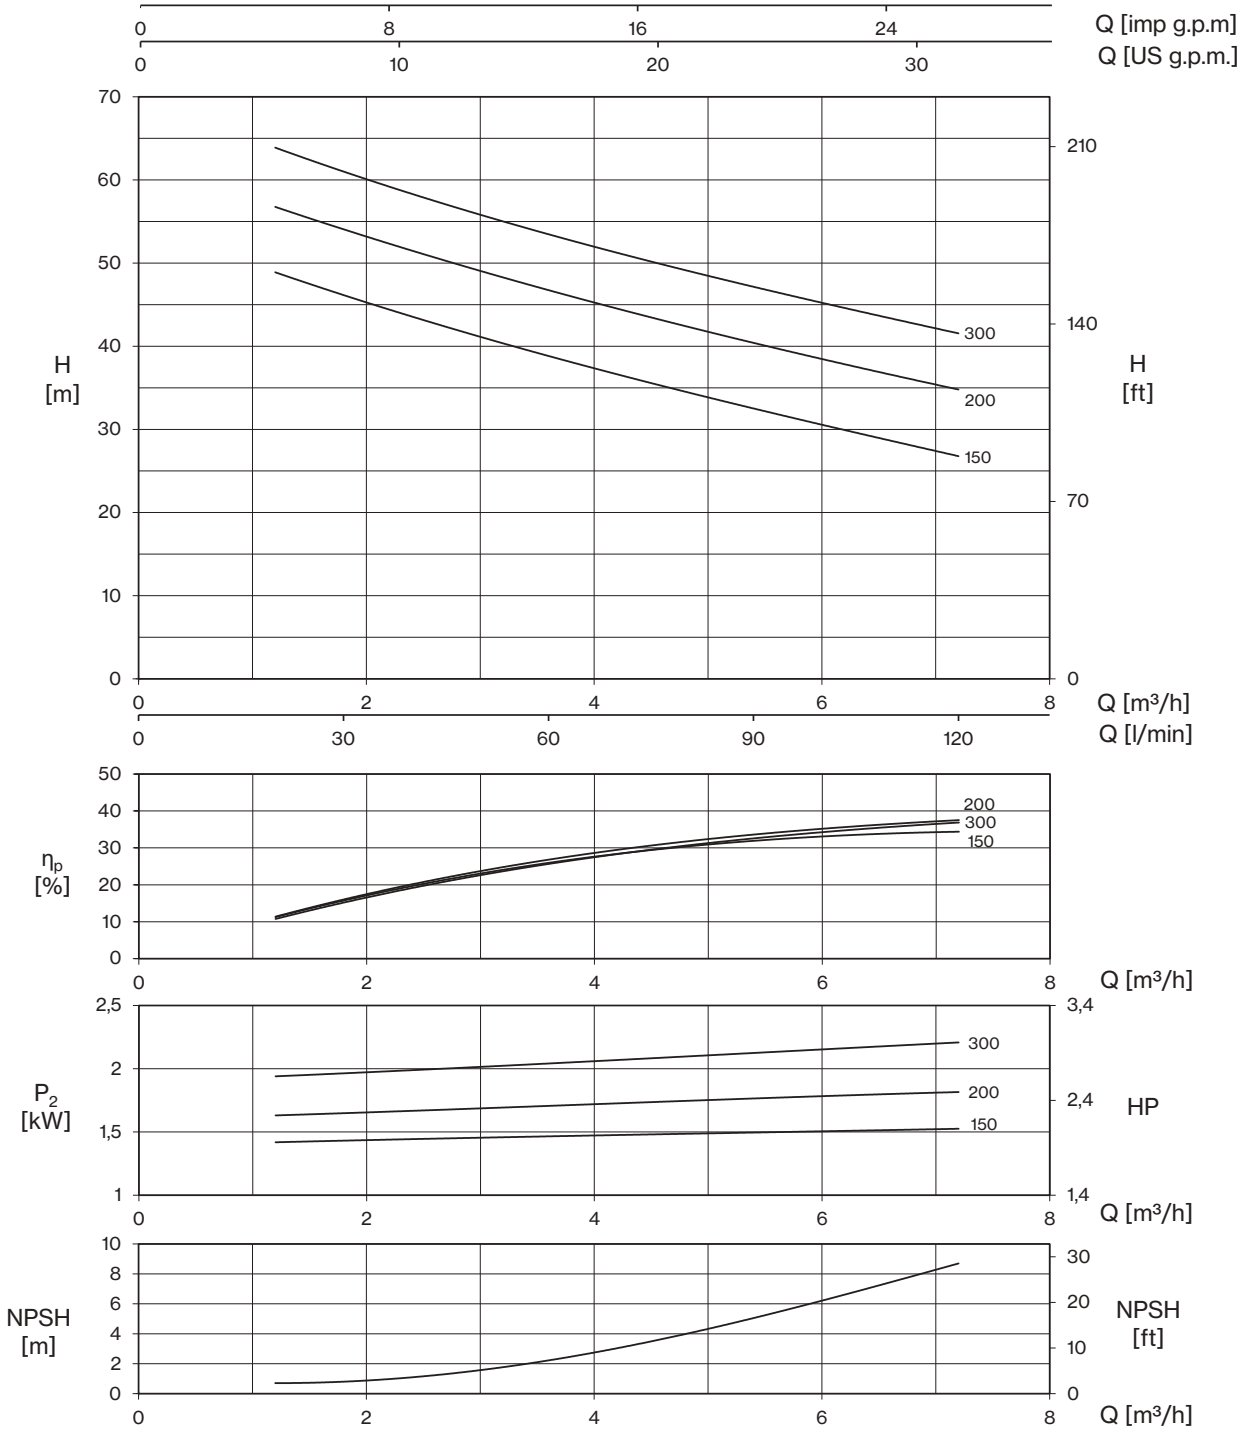




TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	1,2	2,4	3,6	4,8	6	7,2
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	20	40	60	80	100	120
								H (m)						
CAM 150	CAMT 150	2	1,5	1,9	1,8	8,5	3,7	54,8	48,9	43,6	38,8	34,5	30,6	26,8
CAM 200	CAMT 200	2,5	1,85	2,3	2,2	10,4	4,4	62,7	56,8	51,5	46,8	42,4	38,4	34,8
CAM 300	CAMT 300	3	2,2	2,7	2,6	12,5	5,2	70,0	63,9	58,3	53,5	49,2	45,1	41,6



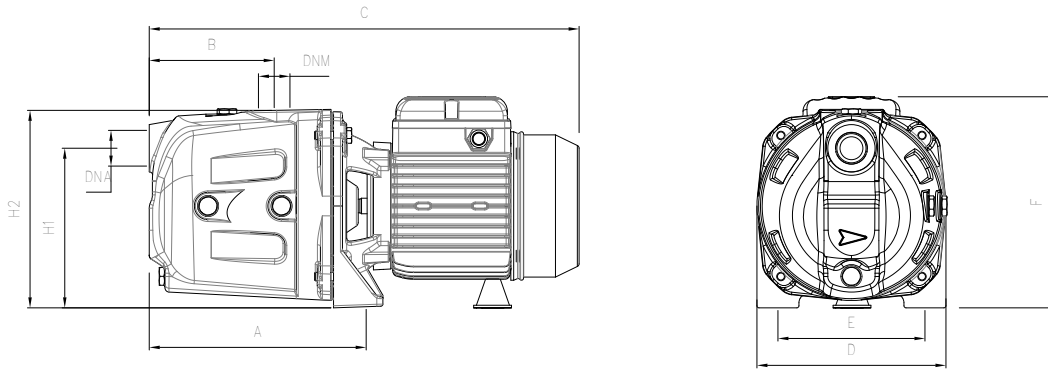

TYPE		DIMENSIONS (mm)													
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	
CAM 50N	CAMT 50N	214	119	410	180	140	195	150	185			440	194	215	12
CAM 75N	CAMT 75N	214	119	410	180	140	195	150	185			440	194	215	12,5
CAM 100N	CAMT 100N	214	119	410	180	140	195	150	185	1" G	1" G	440	194	215	14
CAM 120	CAMT 120	214	119	410	180	140	195	150	185			440	194	215	14,5
CAM 140	CAMT 140	214	119	410	180	140	195	150	185			440	194	215	15

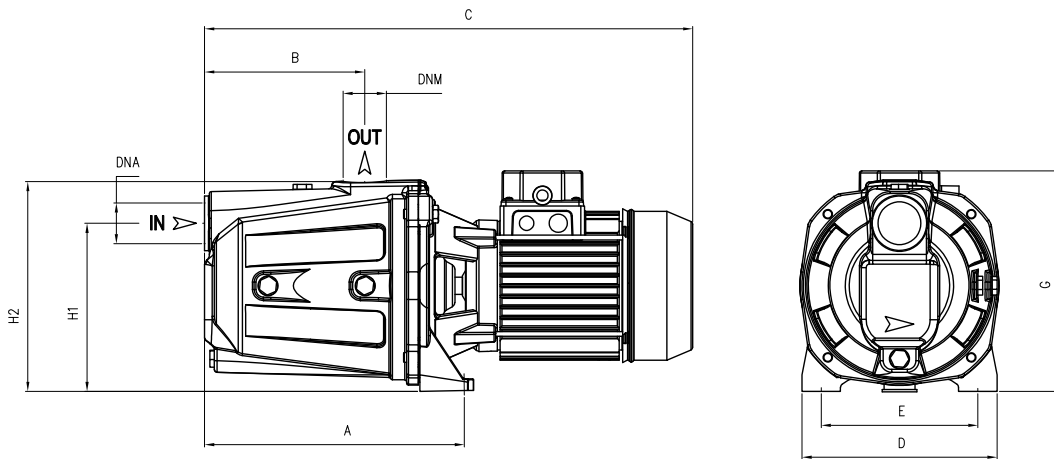


TYPE		DIMENSIONS (mm)															
-1	-3	A	B	C	D	E	F	G	H1	H2	DNA	DNM	I	L	M	-1	-3
CAM 150	CAMT 150	269,6	167	538	203	165	220	231,5	175	220			565	235	232	29	30,5
CAM 200	CAMT 200	269,6	167	538	203	165	220	231,5	175	220			565	235	232	30	29,5
CAM 300	-	269,6	167	608	203	165	220	231,5	175	220	1" 1/2 G	1" 1/4 G	638	230	255	38	-
-	CAMT 300	269,6	167	538	203	165	220	231,5	175	220			565	235	232	-	30,5

CAM (Garden version)

Portable electropumps complete with handle, cable with plug and switch.
The performances depend on adopted pump type.

TYPE	P2		P1 (kW)	Pipe		Performance	
	HP	kW		Suction ("G)	Delivery ("G)	Q (l/min)	H (m)
CAM 50N	0,6	0,44	0,7	1	1	10-55	34,0-15,8
CAM 75N	0,8	0,59	0,82	1	1	10-55	40,5-19,7
CAM 100N	1	0,74	1,04	1	1	10-70	44,3-20,0
CAM 120	1,2	0,88	1,14	1	1	10-70	48,5-23
CAM 140	1,5	1,1	1,3	1	1	10-70	55,7-28,1

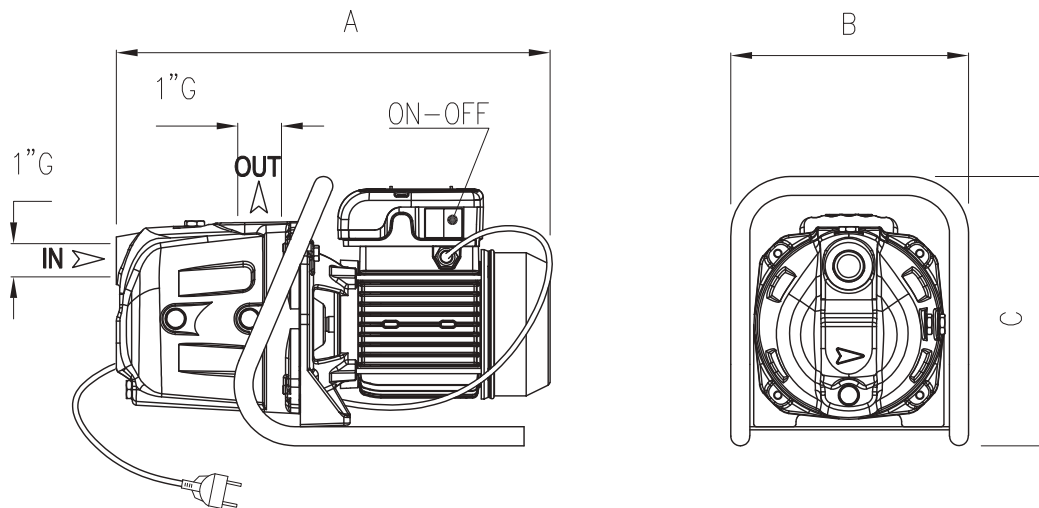

TYPE	DIMENSIONS (mm)		
	A	B	C
CAM 50N	410	266	252
CAM 75N	410	266	252
CAM 100N	410	266	252
CAM 120	410	266	252
CAM 140	410	266	252






Self-priming centrifugal pumps for domestic applications such as domestic systems where air is mixed with water. Recommended in combination with pressure set for water transfer, rainwater harvesting and garden irrigation systems.

Construction features	
Pump body	stainless steel AISI 304
Motor bracket	aluminum
Impeller	Noryl® Noryl®, AISI 304 (100N≠140)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar

Motor	
	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4


INOXT 100N/6 2

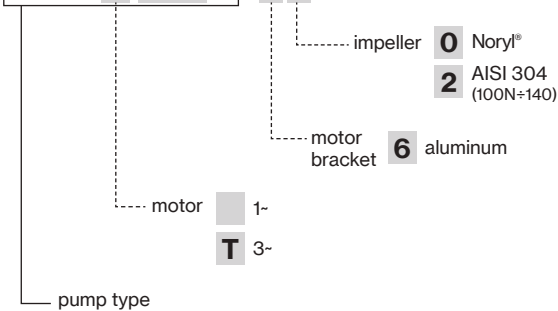


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
INOX	85×110×150	60	85×110×190	80



INOX

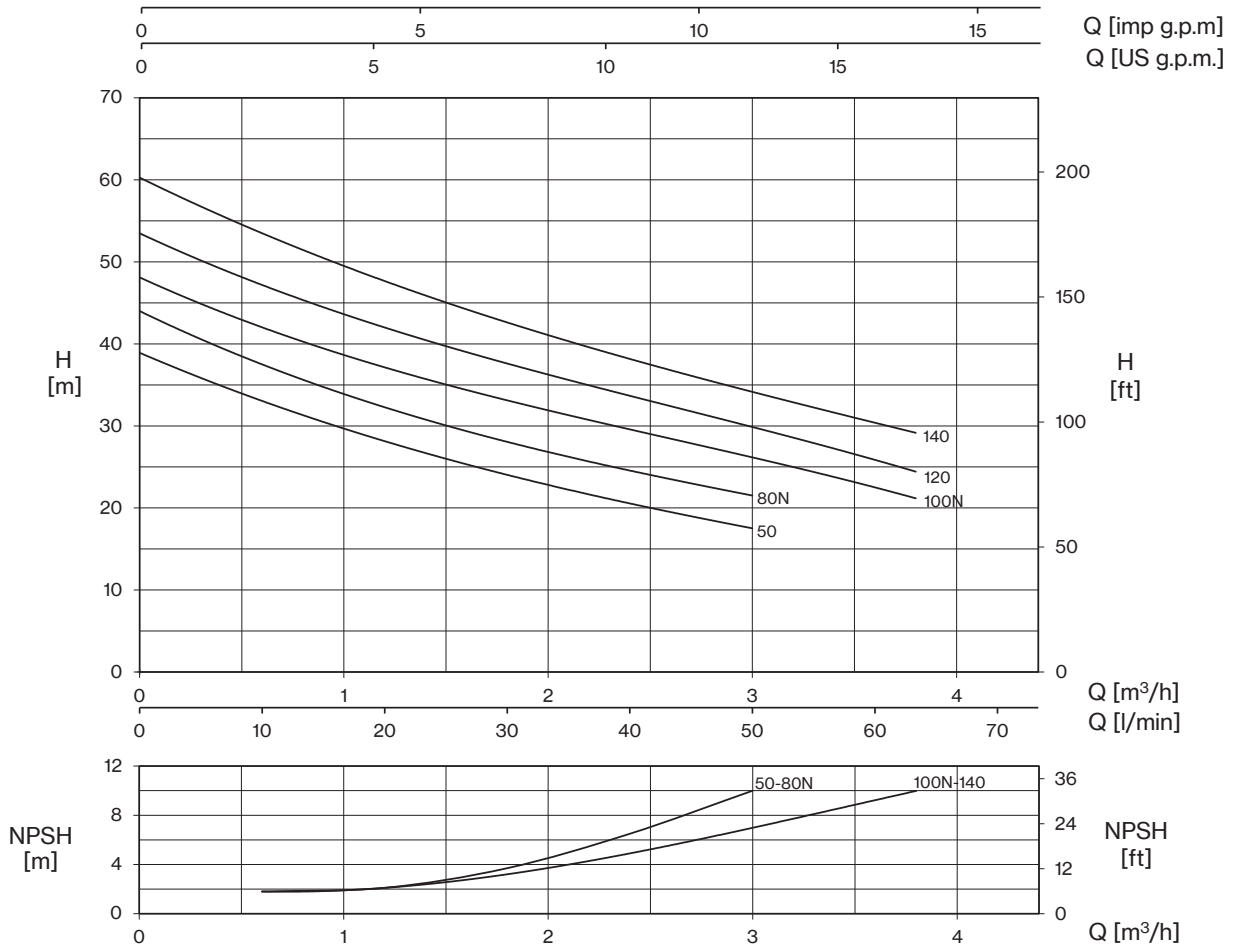

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,6	1,2	1,8	2,4	3	3,6	3,8
								0	10	20	30	40	50	60	63,3
								H (m)							
INOX 50	INOXT 50	0,6	0,44	0,67	0,63	2,9	1,2	38,9	33,1	28,1	24,0	20,6	17,5		
INOX 80N	INOXT 80N	0,8	0,59	0,75	0,76	3,3	1,4	44,0	37,5	32,3	28,0	24,6	21,5		
INOX 100N	INOXT 100N	1	0,74	1,04	0,92	4,7	1,7	48,0	42,3	37,0	33,0	29,6	26,2	22,7	21,0
INOX 120	INOXT 120	1,2	0,88	1,14	1,03	5,2	1,9	53,4	47,4	41,9	37,5	33,7	29,9	26,0	24,3
INOX 140	INOXT 140	1,5	1,1	1,3	1,23	6,0	2,5	60,2	53,6	47,8	42,4	38,0	34,4	30,5	29,0

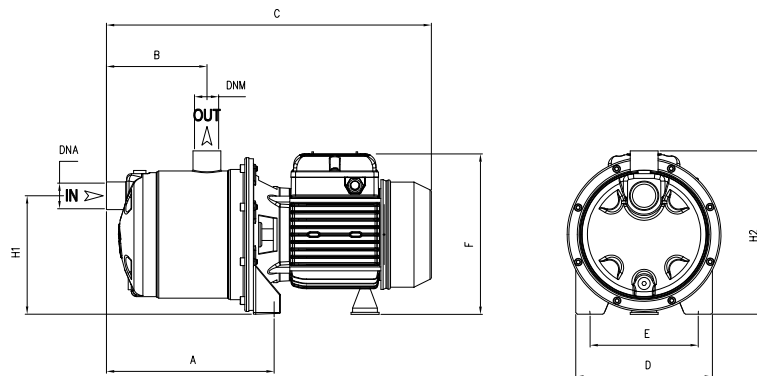

TYPE		DIMENSIONS (mm)													
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	Kg
INOX 50	INOXT 50	208	128	410	175	140	215	153	210			430	210	235	8,5
INOX 80N	INOXT 80N	208	128	410	175	140	215	153	210			430	210	235	9,5
INOX 100N	INOXT 100N	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	10,5
INOX 120	INOXT 120	208	128	410	175	140	215	153	210			430	210	235	11
INOX 140	INOXT 140	208	128	410	175	140	215	153	210			430	210	235	11,5



INOX (Garden version)

Portable electropumps complete with handle, cable with plug and switch.
The performances depend on adopted pump type.




INOX




INOX BOX

TYPE	P2		P1 (kW)	Pipe		Performance	
	HP	kW	1~	Suction ("G)	Delivery ("G)	Q (l/min)	H (m)
INOX 100N	1	0,74	1,04	1	1	10-63,3	42,3-21,0

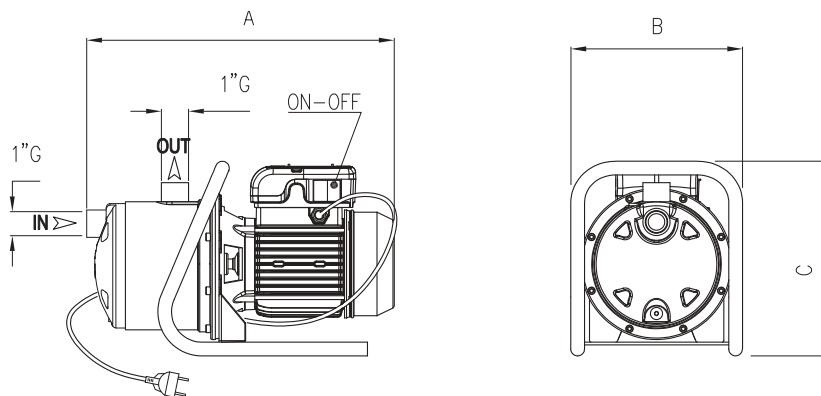

INOX / MPX

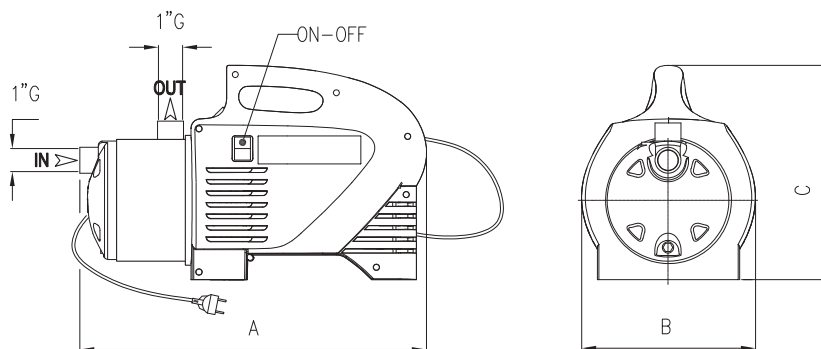

INOX / MPX

TYPE	DIMENSIONS (mm)		
	A	B	C
INOX 100N	410	175	285
INOX 100N BOX	429	209	287

ULTRA A


Self-priming




Self-priming horizontal multistage stainless steel pumps suitable for domestic use, also in combination with autoclave tank. Suitable for drinking water or glycol, for water treatment, heating, air conditioning and washing systems.

Construction features	
Pump body, mechanical seal housing	stainless steel AISI 304
Motor bracket	aluminum
Impellers, diffusers	Noryl®
Mechanical seal	ceramic-graphite-EPDM
Motor shaft	stainless steel AISI 303
Liquid temperature	-5 ÷ +35 °C
Operating pressure	max 7 bar







Motor	
	3- 230/400V - 50Hz
2 poles induction motor	1- 230V - 50Hz (with thermal protection up to 1.85 kW)
Insulation class	F
Protection degree	IPX4

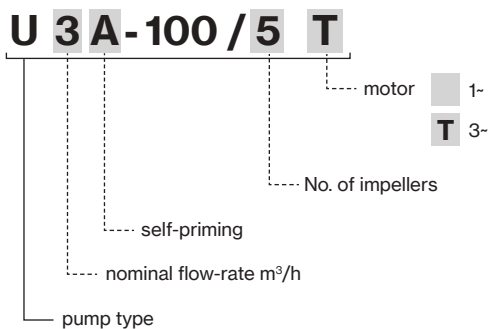


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3A-90/4	85×110×160	70	85×110×185	80
U 3A-100/5	80×120×150	42	80×120×175	49
U 5A-120/4	80×120×150	42	80×120×175	49
U 5A-150/5	80×120×150	42	80×120×175	49

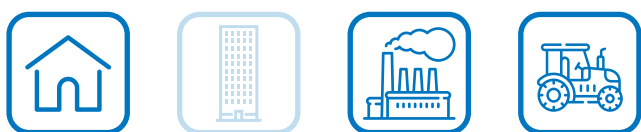

ULTRA A

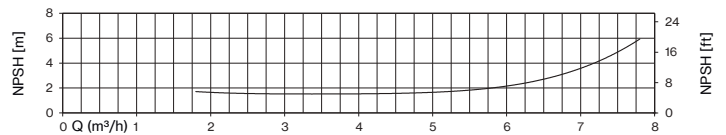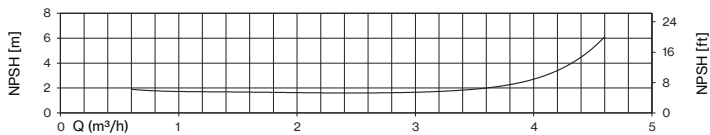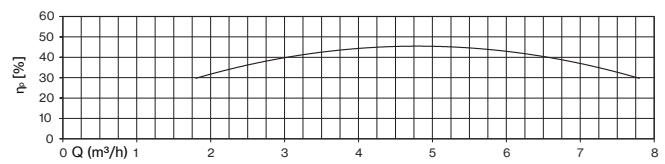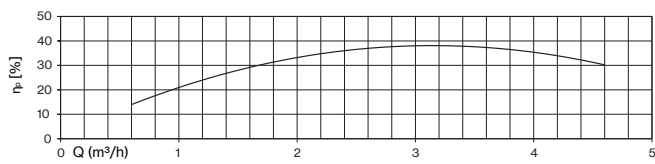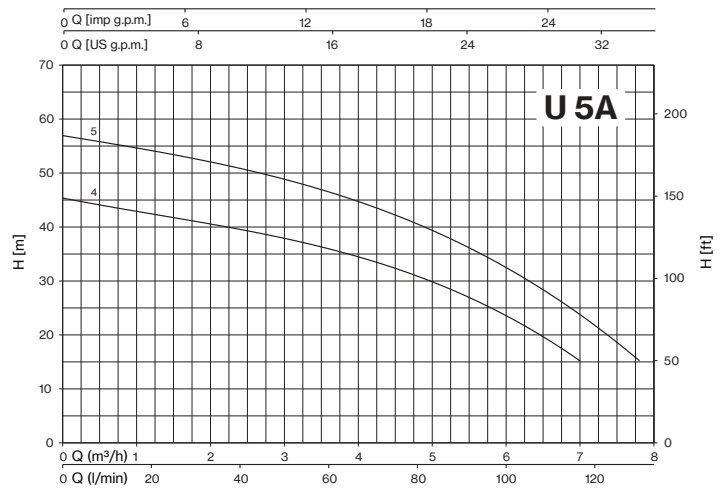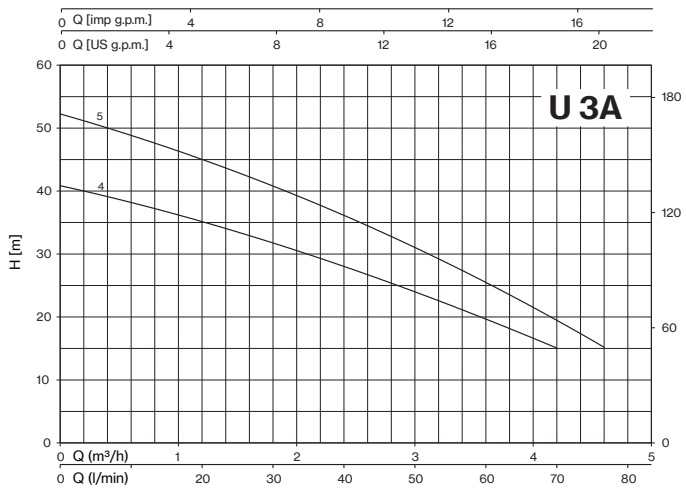

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)															
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)															
								0	0,6	1,2	1,8	2,4	3,6	4,2	4,6	4,8	6	7	7,8				
U 3A-90/4	U 3A-90/4T	0,9	0,66	0,9	0,88	4	1,8	40,8	38,3	35,1	31,8	27,9	19,8	15,0									
U 3A-100/5	U 3A-100/5T	1	0,75	1,06	1,01	4,8	1,9	52,2	48,9	45,1	40,8	36,0	25,4	19,8	15,0								
U 5A-120/4	U 5A-120/4T	1,2	0,9	1,13	1,13	5,2	2,5	45,3			41,3	39,6	35,6	33,4	31,7	30,8	24,0	15,0					
U 5A-150/5	U 5A-150/5T	1,5	1,1	1,47	1,39	6,8	2,8	56,8			53,0	51,0	46,1	43,2	41,2	40,1	33,0	24,0	15,0				

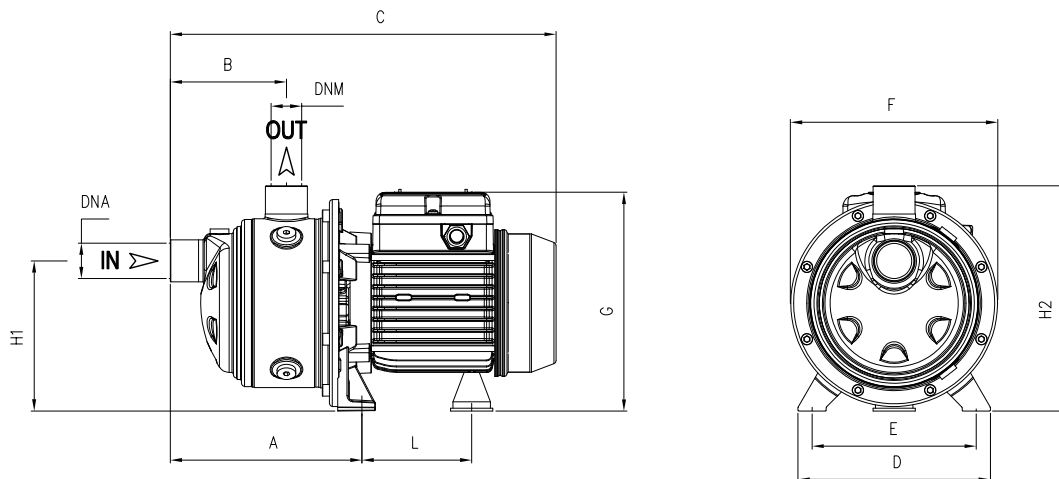

TYPE		DIMENSIONS (mm)												Kg		
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM			
U 3A-90/4	U 3A-90/4T	238,8	175	405	164	140	178	190	93,7	128	192			1" G	1" G	9
U 3A-100/5	U 3A-100/5T	262,8	199	452	164	140	178	203	104,7	128	192					11,5
U 5A-120/4	U 5A-120/4T	238,8	175	428	164	140	178	203	104,7	128	192					11,5
U 5A-150/5	U 5A-150/5T	262,8	199	514	164	140	201	211	128,2	134	198					14,5



ULTRA SA


Self-priming





Self-priming horizontal multistage stainless steel pumps suitable for domestic use, also in combination with autoclave tank. Suitable for drinking water or glycol, for water treatment, heating, air conditioning and washing systems.

Construction features	
Pump body, mechanical seal housing	stainless steel AISI 304
Motor bracket	aluminum
Impellers, diffusers	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM
Motor shaft	stainless steel AISI 303
Liquid temperature	-15 ÷ +110 °C
Operating pressure	max 7 bar







Motor	
	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection up to 1.85 kW)
Insulation class	F
Protection degree	IPX4

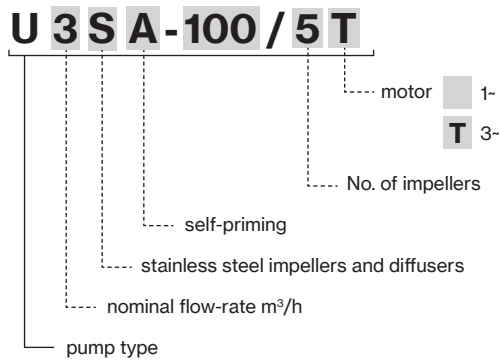


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3SA-90/4	85×110×160	70	85×110×185	80
U 3SA-100/5	80×120×150	42	80×120×175	49
U 5SA-120/4	80×120×150	42	80×120×175	49
U 5SA-150/5	80×120×150	42	80×120×175	49

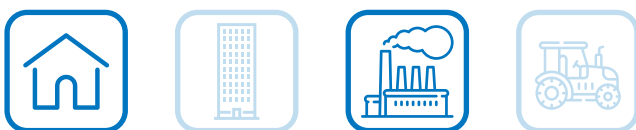

ULTRA SA

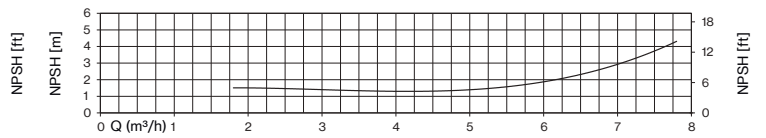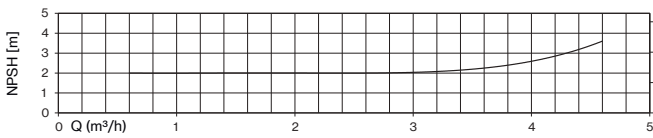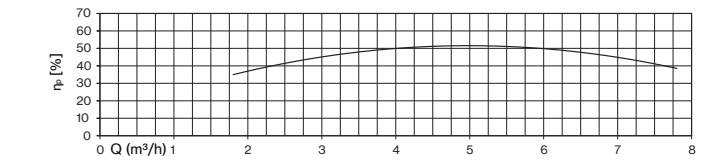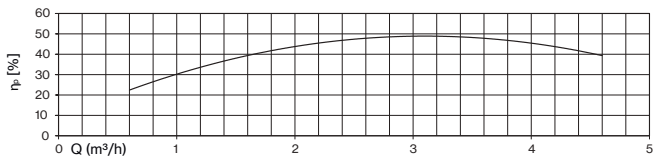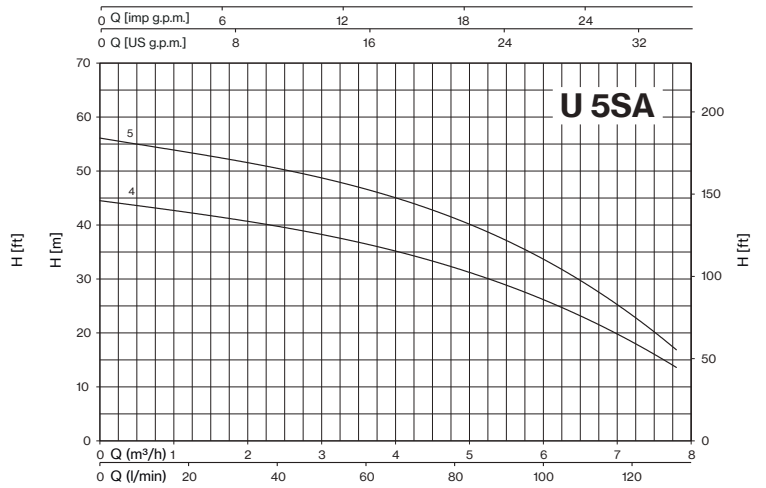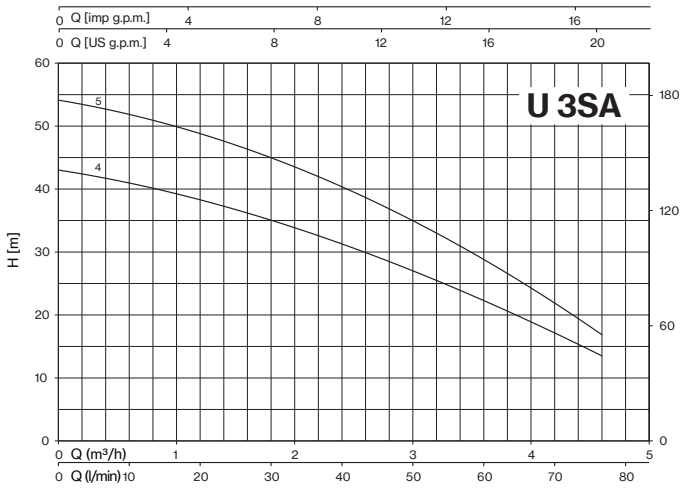

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)												
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,6	1,2	1,8	2,4	3,6	4,6	4,8	6	7	7,8		
								0	10	20	30	40	60	76,7	80	100	116,7	130		
U 3SA-90/4	U 3SA-90/4T	0,9	0,66	0,83	0,8	3,6	1,7	43,0	41,0	38,3	35,0	31,3	22,3	13,5						
U 3SA-100/5	U 3SA-100/5T	1	0,75	0,99	0,92	4,4	1,7	54,0	52,1	48,8	44,9	40,2	29,0	16,8						
U 5SA-120/4	U 5SA-120/4T	1,2	0,9	1,09	1,08	4,9	2,4	44,5			41,0	40,0	36,4	32,8	32,0	26,2	18,5	13,5		
U 5SA-150/5	U 5SA-150/5T	1,5	1,1	1,39	1,31	6,5	2,7	56,0			52,4	50,5	46,4	42,0	41,0	33,8	23,8	16,5		

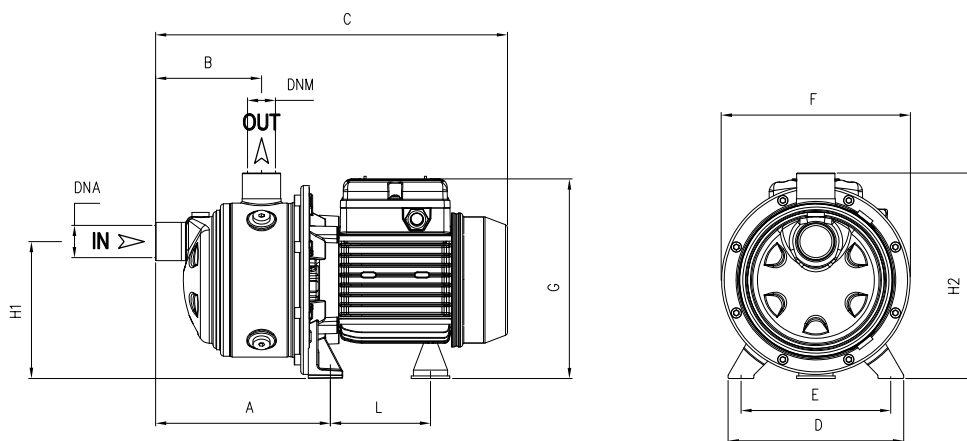

TYPE		DIMENSIONS (mm)												Kg
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM	
U 3SA-90/4	U 3SA-90/4T	238,8	175	405	164	140	178	190	93,7	128	192	1" G	1" G	10
U 3SA-100/5	U 3SA-100/5T	262,8	199	452	164	140	178	203	104,7	128	192			12,5
U 5SA-120/4	U 5SA-120/4T	238,8	175	428	164	140	178	203	104,7	128	192			12,5
U 5SA-150/5	U 5SA-150/5T	262,8	199	514	164	140	201	211	128,2	134	198			15,5





Self-priming centrifugal pumps with 4" external ejector. Suitable for water supply (even if mixed with air) of small domestic systems, that can be connected to an autoclave tank.

Construction features

Pump body	cast iron
Motor bracket	aluminum (75-100) cast iron (150-200)
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416 (75-100); stainless steel AISI 303 hydraulic part (150-200)
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar


Motor

	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

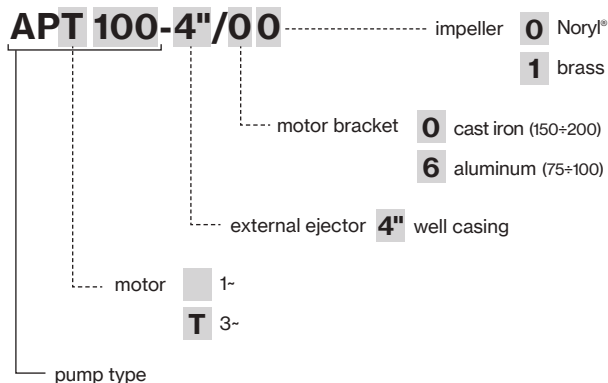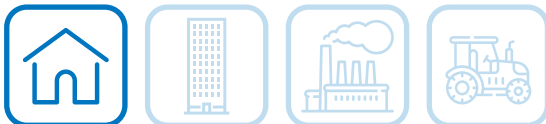


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
AP 75-100	85×110×145	60	85×110×190	80
AP 150-200	80×120×140	35	80×120×190	49



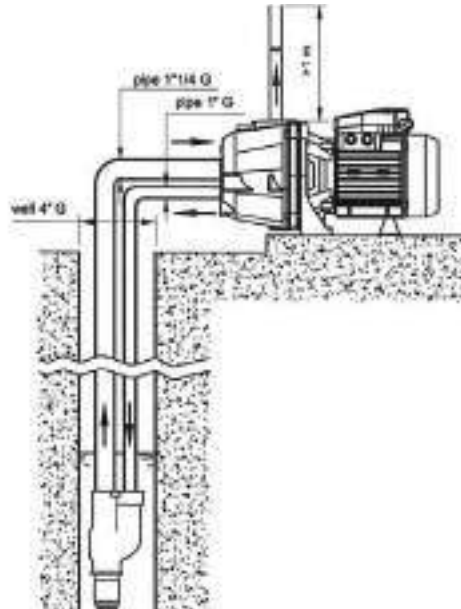

TYPE		P2		P1 (kW)		AMPERE		Ejector type	Suction depth. m	Q (m³/h - l/min)									
1~	3~	HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz			0,18	0,36	0,6	0,9	1,2	1,5	1,8	2,1	3	3,6
										3	6	10	15	20	25	30	35	50	60
H (m)																			
AP 75	APT 75	0,8	0,59	0,8	0,81	3,7	1,4	P 20	15	31	28	25	22	19	17	15	12		
								P 30	20	28	23	18	15	13	11				
AP 100	APT 100	1	0,74	1,02	1,05	4,7	2,3	P 20	15	40	37	34	30	27	24	21	18		
								P 30	20	37	34	30	25	21	17				
AP 150	APT 150	1,5	1,1	1,65	1,65	8,2	3	P 20	15						42	35	25	21	
								P 30	20					50	42	37	30	27	
AP 200	APT 200	2	1,5	2,22	2,22	10,3	4,1	P 20	15							46	35	30	
								P 30	20					49	43	40	20		

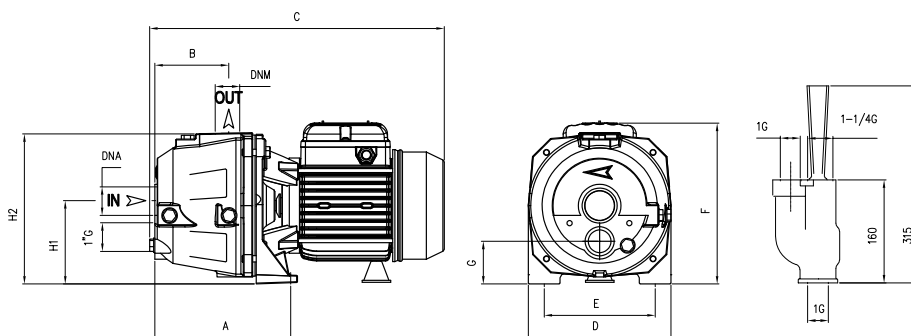

TYPE		DIMENSIONS (mm)											M			Kg
-1	-3	A	B	C	D	E	F	G	H1	H2	DNA	DNM	I	L	M	
AP 75	APT 75	168	82	360	180	140	195	52	97	188	1" 1/4 G	1" G	440	200	225	16
AP 100	APT 100	168	82	360	180	140	195	52	97	188			440	200	225	18
AP 150	APT 150	125	74	415	220	177	230	60	112	240			525	230	280	28,5
AP 200	APT 200	125	74	415	220	177	230	60	112	240			525	230	280	29






Self-priming centrifugal pumps for water supply (also mixed with air) of small and medium domestic and civil installations, that can be connected to an autoclave tank.

Construction features

Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303 hydraulic side
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar


Motor

	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

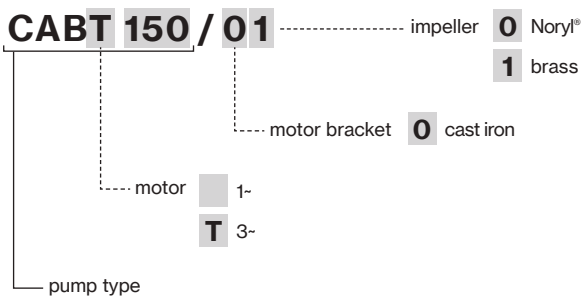

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CAB	85×110×140	30	85×110×190	42




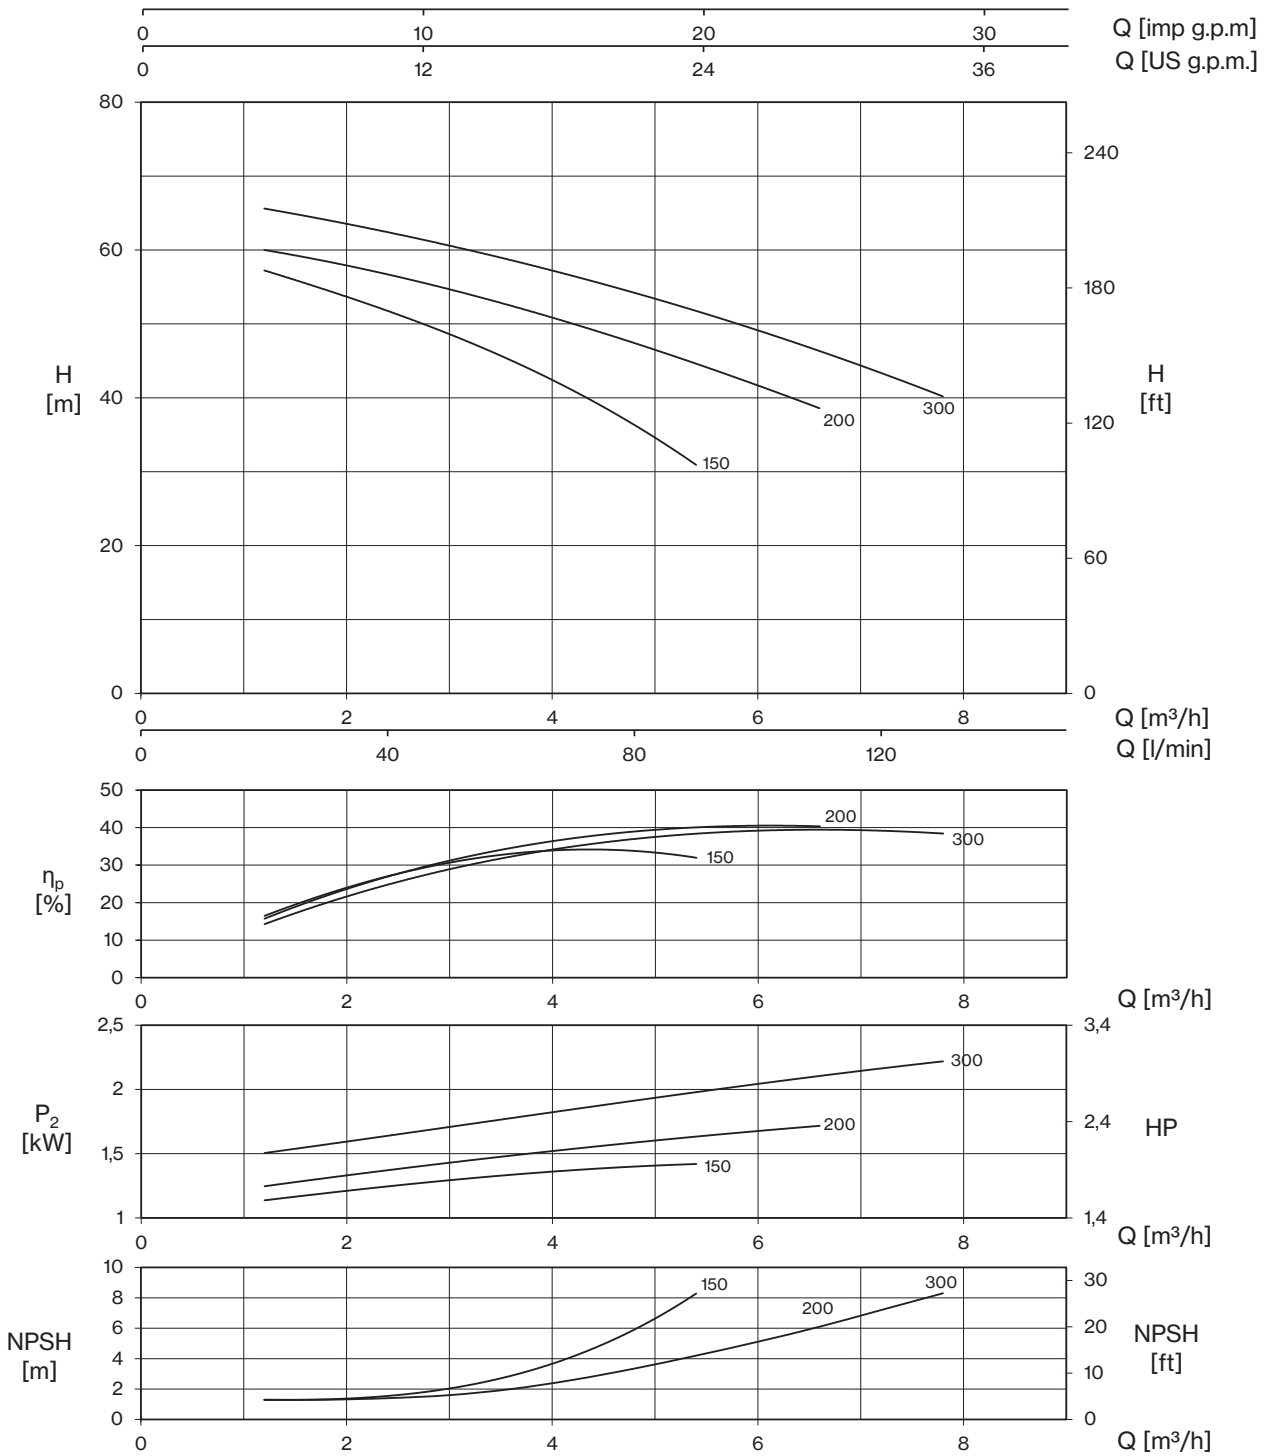



TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	1,2	1,8	3	4,2	5,4	6,6	7,8
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	20	30	50	70	90	110	130
								H (m)							
CAB 150	CABT 150	2	1,5	1,8	1,7	8,2	3,6	61,5	57,2	54,7	48,5	40,9	30,8		
CAB 200	CABT 200	2,5	1,85	2,2	2,1	9,9	4,3	62,8	60,0	58,5	54,7	50,1	44,5	38,7	
CAB 300	CABT 300	3	2,2	2,8	2,6	13,0	5,2	68,4	65,6	64,0	60,7	56,5	51,7	46,4	40,2




CAB

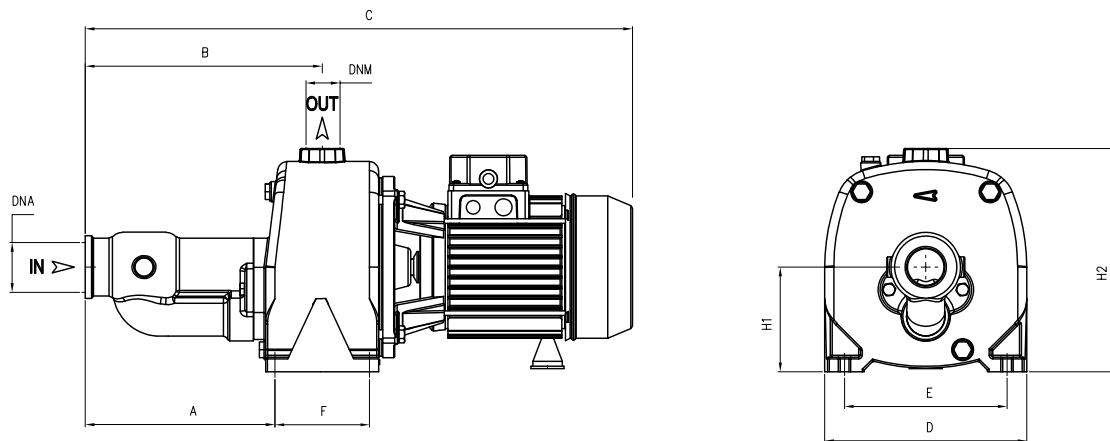

TYPE		DIMENSIONS (mm)														
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	-1	-3
CAB 150	CABT 150	204	257	626	220	177	105	112	240	1" 1/2 G	1" G	638	230	255	33	34
CAB 200	CABT 200	204	257	626	220	177	105	112	240			638	230	255	32,5	33
CAB 300	-	204	257	696	220	177	105	112	240			777	259	280	42	-
-	CABT 300	204	257	626	220	177	105	112	240			638	230	255	-	34



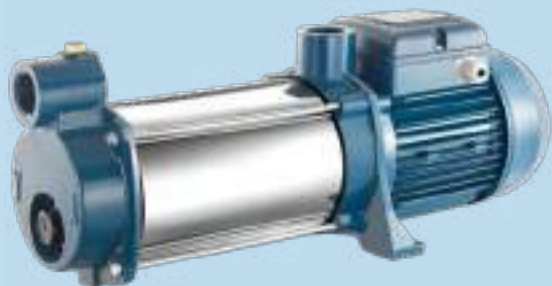

Multi-stage centrifugal pumps, horizontal and self-priming, particularly suitable for constructing small and medium sized pressurisation systems; able to suck liquids mixed with air.


Construction features

Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl®
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	0 - 50 °C
Operating pressure	max 11 bar

Motor

	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4


MP T 100 /4 A

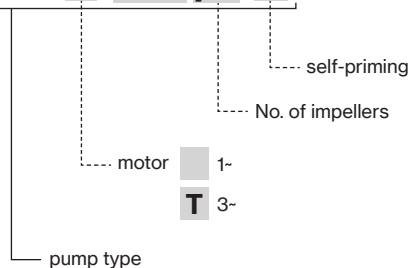


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
MP/A	80×120×150	48	80×120×190	64




MP/A

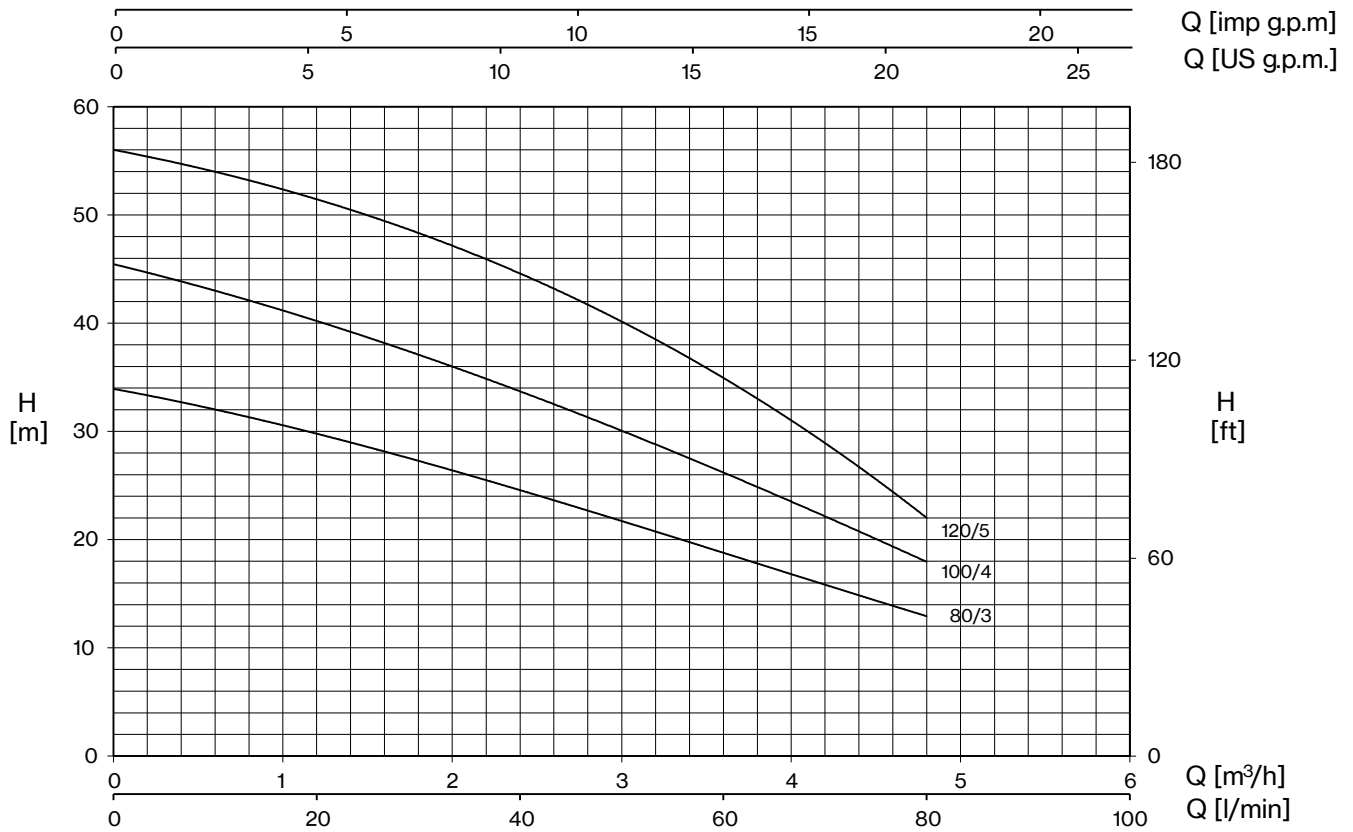


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)				
1~	3~					1~	3~	0	1,2	2,4	3,6	4,8
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)				
MP 80/3 A	MPT 80/3 A	0,8	0,59	0,83	0,88	3,8	1,6	34,0	29,5	25,0	18,5	13,0
MP 100/4 A	MPT 100/4 A	1	0,74	1,07	1,1	5,0	1,9	45,5	40,0	34,0	26,0	18,0
MP 120/5 A	MPT 120/5 A	1,2	0,88	1,27	1,33	6,1	2,3	56	51,5	44,5	35,0	22,0

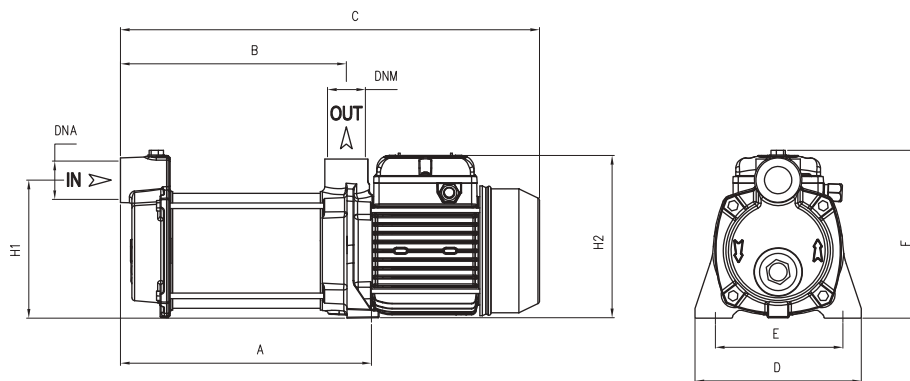

TYPE		DIMENSIONS (mm)													
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	Kg
MP 80/3 A	MPT 80/3 A	245	224	425	180	140	185	150	175			440	200	215	14
MP 100/4 A	MPT 100/4 A	270	240	450	180	140	185	150	175	1" G	1" G	500	200	215	15,5
MP 120/5 A	MPT 120/5 A	295	264	475	180	140	185	150	175			500	200	215	16



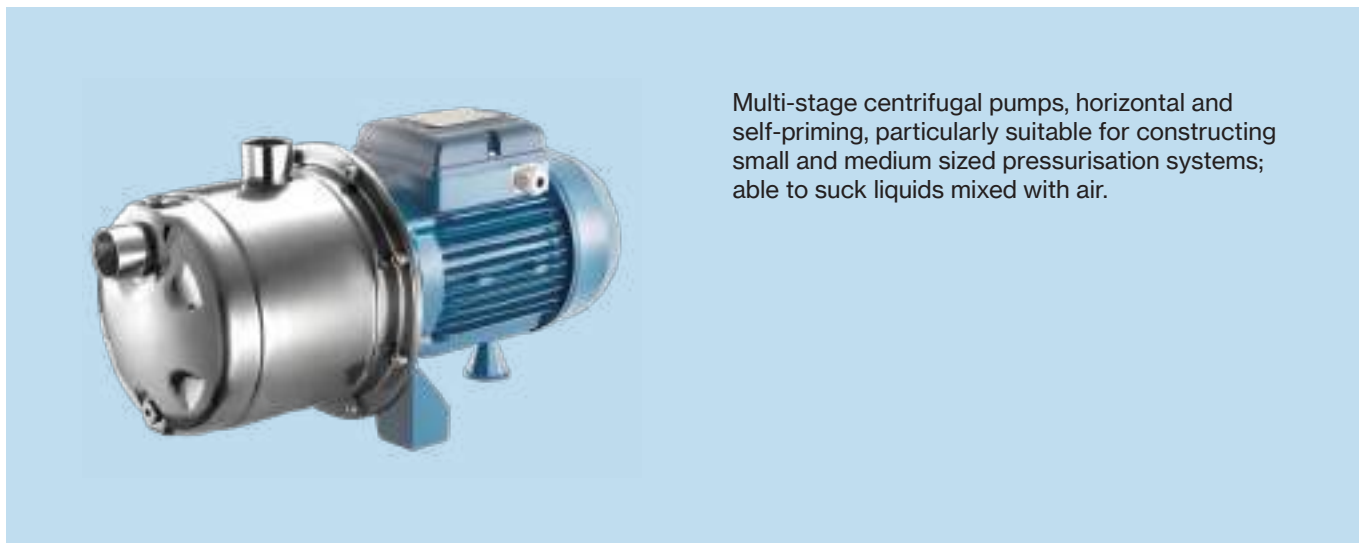


Multi-stage centrifugal pumps, horizontal and self-priming, particularly suitable for constructing small and medium sized pressurisation systems; able to suck liquids mixed with air.

Construction features	
Pump body	stainless steel AISI 304
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-NBR
Pump shaft	stainless steel AISI 416
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar

Motor	
	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4


MPX 100 /4 T

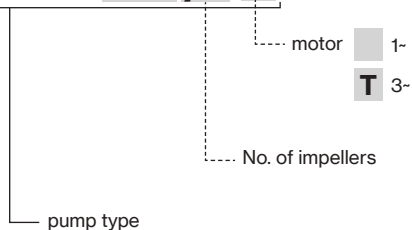


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
MPX	85×110×170	60	85×110×190	80



MPX

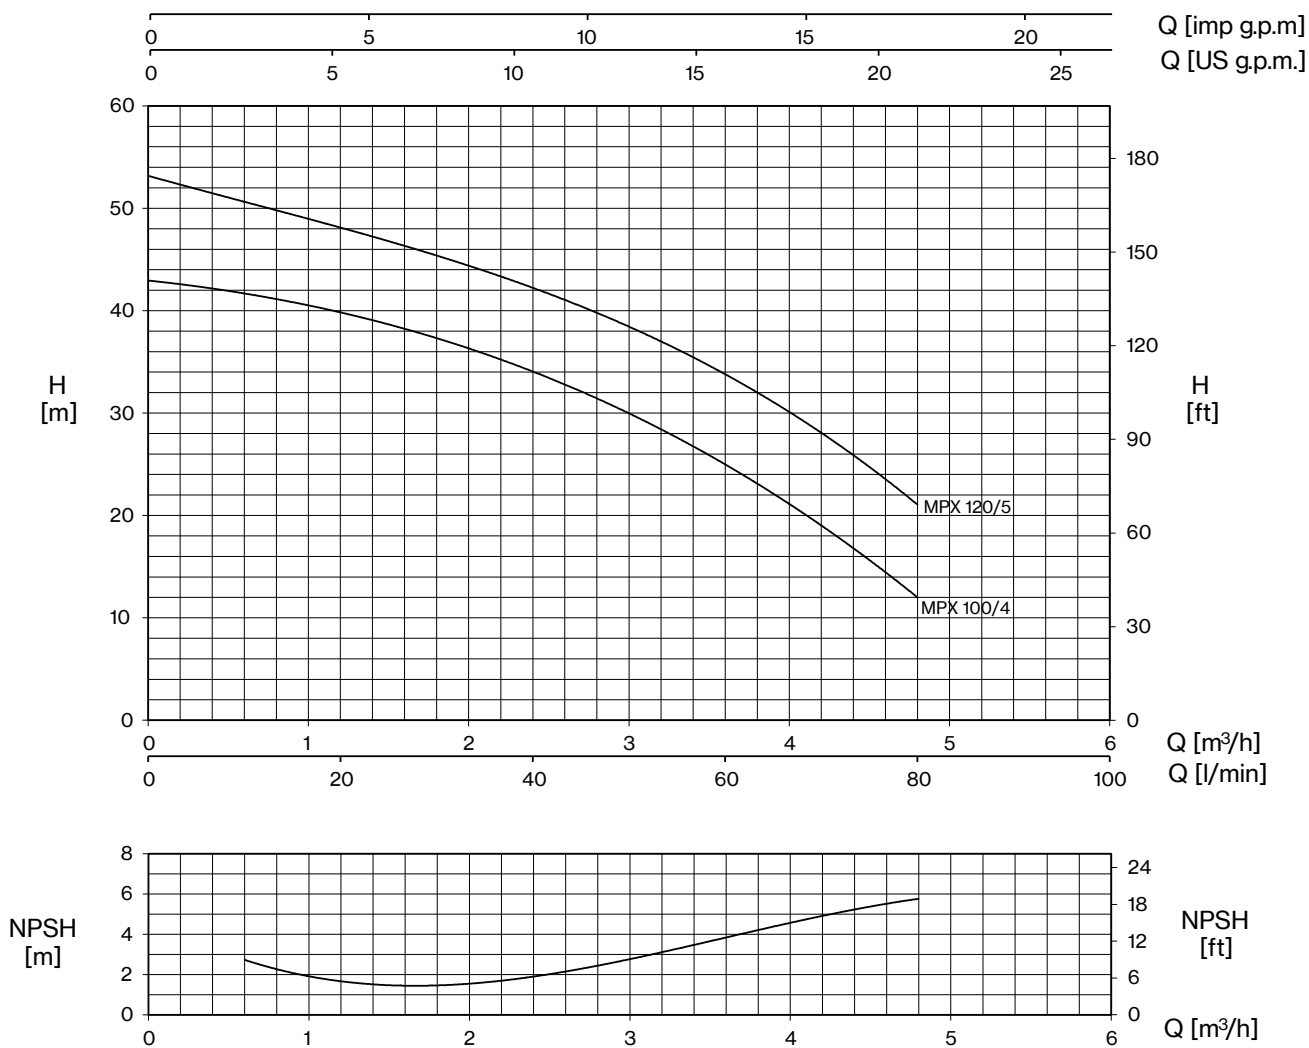

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)					
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,6	1,2	2,4	3,6	4,8
								0	10	20	40	60	80
		H (m)											
MPX 100/4	MPXT 100/4	1	0,74	1,07	1,1	5,0	1,9	43,0	41,5	40,0	34,0	25,0	12,0
MPX 120/5	MPXT 120/5	1,2	0,88	1,27	1,33	6,1	2,3	53,0	51,0	48,0	42,0	34,0	21,0

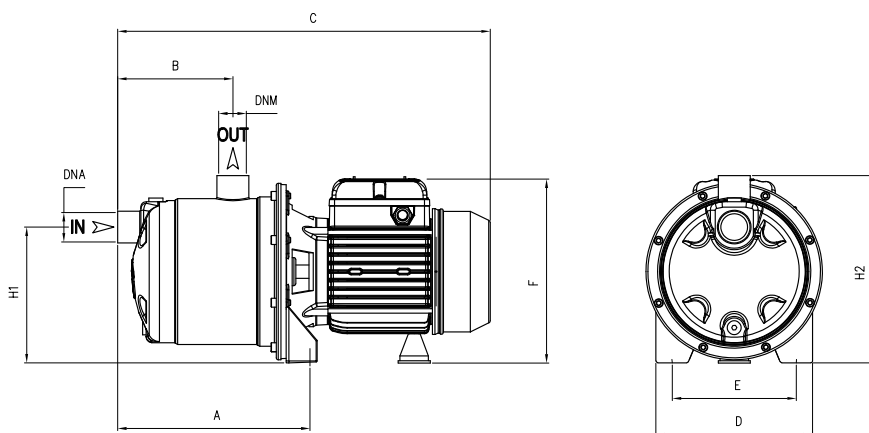

TYPE		DIMENSIONS (mm)													
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	Kg
MPX 100/4	MPXT 100/4	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	
MPX 120/5	MPXT 120/5	208	128	410	175	140	215	153	210	1" G	1" G	430	210	235	11,5



MPX (Garden version)

Portable electropumps complete with handle, cable with plug and switch.
The performances depend on adopted pump type.




MPX




MPX BOX

TYPE	P2		P1 (kW)	Pipe		Performance	
	HP	kW	1~	Suction ("G)	Delivery ("G)	Q (l/min)	H (m)
MPX 100/4	1	0,74	1,07	1	1	10,0-80,0	41,5-12,0
MPX 120/5	1,2	0,88	1,27	1	1	10,0-80,0	51,0-21,0

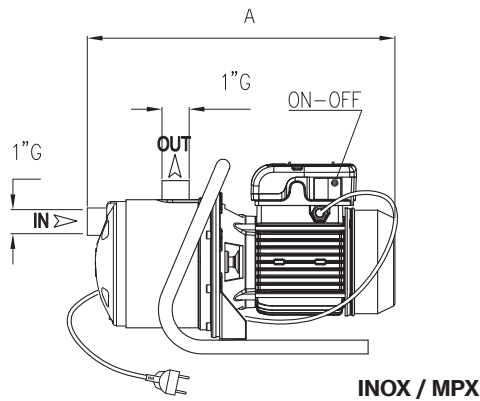



INOX / MPX

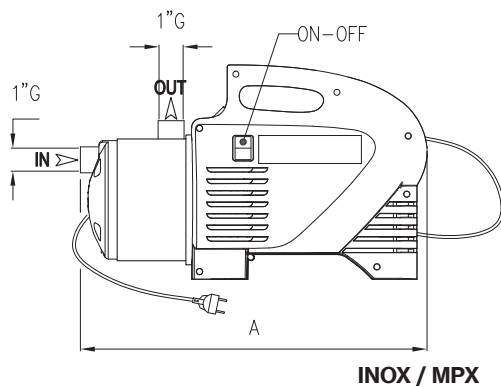

INOX / MPX


TYPE	DIMENSIONS (mm)		
	A	B	C
MPX 100/4	410	175	285
MPX 120/5	410	175	285
MPX 100/4 BOX	429	209	287



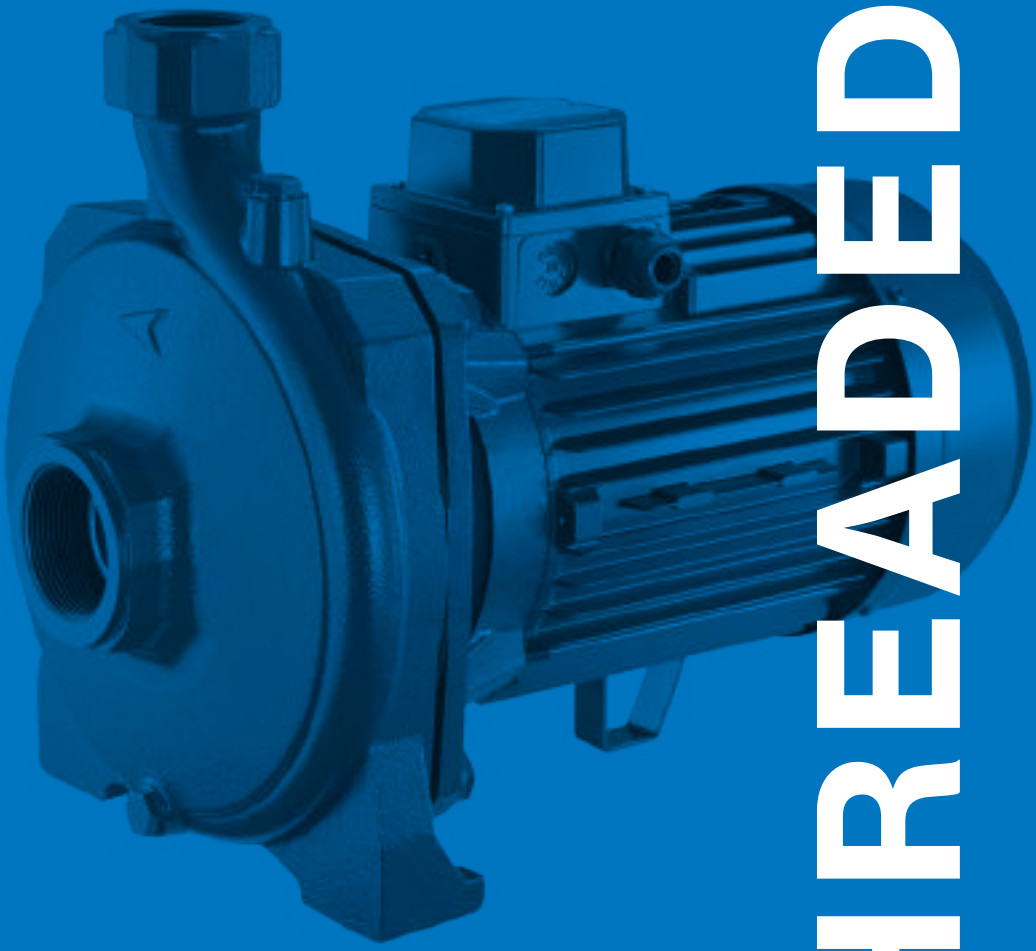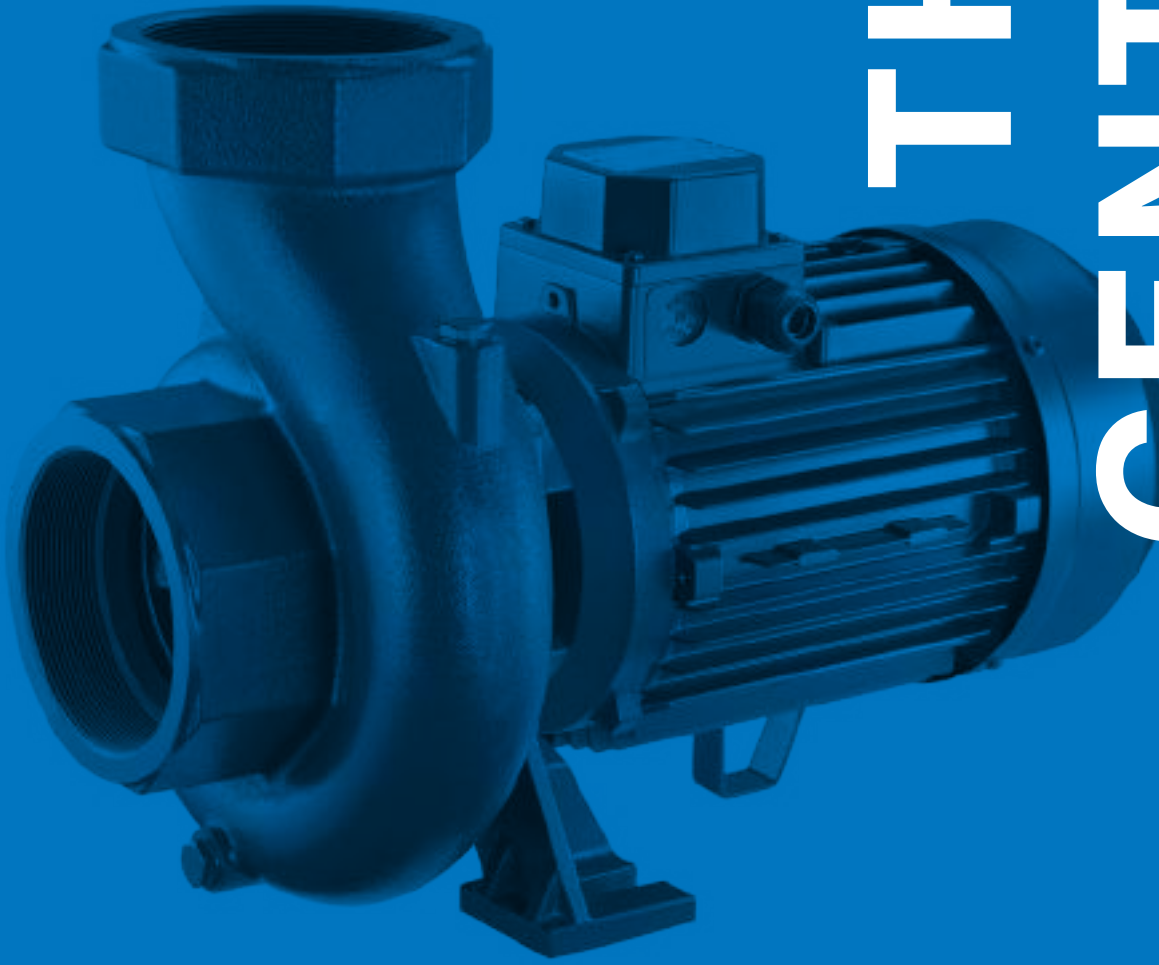

THREADED CENTRIFUGAL

THREADED CENTRIFUGAL PUMPS

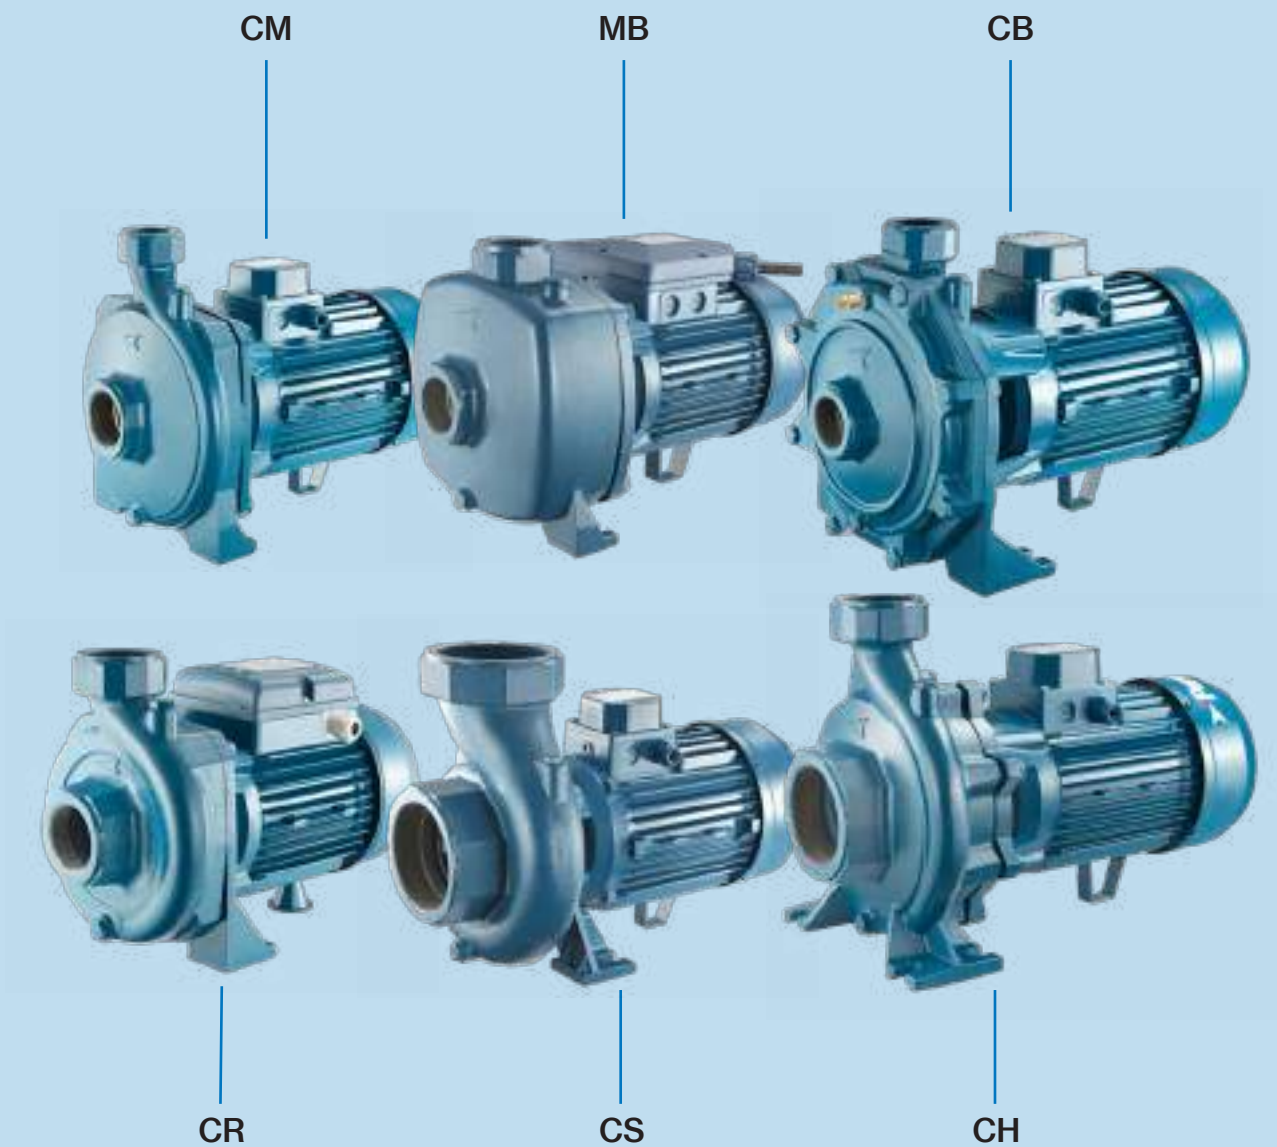


Extremely silent single and double impeller centrifugal pumps, designed for a wide range of applications

Applications:

- Water supply
- Pressurization
- Water circulation systems for heating and air conditioning
- Liquid transfer in industry and horticulture



THREADED CENTRIFUGAL PUMPS

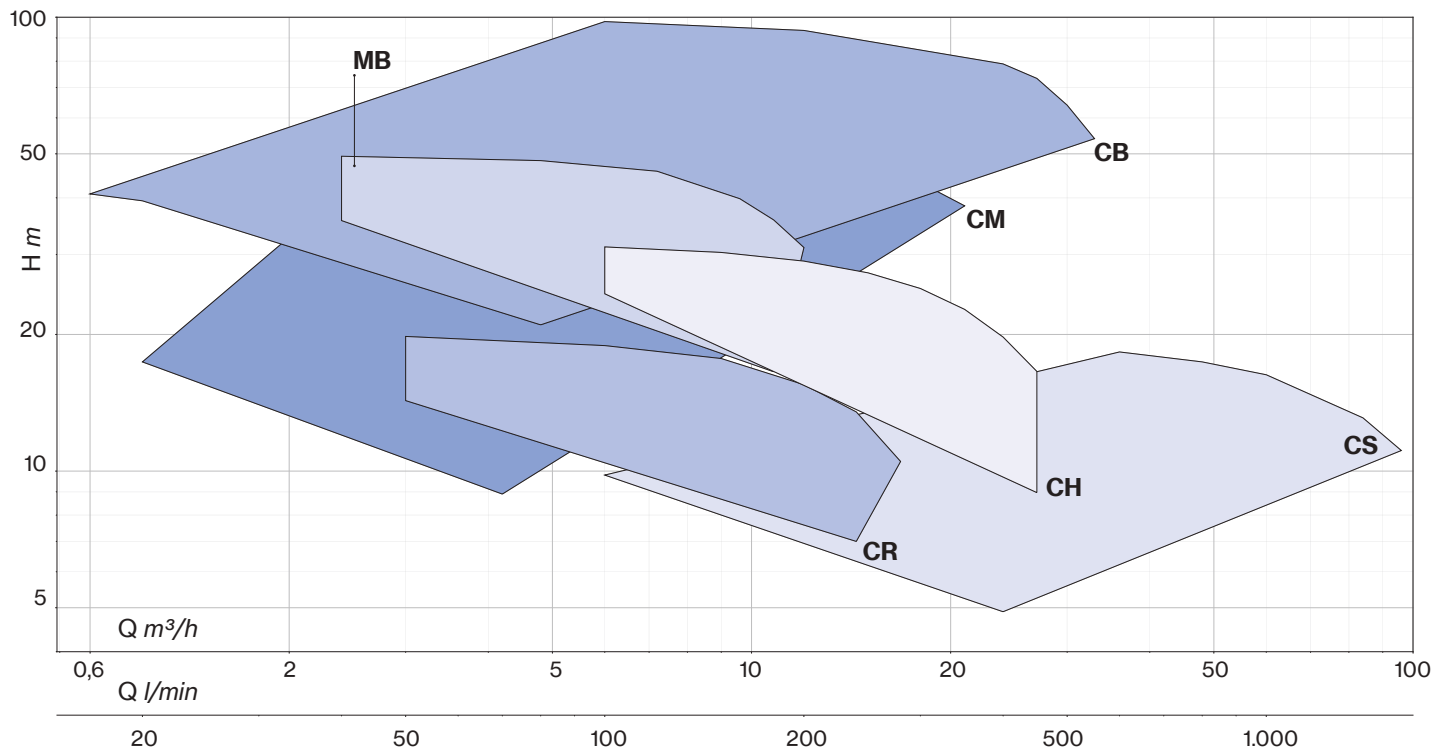



Single-impeller centrifugal pumps, extremely quiet, suitable for domestic, civil and industrial applications. The pumps guarantee constant pressure at the variation of flow rates.


Construction features




Pump body	cast iron
Motor bracket	cast iron (45, 50, 164÷550) aluminum (75÷100)
Impeller	Noryl® (45) Noryl® or brass (50÷314) brass (400-550)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416 (45÷100) stainless steel AISI 303 (164÷550)
Liquid temperature	Noryl® impeller: 0 - 50 °C brass impeller: 0 - 90 °C
Operating pressure	max 6 bar (45÷100) max 8 bar (164÷550)

Motor

	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection up to MEC 80)
Insulation class	F
Protection degree	IPX4

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CM 45-50	80×120×145	102	80×120×190	136
CM 75-100	85×110×145	65	85×110×195	91
CM 164÷314	85×110×140	40	85×110×170	60
CM 314 (1~)	85×110×150	24	85×110×180	30
CM 400-550	85×110×150	24	85×110×180	30

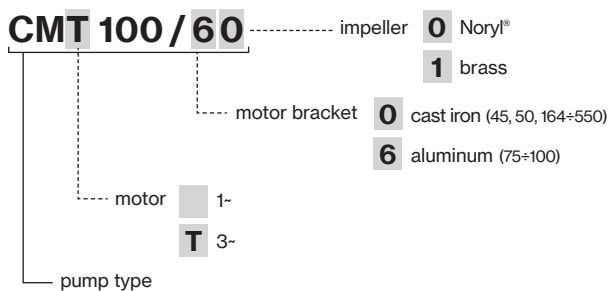


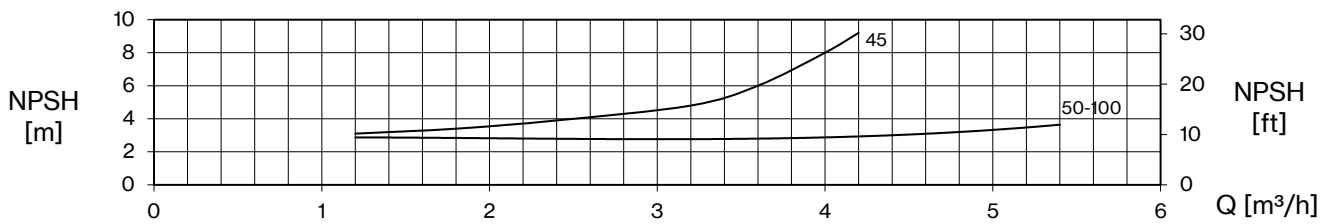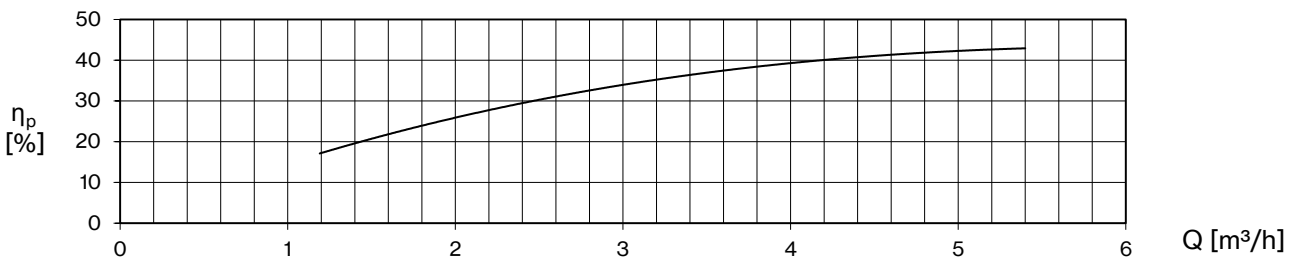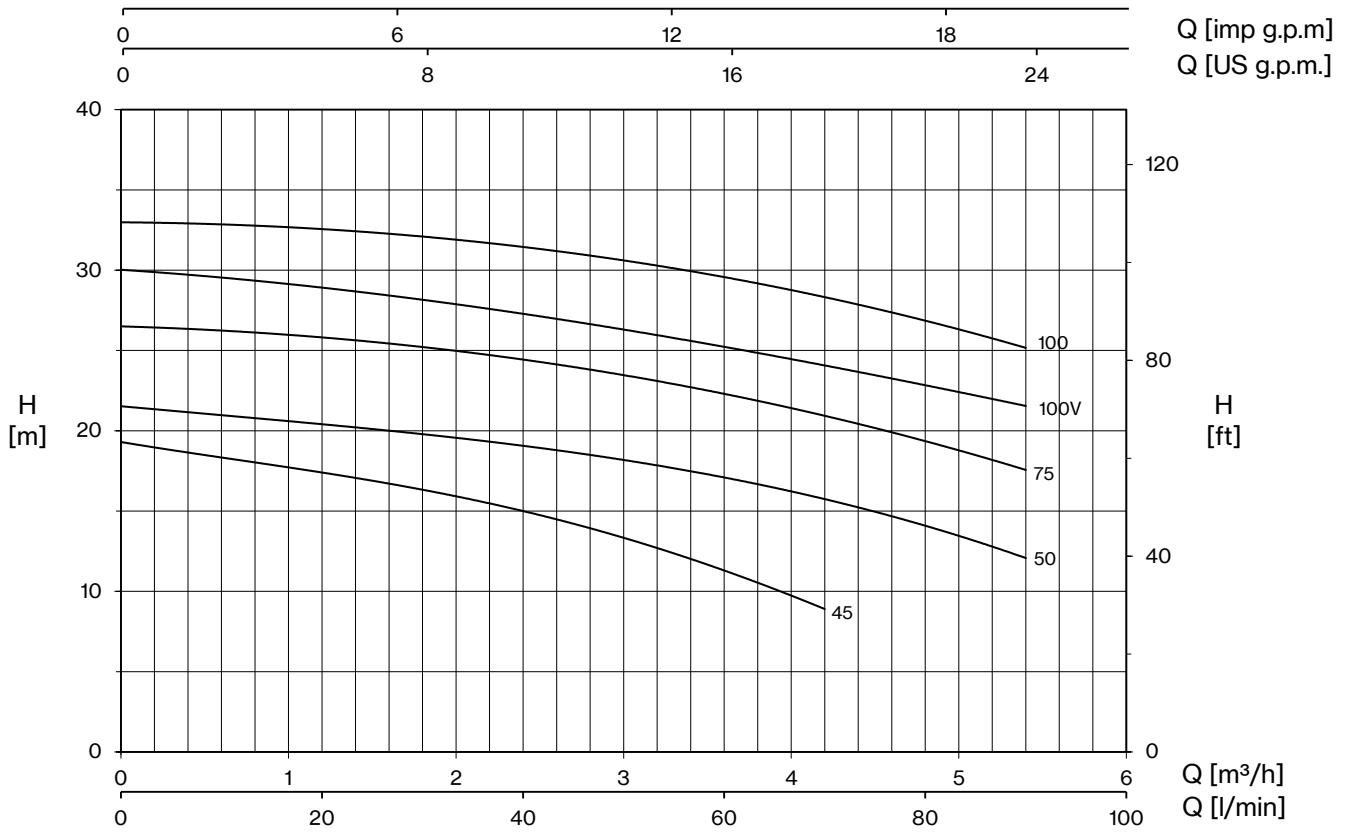

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	1- 230V 50 Hz	3~ 400V 50 Hz	0	1,2	2,4	3,6	4,2
		0	20	40	60					70	80	90		
		HP	kW	1~	3~	H (m)								
CM 45	CMT 45	0,4	0,3	0,51	0,56	2,3	1,0	19,3	17,4	15,0	11,3	8,9		
CM 50	CMT 50	0,5	0,37	0,59	0,65	2,8	1,1	21,5	20,5	19,0	17,0	15,8	14,2	12,0
CM 75	CMT 75	0,8	0,59	0,9	0,94	4,5	1,7	26,5	25,8	24,5	22,2	20,9	19,5	17,5
CM 100 V	-	1	0,74	1,05	-	4,6	-	30,0	29,0	27,2	25,2	24,1	22,9	21,5
CM 100	CMT 100	1	0,74	1,16	1,17	5,7	2,0	33,0	32,5	31,5	29,6	28,3	26,8	25,2




CM

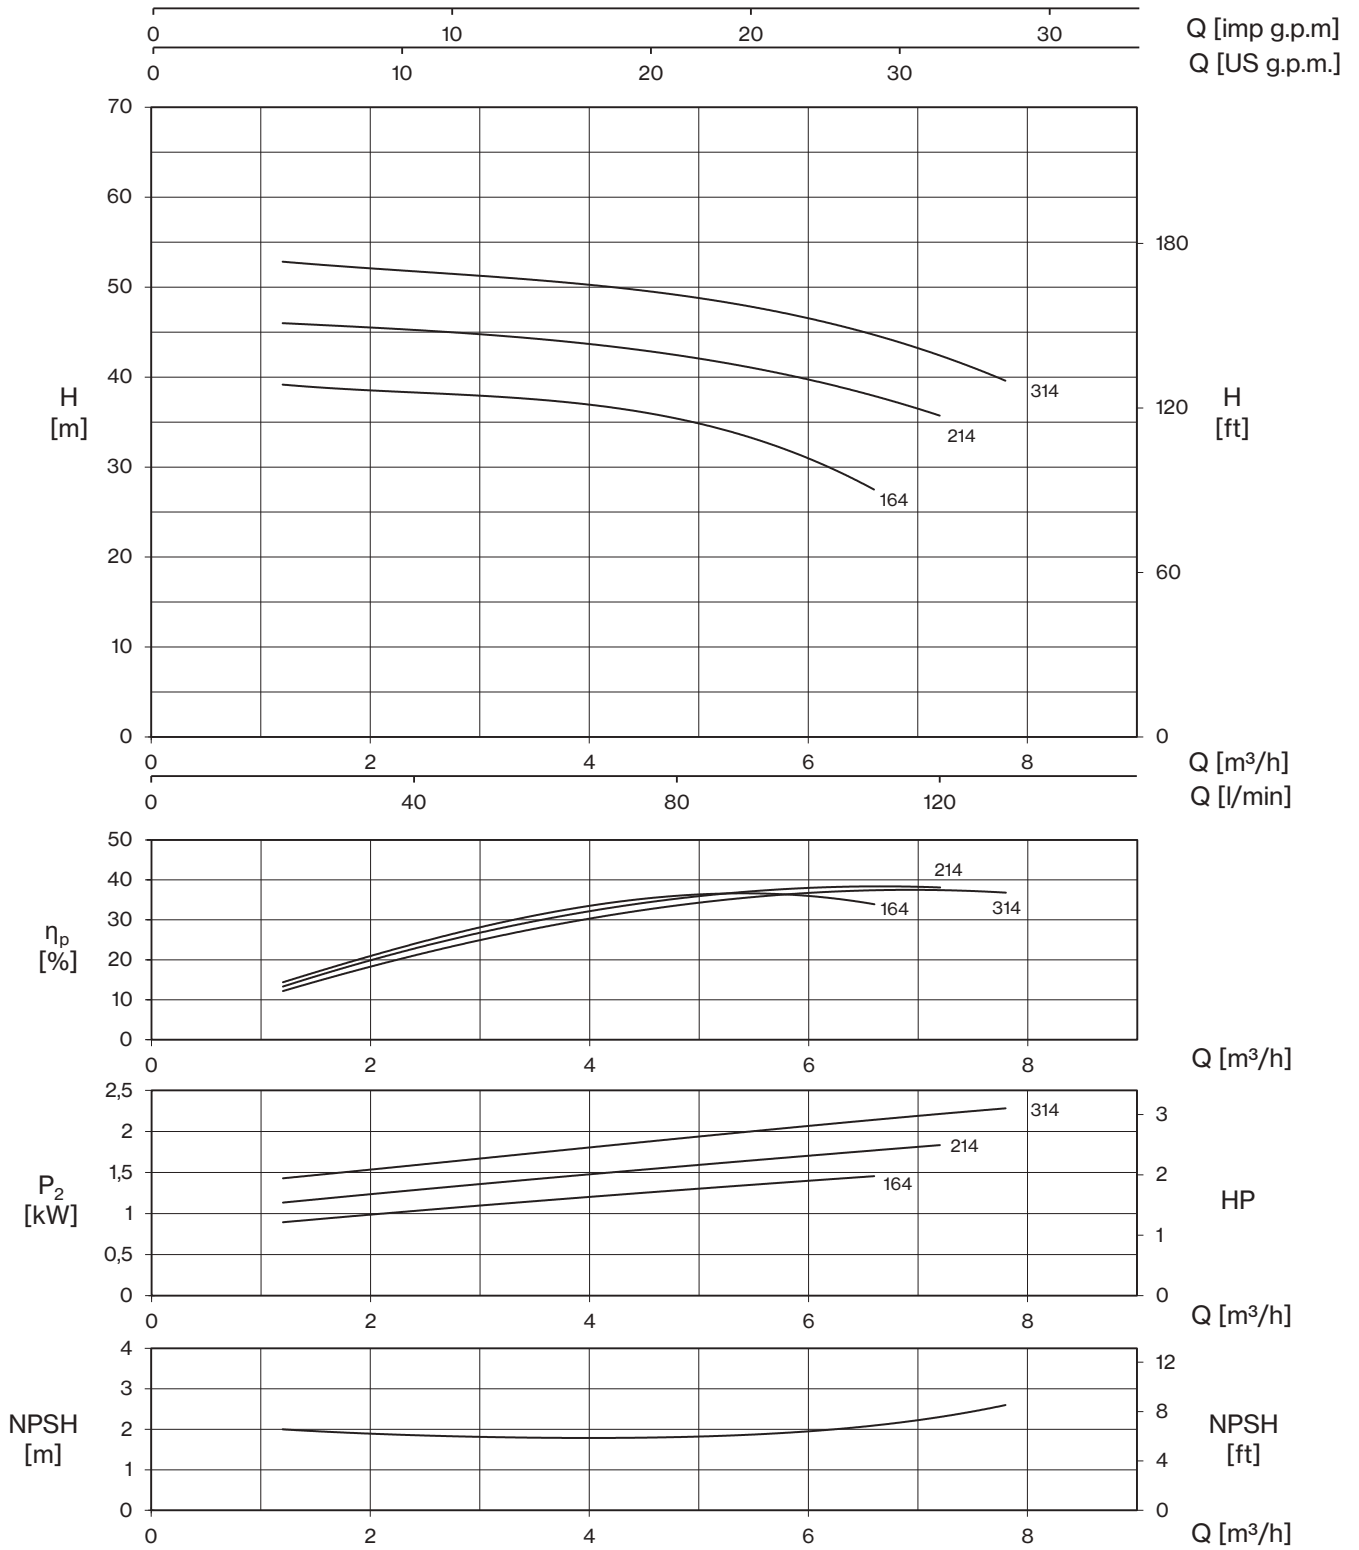

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)									
1~	3~					1~	3~	0	1,2	2,4	3,6	4,8	6	6,6	7,2	7,8	
		HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz	0	20	40	60	80	100	110	120	130	
						H (m)											
CM 164	CMT 164	2	1,5	1,8	1,8	8,2	3,7	39,4	39,1	38,6	37,2	35,2	31,5	27,2			
CM 214	CMT 214	2,5	1,85	2,3	2,2	10,4	4,4	46,3	45,9	45,5	44,1	42,1	39,8	38,2	35,5		
CM 314	CMT 314	3	2,2	2,8	2,6	13,0	5,2	53,2	52,7	52,1	50,8	48,8	46,3	45,0	42,9	39,2	




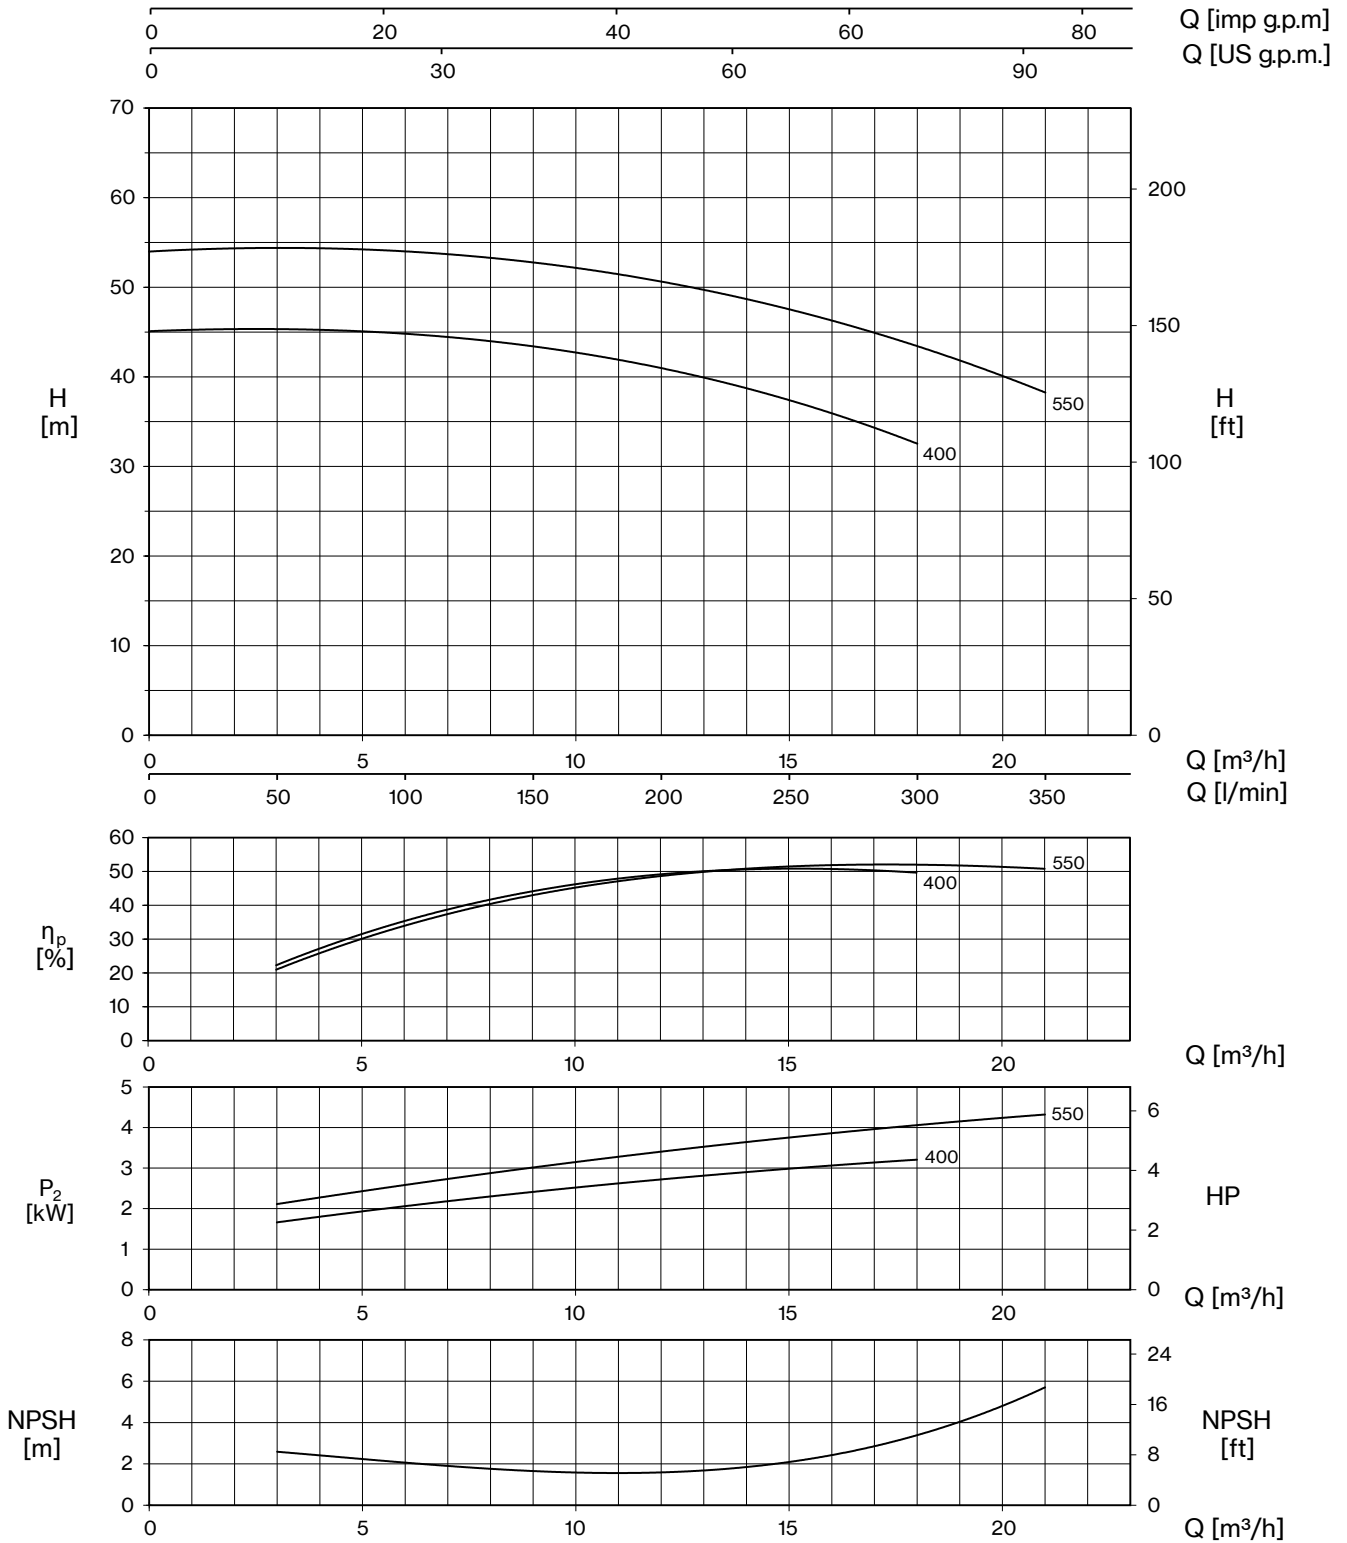



TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	3	6	9	12	15	18	21
		0	50	100	150			200	250	300	350				
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)							
CM 400	CMT 400	4	3	3,6	3,7	16,0	6,7	45,1	45,2	44,9	43,4	40,9	37,4	32,5	
-	CMT 550	5,5	4	-	4,9	-	9,0	54,1	54,1	54,0	52,9	50,7	47,5	43,2	38,4

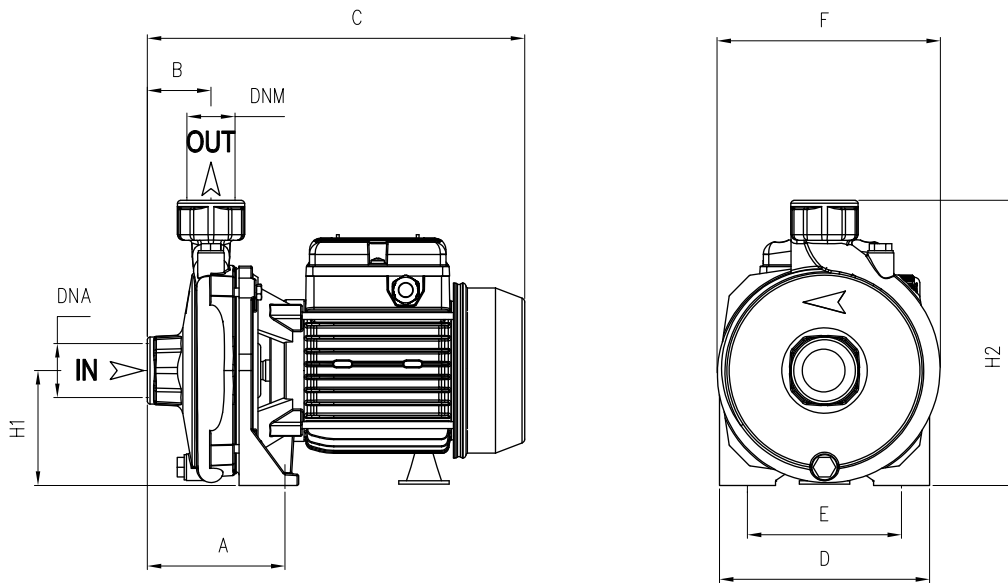

CM



TYPE		DIMENSIONS (mm)														
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	-1	-3
CM 45	CMT 45	95	45,5	265	150	110	160	82	202	1" G	1" G	290	175	225	8,5	8,5
CM 50	CMT 50	95	45,5	265	150	110	160	82	202			290	170	230	9,5	9,5
CM 75	CMT 75	110	46,5	300	180	140	185	97	234	1" G	1" G	325	200	265	13,5	13
CM 100 V	-	110	46,5	300	180	140	185	97	234			325	200	265	14	-
CM 100	CMT 100	110	46,5	300	180	140	185	97	234	1" ¼ G	1" G	420	230	309	25,5	26,5
CM 164	CMT 164	117	46,5	378	220	180	225	115	285			420	230	309	26,5	25,5
CM 214	CMT 214	117	46,5	378	220	180	225	115	285	1" ¼ G	1" G	520	235	320	34,5	-
CM 314	-	117	46,5	446	220	180	225	115	285			420	230	309	-	27
-	CMT 314	117	46,5	378	220	180	225	115	285	2" G	1" ¼ G	480	255	342	46	41,5
CM 400	CMT 400	108	54	460	240	190	250	133	323			480	255	342	-	45,5
-	CMT 550	108	54	460	240	190	250	133	323							






Two impeller compact centrifugal pumps for constructing pressurisation systems for civil and industrial plant: guarantee good ratio between pressure and flow rate.

Construction features



Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303
Liquid temperature	0 - 50 °C
Operating pressure	max 8 bar


Motor

	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

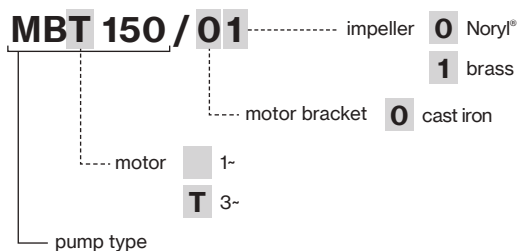


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
MB	85×110×130	40	85×110×190	60


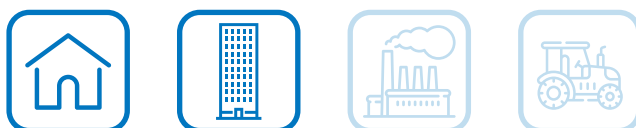


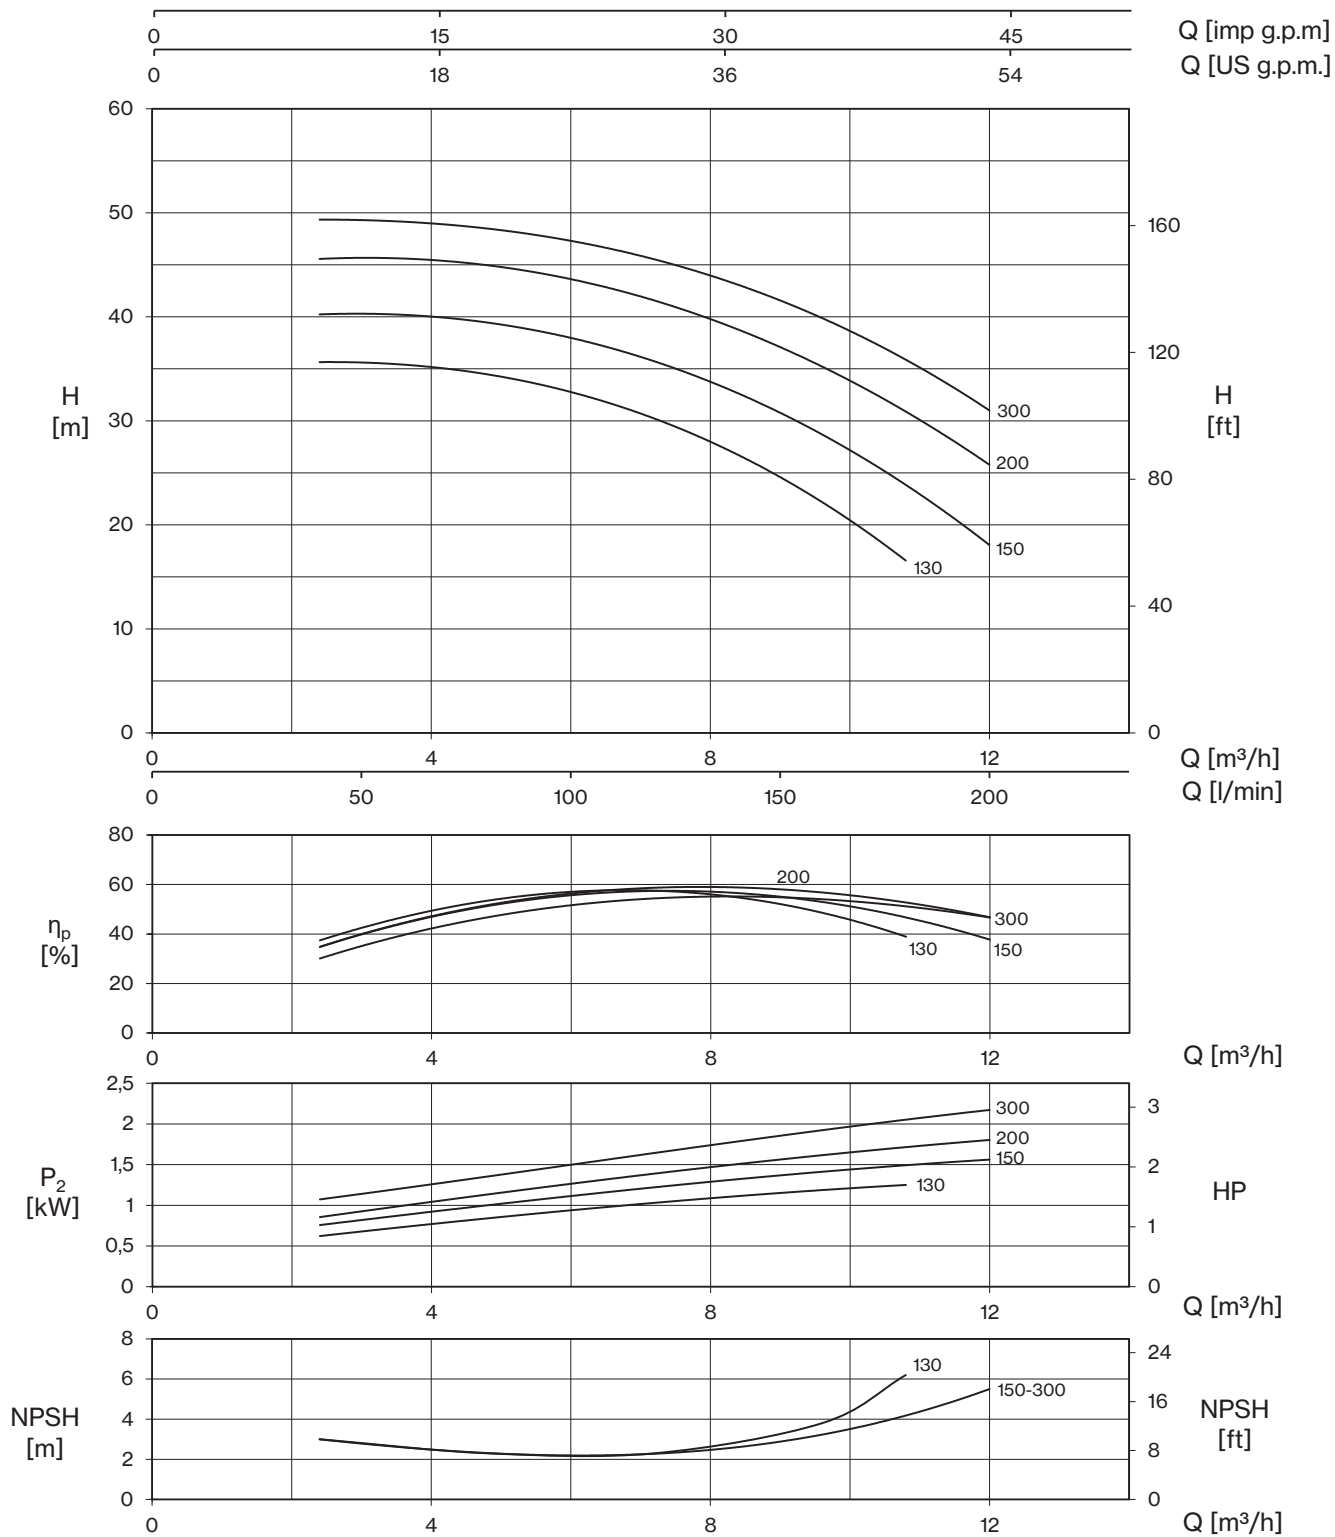

TYPE		P2		P1 (kW)		AMPERE		Q (m ³ /h - l/min)						
1-	3-	HP	kW	1-	3-	1- 230V 50 Hz	3- 400V 50 Hz	0	2,4	4,8	7,2	9,6	10,8	12
								0	40	80	120	160	180	200
								H (m)						
MB 130	-	1,8	1,3	1,6	-	7,4	-	35,1	35,6	34,5	30,2	22,2	16,6	
MB 150	MBT 150	2	1,5	2,0	1,9	8,9	3,7	39,2	40,2	39,5	35,7	28,7	23,9	18,0
MB 200	MBT 200	2,5	1,85	2,3	2,2	10,4	4,4	44,9	45,6	44,8	41,7	35,2	30,8	25,8
MB 300	MBT 300	3	2,2	2,6	2,5	12,4	5,1	49,5	49,4	48,3	45,8	39,8	35,8	31,1



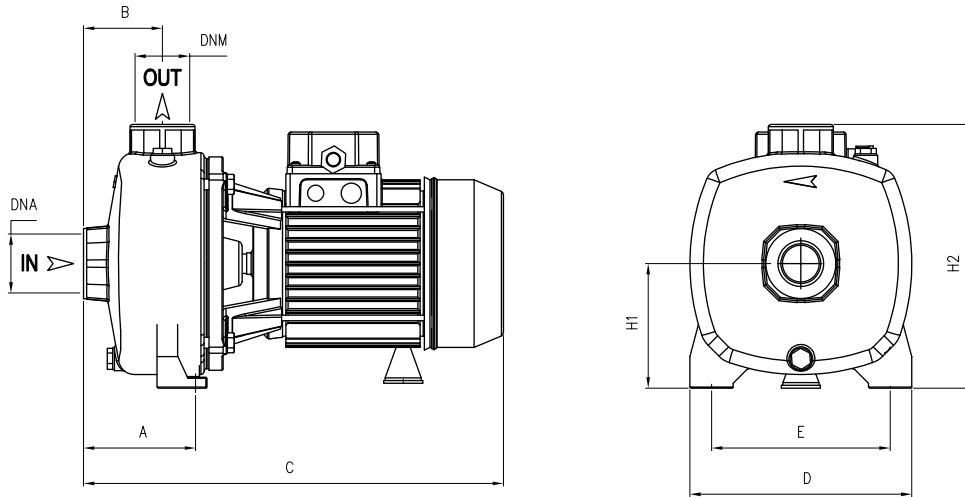

TYPE		DIMENSIONS (mm)												 Kg	
-1	-3	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	-1	-3
MB 130	-	108	73	415	205	165	115	242	1" 1/2 G	1" 1/4 G	433	220	287	23,5	-
MB 150	MBT 150	108	73	415	205	165	115	242			433	220	287	24	25
MB 200	MBT 200	108	73	415	205	165	115	242	1" 1/2 G	1" 1/4 G	433	220	287	25,5	25
MB 300	-	108	73	485	205	165	115	242			520	235	320	34	-
-	MBT 300	108	73	415	205	165	115	242			433	220	287	-	26,5




Two impeller centrifugal pumps for constructing pressurisation systems for civil and industrial plant; the two counter-posed impellers guarantee high head and flow rate.

Construction features


Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass (100÷900) brass (800÷1500)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303 stainless steel AISI 416 (100)
Liquid temperature	Noryl® impeller: 0 - 50 °C brass impeller: 0 - 90 °C
Operating pressure	max 6 bar (100) max 11 bar (160÷1500)


Motor

	3~ 230/400V - 50Hz P ≤ 4kW 3~ 400/690V - 50Hz P > 4kW
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection up to MEC 80)
Insulation class	F
Protection degree	IPX4 IPX5 (800÷1500)

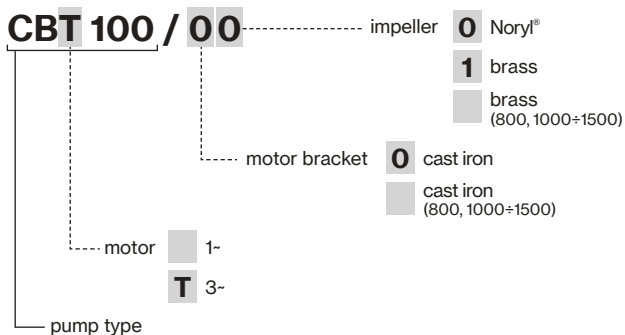

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CB 100	90×110×145	65	90×110×195	91
CB 160÷CBT 310	85×110×130	40	85×110×190	60
CB 310	85×110×150	24	85×110×180	30
CB 400÷900	80×120×150	24	80×120×180	30
CBT 800÷1500	100×120×140	18	100×120×185	24

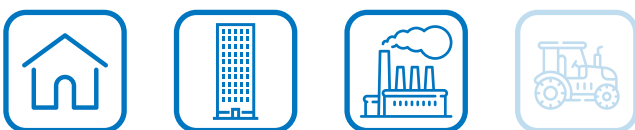


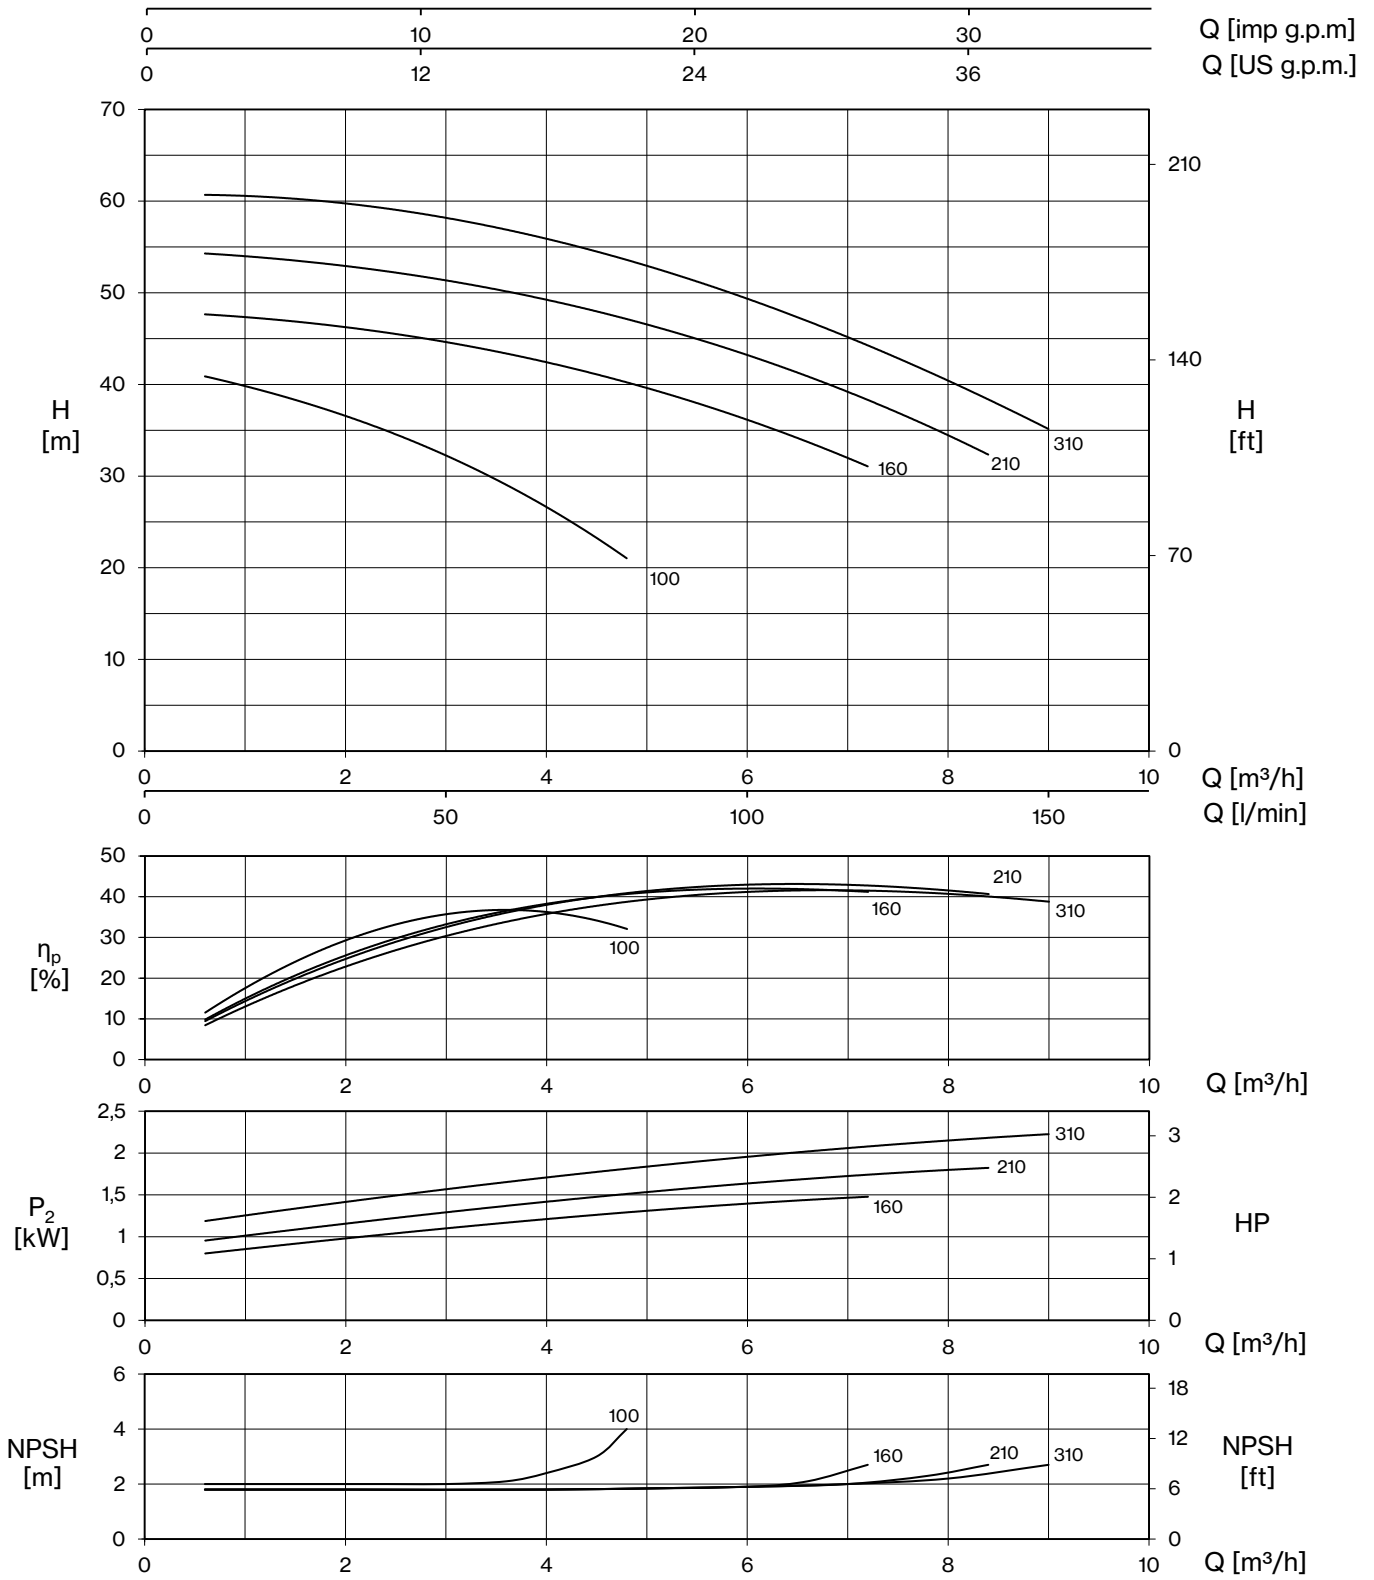

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)											
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	0,6	1,2	1,8	2,4	3,6	4,8	6	7,2	8,4	9	
								0	10	20	30	40	60	80	100	120	140	150	
								H (m)											
CB 100	CBT 100	1	0,74	1,17	1,15	5,4	2,4	42,0	40,8	39,4	37,4	34,7	29,2	21,0					
CB 160	CBT 160	2	1,5	1,9	1,8	8,5	3,7	48,3	47,7	47,1	46,5	45,7	43,5	40,1	36,2	31,1			
CB 210	CBT 210	2,5	1,85	2,3	2,2	10,4	4,4	54,9	54,4	53,8	53,0	52,3	50,5	47,1	43,1	38,3	32,4		
CB 310	CBT 310	3	2,2	2,8	2,6	13,0	5,2	61,4	60,9	60,3	59,8	59,2	57,1	53,6	49,3	44,2	38,3	35,2	




CB

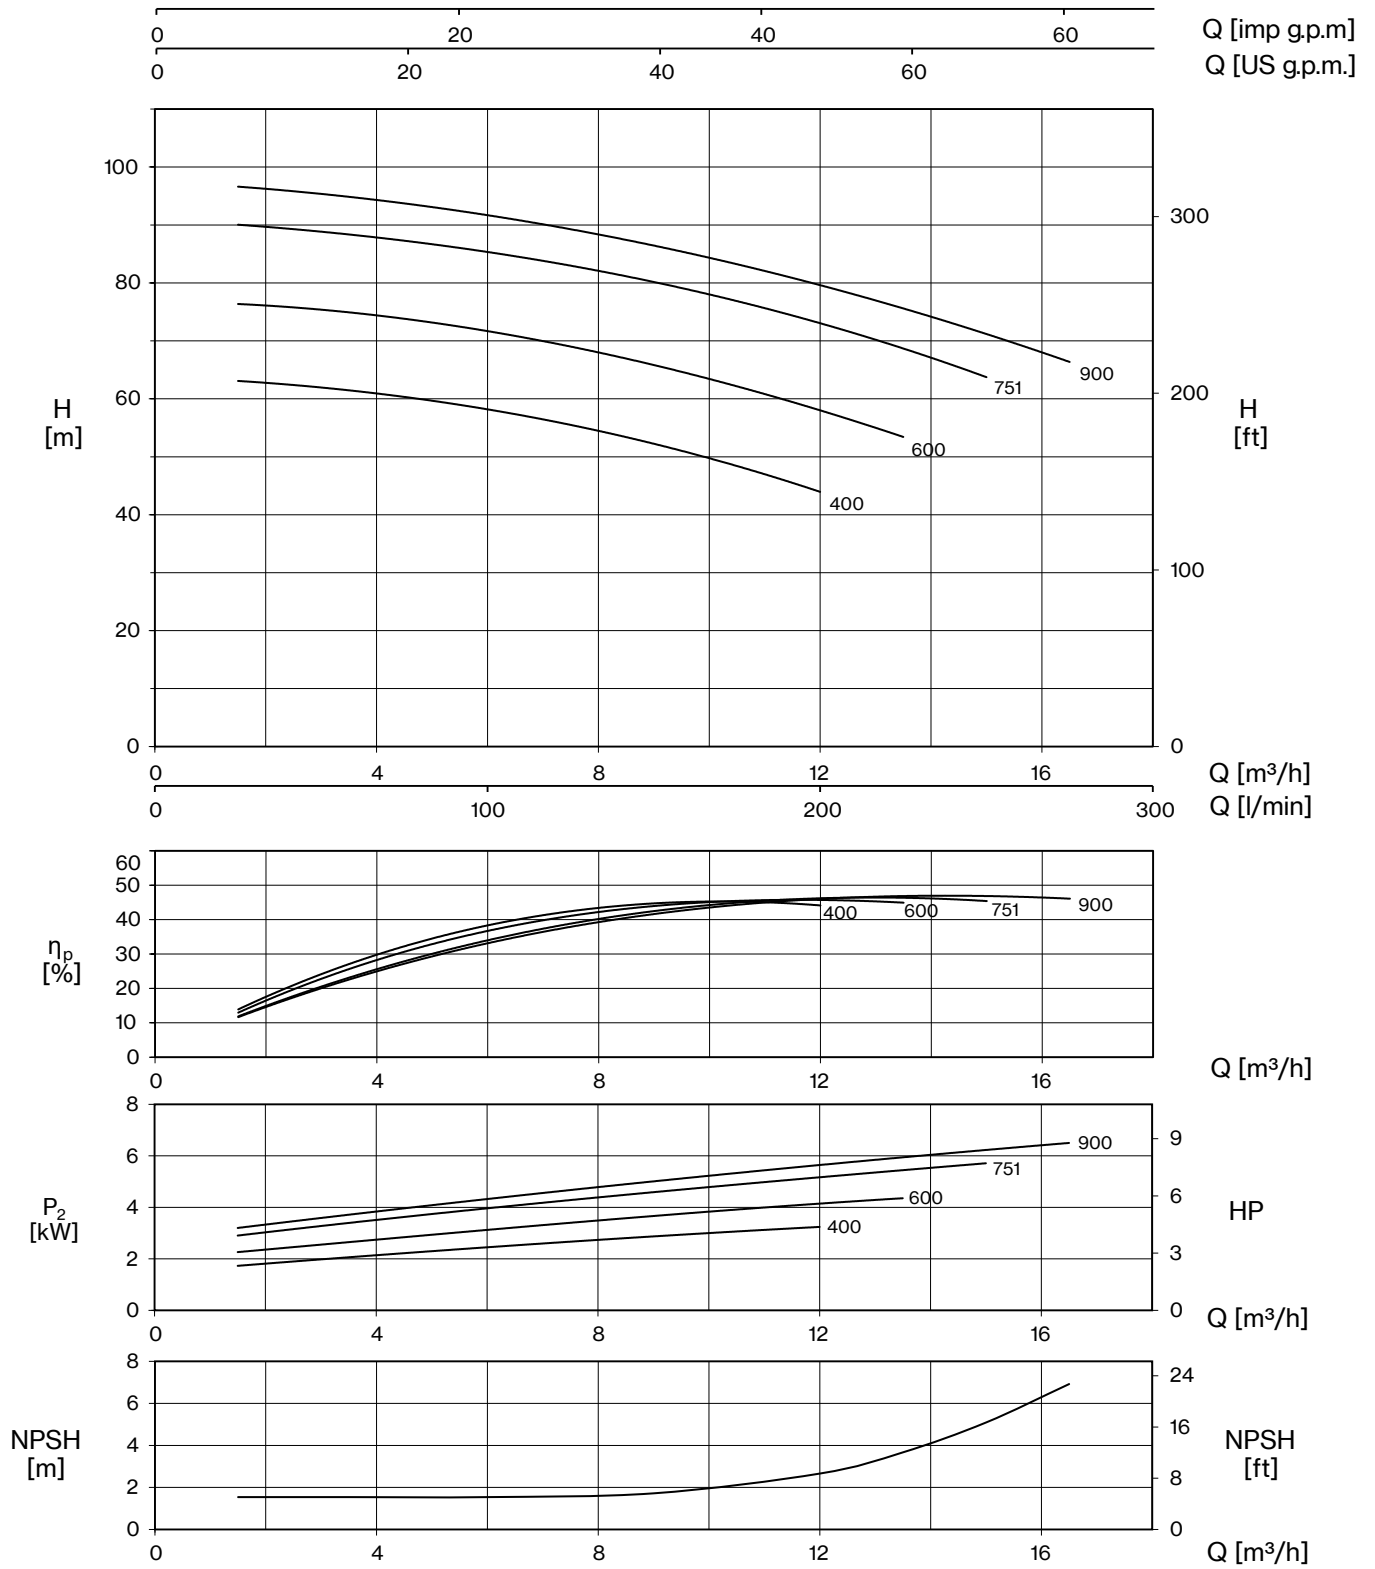


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)															
1~	3~					1~	3~	0	1,5	3,0	4,5	6,0	7,5	9,0	10,5	12	13,5	15,0	16,5				
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	25	50	75	100	125	150	175	200	225	250	275				
		H (m)																					
CB 400	CBT 400	4	3,0	3,7	3,8	16,4	6,7	63,6	63,1	62,0	60,3	58,2	55,5	52,3	48,4	43,9							
CB 600	CBT 600	5,5	4,0	5,2	5,0	23,3	9,1	76,9	76,4	75,4	73,8	71,7	69,0	65,9	62,1	58,0	53,4						
-	CBT 751	7,5	5,5	-	6,5	-	11,5	90,7	90,0	88,9	87,3	85,3	82,9	80,1	76,8	73,1	68,8	63,7					
-	CBT 900	10	7,5	-	7,3	-	13,3	97,5	96,6	95,4	93,7	91,7	89,2	86,5	83,3	79,8	75,2	71,2	66,4				




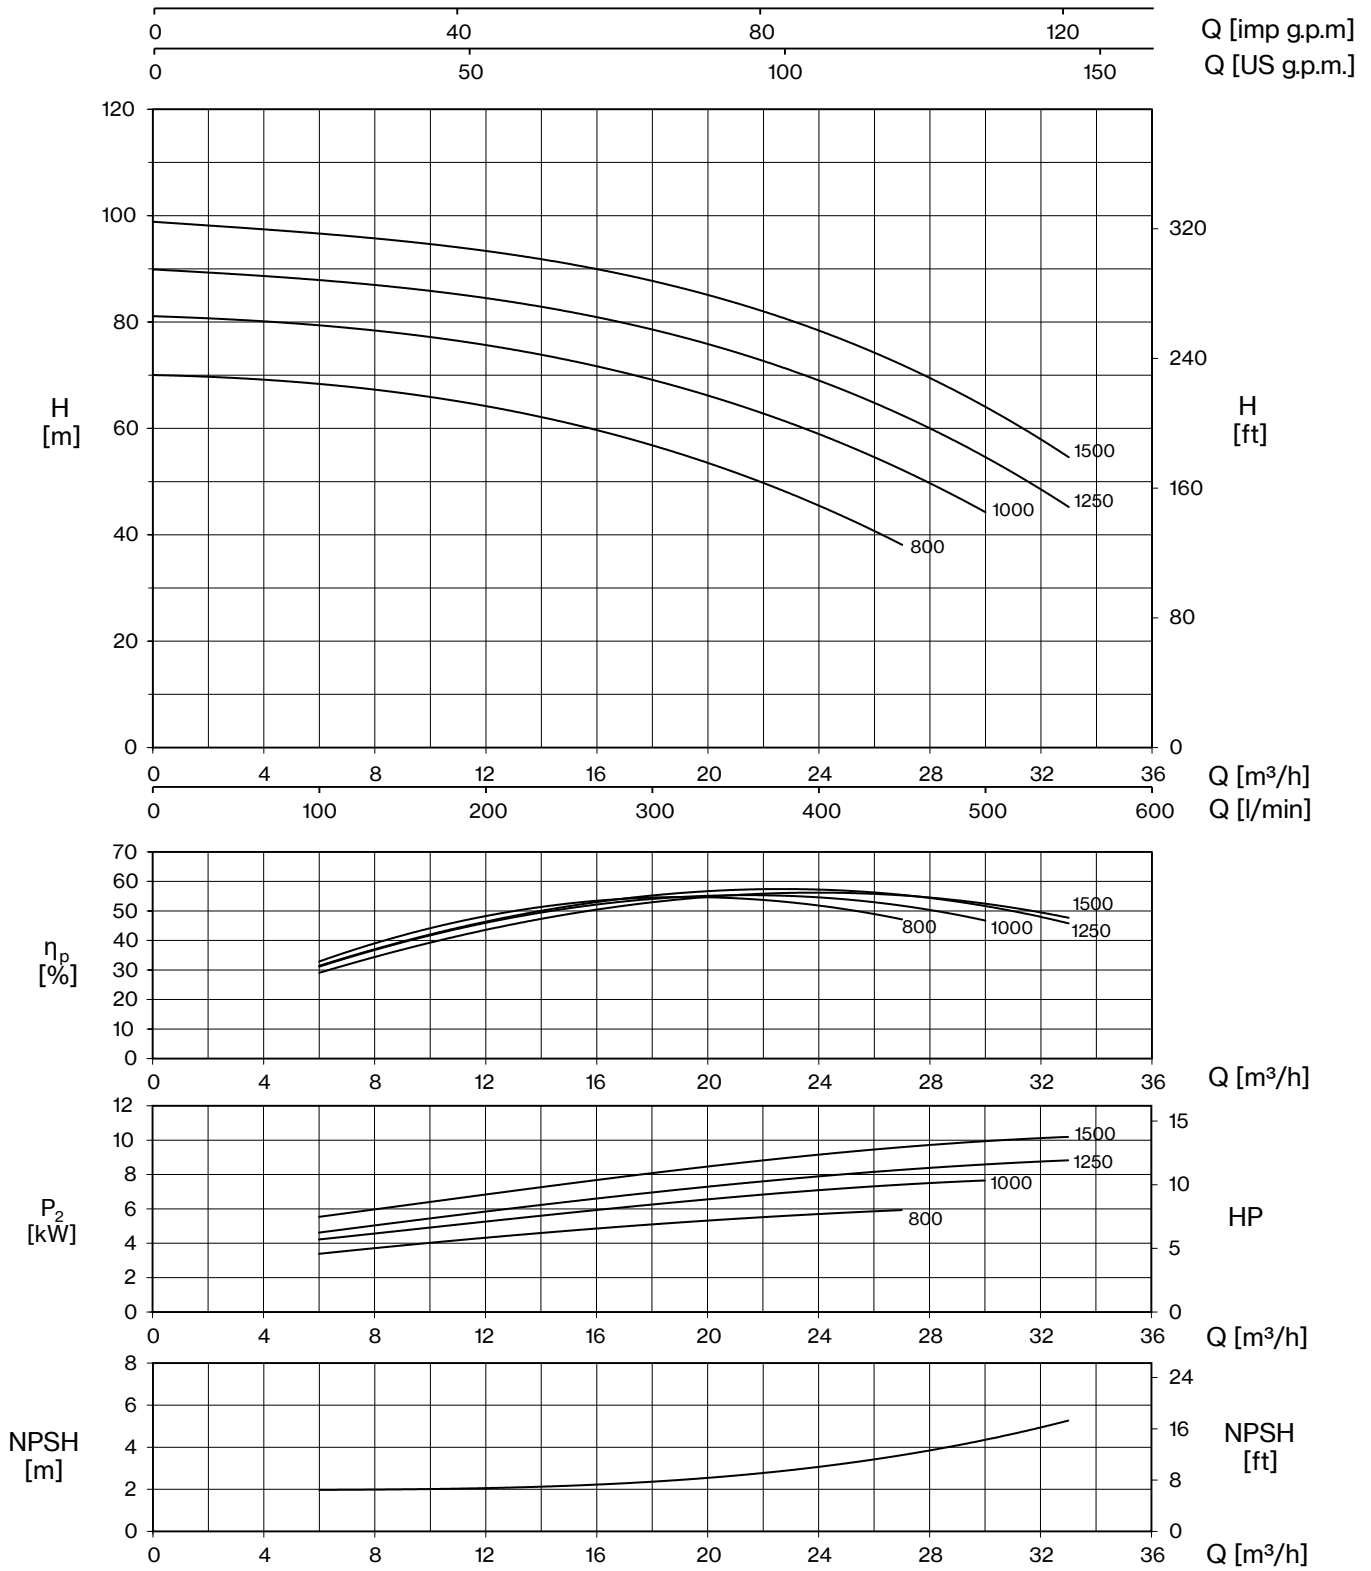


TYPE	P2		P1 (kW)	AMPERE 3~	Q (m³/h - l/min)							
					0	6	12	18	24	27	30	33
	HP	kW	3~	3- 400V 50 Hz	0	100	200	300	400	450	500	550
	H (m)											
CBT 800	7,5	5,5	6,7	11,1	70,0	68,5	63,9	57,1	45,3	38,2		
CBT 1000	10	7,5	8,5	13,9	80,7	80,4	75,0	68,5	59,7	52,6	43,7	
CBT 1250	12,5	9,2	9,8	16,3	89,5	88,8	84,1	77,7	69,7	63,0	54,2	45,1
CBT 1500	15	11,0	11,2	18,6	98,3	97,8	93,5	85,7	78,9	73,3	64,0	54,0



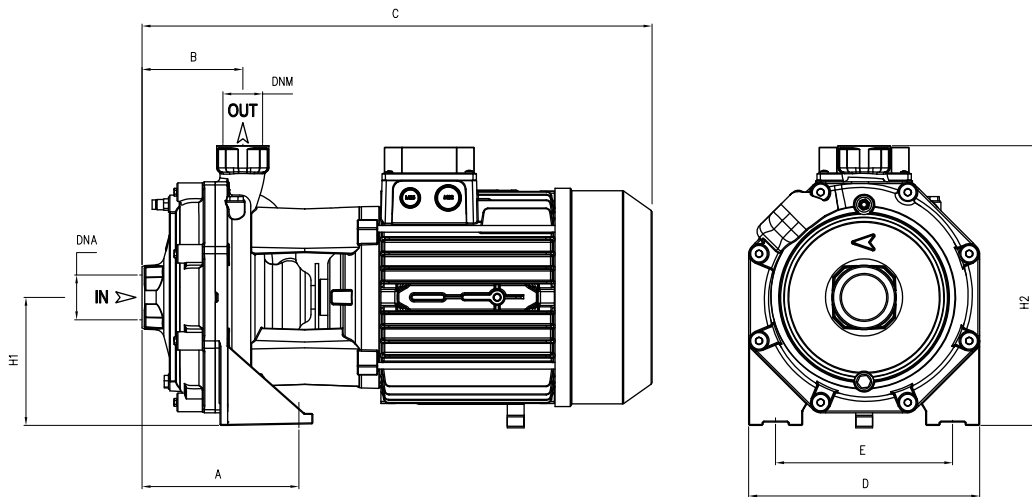

TYPE		DIMENSIONS (mm)													
-1	-3	A	B	C	D	E	H1	H2	DNA	DNM	I	L	M	-1	-3
CB 100	CBT 100	122	72	328	180	140	98	228	1" G	1" G	350	195	265	15,5	15
CB 160	CBT 160	115	82	408	210	170	110	265	1" 1/4 G		433	220	287	25,5	26,5
CB 210	CBT 210	115	82	408	210	170	110	265	1" 1/4 G	1" G	433	220	287	26	27
CB 310	-	115	82	477	210	170	110	265			520	235	320	35,5	-
-	CBT 310	115	82	408	210	170	110	265	1" 1/2 G	1" 1/4 G	433	220	287	-	27,5
CB 400	CBT 400	145	95,5	498	266	212	135	305			553	274	318	48	44
CB 600	CBT 600	145	95,5	498	266	212	135	305	1" 1/2 G	1" 1/4 G	553	274	318	56,5	48
-	CBT 751	145	95,5	532	266	212	135	305			553	274	318	-	56
-	CBT 900	145	95,5	532	266	212	135	305	2" G	1" 1/4 G	553	274	318	-	62
-	CBT 800	190	120	605	275	210	150	330			675	390	300	-	78
-	CBT 1000	190	120	605	275	210	150	330	2" G	1" 1/4 G	675	390	300	-	84
-	CBT 1250	190	120	645	275	210	150	330			675	390	300	-	91,5
-	CBT 1500	190	120	645	275	210	150	330			675	390	300	-	95,5






Medium delivery centrifugal pumps for agricultural applications. Equipped with an open impeller that allows the pumping of non-clean liquids, guaranteeing the free passage of small solids (\varnothing max. 10 mm).

Construction features


Pump body	cast iron
Motor bracket	cast iron
Impeller	Noryl® or brass
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 416
Liquid temperature	Noryl® impeller: 0 - 50 °C brass impeller: 0 - 90 °C
Operating pressure	max 6 bar

Motor


	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX4

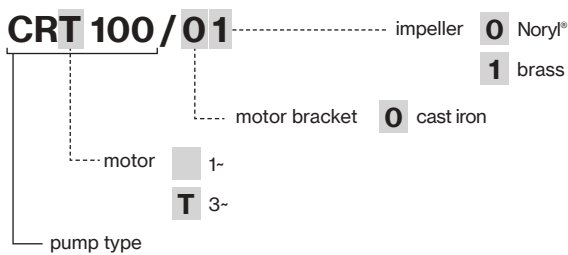

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CR	85x110x145	65	85x110x195	91

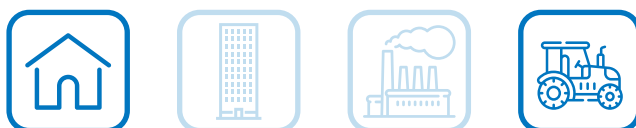



CR

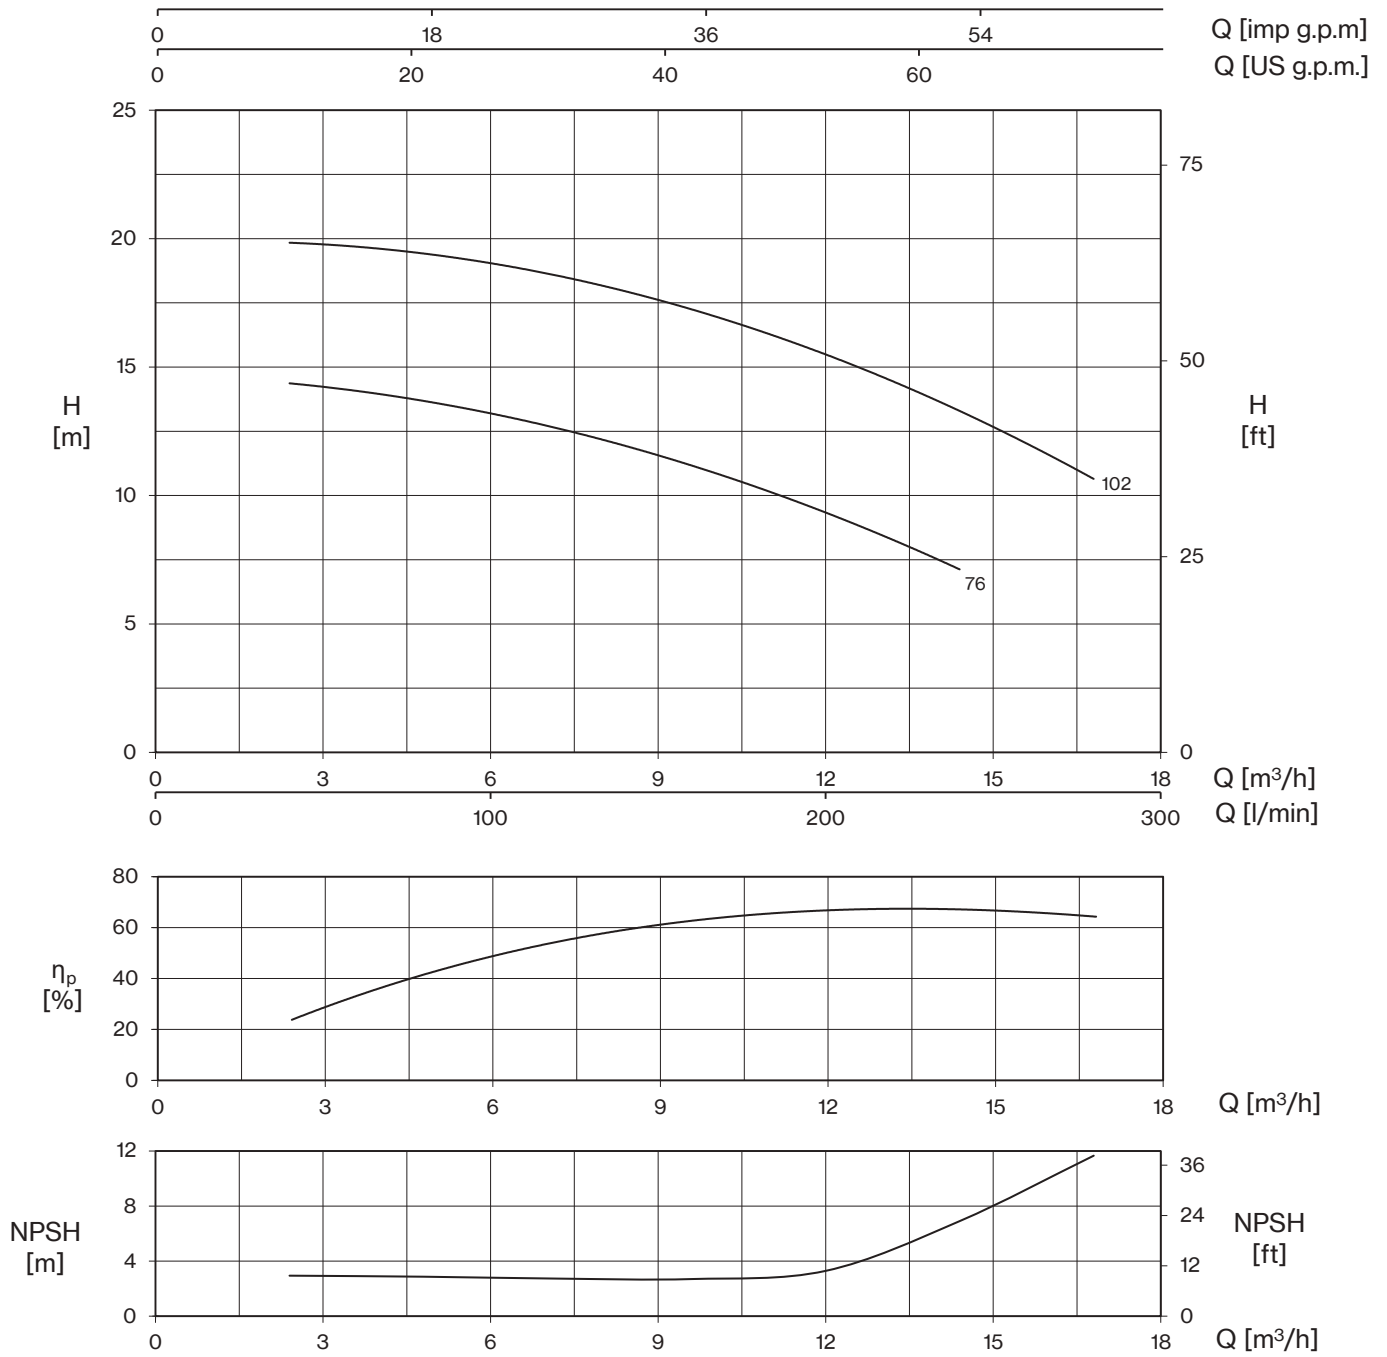

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	3	6	9	12	14,4	16,8
		0	50	100	150			200	240	280				
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)						
CR 76	CRT 76	0,8	0,59	0,73	0,83	3,4	1,5	15,0	14,3	13,0	11,6	9,5	7,0	
CR 102	CRT 102	1	0,74	1,14	1,2	5,3	2,4	20,5	19,8	18,9	17,7	15,5	13,5	10,5



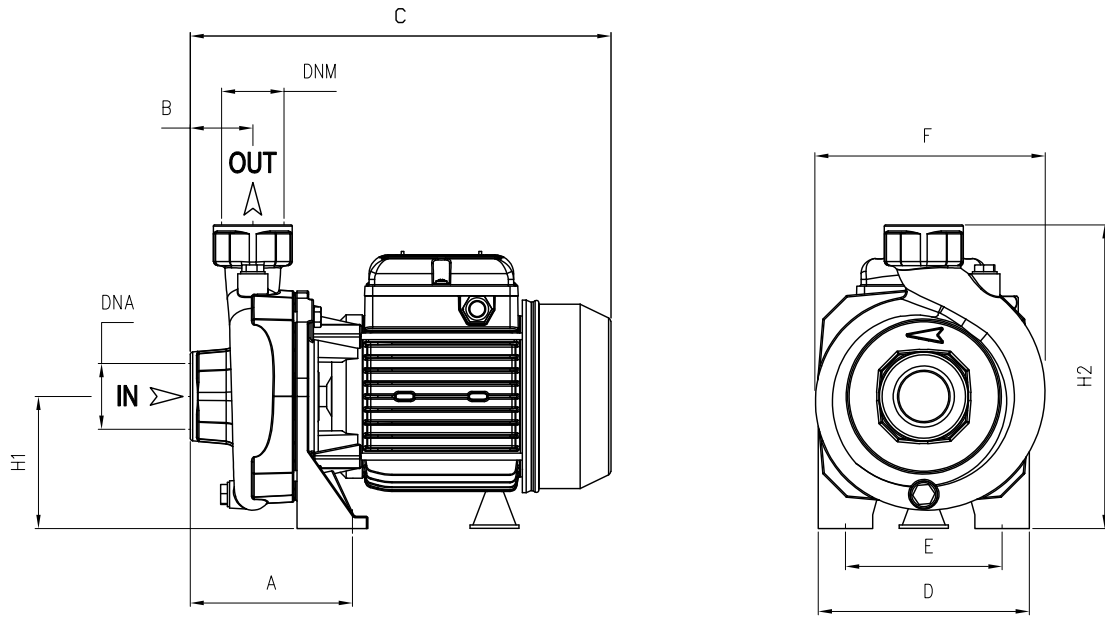

TYPE		DIMENSIONS (mm)													Kg
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	
CR 76	CRT 76	120	45	308	155	115	170	97	222			325	200	265	13
CR 102	CRT 102	120	45	308	155	115	170	97	222	1" 1/2 G	1" 1/2 G	325	200	265	14




Single-impeller, medium to high-flow rate centrifugal pumps with 2", 3" and 4" delivery openings. Mainly used in agriculture for flood and sprinkler irrigation, and water withdrawal from reservoirs or canals.

Construction features



Pump body	cast iron
Motor bracket	cast iron
Impeller	cast iron or brass (CSB)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303 stainless steel AISI 416 (75÷120)
Liquid temperature	0 - 90 °C
Operating pressure	max 6 bar


Motor

	3- 230/400V - 50Hz
2 Poles induction motor	1- 230V - 50Hz (with thermal protection up to MEC 80)
Insulation class	F
Protection degree	IPX4

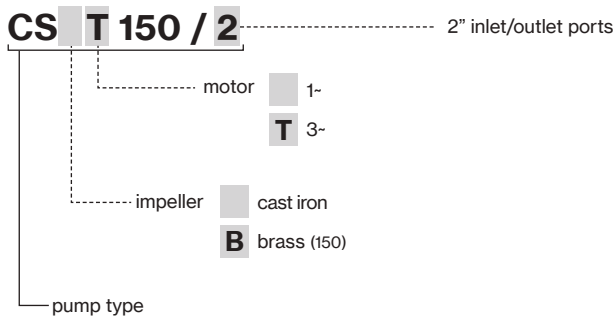

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CS 75/2÷120/2	90×110×145	65	90×110×195	91
CS 150/2-200/2	85×110×140	40	85×110×205	60
CS 200/3-300/3	85×110×150	30	85×110×180	60
CS 400/3÷550/4	80×120×150	30	80×120×180	60
CST 750/4-1000/4	100×120×140	18	100×120×185	24

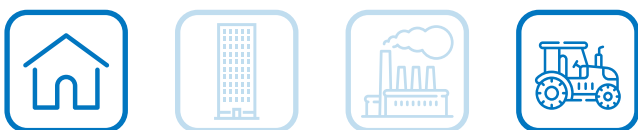


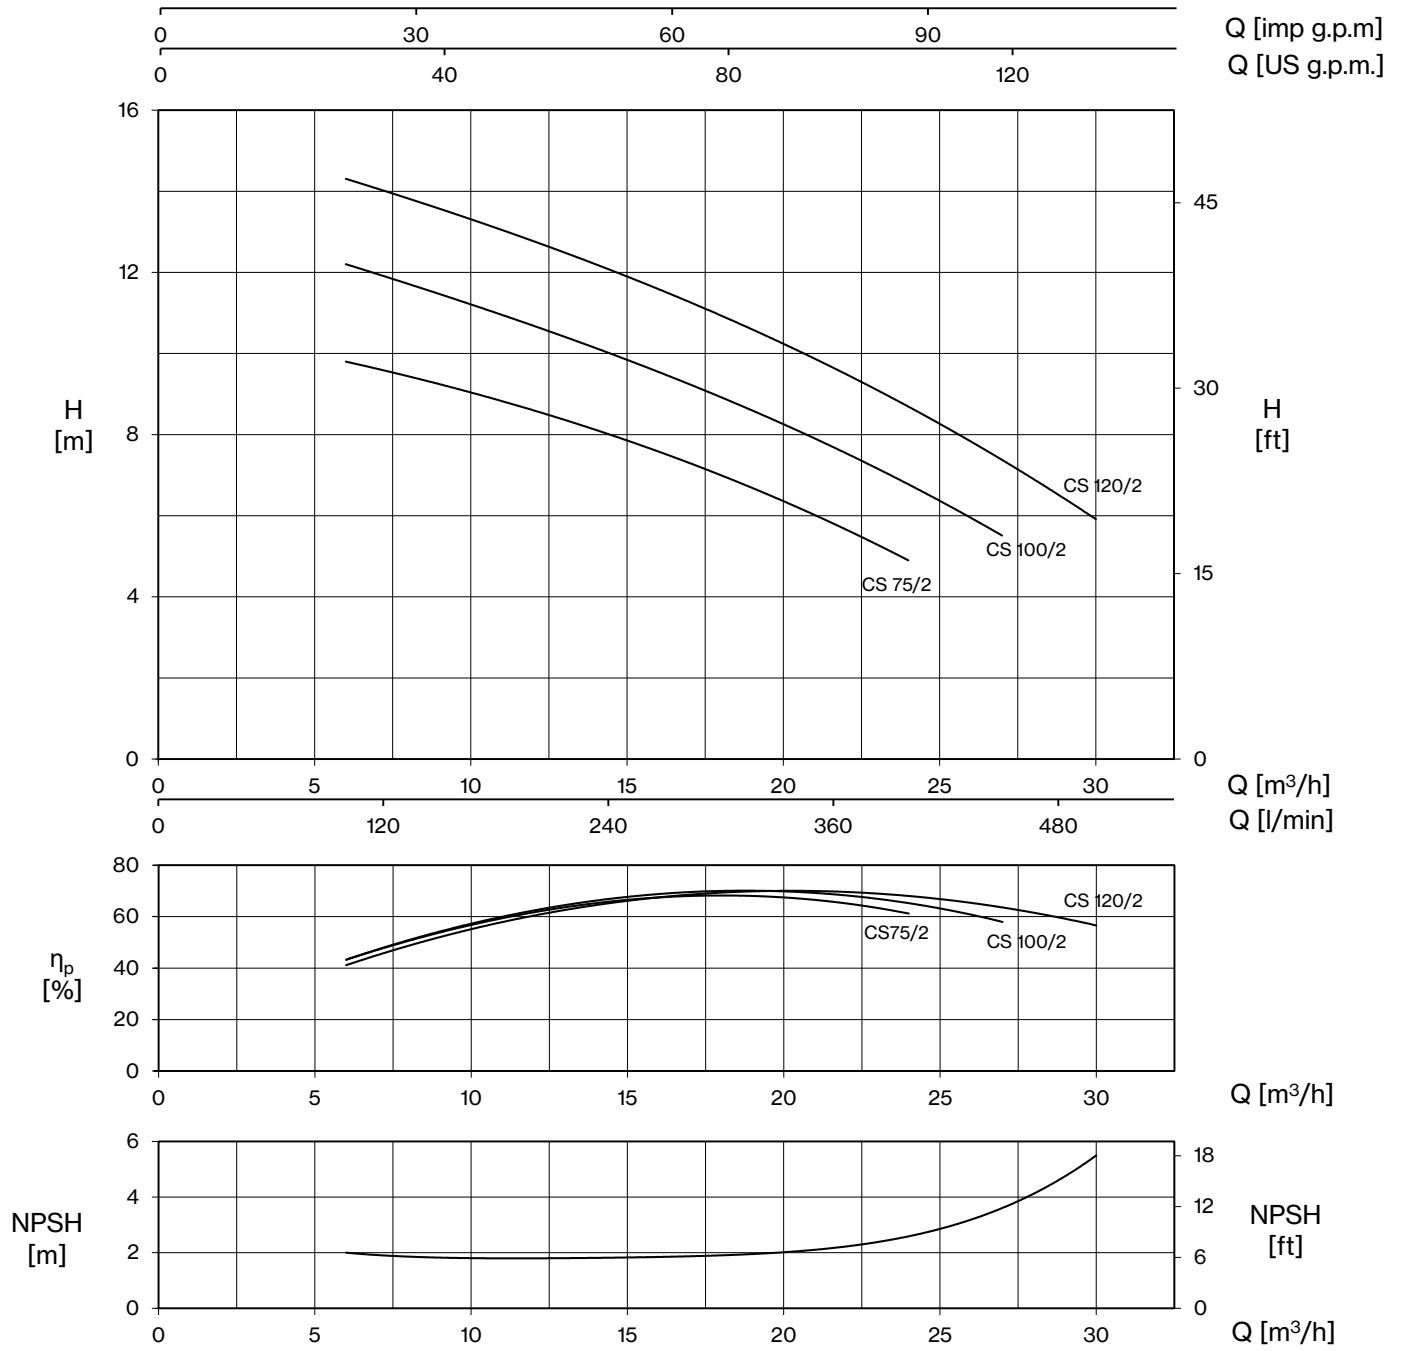

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	6	12	18	24	27	30	
		0	100	200	300			400	450	500	H (m)				
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz								
CS 75/2	CST 75/2	0,8	0,59	0,8	0,7	3,5	1,3	10,1	9,8	8,6	7,0	4,9			
CS 100/2	CST 100/2	1	0,74	1	0,85	4,5	1,6	12,8	12,2	10,7	8,9	6,8	5,5		
CS 120/2	CST 120/2	1,2	0,9	1,2	1,1	5,4	2,0	15,0	14,3	12,8	10,9	8,7	7,4	5,9	




CS

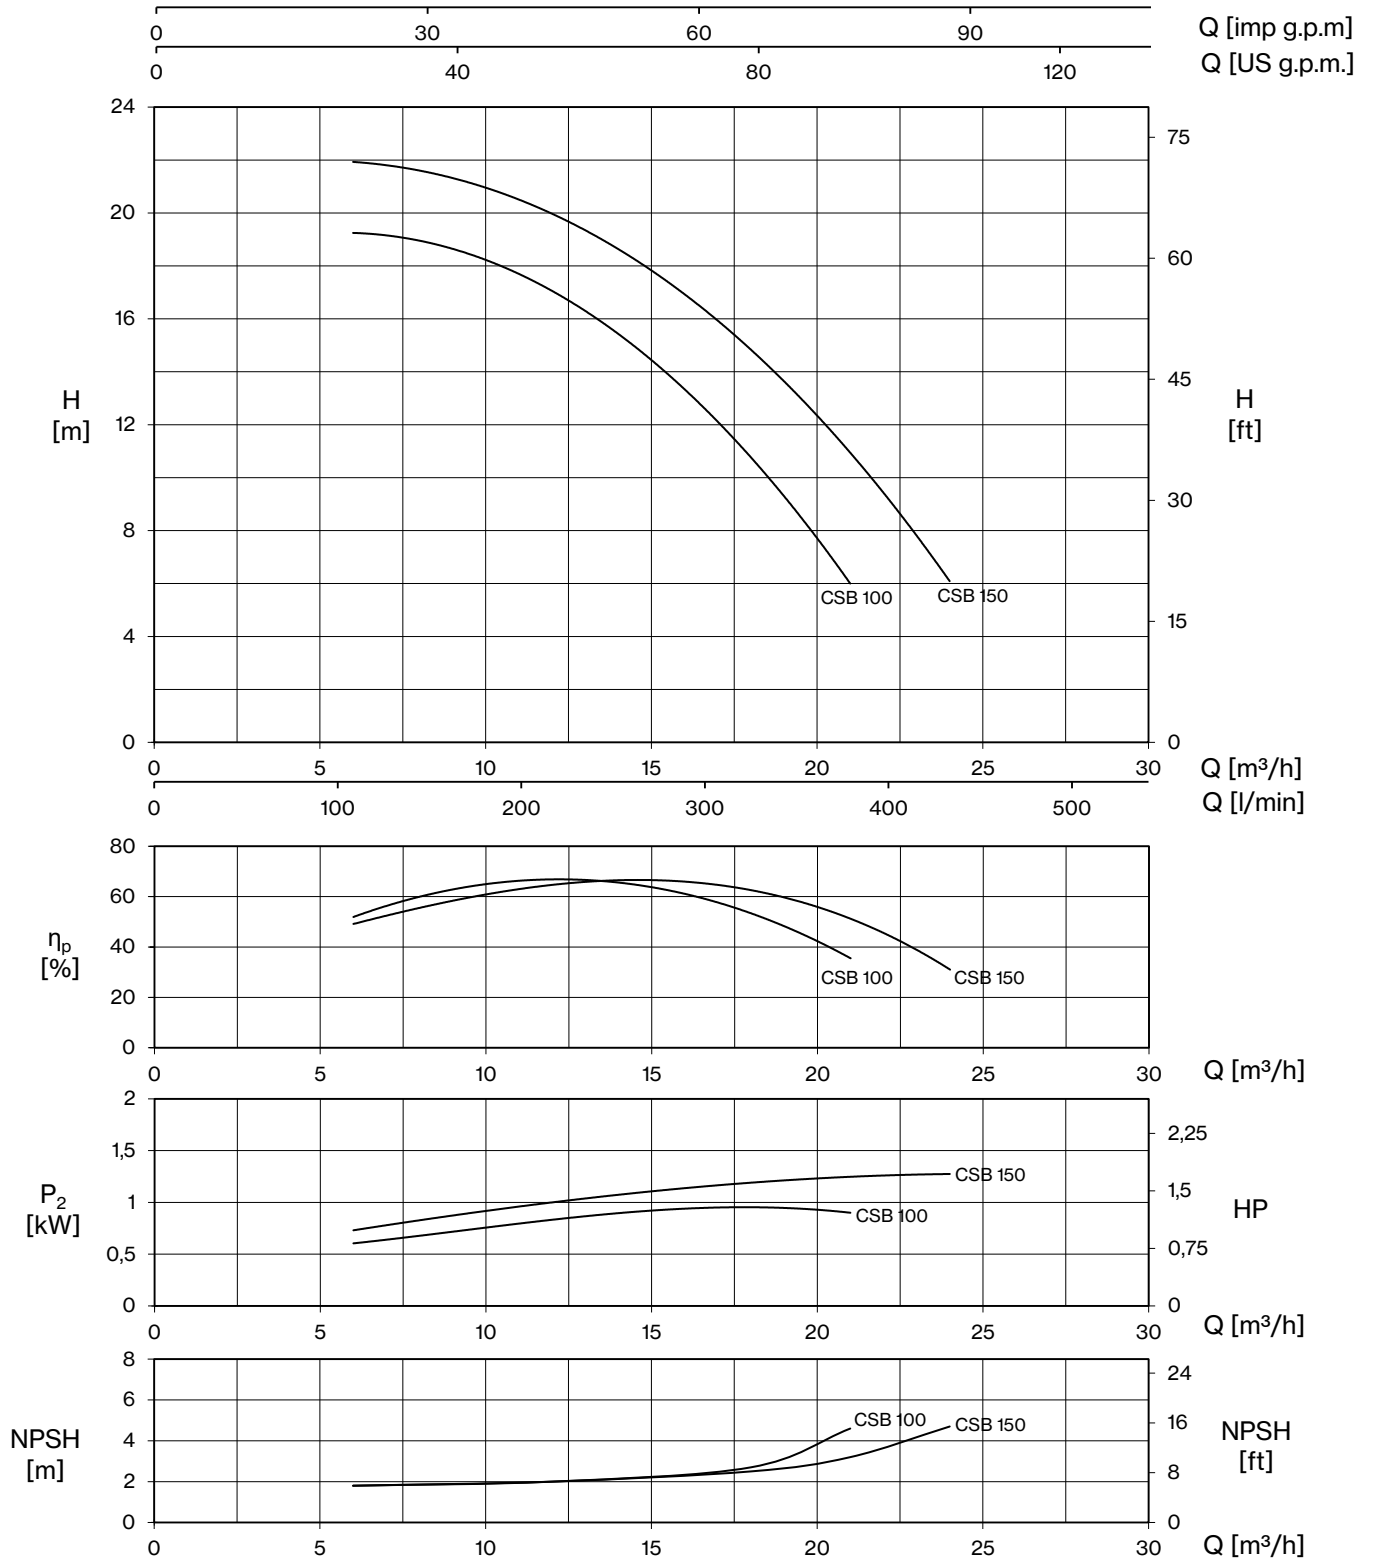


TYPE		P ₂		P ₁ (kW)		AMPERE		Q (m³/h - l/min)					
1~	3~					1~	3~	0	6	12	18	21	24
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	100	200	300	350	400
		H (m)											
CSB 100/2	-	1,5	1,1	1,3	-	6,1	-	18,8	19,2	17,1	10,8	6,0	
CSB 150/2	CSBT 150/2	1,8	1,3	1,6	1,5	7,4	3,5	21,6	21,9	19,9	15,0	10,8	6,1



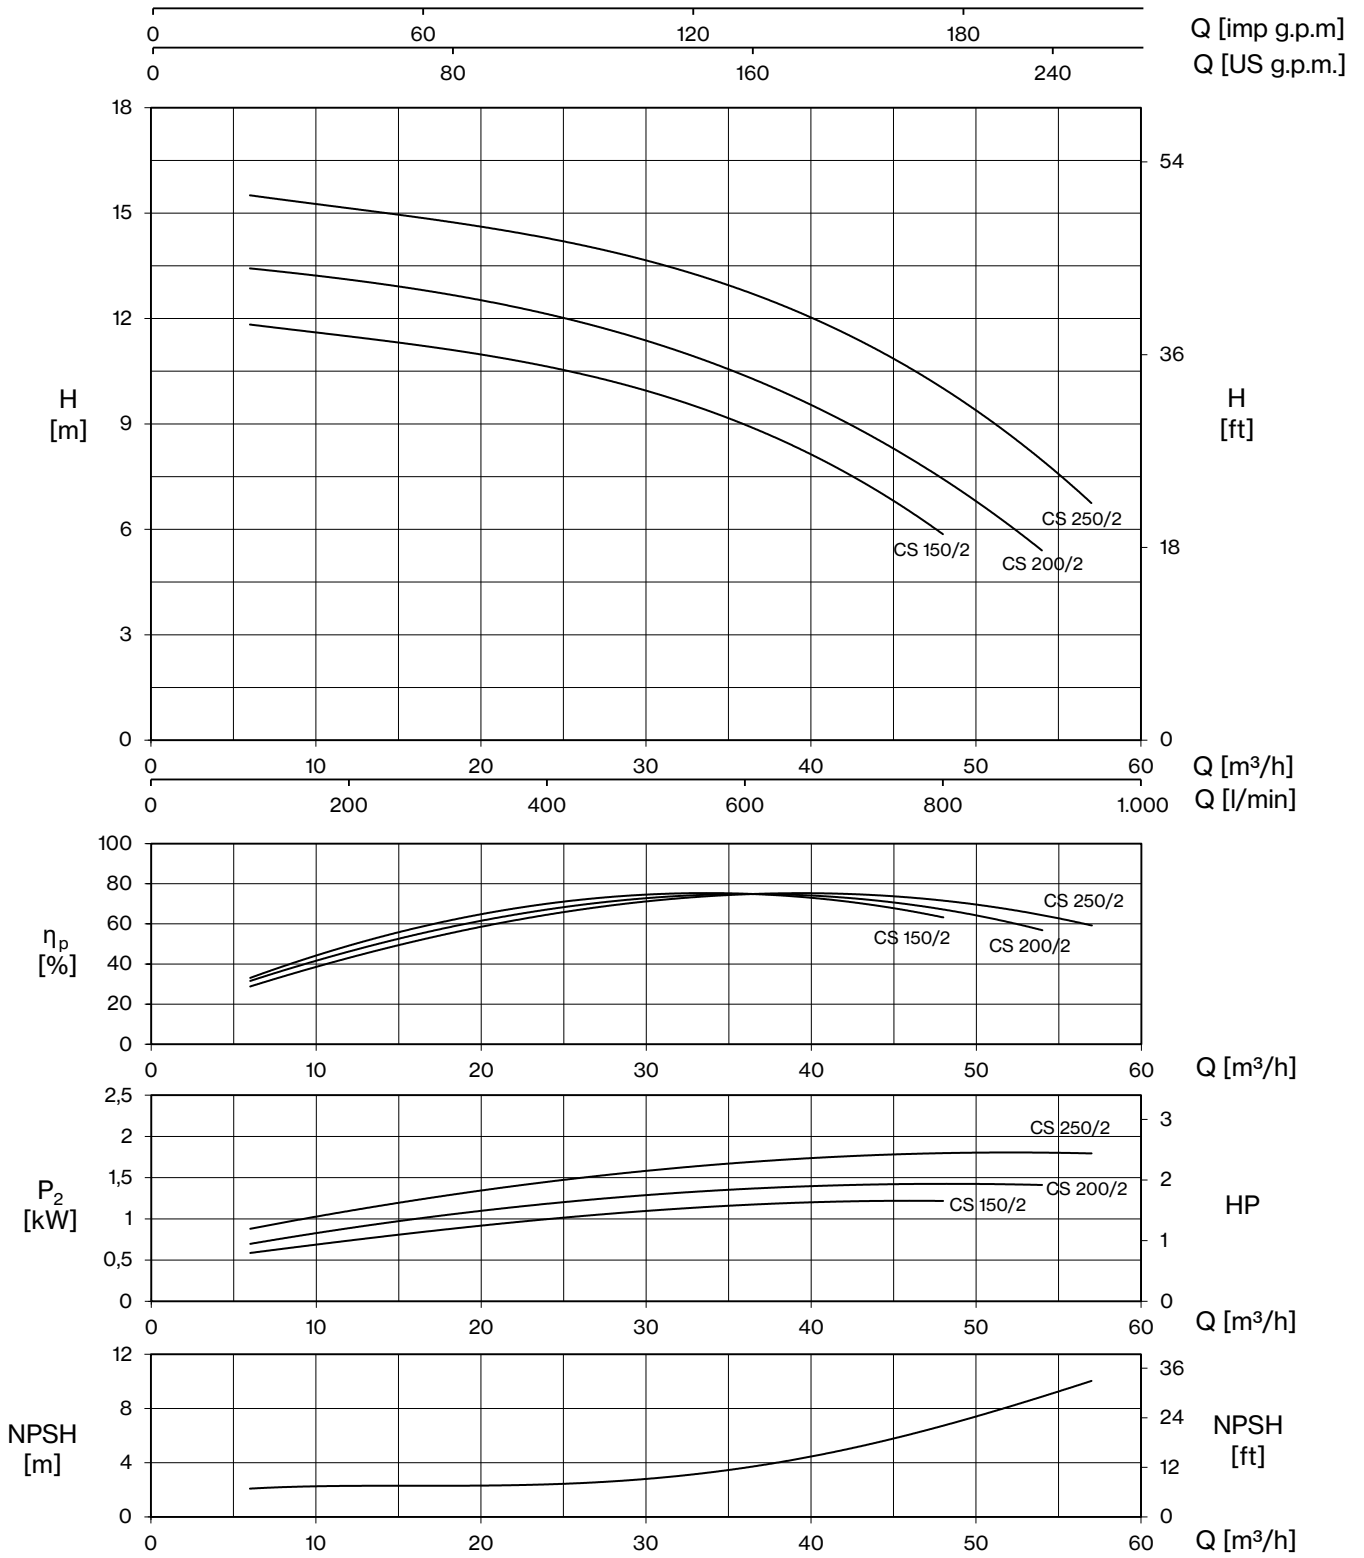


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)										
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	6	18	24	30	36	42	48	54	57	
								0	100	300	400	500	600	700	800	900	950	
								H (m)										
CS 150/2	CST 150/2	1,8	1,3	1,5	1,4	7,1	3,4	11,9	11,8	11,1	10,6	10,0	8,9	7,6	5,9			
CS 200/2	CST 200/2	2	1,5	1,7	1,7	8,0	3,6	13,5	13,4	12,6	12,1	11,4	10,4	9,1	7,3	5,4		
CS 250/2	CST 250/2	2,5	1,85	2,2	2,1	9,9	4,3	15,6	15,6	14,6	14,3	13,8	12,9	11,6	9,9	7,9	6,9	



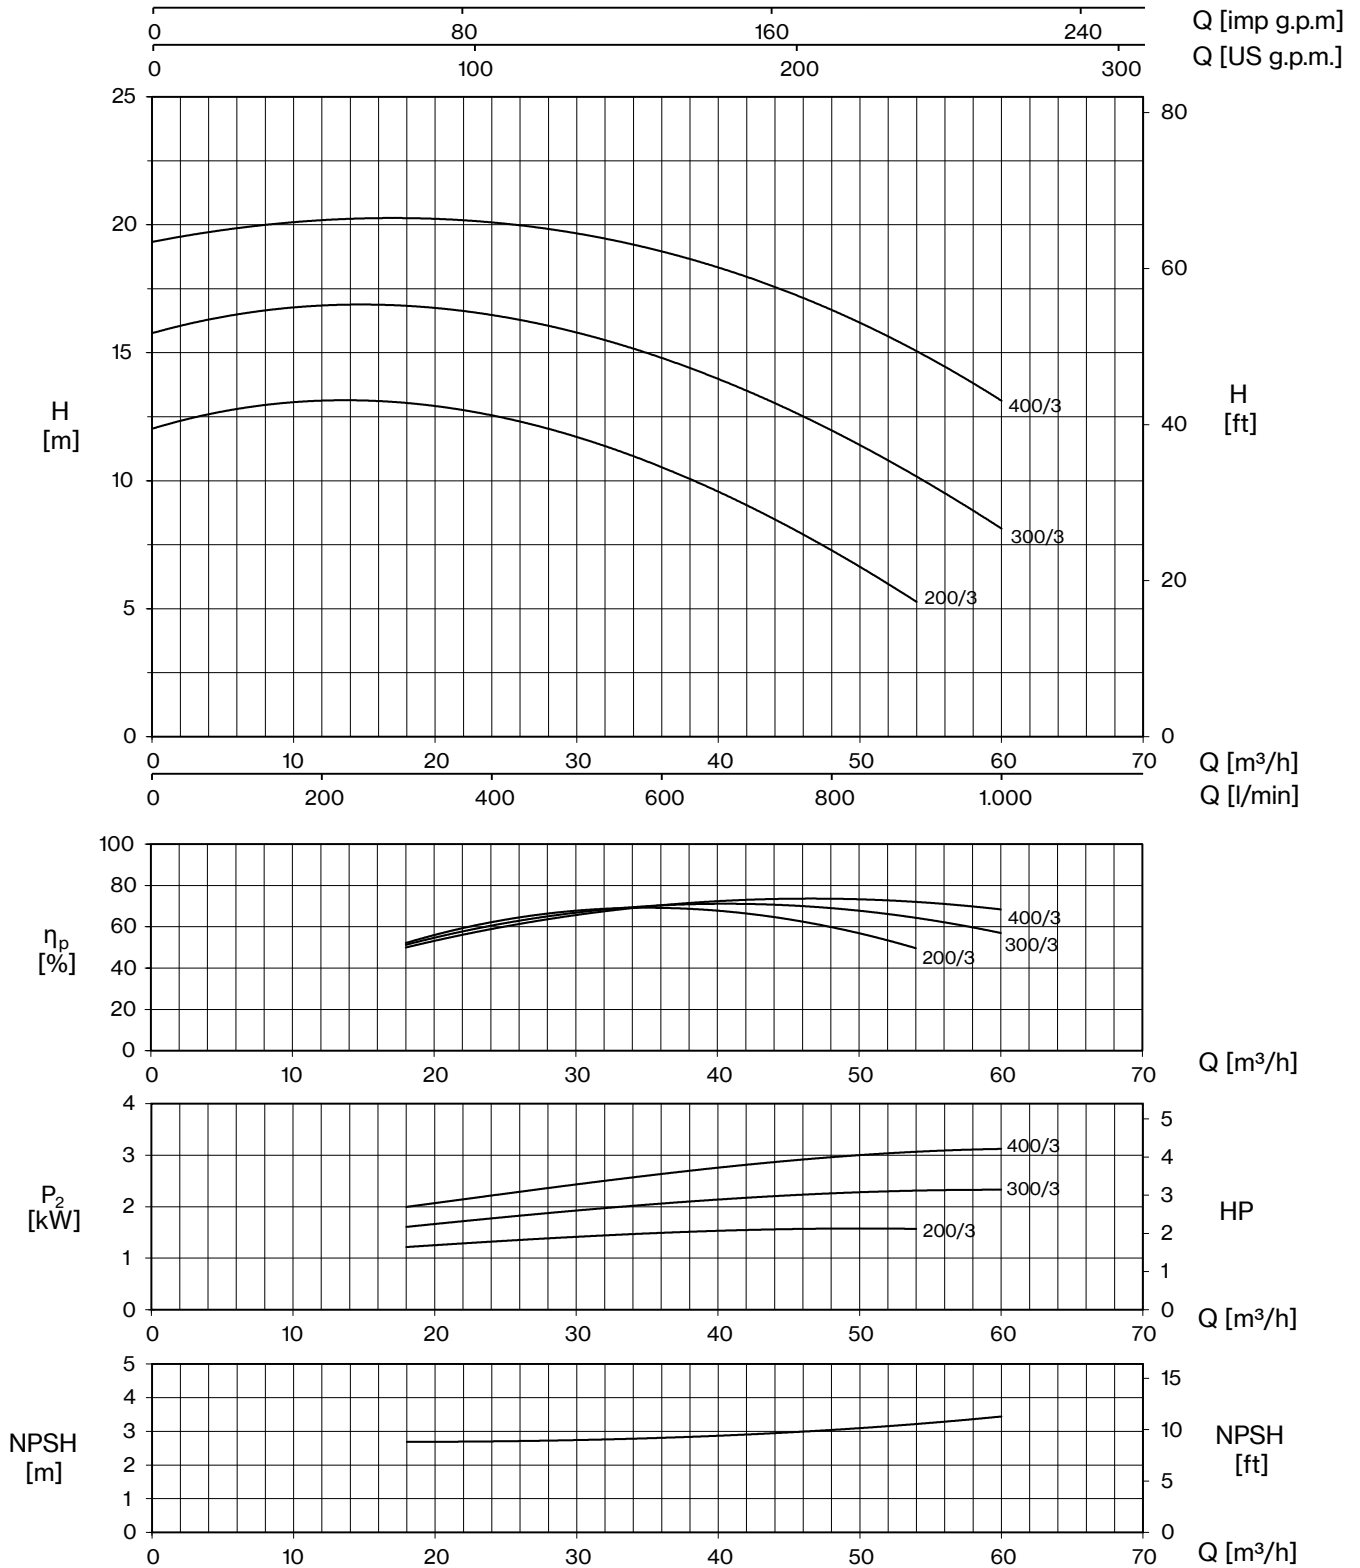


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)								
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	18	24	30	36	42	48	54	60
								0	300	400	500	600	700	800	900	1000
								H (m)								
CS 200/3	CST 200/3	2	1,5	1,9	1,9	8,9	3,5	12,0	13,0	12,6	11,8	10,6	9,0	7,2	5,3	
CS 300/3	CST 300/3	3	2,2	2,7	2,7	12,4	5	15,8	16,8	16,5	15,7	14,7	13,6	12,0	10,1	8,2
-	CST 400/3	4	3	-	3,6	-	6,6	19,3	20,3	20,1	19,6	18,9	18,0	16,8	15,0	13,1



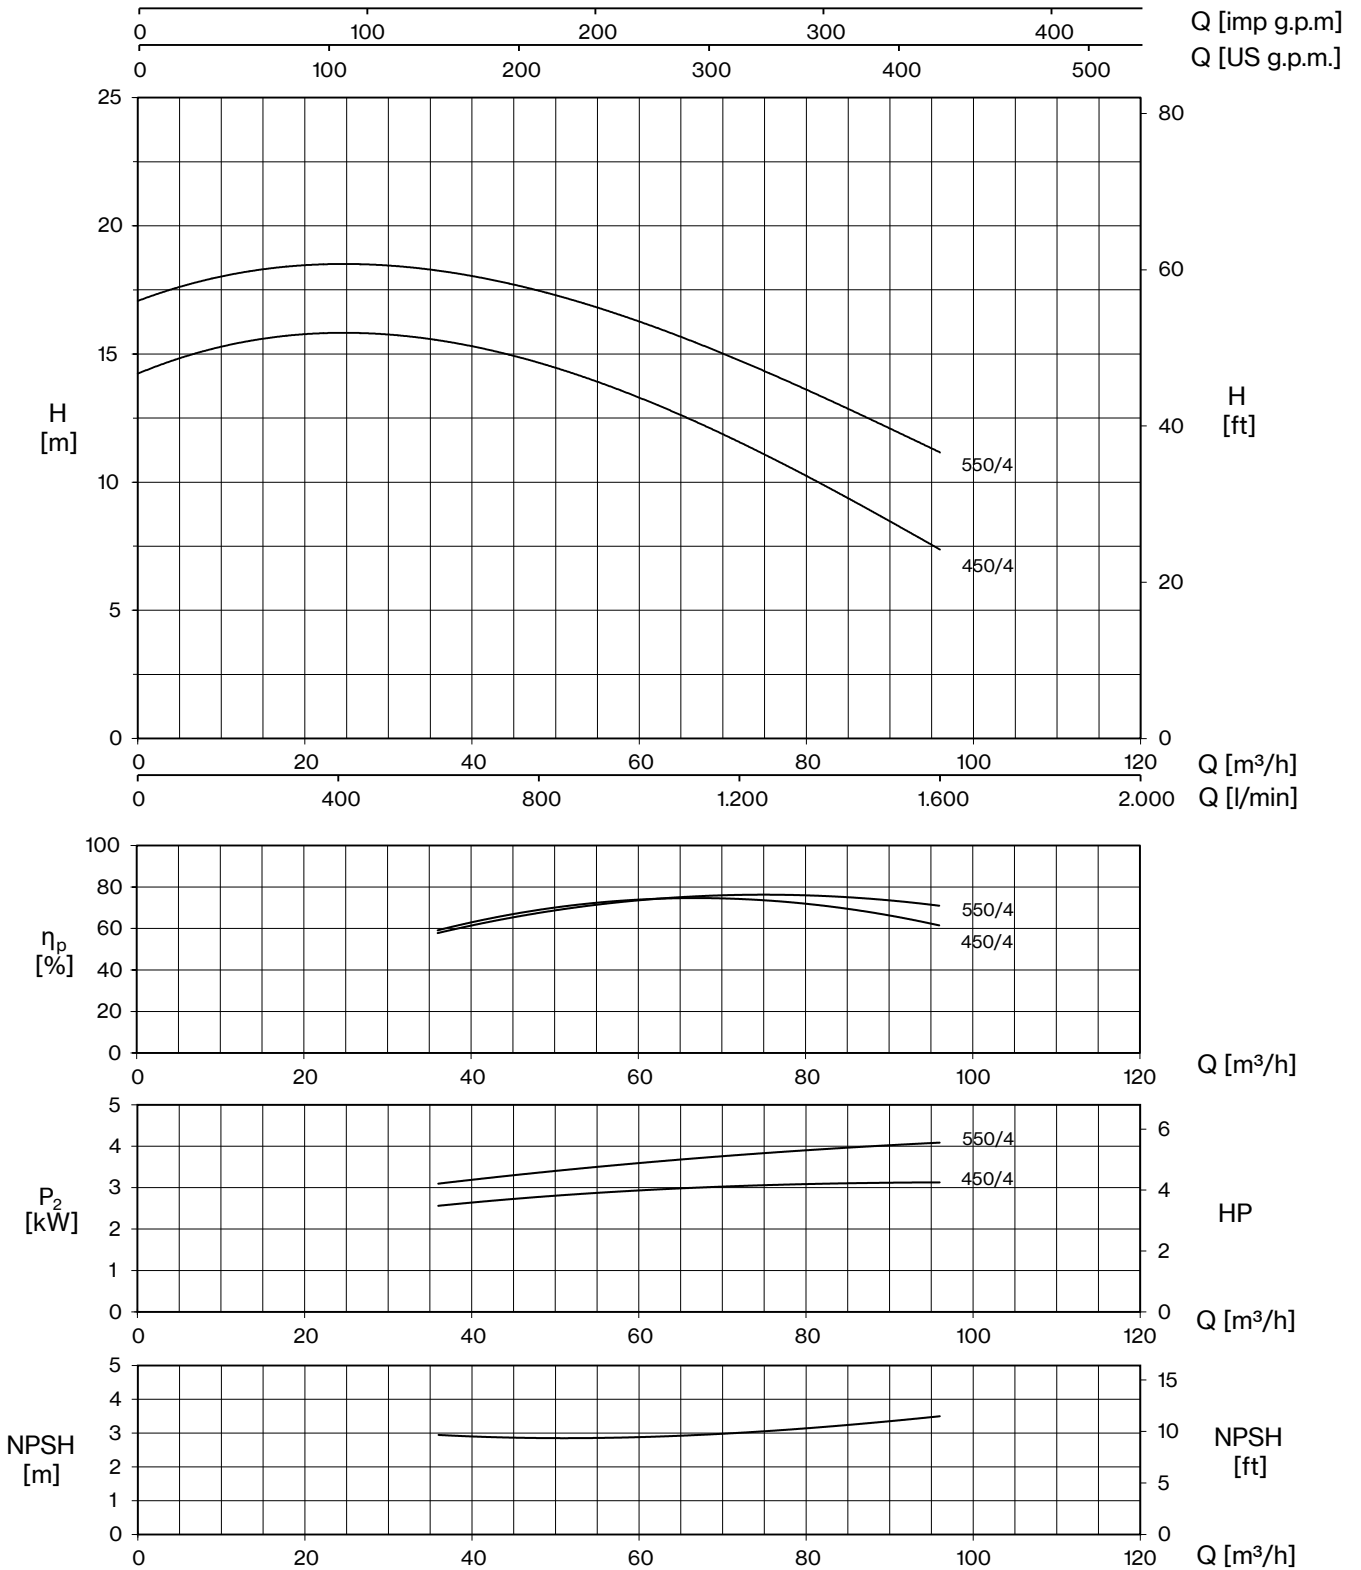


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~	HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	0	36	48	60	72	84	96	
								0	600	800	1000	1200	1400	1600	
		H (m)													
CS 450/4	CST 450/4	4	3	3,6	3,6	16,1	6,5	14,2	15,5	14,7	13,4	11,5	9,6	7,4	
-	CST 550/4	5,5	4	-	4,7	-	8,5	17,1	18,3	17,4	16,3	14,7	13,1	11,1	




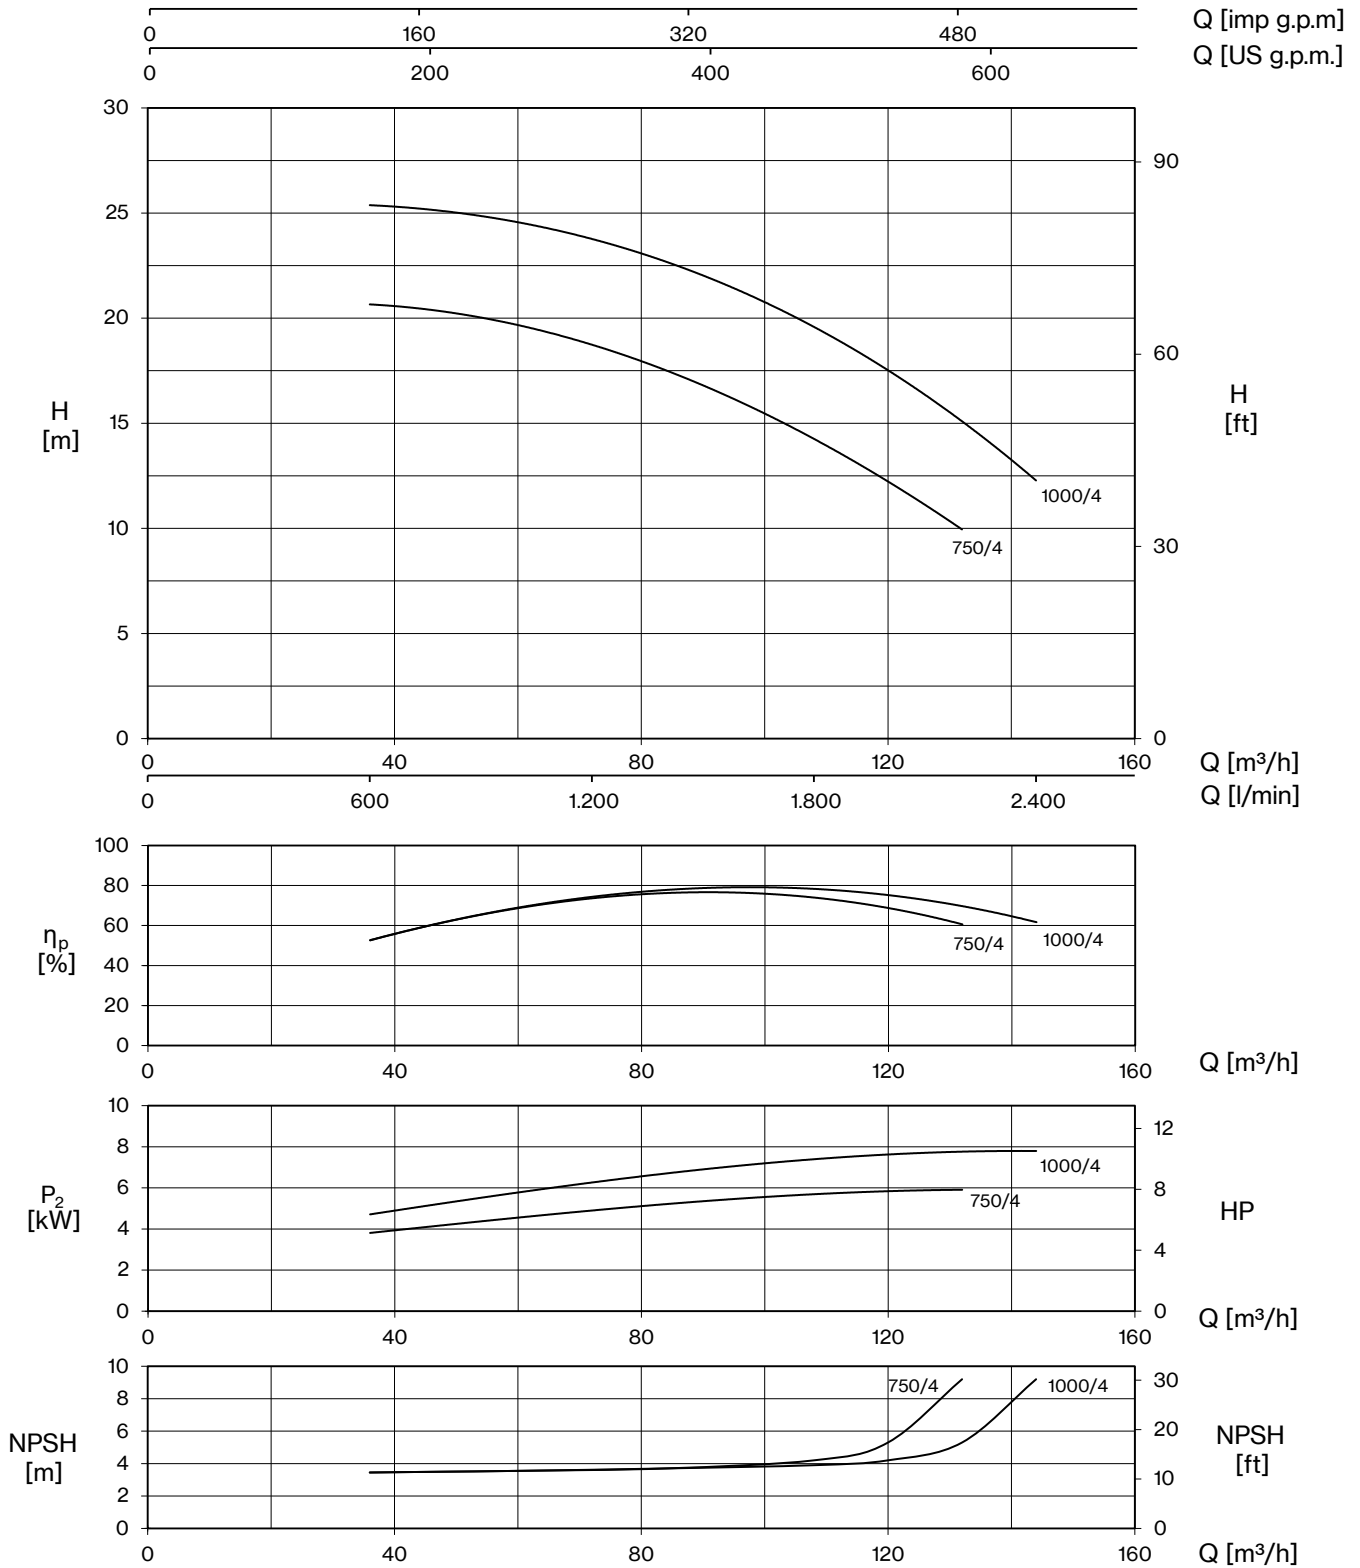


TYPE	P2		P1 (kW)	AMPERE	Q (m³/h - l/min)									
					0	36	48	60	84	108	120	132	144	
3~	HP	kW	3~	3- 400V 50 Hz	H (m)									
					0	600	800	1000	1400	1800	2000	2200	2400	
CST 750/4	7,5	5,5	6,7	11,6	18,9	20,6	20,4	19,7	17,4	14,3	12,3	9,9		
CST 1000/4	10	7,5	8,8	15,4	23,6	25,3	25,2	24,6	22,6	19,5	17,6	15,2	12,2	



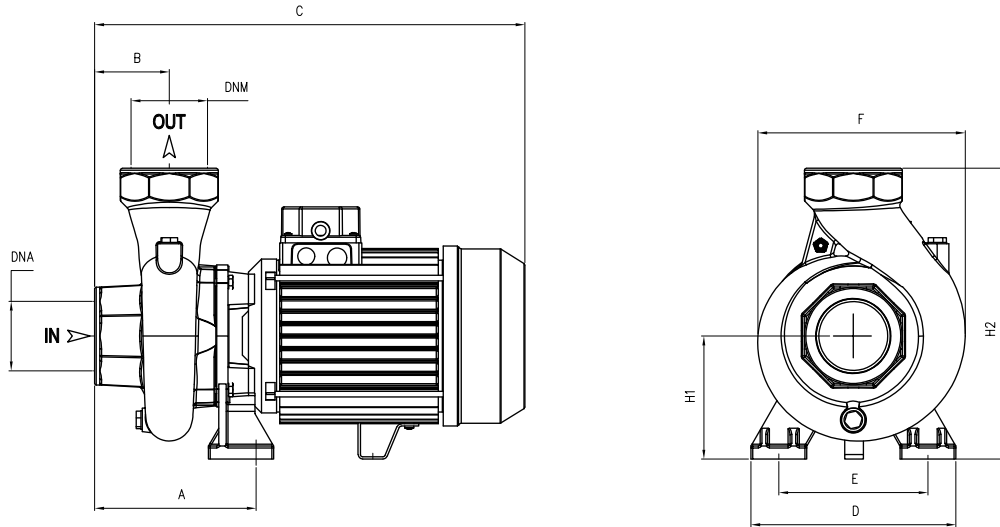

TYPE		DIMENSIONS (mm)													 Kg	
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	-1	-3
CS 75/2	CST 75/2	127	45	315	155	115	178	97	247	2" G	2" G	340	195	280	14,5	14
CS 100/2	CST 100/2	127	45	315	155	115	178	97	247			340	195	280	16	15
CS 120/2	CST 120/2	127	45	315	155	115	178	97	247			340	195	280	16,5	16
CSB 100/2	-	130	70	395	180	130	195	90	240	2" G	2" G	420	230	309	23	-
CSB 150/2	CSBT 150/2	130	70	395	180	130	195	90	240			420	230	309	23	23
CS 150/2	CST 150/2	150	53	400	180	140	218	115	285	2" G	2" G	420	230	309	27	27,5
CS 200/2	CST 200/2	150	53	400	180	140	218	115	285			420	230	309	26	27,5
CS 250/2	CST 250/2	150	53	400	180	140	218	115	285			420	230	309	27,5	28
CS 200/3	CST 200/3	176,5	80	485	184	130	225	112	292	3" G	3" G	520	235	320	33	28
CS 300/3	CST 300/3	176,5	80	485	184	130	225	112	292			520	235	320	33	30,5
-	CST 400/3	176,5	80	485	184	130	225	112	292	4" G	4" G	520	235	320	-	36,5
CS 450/4	CST 450/4	165	85	515	200	150	250	130	330			546	265	355	46,5	42,5
-	CST 550/4	165	85	515	200	150	250	130	330			546	265	355	-	47
-	CST 750/4	117	83	559	215	170	254	134	333			675	390	300	-	56,5
-	CST 1000/4	117	83	559	215	170	254	134	333	675	390	300	-	63		



Centrifugal pumps characterized by medium flow rate and stable head as the flow rate changes. Suitable for flood and sprinkler irrigation, water withdrawal from reservoirs or canals and industrial applications.


Construction features

Pump body	cast iron
Motor bracket	cast iron
Impeller	brass (160÷310) cast iron (350÷550)
Mechanical seal	ceramic-graphite-NBR
Motor shaft	stainless steel AISI 303
Liquid temperature	0 - 90 °C
Operating pressure	max 6 bar


Motor


	3~ 230/400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection up to MEC 80)
Insulation class	F
Protection degree	IPX4

CH T 160

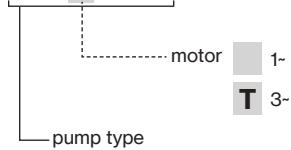

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
CH 160÷310	85×11×140	40	85×110×195	60
CH 350÷550	85×110×150	30	85×110×180	30

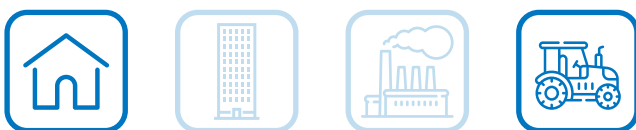


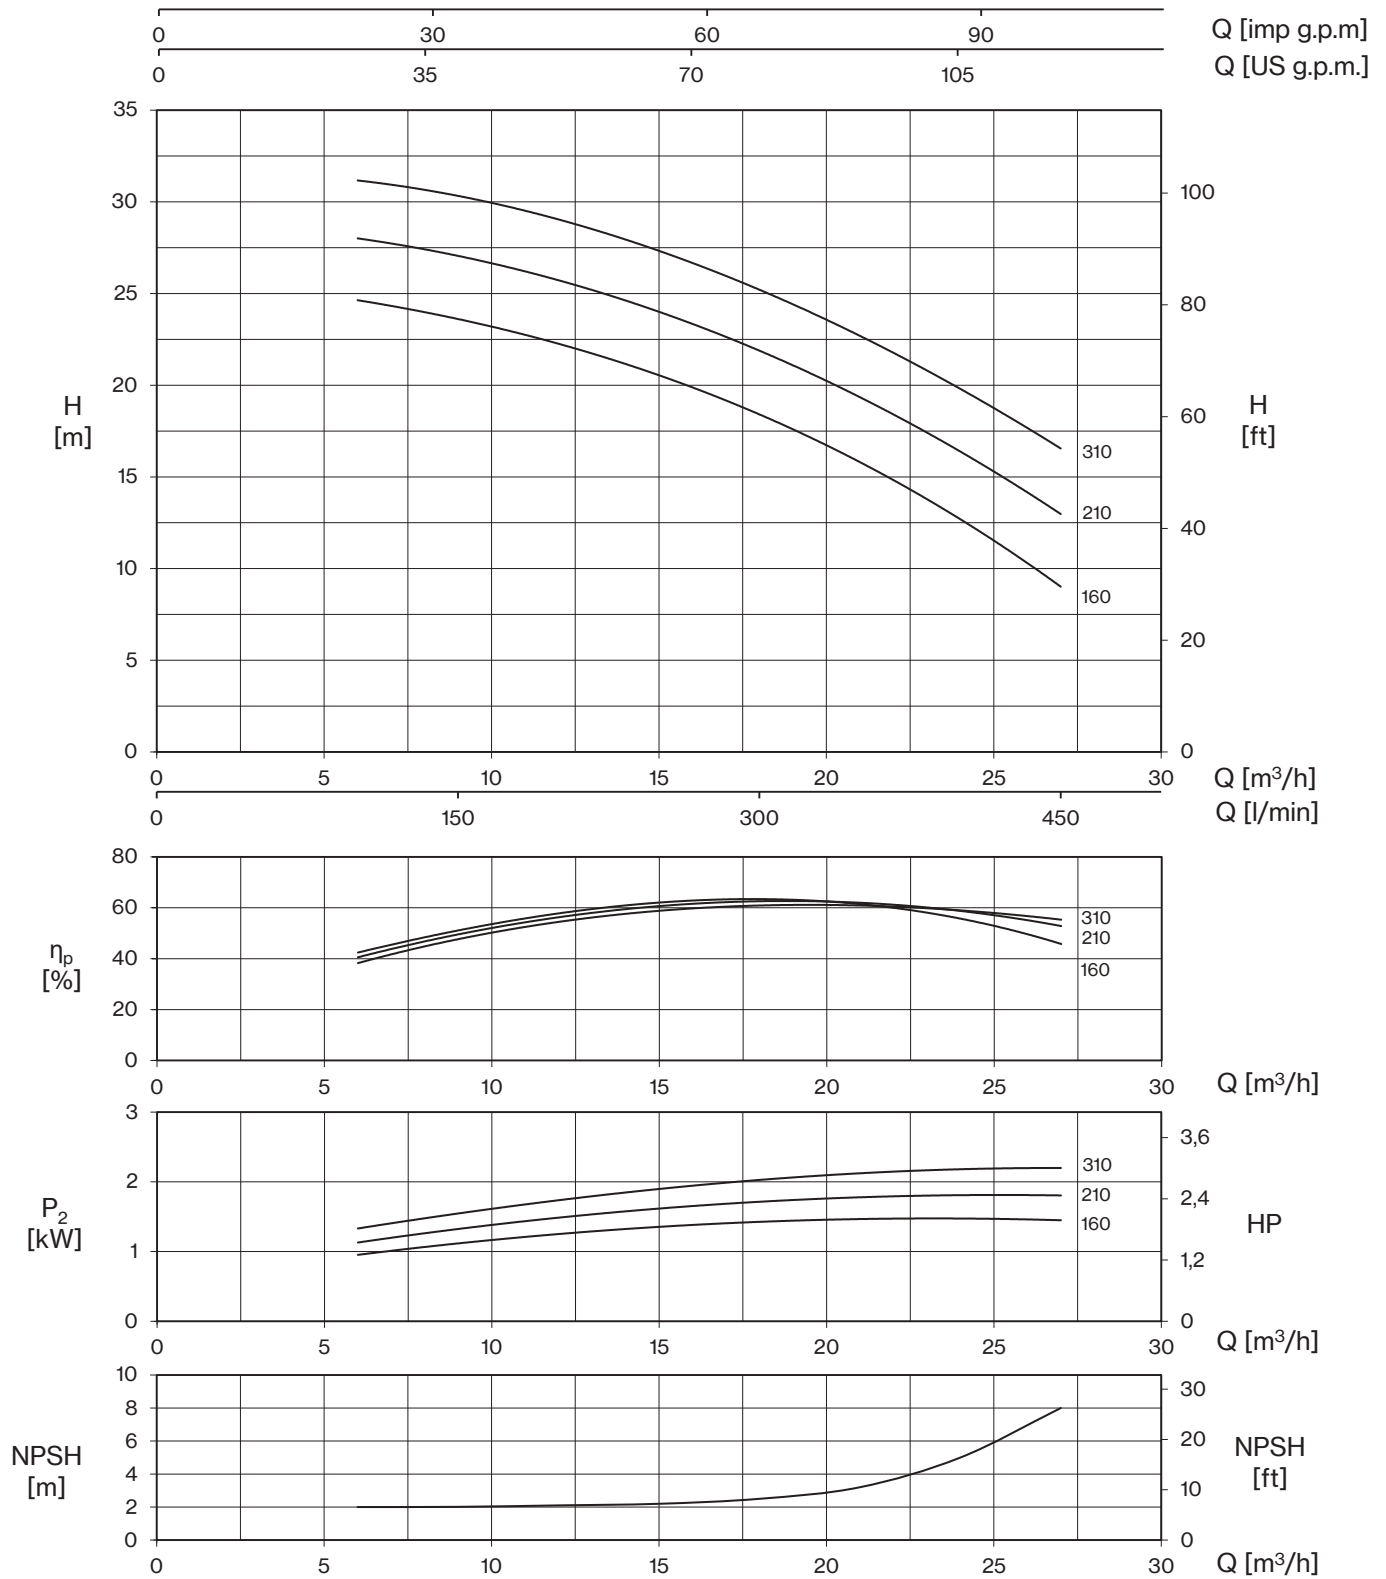

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)								
1~	3~					1~	3~	0	6	9	12	15	18	21	24	27
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)								
CH 160	CHT 160	2	1,5	1,8	1,8	8,2	3,7	24,8	24,6	23,7	22,3	20,5	18,4	15,8	12,8	9,0
CH 210	CHT 210	2,5	1,85	2,3	2,1	10,4	4,3	28,3	28,0	27,1	25,7	23,9	21,9	19,3	16,4	13,0
CH 310	CHT 310	3	2,2	2,6	2,6	12,3	5,2	31,6	31,2	30,3	29,0	27,3	25,3	22,7	19,7	16,6




CH

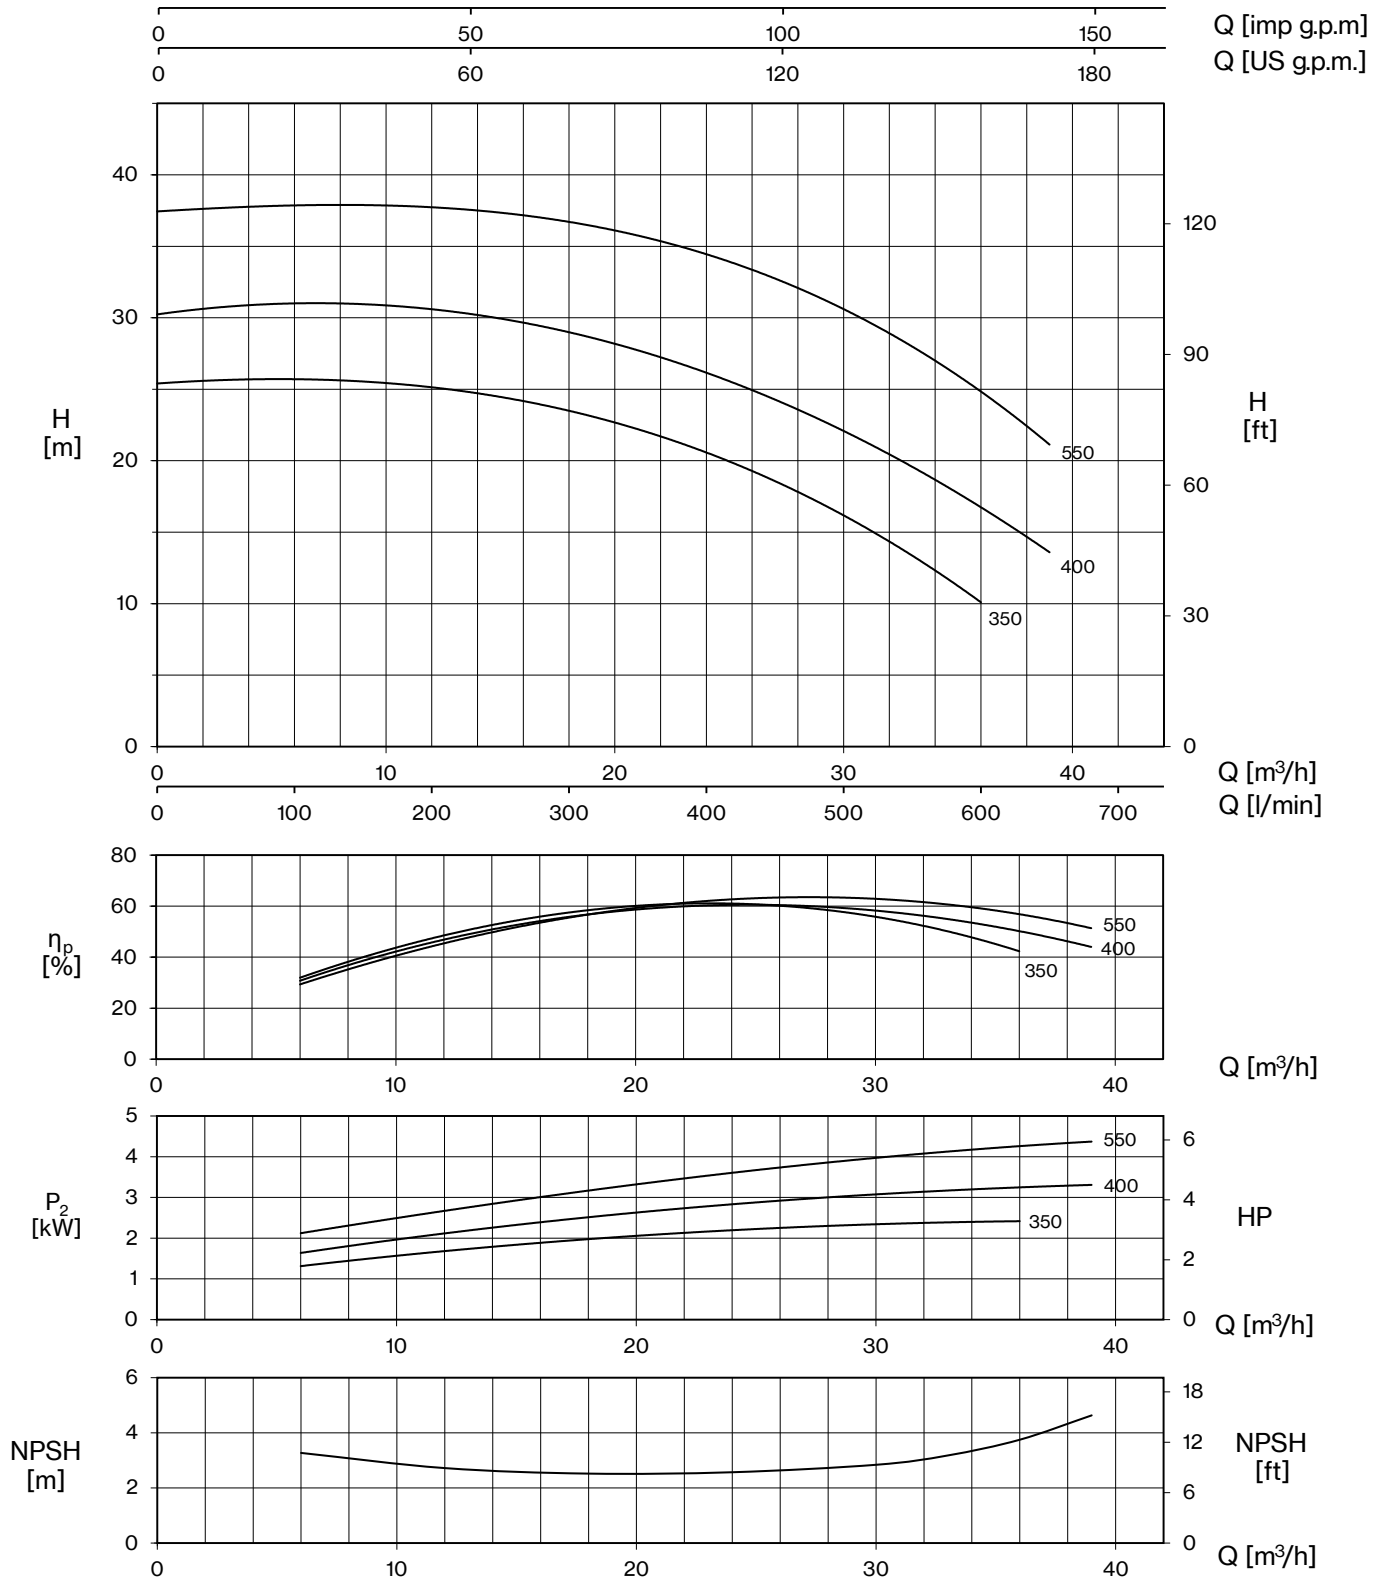


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)								
1~	3~					1~	3~	0	6	12	18	24	30	33	36	39
		HP	kW	1~	3~	1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)								
CH 350	CHT 350	3	2,2	2,8	2,8	12,7	5,2	25,4	25,6	25,3	23,5	20,5	16,2	13,5	10,0	
CH 400	CHT 400	4	3,0	3,8	3,8	17,0	6,9	30,3	30,8	30,7	29,1	26,1	22	19,5	16,7	13,6
-	CHT 550	5,5	4,0		5,0	-	9,1	37,4	37,8	37,9	36,8	34,3	30,2	28,2	25,5	20,7



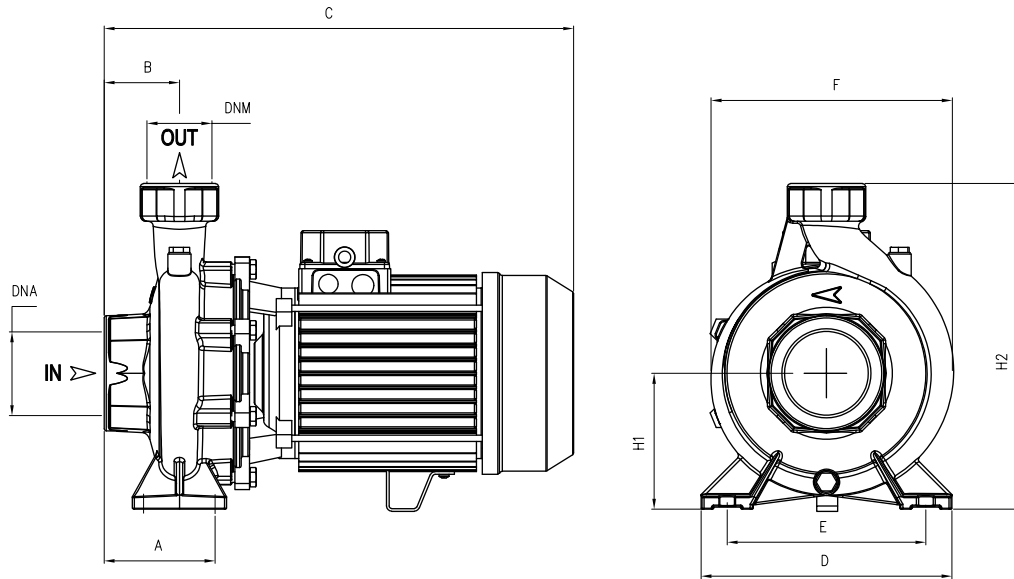


TYPE		DIMENSIONS (mm)														
-1	-3	A	B	C	D	E	F	H1	H2	DNA	DNM	I	L	M	-1	-3
CH 160	CHT 160	105	48	395	200	160	215	110	285	2" G	2" G	420	230	309	26,5	27,5
CH 210	CHT 210	105	48	395	200	160	215	110	285			420	230	309	26	26,5
CH 310	-	105	48	465	200	160	215	110	285			520	235	320	35,5	-
-	CHT 310	105	48	395	200	160	215	110	285			420	230	309	-	28
CH 350	-	105	70	465	240	190	240	126	306	3" G	2" G	530	280	355	38	-
-	CHT 350	105	70	425	240	190	240	126	306			530	280	355	-	35
CH 400	-	105	70	480	240	190	240	126	306			530	280	355	45,5	-
-	CHT 400	105	70	465	240	190	240	126	306			530	280	355	-	38,5
-	CHT 550	105	70	480	240	190	240	126	306			530	280	355	-	45,5



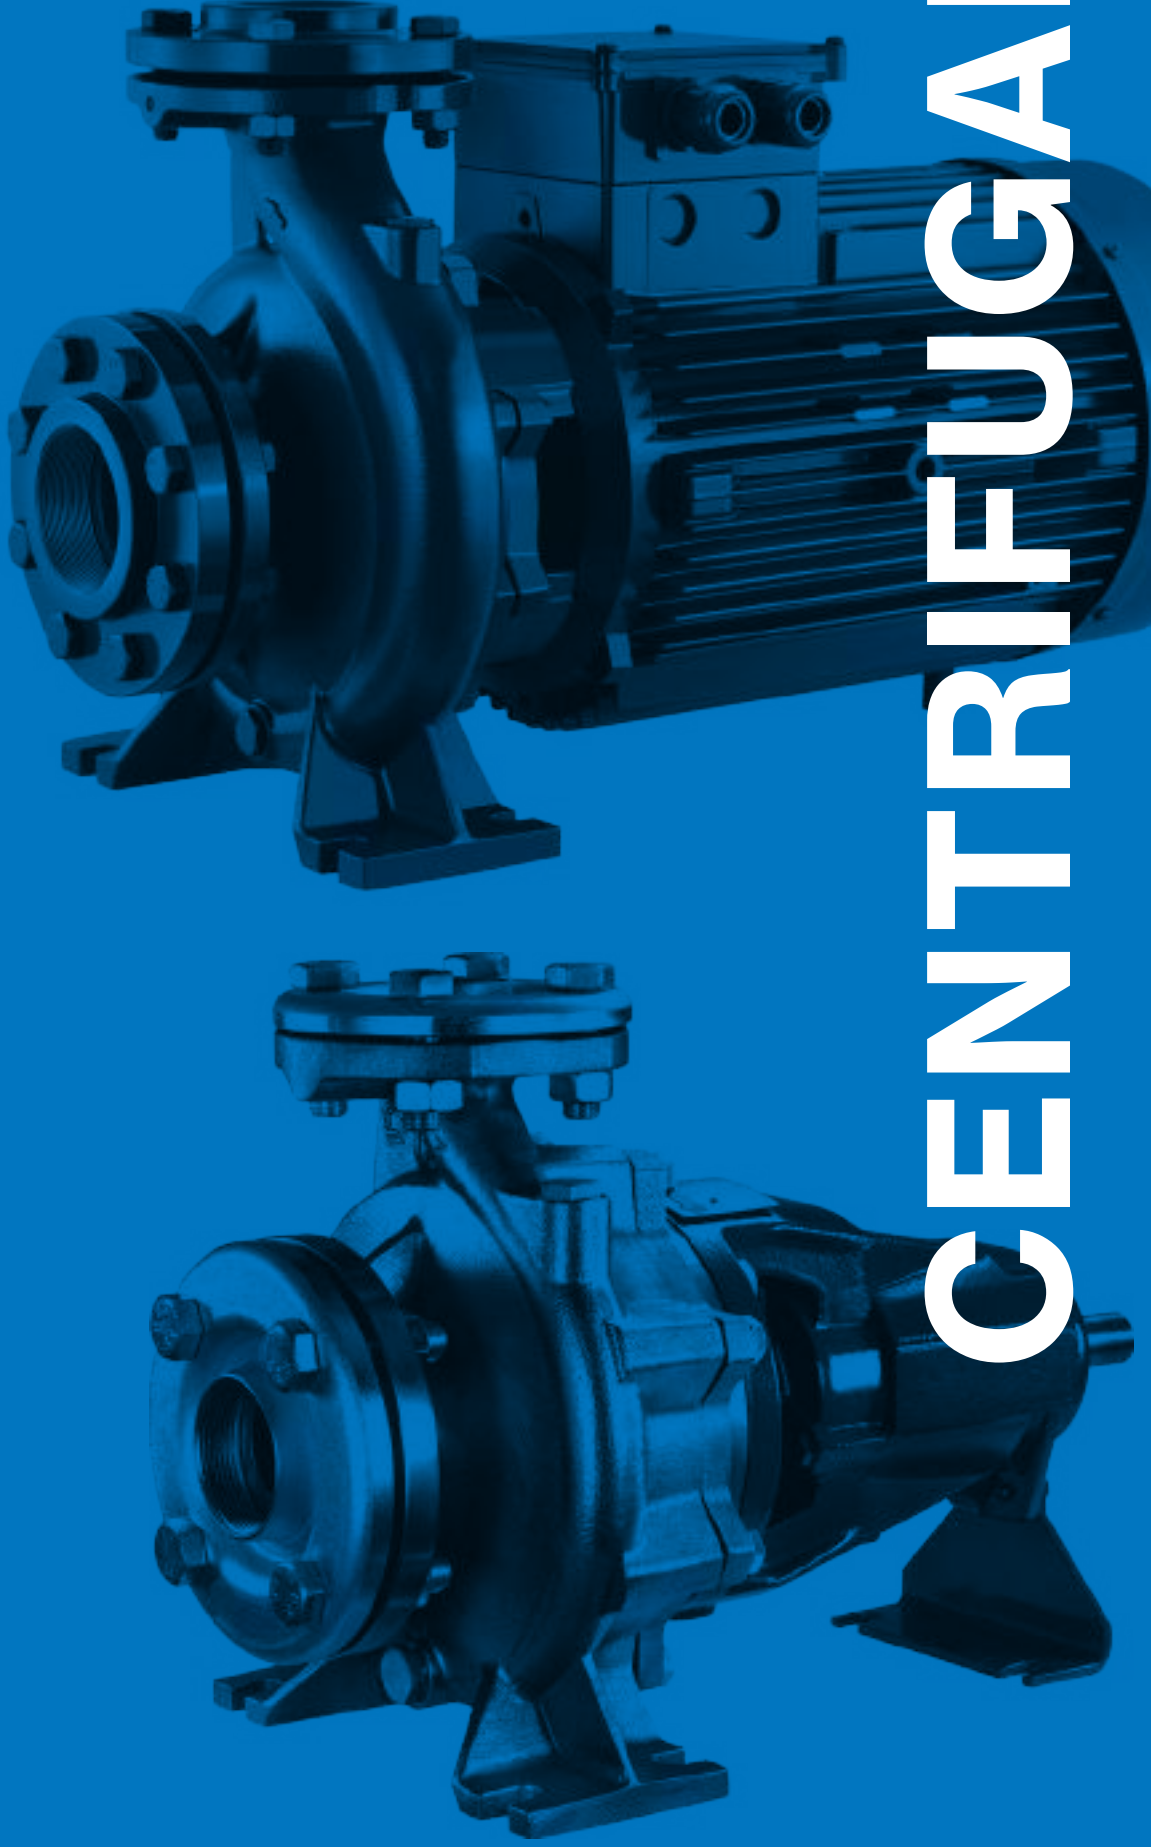

CENTRIFUGAL FLANGED

CENTRIFUGAL FLANGED PUMPS

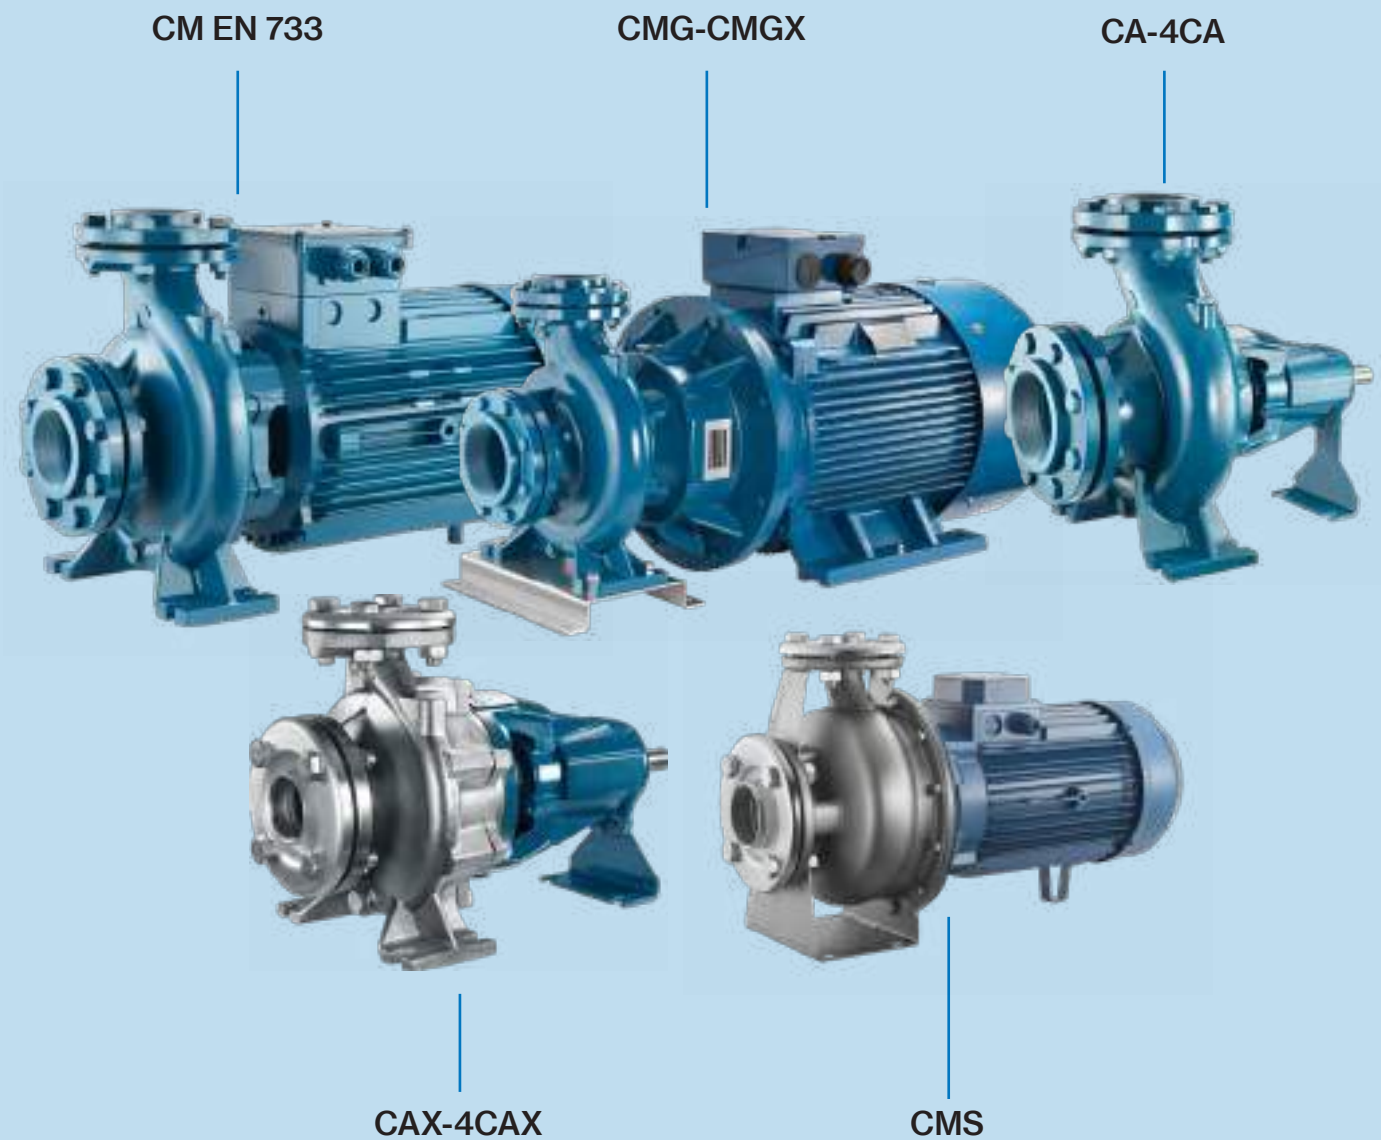

Wide range of centrifugal free axle and monobloc pumps, flanged with axial suction with hydraulic part entirely made of cast iron (CM, CMG, CA), in AISI 304 (CMS) and AISI 316 (CAX).

Applications:


- Water supply
- Pressurization
- Circulation of water in heating and air conditioning systems
- Fluid transfer in industry and agriculture




CM-CMG-CA-4CA

Centrifugal Flanged
EN 733

2 Poles

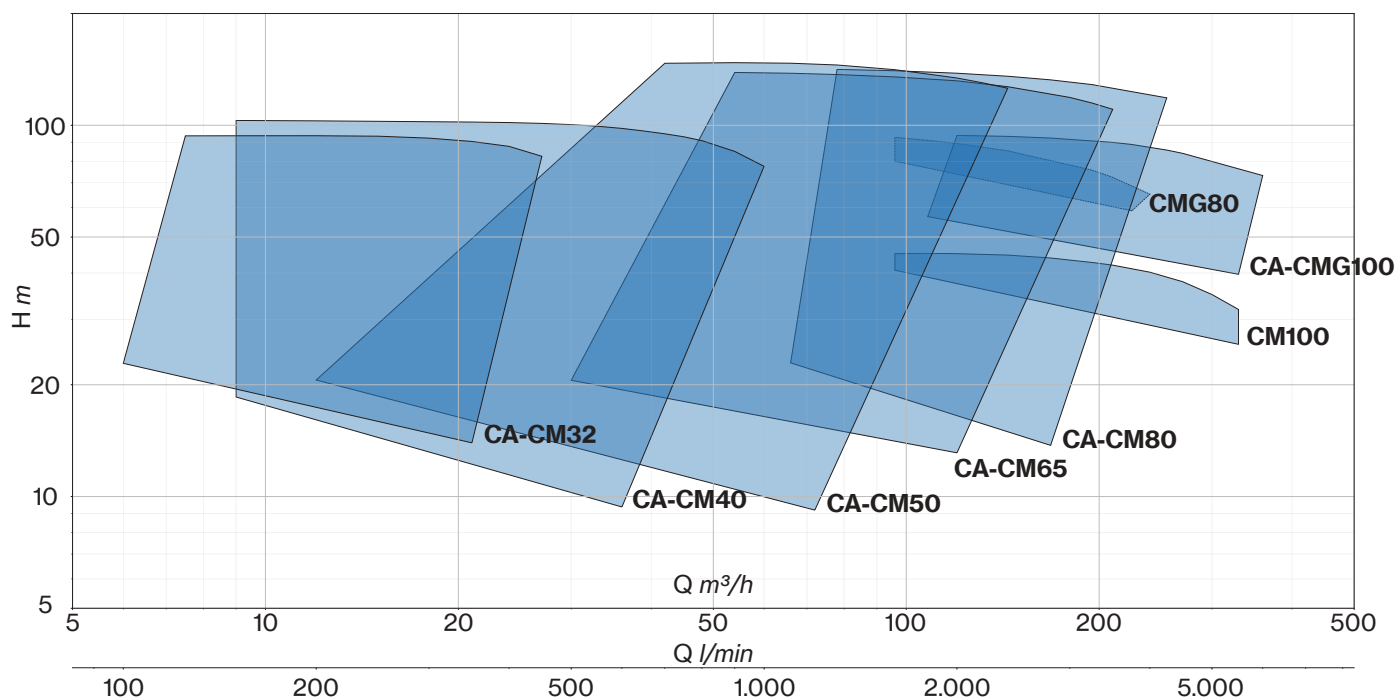

4 Poles

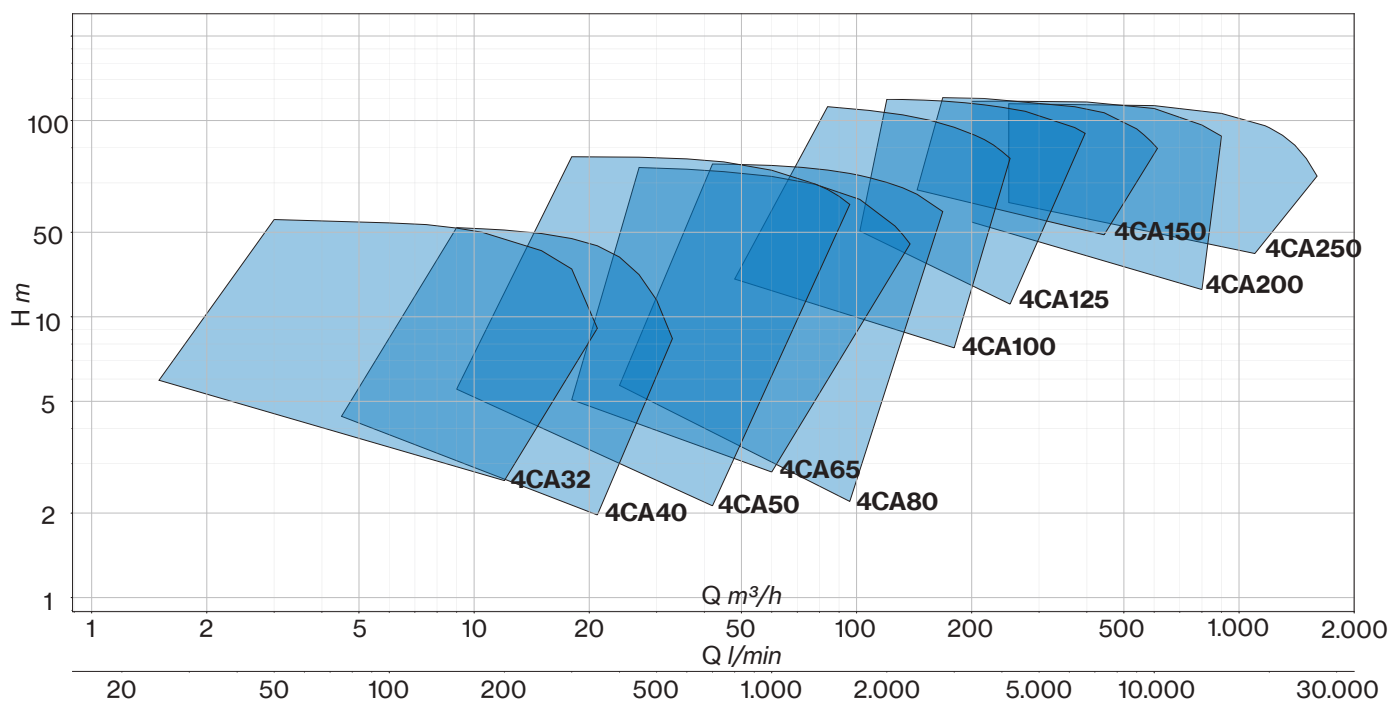

CM-CMG-CA-4CA

Centrifugal Flanged
EN 733

CM: Front suction close-coupled centrifugal pumps with close impeller mounted on IE3 motor shaft extension. Pump casing with axial suction and radial delivery on top, main dimensions and performance according to EN 733.

CMG-CMGX: Front suction centrifugal pumps connected to IE3 standard motor (stub-shaft construction). Pump casing with axial suction and radial delivery on top, main dimensions and performance according to EN 733.

CA-CAX-4CA-4CAX: Single-stage end-suction centrifugal frame-mounted pumps. Dimensions in accordance with EN 733.

TYPE	2 POLES					4 POLES					
	CM	CMG	CMGX	CA	CAT CAX CATX	Flow rate	Head	4CA 4CAT	4CAX 4CATX	Flow rate	Head
						m ³ /h	m			m ³ /h	m
32-160C	■	-	-	■	■	6 ÷ 21	22,8 ÷ 14	■	■	1,5 ÷ 12	5,9 ÷ 2,6
32-160B	■	-	-	■	■	6 ÷ 24	27,7 ÷ 17	■	■	1,5 ÷ 12	7,2 ÷ 3,6
32-160A	■	-	-	■	■	6 ÷ 27	36,2 ÷ 22,1	■	■	1,5 ÷ 15	8,8 ÷ 4
32-200C	■	-	-	■	■	6 ÷ 27	40,3 ÷ 28,7	■	■	3 ÷ 18	10,8 ÷ 4,2
32-200B1	■	-	-	-	-	6 ÷ 27	48 ÷ 37,9	-	-	-	-
32-200B	■	-	-	■	■	6 ÷ 30	48 ÷ 35,4	■	■	3 ÷ 18	12,7 ÷ 6,3
32-200A1	■	-	-	-	-	6 ÷ 30	58,3 ÷ 46,6	-	-	-	-
32-200A	■	-	-	■	■	6 ÷ 33	58,3 ÷ 44,3	■	■	3 ÷ 21	15,7 ÷ 6,8
32-250C	■	-	-	■	■	6 ÷ 27	72 ÷ 61,3	■	■	3 ÷ 21	17,2 ÷ 6,5
32-250B	■	-	-	■	■	7,5 ÷ 27	84 ÷ 73,2	■	■	3 ÷ 21	20 ÷ 8,3
32-250A1	■	-	-	-	-	7,5 ÷ 27	93,6 ÷ 85,3	-	-	-	-
32-250A	■	-	-	■	■	7,5 ÷ 27	93,6 ÷ 85,5	■	■	3 ÷ 21	22,2 ÷ 9,1
40-125C	■	-	-	■	■	9 ÷ 36	18,5 ÷ 9,4	■	■	4,5 ÷ 21	4,4 ÷ 2
40-125B	■	-	-	■	■	9 ÷ 39	23,4 ÷ 13,2	■	■	4,5 ÷ 21	5,5 ÷ 3,3
40-125A	■	-	-	■	■	9 ÷ 42	27,6 ÷ 16,8	■	■	4,5 ÷ 24	6,3 ÷ 3,4
40-160B	■	-	-	■	■	9 ÷ 36	29,2 ÷ 20,5	■	■	4,5 ÷ 24	7,5 ÷ 2,5
40-160A	■	-	-	■	■	9 ÷ 42	34,9 ÷ 23,4	■	■	4,5 ÷ 24	8,9 ÷ 4,5
40-160AP	■	-	-	■	■	9 ÷ 48	39,8 ÷ 25,3	■	■	4,5 ÷ 24	11,1 ÷ 6,8
40-200B1	■	-	-	-	-	9 ÷ 39	45,5 ÷ 32,3	-	-	-	-
40-200B	■	-	-	■	■	9 ÷ 42	45,5 ÷ 29,4	■	■	6 ÷ 24	11,4 ÷ 4,7
40-200A1	■	-	-	-	-	9 ÷ 39	56,5 ÷ 44,4	-	-	-	-
40-200A	■	-	-	■	■	9 ÷ 42	56,5 ÷ 41,6	■	■	6 ÷ 24	13,9 ÷ 8,3
40-200AP	■	-	-	■	■	9 ÷ 45	61,4 ÷ 42,2	■	■	6 ÷ 24	14,9 ÷ 9,4
40-250C	■	-	-	■	■	9 ÷ 36	64,4 ÷ 55,4	■	■	9 ÷ 27	15,2 ÷ 6,6
40-250B	■	-	-	■	■	9 ÷ 39	79,9 ÷ 62,1	■	■	9 ÷ 30	18,2 ÷ 8,3
40-250A1	■	-	-	-	-	9 ÷ 42	84,6 ÷ 72,8	-	-	-	-
40-250A	■	-	-	■	■	9 ÷ 45	84,6 ÷ 69	■	■	9 ÷ 33	20,8 ÷ 8,4
40-250BM	■	-	-	■	■	9 ÷ 54	93,2 ÷ 72	-	-	-	-
40-250AM	■	-	-	■	■	9 ÷ 60	103 ÷ 77,5	-	-	-	-
50-125B	■	-	-	■	■	12 ÷ 72	20,6 ÷ 9,2	■	■	9 ÷ 42	5,5 ÷ 2,1
50-125A	■	-	-	■	■	12 ÷ 72	24,3 ÷ 14,2	■	■	9 ÷ 45	6,4 ÷ 2,9
50-160B1	■	-	-	-	-	21 ÷ 66	33,5 ÷ 21,5	-	-	-	-
50-160B	■	-	-	■	■	21 ÷ 72	33,5 ÷ 18,9	■	■	9 ÷ 42	8 ÷ 2,3
50-160A1	■	-	-	-	-	21 ÷ 72	39,8 ÷ 27,6	-	-	-	-
50-160A	■	-	-	■	■	21 ÷ 78	39,8 ÷ 25,4	■	■	9 ÷ 48	9,4 ÷ 3,1
50-200C	■	-	-	■	■	24 ÷ 72	49,7 ÷ 28,9	■	■	9 ÷ 39	12 ÷ 3,2
50-200B	■	-	-	■	■	24 ÷ 72	54,6 ÷ 35	■	■	10,5 ÷ 42	13,1 ÷ 4,2
50-200A1	■	-	-	-	-	24 ÷ 78	61,8 ÷ 39,8	-	-	-	-



TYPE	2 POLES						4 POLES					
	CM	CMG	CMGX	CA	CAT CAX CATX	Flow rate	Head	4CA 4CAT	4CAX 4CATX	Flow rate	Head	
						m ³ /h	m			m ³ /h	m	
50-200A	■	-	-	■	■	24 ÷ 78	61,8 ÷ 39,8	■	■	10,5 ÷ 45	14,7 ÷ 4,6	
50-250C1	■	-	-	-	-	27 ÷ 60	68,2 ÷ 56,2	-	-	-	-	
50-250C	■	-	-	■	■	27 ÷ 66	68,2 ÷ 52,1	■	■	12 ÷ 45	17,7 ÷ 7,5	
50-250B	■	-	-	■	■	27 ÷ 72	78,4 ÷ 58,5	■	■	12 ÷ 48	20 ÷ 8,2	
50-250A	■	-	-	■	■	27 ÷ 78	88,3 ÷ 61,8	■	■	12 ÷ 54	22,9 ÷ 8,4	
50-315DN	-	-	-	■	-	42 ÷ 132	90,4 ÷ 73,4	-	-	-	-	
50-315C	-	-	-	-	-	-	-	■	■	18 ÷ 84	24,7 ÷ 16,8	
50-315CN	-	-	-	■	-	42 ÷ 132	105 ÷ 88,7	-	-	-	-	
50-315B	-	-	-	-	-	-	-	■	■	18 - 90	31,4 - 21,6	
50-315BN	-	-	-	■	-	42 ÷ 144	124,3 ÷ 103,5	-	-	-	-	
50-315A	-	-	-	-	-	-	-	■	■	18 - 96	37,2 - 25,1	
50-315AN	-	-	-	■	-	42 ÷ 144	146,9 ÷ 125,8	-	-	-	-	
65-125B1	■	-	-	-	-	30 ÷ 108	20,6 ÷ 15	-	-	-	-	
65-125B	■	-	-	■	■	30 ÷ 120	20,6 ÷ 13,1	■	■	18 ÷ 60	5,1 ÷ 2,8	
65-125A1	■	-	-	-	-	30 ÷ 120	25,2 ÷ 18,8	-	-	-	-	
65-125A	■	-	-	■	■	30 ÷ 132	25,2 ÷ 16,8	■	■	18 ÷ 72	6,3 ÷ 3	
65-160C	■	-	-	■	■	42 ÷ 144	30,6 ÷ 13,9	■	■	24 ÷ 78	7,6 ÷ 2,9	
65-160B	■	-	-	■	■	42 ÷ 144	35,1 ÷ 20,4	■	■	24 ÷ 78	8,6 ÷ 3,6	
65-160A1	■	-	-	-	-	42 ÷ 138	42,5 ÷ 31,7	-	-	-	-	
65-160A	■	-	-	■	■	42 ÷ 144	42,5 ÷ 30,9	■	■	24 ÷ 84	9,9 ÷ 4,6	
65-200C1	■	-	-	-	-	54 ÷ 132	46,1 ÷ 28,9	-	-	-	-	
65-200C	■	-	-	■	■	54 ÷ 138	46,1 ÷ 26,8	■	■	27 ÷ 84	11,6 ÷ 5	
65-200B	■	-	-	■	■	54 ÷ 144	53,9 ÷ 34,6	■	■	27 ÷ 84	13,1 ÷ 7	
65-200A	■	-	-	■	■	54 ÷ 144	61,8 ÷ 44,4	■	■	27 ÷ 84	14,8 ÷ 9,3	
65-250B	■	-	-	■	■	54 ÷ 144	80,6 ÷ 47,3	■	■	27 ÷ 84	21 ÷ 8,7	
65-250A	■	-	-	■	■	54 ÷ 150	91,6 ÷ 57,9	■	■	30 ÷ 90	22,9 ÷ 8,8	
65-315CM	-	-	-	-	-	-	-	■	■	27 ÷ 126	23,5 ÷ 13,9	
65-315CN	-	-	-	■	-	54 ÷ 180	96,5 ÷ 80,8	-	-	-	-	
65-315BM	-	-	-	-	-	-	-	■	■	27 ÷ 132	28,9 ÷ 17,2	
65-315BN	-	-	-	■	-	54 ÷ 195	117,9 ÷ 96,3	-	-	-	-	
65-315AM	-	-	-	-	-	-	-	■	■	27 ÷ 138	34 ÷ 18,2	
65-315AN	-	-	-	■	-	54 ÷ 210	138,8 ÷ 110,4	-	-	-	-	
80-160E	■	-	-	■	■	66 ÷ 168	22,9 ÷ 13,7	■	■	24 ÷ 96	5,7 ÷ 2,2	
80-160D	■	-	-	■	■	66 ÷ 180	27,3 ÷ 16,4	■	■	27 ÷ 102	6,8 ÷ 2,6	
80-160C1	■	-	-	-	-	66 ÷ 195	30,9 ÷ 18,4	-	-	-	-	
80-160C	■	-	-	■	■	66 ÷ 195	30,9 ÷ 18,4	■	■	30 ÷ 108	7,4 ÷ 3,1	
80-160B	■	-	-	■	■	66 ÷ 210	35,9 ÷ 22	■	■	33 ÷ 120	8,9 ÷ 3,5	
80-160A	■	-	-	■	■	66 ÷ 225	40,5 ÷ 23,9	■	■	36 ÷ 132	9,8 ÷ 3,8	
80-200B	■	-	-	■	■	72 ÷ 225	54,5 ÷ 38,5	■	■	42 ÷ 132	13,1 ÷ 7,1	
80-200A	■	-	-	■	■	72 ÷ 240	61,7 ÷ 43,9	■	■	42 ÷ 144	14,7 ÷ 7,5	
80-250B	-	■	■	■	■	96 ÷ 225	80 ÷ 58,8	■	■	42 ÷ 132	19,2 ÷ 11,1	
80-250A	-	■	■	■	■	96 ÷ 240	92,8 ÷ 65,2	■	■	42 ÷ 144	22,9 ÷ 12,6	
80-315B	-	-	-	-	-	-	-	■	■	42 ÷ 150	28,3 ÷ 19,9	
80-315BN	-	-	-	■	-	78 ÷ 255	112,4 ÷ 90,8	-	-	-	-	
80-315A	-	-	-	-	-	-	-	■	■	42 ÷ 168	35 ÷ 23,7	
80-315AN	-	-	-	■	-	78 ÷ 255	141,4 ÷ 118,5	-	-	-	-	
100-160B	■	-	-	-	-	96 ÷ 330	40,7 ÷ 25,7	-	-	-	-	
100-160A	■	-	-	-	-	96 ÷ 330	45,1 ÷ 31,9	-	-	-	-	
100-200D	-	-	-	■	■	108 ÷ 300	43,1 ÷ 26,6	■	■	48 ÷ 168	10,8 ÷ 4,8	
100-200C	-	-	-	■	■	108 ÷ 330	48,4 ÷ 28,1	■	■	48 ÷ 168	12 ÷ 6,3	
100-200B	-	■	■	■	■	108 ÷ 330	56,8 ÷ 39,7	■	■	48 ÷ 180	13,6 ÷ 7,8	
100-200A	-	■	■	■	■	108 ÷ 360	62,2 ÷ 42,5	■	■	48 ÷ 192	15,4 ÷ 9,1	
100-250E	-	-	-	-	-	-	-	■	■	60 ÷ 180	16,9 ÷ 11,4	
100-250D	-	-	-	-	-	-	-	■	■	60 ÷ 192	19,6 ÷ 12,7	




TYPE	2 POLES						4 POLES					
	CM	CMG	CMGX	CA	CAT CAX CATX	Flow rate	Head	4CA 4CAT	4CAX 4CATX	Flow rate	Head	
						m ³ /h	m			m ³ /h	m	
100-250C	-	■	■	■	■	120 ÷ 300	73,2 ÷ 61	-	-	-	-	
100-250B	-	■	■	■	■	120 ÷ 330	83,7 ÷ 67,6	-	-	-	-	
100-250A	-	■	■	■	■	120 ÷ 360	93,9 ÷ 73,2	■	■	60 ÷ 204	22,3 ÷ 13,8	
100-315B	-	-	-	-	-	-	-	■	■	72 ÷ 216	31,4 ÷ 17,9	
100-315A	-	-	-	-	-	-	-	■	■	72 ÷ 216	36,5 ÷ 23,1	
100-400C	-	-	-	-	-	-	-	■	■	84 ÷ 228	40,6 ÷ 25,8	
100-400B	-	-	-	-	-	-	-	■	■	84 ÷ 240	48,7 ÷ 31,6	
100-400A	-	-	-	-	-	-	-	■	■	84 ÷ 252	56 ÷ 36,7	
125-250B	-	-	-	-	-	-	-	■	■	102 ÷ 252	20,2 ÷ 11,1	
125-250A	-	-	-	-	-	-	-	■	■	102 ÷ 276	24 ÷ 14,7	
125-315C	-	-	-	-	-	-	-	■	■	120 ÷ 348	25,8 ÷ 15,7	
125-315B	-	-	-	-	-	-	-	■	■	120 ÷ 372	33 ÷ 22,2	
125-315A	-	-	-	-	-	-	-	■	■	120 ÷ 372	39,6 ÷ 28,2	
125-400C	-	-	-	-	-	-	-	■	■	120 ÷ 372	47,6 ÷ 33,8	
125-400B	-	-	-	-	-	-	-	■	■	120 ÷ 396	54,5 ÷ 39,1	
125-400A	-	-	-	-	-	-	-	■	■	120 ÷ 396	59,5 ÷ 45	
150-315D	-	-	-	-	-	-	-	■	■	144 ÷ 444	28,3 ÷ 19,6	
150-315C	-	-	-	-	-	-	-	■	■	144 ÷ 492	32,2 ÷ 21,8	
150-315B	-	-	-	-	-	-	-	■	■	144 ÷ 540	36,3 ÷ 23,6	
150-315A	-	-	-	-	-	-	-	■	■	144 ÷ 564	41 ÷ 27,2	
150-400C	-	-	-	-	-	-	-	■	■	168 ÷ 564	47,8 ÷ 28,7	
150-400B	-	-	-	-	-	-	-	■	■	168 ÷ 588	54,4 ÷ 34,3	
150-400A	-	-	-	-	-	-	-	■	■	168 ÷ 612	60,3 ÷ 39,8	
Not envisaged in the EN 733 standard												
200-315D	-	-	-	-	-	-	-	■	■	200 ÷ 800	21,7 ÷ 12,5	
200-315C	-	-	-	-	-	-	-	■	■	200 ÷ 850	26,6 ÷ 14,6	
200-315B	-	-	-	-	-	-	-	■	■	200 ÷ 900	33,4 ÷ 16,7	
200-315A	-	-	-	-	-	-	-	■	■	200 ÷ 900	35,9 ÷ 19,8	
200-400C	-	-	-	-	-	-	-	■	■	200 ÷ 800	44,1 ÷ 31,5	
200-400B	-	-	-	-	-	-	-	■	■	200 ÷ 850	50,8 ÷ 36,6	
200-400A	-	-	-	-	-	-	-	■	■	200 ÷ 900	58,5 ÷ 44	
250-315C	-	-	-	-	-	-	-	■	■	250 ÷ 1100	25,5 ÷ 16,8	
250-315B	-	-	-	-	-	-	-	■	■	250 ÷ 1170	33 ÷ 19	
250-315A	-	-	-	-	-	-	-	■	■	250 ÷ 1200	35 ÷ 20	
250-400D	-	-	-	-	-	-	-	■	■	250 ÷ 1300	39,9 ÷ 24,3	
250-400C	-	-	-	-	-	-	-	■	■	250 ÷ 1400	45,8 ÷ 27,4	
250-400B	-	-	-	-	-	-	-	■	■	250 ÷ 1500	51,7 ÷ 30,3	
250-400A	-	-	-	-	-	-	-	■	■	250 ÷ 1600	57,4 ÷ 31,7	



CM Series


Models list and materials

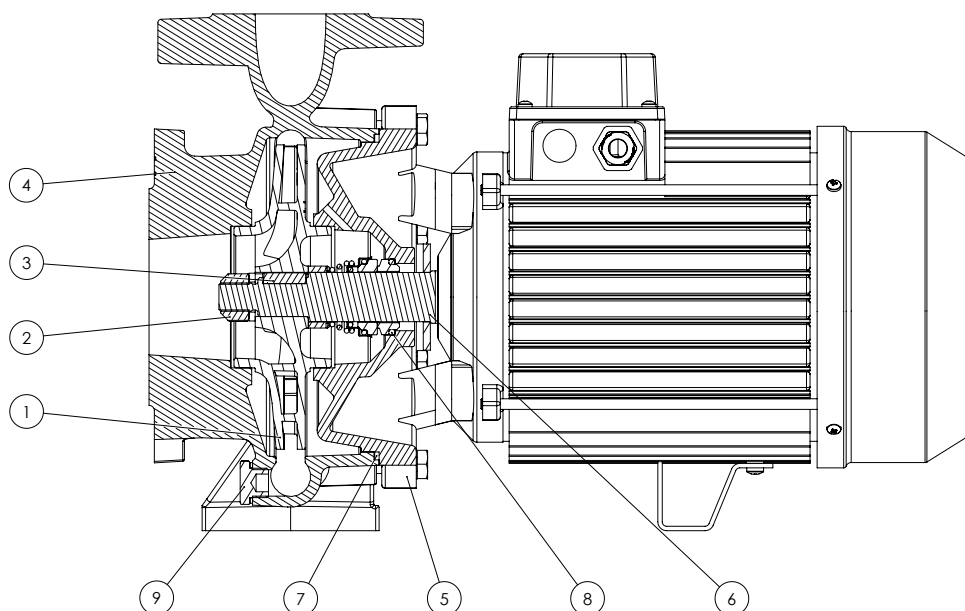

POS. N.	DENOMINATION	VERSION	MATERIAL	REFERENCE STANDARDS	
				EUROPE	USA
1	Impeller	Standard	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		B	Bronze	CuSn10-C (CC480K)	UNS C90700
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
2	Impeller lock nut and washer		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
3	Impeller key		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
4	Volute casing	Up to 80-200	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		From 80-250	Cast iron G25	GJL-250 (JL1040)	ASTM Class 35
5	Motor bracket		Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
6	Shaft extension		Stainless steel	X5CrNi18-10/ 1.4301	AISI 304
7	O-ring	Standard	NBR		
		E	EPDM		
		V	FKM		
8	Mechanical seal		(Search for the material in the mechanical seal table)		
9	Fill and drain plugs		Brass	CU ZN 40 PB2 UNI 5705/65	C37700

CMG Series


Models list and materials

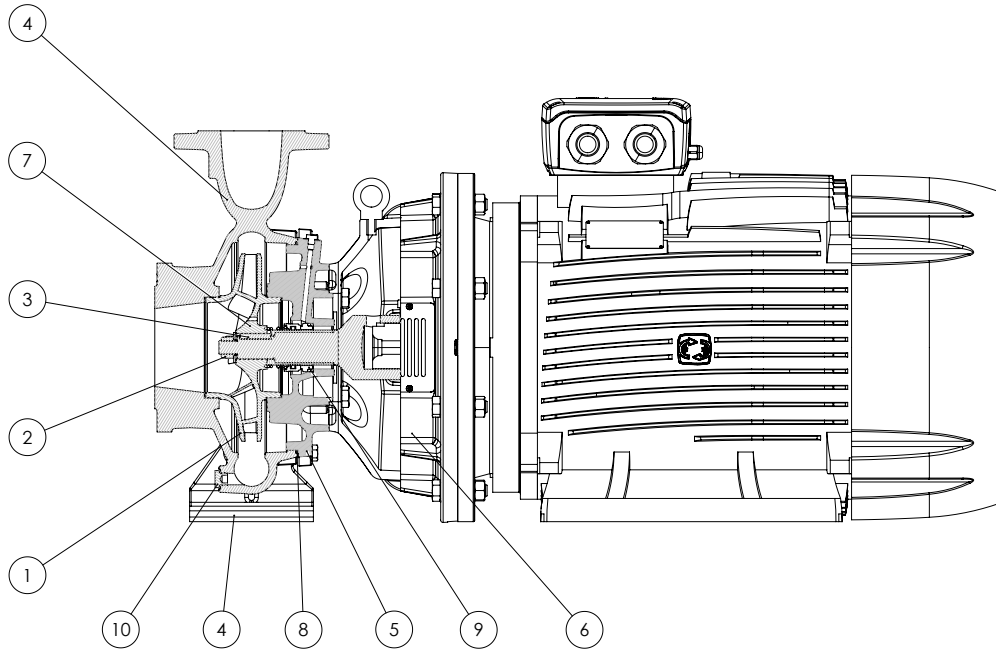

POS. N.	DENOMINATION	VERSION	MATERIAL	REFERENCE STANDARDS	
				EUROPE	USA
1	Impeller	Standard	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		B	Bronze	CuSn10-C (CC480K)	UNS C90700
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
2	Impeller lock nut and washer		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
3	Impeller key		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
4	Volute casing	Standard	Cast iron G25	GJL-250 (JL1040)	ASTM Class 35
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
5	Casing cover	Standard	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
6	Motor bracket		Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
7	Stub shaft		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
8	O-ring	Standard	NBR		
		E	EPDM		
		V	FKM		
9	Mechanical seal		(Search for the material in the mechanical seal table)		
10	Fill and drain plugs	Fill and drain plugs	Brass	CU ZN 40 PB2 UNI 5705/65	C37700

CA-4CA Series

Models list and materials

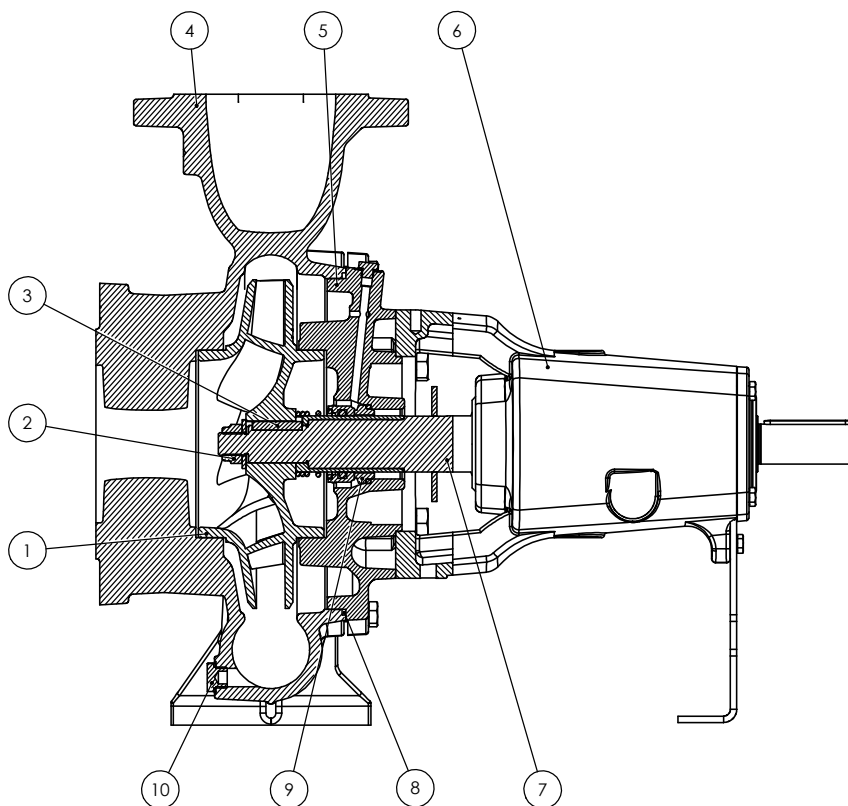

POS. N.	DENOMINATION	VERSION	MATERIAL	REFERENCE STANDARDS	
				EUROPE	USA
1	Impeller	Standard	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		B	Bronze	CuSn10-C (CC480K)	UNS C90700
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
2	Impeller lock nut and washer		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
3	Impeller key		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
4	Volute casing	Up to 80-200	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		From 80-250	Cast iron G25	GJL-250 (JL1040)	ASTM Class 35
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
5	Casing cover	Standard	Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
6	Bracket		Cast iron G20	GJL-200 (JL1030)	ASTM Class 30
7	Shaft		Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316
8	O-ring	Standard	NBR		
		E	EPDM		
		V	FKM		
9	Mechanical seal		(Search for the material in the mechanical seal table)		
10	Fill and drain plugs	Standard	Brass	CU ZN 40 PB2 UNI 5705/65	C37700
		X	Stainless steel	X5CrNiMo17-12-2/ 1.4401	AISI 316




Monobloc horizontal centrifugal pumps, constructed in compliance with EN 733 standards; widely used in water supplies, pressurisation and fire-fighting systems, cooling, heating, irrigation, industrial and agricultural applications; standard supply with counter-flange.

Construction features

Pump body	cast iron
Motor bracket	cast iron
Impeller	cast iron, bronze or stainless steel
Seal type	mechanical
Pump shaft end	stainless steel AISI 304
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 10 bar

Motor

2 Poles induction motor	3~ 230/400V - 50Hz P ≤ 4kW
	3~ 400/690V - 50Hz P > 4kW
	1~ 230V-50Hz
Insulation class	F
Protection degree	IPX5

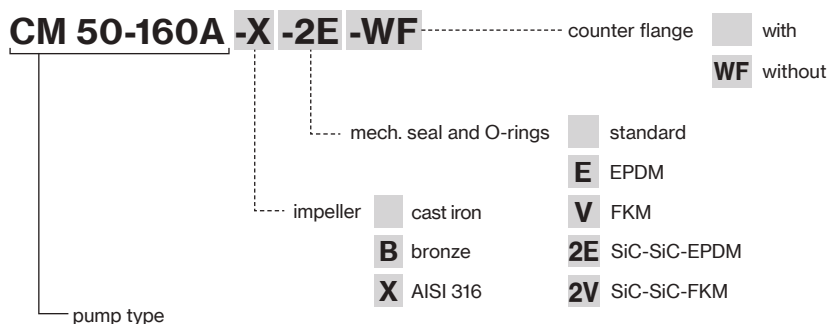

CMG-CMGX ~ 2900 rpm

Centrifugal Flanged
EN 733




Monobloc horizontal centrifugal pumps, constructed in compliance with EN 733 standards, with stub-shaft and bracket for coupling to standard motors; widely used in water supplies, pressurisation and fire-fighting systems; standard supply with counter-flange.

Construction features

Pump body	cast iron (CMG) stainless steel AISI 316 (CMGX)
Motor bracket	cast iron
Impeller	cast iron, bronze, steel (CMG), steel (CMGX)
Seal type	mechanical
Pump shaft end	stainless steel AISI 316
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 10 bar

Motor

2 Poles induction motor	3~ 400/690V - 50Hz
Insulation class	F
Protection degree	IPX5

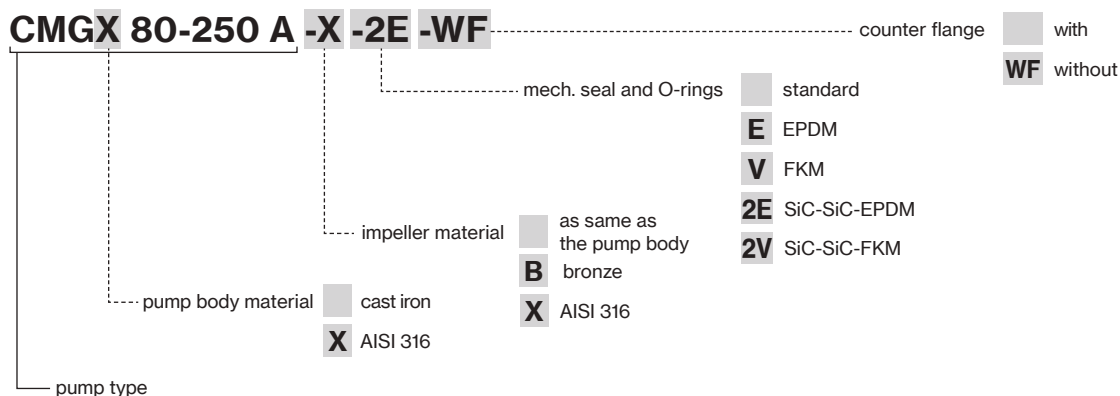

CA-CAX

~ 2900 rpm

4CA-4CAX

~ 1450 rpm



CA-4CA



CAX-4CAX



Centrifugal Flanged EN 733


Bare shaft centrifugal pumps constructed in compliance with EN 733 standards; widely used in water supplies, pressurisation and fire-fighting systems. The pumps are supplied with counter-flange.

Construction features

Pump body	cast iron (CA) stainless steel AISI 316 (CAX)
Motor bracket	cast iron
Impeller	cast iron, bronze, steel (CA) stainless steel AISI 316 (CAX)
Seal type	mechanical (CA-CAX) or gland packing graphite impregnated (CAT-CATX)
Pump shaft end	stainless steel AISI 316
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 10 bar max 14 bar (... -315 ~ 2900 rpm)

Motor

Available with IE3-IE4 efficiency class motor

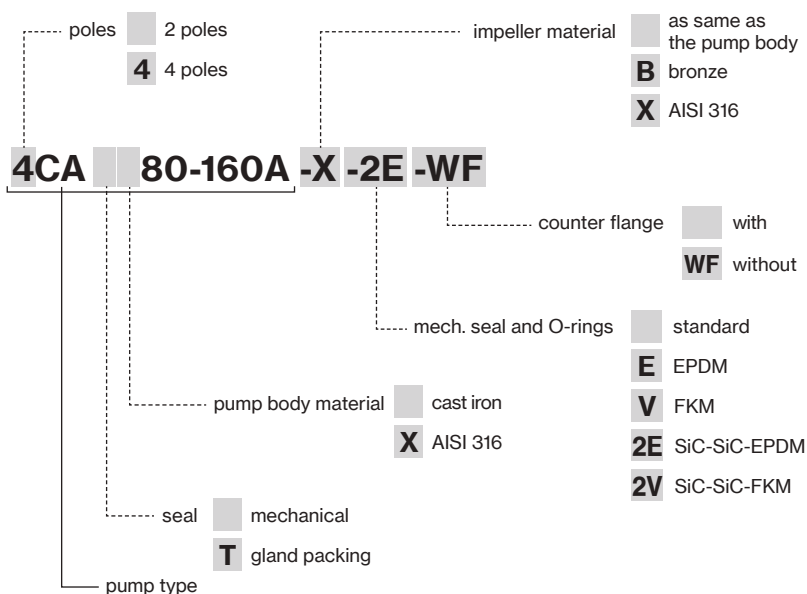

CA-CAX

~ 2900 rpm

Centrifugal Flanged
EN 733

4CA-4CAX

~ 1450 rpm

Construction versions

The pumps can be fitted next to a motor on a common baseplate, with the pump shaft and the motor shaft connected by a flexible coupling.



CA-4CA
with motor



CAX-4CAX
with motor

Shaft seals versions

The pumps can be provided on request with gland packing instead of mechanical seal.



CA-CAX-4CA-4CAX
mechanical seal



CAT-CATX-4CAT-4CATX
gland packing seal

TYPE	P2		1~		3~		Q (m³/h - l/min)														
			P ₁ max kW	A 1~230V 50Hz	P ₁ max kW	A 3~400V 50Hz	0	6	7,5	9	12	15	18	21	24	27	30	33			
	HP	kW	H (m)																		
32-160C	2	1,5	2,0	9,3	1,9	3,6	23,0	22,8	22,5	22,0	21,0	19,2	16,9	14,0							
32-160B	3	2,2	2,7	12,4	2,6	4,9	28,0	27,7	27,4	27,0	26,2	24,9	22,9	20,1	17,0						
32-160A	4	3	-	-	3,8	6,8	36,1	36,2	36,0	35,6	34,6	33,2	31,4	28,9	25,7	22,1					
32-200C	5,5	4	5,2	22,9	4,9	8,9	40,2	40,3	40,1	39,8	38,9	37,7	36,1	34,2	31,6	28,7					
32-200B1	7,5	5,5	-	-	6,4	11,3	48,3	48,0	47,9	47,6	46,7	45,5	44,2	42,6	40,5	37,9					
32-200B	7,5	5,5	-	-	6,7	11,1	48,3	48,0	47,9	47,6	46,7	45,5	44,2	42,6	40,5	37,9	35,4				
32-200A1	10	7,5	-	-	8,2	14,5	57,9	58,3	58,4	58,4	58,0	57,1	55,6	53,8	51,4	49,2	46,6				
32-200A	10	7,5	-	-	8,6	14,1	57,9	58,3	58,4	58,4	58,0	57,1	55,6	53,8	51,4	49,2	46,6	44,3			
32-250C	12,5	9,2	-	-	10,0	16,8	74,6		72,8	72,5	71,9	70,5	68,8	66,6	64,1	61,3					
32-250B	15	11	-	-	12,2	20,0	84,8		84,0	83,9	83,6	82,7	81,1	78,6	75,4	73,2					
32-250A1	20	15	-	-	13,5	23,2	93,5		93,6	93,7	93,7	93,4	92,3	90,4	87,7	85,3					
32-250A	20	15	-	-	13,5	23,2	93,5		93,6	93,7	93,7	93,4	92,3	90,4	87,7	85,3					

TYPE	P2		1~		3~		Q (m³/h - l/min)																
			P ₁ max kW	A 1~230V 50Hz	P ₁ max kW	A 3~400V 50Hz	0	9	12	15	18	21	24	27	30	33	36	39	42	45	48	54	60
	HP	kW	H (m)																				
40-125C	2	1,5	2,0	9,3	1,9	3,6	17,9	18,5	18,4	18,1	17,5	16,6	15,6	14,3	12,8	11,1	9,4						
40-125B	3	2,2	2,7	12,4	2,6	4,9	22,6	23,4	23,3	23,1	22,7	22,0	21,0	19,9	18,6	17,0	15,1	13,2					
40-125A	4	3	-	-	3,6	6,5	26,8	27,6	27,7	27,6	27,2	26,5	25,7	24,6	23,4	22,0	20,3	18,5	16,8				
40-160B	4	3	3,8	16,7	3,8	6,8	28,2	29,2	29,2	28,9	28,3	27,5	26,5	25,3	23,8	22,3	20,5						
40-160A	5,5	4	5,0	22,5	4,9	8,8	33,8	34,9	34,8	34,5	33,9	33,2	32,4	31,3	30,0	28,5	26,9	25,2	23,4				
40-160AP	7,5	5,5	-	-	6,1	11,0	38,6	39,8	39,9	39,8	39,4	38,7	37,9	37,0	35,8	34,4	32,9	31,1	29,3	27,4	25,3		
40-200B1	7,5	5,5	-	-	6,8	12,0	44,7	45,5	45,4	45,0	44,5	43,5	42,3	41,0	39,3	37,2	34,9	32,3					
40-200B	7,5	5,5	-	-	6,9	11,4	44,6	45,5	45,4	45,0	44,5	43,5	42,3	41,0	39,3	37,2	34,9	32,3	29,4				
40-200A1	10	7,5	-	-	9,0	15,5	56,2	56,5	56,5	56,3	55,9	55,1	54,1	52,8	51,2	49,3	47,0	44,4					
40-200A	10	7,5	-	-	9,3	15,1	56,2	56,5	56,5	56,3	55,9	55,1	54,1	52,8	51,2	49,3	47,0	44,4	41,6				
40-200AP	12,5	9,2	-	-	10,2	16,8	61,7	61,4	61,2	60,8	60,0	59,1	57,9	56,4	54,7	53,1	51,1	48,5	45,5	42,2			
40-250C	12,5	9,2	-	-	11,1	18,0	64,8	64,4	64,2	63,8	63,4	62,7	61,9	61,0	59,8	57,9	55,4						
40-250B	15	11	-	-	13,8	22,3	73,7	73,9	74,5	73,2	71,9	71,1	70,2	69,2	68,1	66,7	64,7	62,1					
40-250A1	20	15	-	-	16,5	27,2	82,6	84,6	84,8	84,7	84,3	83,4	82,4	81,3	80,0	78,5	76,9	75,4	72,8				
40-250A	20	15	-	-	17,5	29,1	82,6	84,6	84,8	84,7	84,3	83,4	82,4	81,3	80,0	78,5	76,9	75,4	72,8	69,0			
40-250BM max 14 bar	25	18,5	-	-	20,6	34,1	92,6	93,2	93,3	93,2	93,1	92,8	92,4	91,7	90,9	89,8	88,3	86,5	84,6	82,3	79,5	72,0	
40-250AM max 14 bar	30	22	-	-	24,4	40,3	101,7	103,0	102,8	102,3	102,2	102,0	101,7	101,2	100,4	99,4	98,1	96,5	94,8	93,1	90,9	85,0	77,5

TYPE	P2		1~		3~		Q (m³/h - l/min)																		
			P ₁ max kW	A 1~230V 50Hz	P ₁ max kW	A 3~400V 50Hz	0	12	15	18	21	24	27	30	33	36	39	42	45	48	54	60	66	72	78
	HP	kW	H (m)																						
50-125B	4	3	3,6	16,1	3,8	6,8	20,0	20,6	20,6	20,4	20,3	20,1	19,9	19,6	19,2	18,7	18,2	17,6	17,0	16,4	15,0	13,2	11,3	9,2	
50-125A	5,5	4	5,0	22,5	4,8	8,8	23,7	24,3	24,3	24,2	24,1	23,9	23,7	23,3	23,0	22,6	22,1	21,7	21,2	20,7	19,6	18,2	16,4	14,2	
50-160B1	7,5	5,5	-	-	6,5	11,4	32,1				33,5	33,4	33,1	32,7	32,2	31,6	31,0	30,2	29,1	28,3	26,2	23,9	21,5		
50-160B	7,5	5,5	-	-	6,5	10,9	32,1				33,5	33,4	33,1	32,7	32,2	31,6	31,0	30,2	29,1	28,3	26,2	23,9	21,5	18,9	
50-160A1	10	7,5	-	-	8,6	15,1	38,1				39,8	39,8	39,7	39,5	39,2	38,8	38,3	37,7	36,7	36,0	34,2	32,2	29,7	27,4	
50-160A	10	7,5	-	-	8,8	14,4	38,1				39,8	39,8	39,7	39,5	39,2	38,8	38,3	37,7	36,7	36,0	34,2	32,2	29,7	27,4	25,4
50-200C	12,5	9,2	-	-	10,4	17,2	48,2				49,7	49,2	48,5	47,7	46,9	45,9	44,9	43,7	42,6	40,0	36,0	32,3	28,9		
50-200B	15	11	-	-	11,9	19,5	53,1				54,6	54,1	53,5	52,9	52,2	51,4	50,4	49,3	48,1	45,5	42,7	38,8	35,0		
50-200A1	20	15	-	-	14,6	24,7	59,9				61,8	61,5	61,0	60,4	59,7	58,8	58,0	57,1	56,0	53,6	50,8	47,8	44,4	39,8	
50-200A	20	15	-	-	14,6	24,7	59,9				61,8	61,5	61,0	60,4	59,7	58,8	58,0	57,1	56,0	53,6	50,8	47,8	44,4	39,8	
50-250C1	20	15	-	-	16,1	26,6	69,2					68,2	67,7	67,0	66,3	65,6	64,7	63,8	62,8	59,9	56,2				
50-250C	20	15	-	-	17,2	28,6	69,2					68,2	67,7	67,0	66,3	65,6	64,7	63,8	62,8	59,9	56,2	52,1			
50-250B	25	18,5	-	-	20,7	34,3	78,8					78,4	78,0	77,6	77,0	76,1	75,1	74,0	72,9	70,3	66,9	62,9	58,5		
50-250A	30	22	-	-	24,8	40,9	88,5					88,3	88,1	87,7	87,2	86,6	85,8	84,8	83,8	81,4	78,5	75,0	70,2	64,8	



TYPE	P2		3-		Q (m ³ /h - l/min)																				
			P ₁ max kW	A 3~400V 50Hz	0	30	33	36	39	42	45	48	54	60	66	72	78	84	96	108	120	132	138	144	150
	HP	kW	H (m)																						
65-125B1	7,5	5,5	6,4	11,3	19,7	20,6	20,5	20,4	20,4	20,3	20,2	20,2	20,0	19,7	19,3	18,8	18,2	17,5	16,3	15,0					
65-125B	7,5	5,5	6,6	11,0	19,7	20,6	20,5	20,4	20,4	20,3	20,2	20,2	20,0	19,7	19,3	18,8	18,2	17,5	16,3	15,0	13,1				
65-125A1	10	7,5	8,6	15,1	24,6	25,2	25,2	25,1	25,1	25,0	24,8	24,9	24,7	24,5	24,2	23,9	23,5	23,0	22,0	20,6	18,8				
65-125A	10	7,5	8,8	14,4	24,6	25,2	25,2	25,1	25,1	25,0	24,9	24,9	24,7	24,5	24,2	23,9	23,5	23,0	22,0	20,6	18,8	16,8			
65-160C	12,5	9,2	10,1	16,8	28,9					30,6	30,5	30,3	30,0	29,6	29,1	28,5	27,9	27,2	25,3	22,9	20,2	17,5	16,0	13,9	
65-160B	15	11	12,7	20,6	33,2					35,1	35,0	34,9	34,6	34,3	33,8	33,3	32,8	32,1	30,4	28,2	25,5	22,5	21,4	20,4	
65-160A1	20	15	16,8	27,6	40,1					42,5	42,5	42,5	42,3	42,1	41,8	41,4	41,0	40,4	38,9	37,1	35,3	32,8	31,7		
65-160A	20	15	17,1	28,5	40,1					42,5	42,5	42,5	42,3	42,1	41,8	41,4	41,0	40,4	38,9	37,1	35,3	32,8	31,7	30,9	
65-200C1	20	15	16,8	27,6	44,4								46,1	45,4	44,7	44,0	43,2	42,4	40,3	37,5	33,7	28,9			
65-200C	20	15	17,0	28,3	44,4								46,1	45,4	44,7	44,0	43,2	42,4	40,3	37,5	33,7	28,9	26,8		
65-200B	25	18,5	21,2	34,8	51,7								53,9	53,4	52,7	52,0	51,3	50,4	48,6	45,9	43,0	39,4	37,1	34,6	
65-200A	30	22	25,4	41,7	60,3								61,8	61,4	61,0	60,4	59,8	59,1	57,1	54,6	51,6	48,3	46,5	44,4	
65-250B	40	30	30,8	55,3	80,6								80,6	79,5	78,4	77,1	75,7	74,1	70,4	66,1	61,0	54,7	51,0	47,3	
65-250A	50	37	37,0	69,2	91,6								91,6	90,8	89,8	88,6	87,4	85,9	82,5	77,8	72,8	67,4	64,3	60,8	57,9

TYPE	P2		3-		Q (m ³ /h - l/min)																			
			P ₁ max kW	A 3~400V 50Hz	0	66	72	78	84	96	108	120	132	138	144	156	168	180	195	210	225	240		
	HP	kW	H (m)																					
80-160E	12,5	9,2	9,8	16,3	21,5	22,9	22,5	22,1	21,6	20,8	19,9	18,9	17,7	17,2	16,6	15,3	13,7							
80-160D	15	11	12,2	20,0	25,4	27,3	27,0	26,6	26,3	25,4	24,5	23,5	22,4	21,8	21,2	19,9	18,3	16,4						
80-160C1	20	15	14,5	24,5	29,0	30,9	30,7	30,4	30,1	29,4	28,5	27,4	26,3	25,8	25,3	24,1	22,5	20,7	18,4					
80-160C	20	15	14,5	24,5	29,0	30,9	30,7	30,4	30,1	29,4	28,5	27,4	26,3	25,8	25,3	24,1	22,5	20,7	18,4					
80-160B	25	18,5	18,1	30,3	33,6	35,9	35,7	35,4	35,2	34,5	33,7	32,9	32,0	31,6	31,1	30,0	28,6	27,0	24,5	22,0				
80-160A	30	22	22	37	38	40,5	40,4	40,2	40,1	39,6	39,1	38,4	37,5	37,1	36,6	35,4	34,1	32,6	30,4	28,3	23,9			
80-200B	40	30	32,0	57,2	50,4				54,5	53,9	53,2	52,3	51,3	50,7	50,2	48,9	47,4	45,8	43,4	40,9	38,5			
80-200A	50	37	38,6	71,6	57,3				61,7	61,3	60,6	59,4	58,2	57,8	57,5	56,8	55,4	53,7	51,5	49,1	46,6	43,9		

TYPE	P2		3-		Q (m ³ /h - l/min)																			
			P ₁ max kW	A 3~400V 50Hz	0	96	108	120	132	138	144	156	168	180	195	210	225	240	270	300	330			
	HP	kW	H (m)																					
100-160B	40	30	31,9	57,1	41,7	40,7	40,8	40,7	40,4	40,3	40,1	39,6	39,1	38,5	37,8	37,0	36,1	35,0	32,3	29,2	25,7			
100-160A	50	37	37,5	70,2	46,0	45,1	45,2	45,1	44,9	44,8	44,7	44,3	43,9	43,3	42,7	42,0	41,1	40,2	37,9	35,0	31,9			



CMG-CMGX ~ 2900 rpm

Centrifugal Flanged
EN 733

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)																			
			0	96	108	120	132	138	144	156	168	180	195	210	225	240	255	270	300	330	360	
			0	1600	1800	2000	2200	2300	2400	2600	2800	3000	3250	3500	3750	4000	4250	4500	5000	5500	6000	
			H (m) pump input power (kW)																			
80-250B	45	225M	77,2	80,0	79,0	77,5	75,3	74,2	73,1	71,0	69,0	67,0	64,5	61,8	58,8							
			14,01	30,93	32,60	34,34	36,13	37,02	37,86	39,38	40,78	42,10	43,60	44,94	46,15							
80-250A	55	250M	90,0	92,8	91,1	89,3	87,4	86,4	85,4	83,1	80,7	78,5	75,7	72,4	68,8	65,2						
			16,74	36,56	38,57	40,54	42,46	43,39	44,31	46,12	47,81	49,29	50,92	52,59	54,18	55,50						
100-200B	45	225M	56,1		56,8	56,5	56,1	55,9	55,6	55,1	54,5	53,9	53,1	52,2	51,4	50,4	49,0	47,5	43,8	39,7		
			21,75		28,84	29,78	30,74	31,24	31,75	32,81	33,89	35,04	36,50	37,82	38,89	39,85	40,77	41,60	42,92	43,82		
100-200A	55	250M	61,1		62,2	61,8	61,5	61,2	61,0	60,5	59,9	59,5	58,9	58,3	57,4	56,4	55,2	53,8	50,6	46,8	42,5	
			24,57		33,04	34,07	35,11	35,64	36,18	37,28	38,39	39,49	40,86	42,23	43,60	44,97	46,20	47,28	49,05	50,53	51,62	
100-250C	55	250M	71,9			73,2	73,1	73,0	72,9	72,6	72,2	71,8	71,1	70,3	69,3	67,9	66,4	64,7	61,0			
	75	280S	24,75			40,12	41,93	42,84	43,70	45,28	46,77	48,21	49,94	51,65	53,38	55,05	56,66	58,19	60,99			
100-250B	75	280S	83,6			83,7	83,5	83,4	83,2	82,9	82,5	82,1	81,4	80,8	80,0	79,0	77,9	76,4	72,0	67,6		
			29,69			47,10	49,06	50,04	51,01	52,92	54,76	56,47	58,46	60,26	61,86	63,49	65,17	66,93	70,91	73,78		
100-250A	90	280M	93,5			93,9	93,7	93,5	93,4	92,9	92,4	91,8	90,9	89,9	88,8	87,4	85,7	84,0	80,4	75,8	73,2	
			32,71			51,99	54,14	55,23	56,31	58,48	60,60	62,57	64,88	66,97	68,84	70,81	72,81	74,73	78,17	81,33	85,53	



TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)													
			0	6	7,5	9	12	15	18	21	24	27	30	33		
			0	100	125	150	200	250	300	350	400	450	500	550		
			H (m) pump input power (kW)													
32-160C	1,5	90S	23,0 <u>0,57</u>	22,8 <u>0,93</u>	22,5 <u>1,02</u>	22,0 <u>1,10</u>	21,0 <u>1,26</u>	19,2 <u>1,40</u>	16,9 <u>1,52</u>	14,0 <u>1,61</u>						
32-160B	2,2	90L	28,0 <u>0,83</u>	27,7 <u>1,24</u>	27,4 <u>1,35</u>	27,0 <u>1,45</u>	26,2 <u>1,65</u>	24,9 <u>1,83</u>	22,9 <u>1,99</u>	20,1 <u>2,13</u>	17,0 <u>2,25</u>					
32-160A	3	100L	36,1	36,2	36,0	35,6	34,6	33,2	31,4	28,9	25,7	22,1				
	4	112M	<u>1,29</u>	<u>1,80</u>	<u>1,94</u>	<u>2,07</u>	<u>2,32</u>	<u>2,55</u>	<u>2,76</u>	<u>2,94</u>	<u>3,11</u>	<u>3,25</u>				
32-200C	4	112M	40,2	40,3	40,1	39,8	38,9	37,7	36,1	34,2	31,6	28,7				
	5,5	132S	<u>1,61</u>	<u>2,27</u>	<u>2,45</u>	<u>2,63</u>	<u>2,96</u>	<u>3,27</u>	<u>3,56</u>	<u>3,82</u>	<u>4,08</u>	<u>4,31</u>				
32-200B	5,5	132S	48,3	48,0	47,9	47,6	46,7	45,5	44,2	42,6	40,5	37,9	35,4			
	7,5	132S	<u>2,35</u>	<u>3,16</u>	<u>3,37</u>	<u>3,57</u>	<u>3,97</u>	<u>4,35</u>	<u>4,71</u>	<u>5,05</u>	<u>5,36</u>	<u>5,66</u>	<u>5,93</u>			
32-200A	7,5	132S	57,9 <u>3,06</u>	58,3 <u>4,03</u>	58,4 <u>4,28</u>	58,4 <u>4,53</u>	58,0 <u>5,02</u>	57,1 <u>5,50</u>	55,6 <u>5,92</u>	53,8 <u>6,34</u>	51,4 <u>6,72</u>	49,2 <u>7,08</u>	46,6 <u>7,42</u>	44,3 <u>7,72</u>		
32-250C	11	160M	74,6 <u>4,25</u>		72,8 <u>5,69</u>	72,5 <u>6,00</u>	71,9 <u>6,59</u>	70,5 <u>7,17</u>	68,8 <u>7,69</u>	66,6 <u>8,17</u>	64,1 <u>8,67</u>	61,3 <u>9,08</u>				
32-250B	11	160M	84,8 <u>5,16</u>		84,0 <u>6,93</u>	83,9 <u>7,29</u>	83,6 <u>7,99</u>	82,7 <u>8,66</u>	81,1 <u>9,28</u>	78,6 <u>9,87</u>	75,4 <u>10,44</u>	73,2 <u>11,05</u>				
32-250A	15	160M	93,5 <u>5,71</u>		93,6 <u>7,59</u>	93,7 <u>7,99</u>	93,7 <u>8,82</u>	93,4 <u>9,59</u>	92,3 <u>10,35</u>	90,4 <u>11,07</u>	87,7 <u>11,72</u>	85,3 <u>12,34</u>				

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																	
			0	9	12	15	18	21	24	27	30	33	36	39	42	45	48	54	60	
			0	150	200	250	300	350	400	450	500	550	600	650	700	750	800	900	1000	
			H (m) pump input power (kW)																	
40-125C	1,5	90S	17,9	18,5	18,4	18,1	17,5	16,6	15,6	14,3	12,8	11,1	9,4							
	2,2	90L	<u>0,56</u>	<u>0,96</u>	<u>1,09</u>	<u>1,21</u>	<u>1,31</u>	<u>1,41</u>	<u>1,48</u>	<u>1,53</u>	<u>1,57</u>	<u>1,59</u>	<u>1,60</u>							
40-125B	2,2	90L	22,6	23,4	23,3	23,1	22,7	22,0	21,0	19,9	18,6	17,0	15,1	13,2						
	3	100L	<u>0,82</u>	<u>1,30</u>	<u>1,48</u>	<u>1,63</u>	<u>1,76</u>	<u>1,89</u>	<u>2,00</u>	<u>2,09</u>	<u>2,16</u>	<u>2,22</u>	<u>2,27</u>	<u>2,30</u>						
40-125A	3	100L	26,8	27,6	27,7	27,6	27,2	26,5	25,7	24,6	23,4	22,0	20,3	18,5	16,8					
	3	100L	<u>1,10</u>	<u>1,64</u>	<u>1,83</u>	<u>2,03</u>	<u>2,20</u>	<u>2,37</u>	<u>2,52</u>	<u>2,65</u>	<u>2,76</u>	<u>2,86</u>	<u>2,95</u>	<u>3,02</u>	<u>3,08</u>					
40-160B	3	100L	28,2	29,2	29,2	28,9	28,3	27,5	26,5	25,3	23,8	22,3	20,5							
	4	112M	<u>1,26</u>	<u>1,92</u>	<u>2,13</u>	<u>2,33</u>	<u>2,51</u>	<u>2,67</u>	<u>2,82</u>	<u>2,96</u>	<u>3,08</u>	<u>3,17</u>	<u>3,25</u>							
40-160A	4	112M	33,8	34,9	34,8	34,5	33,9	33,2	32,4	31,3	30,0	28,5	26,9	25,2	23,4					
	5,5	132S	<u>1,62</u>	<u>2,33</u>	<u>2,58</u>	<u>2,81</u>	<u>3,04</u>	<u>3,25</u>	<u>3,44</u>	<u>3,62</u>	<u>3,78</u>	<u>3,93</u>	<u>4,06</u>	<u>4,16</u>	<u>4,25</u>					
40-160AP	5,5	132S	38,6	39,8	39,9	39,8	39,4	38,7	37,9	37,0	35,8	34,4	32,9	31,1	29,3	27,4	25,3			
	5,5	132S	<u>1,90</u>	<u>2,76</u>	<u>3,06</u>	<u>3,33</u>	<u>3,60</u>	<u>3,85</u>	<u>4,08</u>	<u>4,29</u>	<u>4,49</u>	<u>4,67</u>	<u>4,84</u>	<u>5,00</u>	<u>5,14</u>	<u>5,27</u>	<u>5,39</u>			
40-200B	5,5	132S	44,6	45,5	45,4	45,0	44,5	43,5	42,3	41,0	39,3	37,2	34,9	32,3	29,4					
	7,5	132S	<u>2,32</u>	<u>3,25</u>	<u>3,62</u>	<u>3,96</u>	<u>4,27</u>	<u>4,57</u>	<u>4,85</u>	<u>5,11</u>	<u>5,35</u>	<u>5,57</u>	<u>5,76</u>	<u>5,94</u>	<u>6,13</u>					
40-200A	7,5	132S	56,2	56,5	56,5	56,3	55,9	55,1	54,1	52,8	51,2	49,3	47,0	44,4	41,6					
	11	160M	<u>3,48</u>	<u>4,63</u>	<u>5,08</u>	<u>5,51</u>	<u>5,91</u>	<u>6,31</u>	<u>6,68</u>	<u>7,01</u>	<u>7,32</u>	<u>7,63</u>	<u>7,90</u>	<u>8,14</u>	<u>8,37</u>					
40-200AP	7,5	132S	61,7	61,4	61,2	60,8	60,0	59,1	57,9	56,4	54,7	53,1	51,1	48,5	45,5	42,2				
	11	160M	<u>3,50</u>	<u>4,81</u>	<u>5,30</u>	<u>5,74</u>	<u>6,16</u>	<u>6,56</u>	<u>6,95</u>	<u>7,31</u>	<u>7,65</u>	<u>7,96</u>	<u>8,25</u>	<u>8,51</u>	<u>8,73</u>	<u>8,93</u>				
40-250C	11	160M	64,8	64,4	64,2	63,8	63,4	62,7	61,9	61,0	59,8	57,9	55,4							
	11	160M	<u>4,23</u>	<u>5,50</u>	<u>6,02</u>	<u>6,56</u>	<u>7,11</u>	<u>7,65</u>	<u>8,14</u>	<u>8,63</u>	<u>9,12</u>	<u>9,57</u>	<u>10,01</u>							
40-250B	11	160M	73,7	73,9	74,5	73,2	71,9	71,1	70,2	69,2	68,1	66,7	64,7	62,1						
	15	160M	<u>5,33</u>	<u>6,74</u>	<u>7,38</u>	<u>7,96</u>	<u>8,53</u>	<u>9,10</u>	<u>9,69</u>	<u>10,28</u>	<u>10,87</u>	<u>11,43</u>	<u>11,91</u>	<u>12,39</u>						
40-250A	15	160M	82,6	84,6	84,8	84,7	84,3	83,4	82,4	81,3	80,0	78,5	76,9	75,4	72,8	69,0				
	18,5	160L	<u>6,57</u>	<u>8,36</u>	<u>9,03</u>	<u>9,74</u>	<u>10,45</u>	<u>11,11</u>	<u>11,76</u>	<u>12,44</u>	<u>13,08</u>	<u>13,66</u>	<u>14,23</u>	<u>14,80</u>	<u>15,37</u>	<u>15,93</u>				
40-250BM max 14 bar	18,5	160L	92,6 <u>7,41</u>	93,2 <u>9,12</u>	93,3 <u>9,78</u>	93,2 <u>10,48</u>	93,1 <u>11,18</u>	92,8 <u>11,91</u>	92,4 <u>12,65</u>	91,7 <u>13,38</u>	90,9 <u>14,06</u>	89,8 <u>14,73</u>	88,3 <u>15,38</u>	86,5 <u>16,00</u>	84,6 <u>16,60</u>	82,3 <u>17,18</u>	79,5 <u>17,74</u>	72,0 <u>18,83</u>		
40-250AM max 14 bar	22	180M	101,7 <u>8,80</u>	103,0 <u>10,63</u>	102,8 <u>11,26</u>	102,3 <u>11,93</u>	102,2 <u>12,69</u>	102,0 <u>13,46</u>	101,7 <u>14,21</u>	101,2 <u>14,97</u>	100,4 <u>15,74</u>	99,4 <u>16,50</u>	98,1 <u>17,22</u>	96,5 <u>17,92</u>	94,8 <u>18,61</u>	93,1 <u>19,29</u>	90,9 <u>19,96</u>	85,0 <u>21,28</u>	77,5 <u>22,45</u>	

CA-CAX ~ EN 733

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)																		
			0	12	15	18	21	24	27	30	33	36	39	42	45	48	54	60	66	72	78
			0	200	250	300	350	400	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300
			H (m) pump input power (kW)																		
50-125B	3	100L	20,0 <i>1,15</i>	20,6 <i>1,65</i>	20,6 <i>1,79</i>	20,4 <i>1,93</i>	20,3 <i>2,07</i>	20,1 <i>2,19</i>	19,9 <i>2,28</i>	19,6 <i>2,37</i>	19,2 <i>2,49</i>	18,7 <i>2,63</i>	18,2 <i>2,75</i>	17,6 <i>2,84</i>	17,0 <i>2,92</i>	16,4 <i>3,00</i>	15,0 <i>3,13</i>	13,2 <i>3,21</i>	11,3 <i>3,28</i>	9,2 <i>3,31</i>	
50-125A	4	112M	23,7 <i>1,50</i>	24,3 <i>2,02</i>	24,3 <i>2,19</i>	24,2 <i>2,35</i>	24,1 <i>2,51</i>	23,9 <i>2,66</i>	23,7 <i>2,81</i>	23,3 <i>2,94</i>	23,0 <i>3,07</i>	22,6 <i>3,21</i>	22,1 <i>3,34</i>	21,7 <i>3,47</i>	21,2 <i>3,59</i>	20,7 <i>3,69</i>	19,6 <i>3,88</i>	18,2 <i>4,03</i>	16,4 <i>4,15</i>	14,2 <i>4,23</i>	
50-160B	5,5	132S	32,1 <i>1,92</i>				33,5 <i>3,60</i>	33,4 <i>3,84</i>	33,1 <i>4,06</i>	32,7 <i>4,28</i>	32,2 <i>4,48</i>	31,6 <i>4,67</i>	31,0 <i>4,84</i>	30,2 <i>4,99</i>	29,1 <i>5,12</i>	28,3 <i>5,24</i>	26,2 <i>5,45</i>	23,9 <i>5,60</i>	21,5 <i>5,70</i>	18,9 <i>5,75</i>	
50-160A	7,5	132S	38,1 <i>2,49</i>				39,8 <i>4,44</i>	39,8 <i>4,74</i>	39,7 <i>5,03</i>	39,5 <i>5,30</i>	39,2 <i>5,56</i>	38,8 <i>5,79</i>	38,3 <i>6,00</i>	37,7 <i>6,21</i>	36,9 <i>6,21</i>	36,0 <i>6,60</i>	34,2 <i>6,93</i>	32,2 <i>7,20</i>	29,7 <i>7,45</i>	27,4 <i>7,66</i>	25,4 <i>7,95</i>
50-200C	11	160M	48,2 <i>3,13</i>				49,7 <i>6,11</i>	49,7 <i>6,44</i>	49,2 <i>6,75</i>	48,5 <i>7,06</i>	47,7 <i>7,35</i>	46,9 <i>7,62</i>	45,9 <i>7,88</i>	44,9 <i>8,11</i>	43,7 <i>8,31</i>	42,6 <i>8,31</i>	40,0 <i>8,67</i>	36,0 <i>9,02</i>	32,3 <i>9,26</i>	28,9 <i>9,43</i>	
50-200B	11	160M	53,1 <i>3,44</i>				54,6 <i>6,75</i>	54,1 <i>7,14</i>	53,5 <i>7,52</i>	52,9 <i>7,86</i>	52,2 <i>8,17</i>	51,4 <i>8,47</i>	50,4 <i>8,78</i>	49,3 <i>9,09</i>	48,1 <i>9,34</i>	45,5 <i>9,76</i>	42,7 <i>10,15</i>	38,8 <i>10,47</i>	35,0 <i>10,73</i>		
50-200A	15	160M	59,9 <i>4,38</i>				61,8 <i>7,92</i>	61,5 <i>8,36</i>	61,0 <i>8,78</i>	60,4 <i>9,20</i>	59,7 <i>9,62</i>	58,8 <i>10,02</i>	58,0 <i>10,38</i>	57,1 <i>10,73</i>	56,0 <i>11,05</i>	53,6 <i>11,65</i>	50,8 <i>12,17</i>	47,8 <i>12,62</i>	44,4 <i>13,01</i>	39,8 <i>13,35</i>	
50-250C	15	160M	69,2 <i>5,27</i>					68,2 <i>10,08</i>	67,7 <i>10,60</i>	67,0 <i>11,11</i>	66,3 <i>11,60</i>	65,6 <i>12,07</i>	64,7 <i>12,52</i>	63,8 <i>12,94</i>	62,8 <i>13,33</i>	59,9 <i>14,14</i>	56,2 <i>14,94</i>	52,1 <i>15,59</i>			
50-250B	18,5	160L	78,8 <i>6,33</i>					78,4 <i>11,72</i>	78,0 <i>12,33</i>	77,6 <i>12,92</i>	77,0 <i>13,49</i>	76,1 <i>14,03</i>	75,1 <i>14,55</i>	74,0 <i>15,06</i>	72,9 <i>15,53</i>	70,3 <i>16,44</i>	66,9 <i>17,34</i>	62,9 <i>18,18</i>	58,5 <i>18,96</i>		
50-250A	22	180M	88,5 <i>7,43</i>					88,3 <i>13,20</i>	88,1 <i>13,87</i>	87,7 <i>14,55</i>	87,2 <i>15,22</i>	86,6 <i>15,88</i>	85,8 <i>16,51</i>	84,8 <i>17,13</i>	83,8 <i>17,74</i>	81,4 <i>18,90</i>	78,5 <i>19,99</i>	75,0 <i>21,00</i>	70,2 <i>21,94</i>	64,8 <i>22,82</i>	

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)																		
			0	42	45	48	54	60	66	72	78	84	96	108	120	132	138	144			
			0	700	750	800	900	1000	1100	1200	1300	1400	1600	1800	2000	2200	2300	2400			
			H (m) pump input power (kW)																		
50-315DN No EN 733; no CAT, CAX, CATX	37	200L	87,8 <i>11,19</i>	90,4 <i>20,11</i>	90,3 <i>20,81</i>	90,2 <i>21,52</i>	89,9 <i>22,91</i>	89,2 <i>24,19</i>	88,2 <i>25,41</i>	87,1 <i>26,58</i>	86,0 <i>27,71</i>	84,8 <i>28,81</i>	82,4 <i>30,91</i>	79,9 <i>32,92</i>	76,9 <i>34,81</i>	73,4 <i>36,56</i>					
50-315CN No EN 733; no CAT, CAX, CATX	45	225M	101,8 <i>13,32</i>	105,0 <i>23,97</i>	104,9 <i>24,79</i>	104,8 <i>25,63</i>	104,3 <i>27,25</i>	103,7 <i>28,77</i>	102,7 <i>30,21</i>	101,5 <i>31,55</i>	100,3 <i>32,85</i>	99,1 <i>34,15</i>	96,7 <i>36,68</i>	94,1 <i>39,06</i>	91,3 <i>41,26</i>	88,7 <i>43,26</i>					
50-315BN No EN 733; no CAT, CAX, CATX	55	250M	122,3 <i>17,44</i>	124,3 <i>29,30</i>	124,4 <i>30,29</i>	124,5 <i>31,30</i>	124,7 <i>33,28</i>	124,4 <i>35,10</i>	123,6 <i>36,80</i>	122,5 <i>38,35</i>	121,3 <i>39,85</i>	119,9 <i>41,39</i>	116,6 <i>44,41</i>	113,3 <i>47,32</i>	110,1 <i>50,01</i>	107,1 <i>52,39</i>	105,4 <i>53,60</i>	103,5 <i>54,83</i>			
50-315AN No EN 733; no CAT, CAX, CATX	75	280S	146,1 <i>22,75</i>	146,9 <i>35,89</i>	147,1 <i>37,03</i>	147,3 <i>38,21</i>	147,4 <i>40,53</i>	147,3 <i>42,66</i>	146,9 <i>44,71</i>	146,3 <i>46,72</i>	145,3 <i>48,67</i>	144,1 <i>50,59</i>	141,2 <i>54,26</i>	137,9 <i>57,67</i>	134,1 <i>60,84</i>	130,0 <i>63,78</i>	127,9 <i>65,11</i>	125,8 <i>66,34</i>			

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)																				
			0	30	33	36	39	42	45	48	54	60	66	72	78	84	96	108	120	132	138	144	150
			0	500	550	600	650	700	750	800	900	1000	1100	1200	1300	1400	1600	1800	2000	2200	2300	2400	2500
			H (m) pump input power (kW)																				
65-125B	5,5	132S	19,7 <i>2,07</i>	20,6 <i>3,36</i>	20,5 <i>3,49</i>	20,4 <i>3,62</i>	20,4 <i>3,75</i>	20,3 <i>3,87</i>	20,2 <i>3,99</i>	20,2 <i>4,11</i>	20,0 <i>4,34</i>	19,7 <i>4,54</i>	19,3 <i>4,71</i>	18,8 <i>4,87</i>	18,2 <i>5,03</i>	17,5 <i>5,17</i>	16,3 <i>5,45</i>	15,0 <i>5,67</i>	13,1 <i>5,84</i>				
65-125A	7,5	132S	24,6 <i>2,95</i>	25,2 <i>4,37</i>	25,2 <i>4,52</i>	25,1 <i>4,68</i>	25,1 <i>4,83</i>	25,0 <i>4,98</i>	24,9 <i>5,13</i>	24,9 <i>5,29</i>	24,7 <i>5,60</i>	24,5 <i>5,89</i>	24,2 <i>6,16</i>	23,9 <i>6,41</i>	23,5 <i>6,65</i>	23,0 <i>6,86</i>	22,0 <i>7,25</i>	20,6 <i>7,55</i>	18,8 <i>7,77</i>	16,8 <i>7,93</i>			
65-160C	11	160M	28,9 <i>2,67</i>					30,6 <i>5,52</i>	30,5 <i>5,71</i>	30,3 <i>5,90</i>	30,0 <i>6,26</i>	29,6 <i>6,60</i>	29,1 <i>6,93</i>	28,5 <i>7,23</i>	27,9 <i>7,51</i>	27,2 <i>7,77</i>	25,3 <i>8,26</i>	22,9 <i>8,64</i>	20,2 <i>8,92</i>	17,5 <i>9,11</i>	16,0 <i>9,17</i>	13,9 <i>9,19</i>	
65-160B	11	160M	33,2 <i>3,37</i>					35,1 <i>6,51</i>	35,0 <i>6,74</i>	34,9 <i>6,95</i>	34,6 <i>7,37</i>	34,3 <i>7,77</i>	33,8 <i>8,17</i>	33,3 <i>8,56</i>	32,8 <i>8,91</i>	32,1 <i>9,24</i>	30,4 <i>9,85</i>	28,2 <i>10,38</i>	25,5 <i>10,82</i>	22,5 <i>11,17</i>	21,4 <i>11,34</i>	20,4 <i>11,49</i>	
65-160A	15	160M	40,1 <i>4,54</i>					42,5 <i>8,31</i>	42,5 <i>8,59</i>	42,5 <i>8,86</i>	42,3 <i>9,37</i>	42,1 <i>9,86</i>	41,8 <i>10,35</i>	41,4 <i>10,85</i>	41,0 <i>11,32</i>	40,4 <i>11,77</i>	38,9 <i>12,65</i>	37,1 <i>13,46</i>	35,3 <i>14,14</i>	32,8 <i>14,79</i>	31,7 <i>15,14</i>	30,9 <i>15,52</i>	
65-200C	15	160M	44,4 <i>4,38</i>								46,1 <i>10,30</i>	45,4 <i>10,87</i>	44,7 <i>11,44</i>	44,0 <i>12,00</i>	43,2 <i>12,52</i>	42,4 <i>12,98</i>	40,3 <i>13,76</i>	37,5 <i>14,36</i>	33,7 <i>14,89</i>	28,9 <i>15,27</i>	26,8 <i>15,43</i>		
65-200B	18,5	160L	51,7 <i>5,71</i>								53,9 <i>12,58</i>	53,4 <i>13,25</i>	52,7 <i>13,89</i>	52,0 <i>14,51</i>	51,3 <i>15,12</i>	50,4 <i>15,66</i>	48,6 <i>16,56</i>	45,9 <i>17,56</i>	43,0 <i>18,37</i>	39,4 <i>18,96</i>	37,1 <i>19,20</i>	34,6 <i>19,42</i>	
65-200A	22	180M	60,3 <i>7,25</i>								61,8 <i>14,56</i>	61,4 <i>15,38</i>	61,0 <i>16,18</i>	60,4 <i>16,93</i>	59,8 <i>17,64</i>	59,1 <i>18,33</i>	57,1 <i>19,66</i>	54,6 <i>20,84</i>	48,3 <i>21,83</i>	46,5 <i>22,73</i>	44,4 <i>23,10</i>	41,4 <i>23,41</i>	
65-250B	30	200L	80,6 <i>9,16</i>								80,6 <i>19,79</i>	79,5 <i>20,77</i>	78,4 <i>21,74</i>	77,1 <i>22,72</i>	75,7 <i>23,63</i>	74,1 <i>24,37</i>	70,4 <i>25,59</i>	66,1 <i>26,73</i>	61,0 <i>27,55</i>	54,7 <i>28,09</i>	51,0 <i>28,27</i>	47,3 <i>28,38</i>	
65-250A	37	200L	91,6 <i>11,32</i>								91,6 <i>23,01</i>	90,8 <i>24,18</i>	89,8 <i>25,33</i>	88,6 <i>26,47</i>	87,4 <i>27,58</i>	85,9 <i>28,55</i>	82,5 <i>30,14</i>	77,8 <i>31,64</i>	72,8 <i>32,77</i>	67,4 <i>33,54</i>	60,8 <i>33,85</i>	57,9 <i>34,09</i>	



TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																		
			0	54	60	66	72	78	84	96	108	120	132	138	144	150	156	168	180	195	210
			0	900	1000	1100	1200	1300	1400	1600	1800	2000	2200	2300	2400	2500	2600	2800	3000	3250	3500
			H (m) pump input power (kW)																		
65-315CN No CAT, CAX, CATX	55	250M	93,9 15,58	96,5 26,64	96,4 27,96	96,3 29,26	96,0 30,48	95,6 31,67	95,1 32,88	93,8 35,28	92,3 37,55	90,7 39,76	89,1 41,99	88,3 43,09	87,5 44,18	86,5 45,24	85,5 46,28	83,2 48,31	80,8 50,27		
65-315BN No CAT, CAX, CATX	75	280S	116,5 21,16	117,9 34,28	117,8 35,82	117,7 37,35	117,4 38,80	117,0 40,26	116,4 41,84	114,9 45,05	113,3 47,88	111,4 50,51	109,4 53,05	108,3 54,27	107,2 55,48	106,0 56,64	104,9 57,76	102,5 59,94	99,9 62,26	96,3 65,43	
65-315AN No CAT, CAX, CATX	90	280M	138,2 26,69	138,8 43,17	138,5 45,02	138,1 46,88	137,6 48,78	137,0 50,67	136,4 52,51	135,0 56,09	133,5 59,51	131,7 62,82	129,5 66,08	128,3 67,67	127,0 69,20	125,8 70,68	124,5 72,10	121,8 74,81	118,8 77,32	114,8 80,16	110,4 83,11

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	66	72	78	84	96	108	120	132	138	144	156	168	180	195	210	225	240		
			0	1100	1200	1300	1400	1600	1800	2000	2200	2300	2400	2600	2800	3000	3250	3500	3750	4000		
			H (m) pump input power (kW)																			
80-160E	11	160M	21,5 3,48	22,9 6,43	22,5 6,65	22,1 6,86	21,6 7,07	20,8 7,45	19,9 7,76	18,9 8,05	17,7 8,38	17,2 8,52	16,6 8,65	15,3 8,84	13,7 8,88							
80-160D	11	160M	25,4 4,16	27,3 7,74	27,0 8,01	26,6 8,27	26,3 8,53	25,4 9,03	24,5 9,46	23,5 9,79	22,4 10,14	21,8 10,32	21,2 10,49	19,9 10,76	18,3 10,95	16,4 11,07						
80-160C	15	160M	29,0 4,74	30,9 8,66	30,7 8,98	30,4 9,29	30,1 9,59	29,4 10,22	28,5 10,85	27,4 11,38	26,3 11,85	25,8 12,06	25,3 12,25	24,1 12,59	22,5 12,85	20,7 13,05	18,4 13,21					
80-160B	18,5	160L	33,6 6,28	35,9 10,61	35,7 10,94	35,4 11,25	35,2 11,57	34,5 12,25	33,7 12,99	32,9 13,69	32,0 14,33	31,6 14,62	31,1 14,90	30,0 15,38	28,6 15,75	27,0 16,04	24,5 16,35	22,0 16,57				
80-160A	22,5	180M	38,0 6,82	40,5 12,04	40,4 12,50	40,2 12,96	40,1 13,42	39,6 14,34	39,1 15,23	38,4 16,05	37,5 16,81	37,1 17,19	36,6 17,57	35,4 18,29	34,1 18,86	32,6 19,34	30,4 19,84	28,3 20,38	23,9 20,28			
80-200B	30	200L	50,4 8,89				54,5 18,00	53,9 19,22	53,2 20,56	52,3 22,05	51,3 23,32	50,2 23,79	50,2 24,21	48,9 25,06	47,4 26,03	45,8 26,97	43,4 27,97	40,9 28,81	38,5 29,48			
80-200A	37	200L	57,3 10,32				61,7 21,15	61,3 22,80	60,6 24,43	59,4 26,13	58,2 27,62	57,8 28,17	57,5 28,57	56,8 29,28	55,4 30,39	53,7 31,67	51,5 32,98	49,1 34,05	46,6 34,94	43,9 35,68		
80-250B	45	225M	77,2 14,01					80,0 30,93	79,0 32,60	77,5 34,34	75,3 36,13	74,2 37,02	73,1 37,86	71,0 39,38	69,0 40,78	67,0 42,10	64,5 43,60	61,8 44,94	58,8 46,15			
80-250A	55	250M	90,0 16,74					92,8 36,56	91,1 38,57	89,3 40,54	87,4 42,46	86,4 43,39	85,4 44,31	83,1 46,12	80,7 47,81	78,5 49,29	75,7 50,92	72,4 52,59	68,8 54,18	65,2 55,50		

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	78	84	96	108	120	132	138	144	156	168	180	195	210	225	240	255			
			0	1300	1400	1600	1800	2000	2200	2300	2400	2600	2800	3000	3250	3500	3750	4000	4250			
			H (m) pump input power (kW)																			
80-315BN No CAT, CAX, CATX	90	280M	108,0 21,85	112,4 42,35	112,4 44,06	112,2 47,49	111,7 50,86	111,1 54,13	110,2 57,25	109,7 58,76	109,1 60,24	107,9 63,14	106,4 65,95	104,9 68,72	102,7 72,14	100,4 75,60	98,3 78,97	95,7 82,15	90,8 85,17			
80-315AN No CAT, CAX, CATX	110	315S	140,5 31,92	141,4 55,48	141,1 57,36	140,2 61,13	139,2 64,91	138,1 68,78	136,9 72,88	136,2 74,96	135,5 76,96	134,1 80,84	132,5 84,36	131,0 87,02	128,7 90,23	125,8 94,76	122,5 99,35	121,7 103,04	118,5 106,15			

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	108	120	132	138	144	156	168	180	195	210	225	240	255	270	300	330	360		
			0	1800	2000	2200	2300	2400	2600	2800	3000	3250	3500	3750	4000	4250	4500	5000	5500	6000		
			H (m) pump input power (kW)																			
100-200D	30	200L	44,1 17,69	43,3 21,82	42,9 22,56	42,3 23,28	42,0 23,62	41,6 23,94	40,8 24,53	39,9 25,08	39,0 25,65	37,9 26,39	36,8 27,08	35,4 27,68	33,8 28,21	32,3 28,71	30,6 29,16	26,3 29,70				
100-200C	37	200L	48,5 19,89	48,4 24,72	48,0 25,53	47,6 26,31	47,3 26,70	47,0 27,09	46,3 27,87	45,4 28,66	44,6 29,43	43,6 30,38	42,5 31,30	41,2 32,12	39,5 32,85	37,8 33,51	36,2 34,11	32,7 35,06	28,1 35,64			
100-200B	45	225M	56,1 21,75	56,8 28,84	56,5 29,78	56,1 30,74	55,9 31,24	55,6 31,75	55,1 32,81	54,5 33,89	53,9 35,04	53,1 36,50	52,2 37,82	51,4 38,89	50,4 39,85	49,0 40,77	47,5 41,60	43,8 42,92	39,7 43,82			
100-200A	55	250M	61,1 24,57	62,2 33,04	61,8 34,07	61,5 35,11	61,2 35,64	60,5 36,18	59,9 37,28	59,5 38,39	58,9 39,49	58,3 40,86	57,4 42,23	56,4 43,60	55,2 44,97	53,8 46,20	50,6 47,28	46,8 49,05	42,5 50,53	42,5 51,62		
100-250C	55 75	250M 280S	71,9 24,75		73,2 40,12	73,1 41,93	73,0 42,84	72,9 43,70	72,6 45,28	72,2 46,77	71,8 48,21	71,1 49,94	70,3 51,65	69,3 53,38	67,9 55,05	66,4 56,66	64,7 58,19	61,0 60,99				
100-250B	75	280S	83,6 29,69		83,7 47,10	83,5 49,06	83,4 50,04	83,2 51,01	82,9 52,92	82,5 54,76	82,1 56,47	81,4 58,46	80,8 60,26	80,0 61,86	79,0 63,49	77,9 65,17	76,4 66,93	72,0 70,91	67,6 73,78			
100-250A	90	280M	93,5 32,71		93,9 51,99	93,7 54,14	93,5 55,23	93,4 56,31	92,9 58,48	92,4 60,60	91,8 62,57	90,9 64,88	89,9 66,97	88,8 68,84	87,4 70,81	85,7 72,81	84,0 74,73	80,4 78,17	75,8 81,33	73,2 85,53		



4CA-4CAX

Centrifugal Flanged EN 733

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)														
			0	1,5	3	4,5	6	7,5	9	10,5	12	15	18	21			
			0	25	50	75	100	125	150	175	200	250	300	350			
			H (m)														
			<i>pump input power (kW)</i>														
32-160C	0,37	71B	5,9	5,9	5,8	5,5	5,3	4,8	4,3	3,5	2,6						
			<small>0,15</small>	<small>0,18</small>	<small>0,20</small>	<small>0,22</small>	<small>0,24</small>	<small>0,26</small>	<small>0,28</small>	<small>0,28</small>	<small>0,29</small>						
32-160B	0,37	71B	7,2	7,2	7,1	6,7	6,4	5,9	5,3	4,6	3,6						
			<small>0,18</small>	<small>0,21</small>	<small>0,24</small>	<small>0,27</small>	<small>0,29</small>	<small>0,31</small>	<small>0,33</small>	<small>0,34</small>	<small>0,36</small>						
32-160A	0,55	80A	8,8	8,8	8,7	8,5	8,2	7,9	7,4	6,9	6,1	4,0					
			<small>0,22</small>	<small>0,26</small>	<small>0,29</small>	<small>0,31</small>	<small>0,35</small>	<small>0,37</small>	<small>0,39</small>	<small>0,41</small>	<small>0,43</small>	<small>0,45</small>					
32-200C	0,75	80B	11,0		10,8	10,6	10,2	9,9	9,4	8,9	8,4	6,7	4,2				
			<small>0,26</small>		<small>0,39</small>	<small>0,43</small>	<small>0,47</small>	<small>0,51</small>	<small>0,54</small>	<small>0,57</small>	<small>0,59</small>	<small>0,66</small>	<small>0,71</small>				
32-200B	1,1	90S	13,0		12,7	12,5	12,2	11,7	11,2	10,6	10,1	8,7	6,3				
			<small>0,38</small>		<small>0,47</small>	<small>0,51</small>	<small>0,56</small>	<small>0,61</small>	<small>0,66</small>	<small>0,70</small>	<small>0,74</small>	<small>0,78</small>	<small>0,81</small>				
32-200A	1,1	90S	15,9		15,7	15,5	15,3	15,0	14,5	13,8	13,2	11,7	9,5	6,8			
			<small>0,44</small>		<small>0,53</small>	<small>0,57</small>	<small>0,66</small>	<small>0,71</small>	<small>0,77</small>	<small>0,82</small>	<small>0,88</small>	<small>0,98</small>	<small>1,04</small>	<small>1,10</small>			
32-250C	1,5	90L	17,5		17,2	16,9	16,6	16,2	15,7	15,1	14,4	12,5	10,0	6,5			
			<small>0,55</small>		<small>0,75</small>	<small>0,79</small>	<small>0,85</small>	<small>0,90</small>	<small>0,95</small>	<small>1,00</small>	<small>1,04</small>	<small>1,09</small>	<small>1,18</small>	<small>1,21</small>			
32-250B	1,5	90L	20,3		20,0	19,7	19,4	19,0	18,4	17,8	17,0	15,3	12,6	8,3			
			<small>0,75</small>		<small>0,87</small>	<small>0,93</small>	<small>1,00</small>	<small>1,06</small>	<small>1,14</small>	<small>1,19</small>	<small>1,24</small>	<small>1,33</small>	<small>1,39</small>	<small>1,42</small>			
32-250A	2,2	100L	22,6		22,2	21,9	21,6	21,3	20,7	20,0	18,9	17,2	14,8	9,1			
			<small>0,80</small>		<small>0,95</small>	<small>1,03</small>	<small>1,10</small>	<small>1,18</small>	<small>1,24</small>	<small>1,30</small>	<small>1,36</small>	<small>1,46</small>	<small>1,52</small>	<small>1,55</small>			

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)														
			0	4,5	6	7,5	9	10,5	12	15	18	21	24	27	30	33	
			0	75	100	125	150	175	200	250	300	350	400	450	500	550	
			H (m)														
			<i>pump input power (kW)</i>														
40-125C	0,37	71B	4,2	4,4	4,3	4,2	4,1	4,0	3,8	3,4	2,8	2,0					
			<small>0,15</small>	<small>0,18</small>	<small>0,19</small>	<small>0,21</small>	<small>0,23</small>	<small>0,23</small>	<small>0,25</small>	<small>0,26</small>	<small>0,27</small>	<small>0,29</small>					
40-125B	0,37	71B	5,4	5,5	5,5	5,4	5,3	5,2	5,0	4,6	4,0	3,3					
			<small>0,19</small>	<small>0,22</small>	<small>0,25</small>	<small>0,26</small>	<small>0,28</small>	<small>0,29</small>	<small>0,31</small>	<small>0,34</small>	<small>0,35</small>	<small>0,37</small>					
40-125A	0,55	80A	6,2	6,3	6,3	6,2	6,1	6,0	5,8	5,4	4,9	4,2	3,4				
			<small>0,23</small>	<small>0,28</small>	<small>0,30</small>	<small>0,32</small>	<small>0,34</small>	<small>0,36</small>	<small>0,38</small>	<small>0,40</small>	<small>0,43</small>	<small>0,44</small>	<small>0,46</small>				
40-160B	0,55	80A	7,4	7,5	7,6	7,4	7,2	7,0	6,8	6,1	4,9	3,7	2,5				
			<small>0,21</small>	<small>0,29</small>	<small>0,34</small>	<small>0,37</small>	<small>0,40</small>	<small>0,42</small>	<small>0,43</small>	<small>0,45</small>	<small>0,47</small>	<small>0,48</small>	<small>0,47</small>				
40-160A	0,75	80B	8,8	8,9	9,0	8,9	8,7	8,5	8,3	7,5	6,6	5,6	4,5				
			<small>0,23</small>	<small>0,34</small>	<small>0,38</small>	<small>0,41</small>	<small>0,45</small>	<small>0,47</small>	<small>0,49</small>	<small>0,53</small>	<small>0,57</small>	<small>0,59</small>	<small>0,60</small>				
40-160AP	0,75	80B	11,1	11,1	11,3	11,3	11,1	10,9	10,6	10,0	9,0	8,0	6,8				
	1,1	90S	<small>0,32</small>	<small>0,47</small>	<small>0,52</small>	<small>0,56</small>	<small>0,60</small>	<small>0,64</small>	<small>0,67</small>	<small>0,72</small>	<small>0,77</small>	<small>0,81</small>	<small>0,84</small>				
40-200B	1,1	90S	11,3		11,4	11,3	11,1	10,8	10,5	9,6	8,5	6,9	4,7				
			<small>0,36</small>		<small>0,52</small>	<small>0,56</small>	<small>0,60</small>	<small>0,64</small>	<small>0,68</small>	<small>0,75</small>	<small>0,78</small>	<small>0,81</small>	<small>0,84</small>				
40-200A	1,1	90S	13,8		13,9	13,8	13,6	13,4	13,2	12,3	11,3	10,0	8,3				
			<small>0,37</small>		<small>0,64</small>	<small>0,72</small>	<small>0,74</small>	<small>0,79</small>	<small>0,82</small>	<small>0,91</small>	<small>0,99</small>	<small>1,06</small>	<small>1,13</small>				
40-200AP	1,1	90S	14,8		14,9	14,8	14,6	14,4	14,2	13,3	12,3	11,0	9,4				
	1,5	90L	<small>0,41</small>		<small>0,69</small>	<small>0,79</small>	<small>0,81</small>	<small>0,86</small>	<small>0,90</small>	<small>0,99</small>	<small>1,08</small>	<small>1,16</small>	<small>1,23</small>				
40-250C	1,5	90L	15,7				15,2	15,0	14,7	14,0	12,8	11,1	9,1	6,6			
			<small>0,61</small>				<small>0,93</small>	<small>0,98</small>	<small>1,04</small>	<small>1,14</small>	<small>1,22</small>	<small>1,32</small>	<small>1,38</small>	<small>1,45</small>			
40-250B	2,2	100L	18,3				18,2	17,9	17,7	17,1	16,2	14,9	12,9	10,7	8,3		
			<small>0,73</small>				<small>1,13</small>	<small>1,19</small>	<small>1,24</small>	<small>1,39</small>	<small>1,51</small>	<small>1,62</small>	<small>1,73</small>	<small>1,82</small>	<small>1,89</small>		
40-250A	2,2	100L	20,9				20,8	20,6	20,4	19,8	19,0	17,9	16,3	14,1	11,5	8,4	
			<small>0,89</small>				<small>1,32</small>	<small>1,40</small>	<small>1,47</small>	<small>1,62</small>	<small>1,75</small>	<small>1,88</small>	<small>2,00</small>	<small>2,10</small>	<small>2,21</small>	<small>2,31</small>	

TYPE	P2 (kW)	Motor Size	Q (m ³ /h - l/min)																
			0	9	10,5	12	15	18	21	24	27	30	33	36	39	42	45	48	54
			0	150	175	200	250	300	350	400	450	500	550	600	650	700	750	800	900
			H (m)																
			<i>pump input power (kW)</i>																
50-125B	0,55	80A	5,3	5,5	5,5	5,4	5,3	5,1	4,9	4,7	4,4	4,1	3,6	3,1	2,6	2,1			
			<small>0,15</small>	<small>0,23</small>	<small>0,25</small>	<small>0,28</small>	<small>0,32</small>	<small>0,38</small>	<small>0,40</small>	<small>0,44</small>	<small>0,45</small>	<small>0,46</small>	<small>0,47</small>	<small>0,47</small>	<small>0,48</small>	<small>0,49</small>			
50-125A	0,75	80B	6,2	6,4	6,4	6,3	6,3	6,1	6,0	5,8	5,5	5,2	4,8	4,4	3,9	3,4	2,9		
			<small>0,23</small>	<small>0,38</small>	<small>0,39</small>	<small>0,41</small>	<small>0,44</small>	<small>0,48</small>	<small>0,51</small>	<small>0,55</small>	<small>0,59</small>	<small>0,62</small>	<small>0,63</small>	<small>0,64</small>	<small>0,64</small>	<small>0,64</small>	<small>0,63</small>		
50-160B	0,75	80B	7,9	8,0	7,9	7,8	7,7	7,3	6,9	6,4	5,9	5,3	4,7	4,0	3,2	2,3			
			<small>0,23</small>	<small>0,43</small>	<small>0,45</small>	<small>0,47</small>	<small>0,51</small>	<small>0,56</small>	<small>0,60</small>	<small>0,63</small>	<small>0,65</small>	<small>0,66</small>	<small>0,67</small>	<small>0,68</small>	<small>0,68</small>	<small>0,67</small>			
50-160A	1,1	90S	9,4	9,4	9,4	9,3	9,2	9,0	8,7	8,3	7,8	7,2	6,7	6,0	5,4	4,7	3,9	3,1	
			<small>0,34</small>	<small>0,55</small>	<small>0,57</small>	<small>0,59</small>	<small>0,65</small>	<small>0,72</small>	<small>0,77</small>	<small>0,80</small>	<small>0,82</small>	<small>0,84</small>	<small>0,86</small>	<small>0,87</small>	<small>0,88</small>	<small>0,88</small>	<small>0,89</small>	<small>0,88</small>	
50-200C	1,1	90S	12,0	12,0	11,8	11,7	11,2	10,7	10,0	9,3	8,2	7,2	6,0	4,6	3,2				
			<small>0,39</small>	<small>0,63</small>	<small>0,68</small>	<small>0,72</small>	<small>0,79</small>	<small>0,83</small>	<small>0,86</small>	<small>0,89</small>	<small>0,91</small>	<small>0,93</small>	<small>0,94</small>	<small>0,94</small>	<small>0,95</small>				
50-200B	1,5	90L	13,1		13,1	13,1	12,7	12,2	11,6	10,9	10,0	9,2	8,2	7,0	5,7	4,2			
			<small>0,48</small>		<small>0,77</small>	<small>0,83</small>	<small>0,92</small>	<small>1,02</small>	<small>1,09</small>	<small>1,14</small>	<small>1,18</small>	<small>1,22</small>	<small>1,24</small>	<small>1,27</small>	<small>1,27</small>				
50-200A	1,5	90L	14,8		14,7	14,5	14,4	13,9	13,4	12,7	11,9	11,0	10,0	8,9	7,6	6,3	4,6		
			<small>0,54</small>		<small>0,87</small>	<small>0,92</small>	<small>1,03</small>	<small>1,14</small>	<small>1,22</small>	<small>1,28</small>	<small>1,32</small>	<small>1,36</small>	<small>1,40</small>	<small>1,43</small>	<small>1,45</small>	<small>1,47</small>	<small>1,48</small>		
50-250C	2,2	100L	17,9		17,7	17,4	16,9	16,4	15,8	14,9	14,2	13,4	12,4	11,0	9,5	7,5			
			<small>0,58</small>		<small>1,24</small>	<small>1,32</small>	<small>1,47</small>	<small>1,59</small>	<small>1,71</small>	<small>1,80</small>	<small>1,89</small>	<small>1,97</small>	<small>2,04</small>	<small>2,10</small>	<small>2,16</small>	<small>2,22</small>			
50-250B	3	100L	19,9		20,0	19,6	19,1	18,8	18,2	17,5	16,7	15,7	14,6	13,6	12,0	10,4	8,2		
			<small>0,79</small>		<small>1,43</small>	<small>1,58</small>	<small>1,72</small>	<small>1,85</small>	<small>1,97</small>	<small>2,07</small>	<small>2,19</small>	<small>2,28</small>	<small>2,37</small>	<small>2,45</small>	<small>2,52</small>	<small>2,58</small>	<small>2,64</small>		
50-250A	4	112M	23,0		22,9	22,7	22,5	22,2	21,8	21,1	20,4	19,5	18,7	17,7	16,6	15,2	13,4	8,4	
			<small>0,90</small>		<small>1,62</small>	<small>1,84</small>	<small>2,07</small>	<small>2,21</small>	<small>2,42</small>	<small>2,60</small>	<small>2,78</small>	<small>2,95</small>	<small>3,12</small>	<small>3,28</small>	<small>3,43</small>	<small>3,53</small>	<small>3,62</small>	<small>3,74</small>	



TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	18	21	24	27	30	33	36	39	42	45	48	54	60	66	72	78	84	90	96
			0	300	350	400	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300	1400	1500	1600
			H (m) pump input power (kW)																			
50-315C No EN 733	5,5	132M	24,4	24,7	24,7	24,6	24,5	24,3	24,0	23,7	23,4	23,1	22,8	22,5	21,9	21,1	20,2	19,2	18,1	16,8		
50-315B No EN 733	7,5	132M	31,3	31,4	31,4	31,3	31,3	31,2	30,9	30,6	30,3	29,9	29,5	29,1	28,2	27,3	26,5	25,5	24,4	23,1	21,6	
50-315A No EN 733	11	160M	37,5	37,2	37,2	37,1	37,0	36,9	36,7	36,5	36,3	36,0	35,6	35,2	34,3	33,3	32,1	30,9	29,7	28,4	26,9	25,1

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	18	21	24	27	30	33	36	39	42	45	48	54	60	66	72	78	84	90	
			0	300	350	400	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300	1400	1500	
			H (m) pump input power (kW)																			
65-125B	0,75	80M	4,9	5,1	5,1	5,0	5,0	4,9	4,7	4,6	4,5	4,3	4,0	3,8	3,3	2,8						
65-125A	1,1	90S	6,1	6,3	6,2	6,1	6,1	6,0	5,9	5,8	5,7	5,5	5,3	5,0	4,7	4,3	3,7	3,0				
65-160C	1,5	90L	7,3			7,6	7,5	7,3	7,2	7,0	6,8	6,7	6,4	6,2	5,7	5,1	4,4	3,6	2,9			
65-160B	1,5	90L	8,4			8,6	8,4	8,3	8,2	8,0	7,8	7,6	7,4	7,2	6,5	5,9	5,2	4,4	3,6			
65-160A	2,2	100L	9,8			9,9	9,9	9,8	9,6	9,5	9,3	9,1	8,9	8,7	8,2	7,6	6,8	6,1	5,3	4,6		
65-200C	2,2	100L	11,0			11,6	11,5	11,4	11,3	11,2	10,9	10,5	10,3	9,7	9,1	8,3	7,4	6,5	5,0			
65-200B	3	100L	12,3			13,1	13,0	12,8	12,7	12,5	12,3	12,1	11,9	11,3	10,6	10,0	9,0	8,0	7,0			
65-200A	3	100L	14,0			14,8	14,7	14,6	14,5	14,2	14,0	13,9	13,7	13,3	12,7	12,0	11,3	10,3	9,3			
65-250B	5,5	132S	20,6			21,0	20,8	20,4	20,1	19,8	19,3	18,8	18,4	17,3	16,0	14,5	12,9	11,2	8,7			
65-250A	5,5	132S	22,8			22,9	22,5	22,1	21,7	21,4	20,9	20,4	19,2	17,6	16,9	15,4	13,6	11,5	8,8			

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																							
			0	27	30	33	36	39	42	45	48	54	60	66	72	78	84	90	96	102	108	114	120	126	132	138
			0	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300
			H (m) pump input power (kW)																							
65-315CM	7,5	132M	23,0	23,5	23,5	23,4	23,3	23,2	23,1	22,9	22,7	22,3	21,9	21,5	21,0	20,5	20,0	19,3	18,5	17,7	16,9	16,0	15,0	13,9		
65-315BM	11	160M	28,9	28,9	28,9	28,8	28,7	28,6	28,4	28,2	28,0	27,5	27,0	26,5	25,9	25,3	24,7	24,0	23,3	22,5	21,6	20,6	19,6	18,4	17,2	
65-315AM	11	160M	34,5	34,0	33,9	33,7	33,5	33,3	33,1	32,9	32,6	32,2	31,6	31,0	30,4	29,6	28,9	28,1	27,2	26,2	25,1	23,8	22,5	21,1	19,6	18,2

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																					
			0	24	27	30	33	36	42	48	60	72	84	96	102	108	120	132	144					
			0	400	450	500	550	600	700	800	1000	1200	1400	1600	1700	1800	2000	2200	2400					
			H (m) pump input power (kW)																					
80-160E	1,1	90S	5,5	5,7	5,7	5,7	5,6	5,4	5,1	4,9	4,2	3,8	2,8	2,2										
80-160D	1,5	90L	6,3		6,8	6,7	6,6	6,5	6,3	6,1	5,5	4,8	4	3,1	2,6									
80-160C	1,5	90L	7,0		7,4	7,3	7,3	7,1	6,8	6,4	5,7	4,9	4	3,5	3,1									
80-160B	2,2	100L	8,5		8,9	8,9	8,7	8,5	8,0	7,5	6,8	5,7	5,2	4,7	3,5									
80-160A	3	100L	9,3		9,8	9,7	9,5	9,1	8,6	7,9	7,1	6,6	6,2	5,0	3,8									
80-200B	4	112M	12,3		13,1	13,0	12,6	12,1	11,4	10,5	10,1	9,6	8,4	7,1										
80-200A	5,5	132S	13,8		14,7	14,6	14,2	13,7	13,1	12,3	11,7	11,2	10,1	8,8	7,5									
80-250B	5,5	132S	18,9		19,2	19,0	18,1	17,0	15,9	14,8	14,2	13,6	12,4	11,1										
80-250A	7,5	132M	22,4		22,9	22,6	21,8	20,7	19,6	18,3	17,7	17,0	15,6	14,2	12,6									



4CA-4CAX ~ EN 733

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)															
			0	42	48	60	72	84	96	102	108	120	132	144	150	156	168	
			0	700	800	1000	1200	1400	1600	1700	1800	2000	2200	2400	2500	2600	2800	
			H (m) pump input power (kW)															
80-315B	11	160M	27,7 <u>2,99</u>	28,3 <u>5,48</u>	28,2 <u>5,88</u>	27,9 <u>6,67</u>	27,2 <u>7,42</u>	26,4 <u>8,09</u>	25,4 <u>8,67</u>	24,9 <u>8,95</u>	24,4 <u>9,21</u>	23,3 <u>9,74</u>	21,9 <u>10,28</u>	20,5 <u>10,66</u>	19,9 <u>10,85</u>			
80-315A	15	160L	34,5 <u>4,29</u>	35,0 <u>7,30</u>	34,9 <u>7,78</u>	34,6 <u>8,75</u>	34,0 <u>9,66</u>	33,3 <u>10,53</u>	32,4 <u>11,37</u>	31,9 <u>11,77</u>	31,3 <u>12,17</u>	30,1 <u>12,91</u>	28,8 <u>13,50</u>	27,3 <u>14,05</u>	26,4 <u>14,31</u>	25,5 <u>14,56</u>	23,7 <u>15,04</u>	

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																	
			0	48	60	72	84	96	102	108	120	132	144	150	156	168	180	192	204	
			0	800	1000	1200	1400	1600	1700	1800	2000	2200	2400	2500	2600	2800	3000	3200	3400	
			H (m) pump input power (kW)																	
100-200D	4	112M	10,9 <u>2,28</u>	10,8 <u>2,69</u>	10,6 <u>2,88</u>	10,3 <u>3,05</u>	9,9 <u>3,19</u>	9,5 <u>3,34</u>	9,2 <u>3,41</u>	9,0 <u>3,48</u>	8,5 <u>3,58</u>	7,8 <u>3,66</u>	6,9 <u>3,71</u>	6,4 <u>3,72</u>	5,9 <u>3,73</u>	4,8 <u>3,71</u>				
100-200C	5,5	132S	12,0 <u>2,46</u>	12,0 <u>2,99</u>	11,8 <u>3,20</u>	11,5 <u>3,40</u>	11,2 <u>3,57</u>	10,8 <u>3,76</u>	10,6 <u>3,85</u>	10,3 <u>3,94</u>	9,8 <u>4,06</u>	9,1 <u>4,17</u>	8,3 <u>4,26</u>	7,8 <u>4,28</u>	7,4 <u>4,30</u>	6,3 <u>4,33</u>				
100-200B	5,5	132S	13,5 <u>2,79</u>	13,6 <u>3,48</u>	13,4 <u>3,70</u>	13,1 <u>3,93</u>	12,8 <u>4,15</u>	12,5 <u>4,38</u>	12,3 <u>4,49</u>	12,1 <u>4,59</u>	11,6 <u>4,77</u>	11,0 <u>4,93</u>	10,3 <u>5,05</u>	9,9 <u>5,09</u>	9,5 <u>5,13</u>	8,7 <u>5,19</u>	7,8 <u>5,23</u>			
100-200A	7,5	132M	15,2 <u>3,12</u>	15,4 <u>3,96</u>	15,3 <u>4,22</u>	15,0 <u>4,48</u>	14,8 <u>4,74</u>	14,5 <u>5,03</u>	14,4 <u>5,17</u>	14,2 <u>5,31</u>	13,8 <u>5,58</u>	13,2 <u>5,80</u>	12,5 <u>5,99</u>	12,2 <u>6,07</u>	11,8 <u>6,13</u>	11,0 <u>6,23</u>	10,1 <u>6,33</u>	9,1 <u>6,40</u>		
100-250E	7,5	132M	16,7 <u>3,06</u>		16,9 <u>4,71</u>	16,8 <u>5,06</u>	16,6 <u>5,42</u>	16,3 <u>5,75</u>	16,2 <u>5,91</u>	16,0 <u>6,07</u>	15,5 <u>6,39</u>	14,8 <u>6,69</u>	14,0 <u>6,96</u>	13,6 <u>7,08</u>	13,2 <u>7,19</u>	12,4 <u>7,38</u>	11,4 <u>7,53</u>			
100-250D	7,5	132M	19,6 <u>3,39</u>		19,6 <u>5,44</u>	19,4 <u>5,88</u>	19,2 <u>6,29</u>	18,9 <u>6,66</u>	18,7 <u>6,82</u>	18,5 <u>6,98</u>	18,0 <u>7,30</u>	17,4 <u>7,60</u>	16,6 <u>7,90</u>	16,2 <u>8,05</u>	15,7 <u>8,19</u>	14,8 <u>8,41</u>	13,7 <u>8,60</u>	12,7 <u>8,75</u>		
100-250A	11	160M	22,6 <u>3,96</u>		22,3 <u>6,17</u>	22,1 <u>6,67</u>	21,8 <u>7,15</u>	21,4 <u>7,59</u>	21,2 <u>7,80</u>	21,0 <u>8,00</u>	20,5 <u>8,37</u>	19,9 <u>8,71</u>	19,1 <u>9,04</u>	18,7 <u>9,20</u>	18,3 <u>9,36</u>	17,3 <u>9,63</u>	16,1 <u>9,85</u>	15,0 <u>10,04</u>	13,8 <u>10,19</u>	

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)															
			0	72	84	96	102	108	120	132	144	150	156	168	180	192	204	216
			0	1200	1400	1600	1700	1800	2000	2200	2400	2500	2600	2800	3000	3200	3400	3600
			H (m) pump input power (kW)															
100-315B	15	160L	31,8 <u>4,74</u>	31,4 <u>9,27</u>	30,6 <u>10,05</u>	29,8 <u>9,67</u>	29,4 <u>10,05</u>	29,0 <u>11,42</u>	28,2 <u>11,10</u>	27,3 <u>12,54</u>	26,3 <u>12,27</u>	25,8 <u>12,54</u>	25,3 <u>13,54</u>	24,2 <u>13,06</u>	23,0 <u>14,31</u>	21,4 <u>13,54</u>	19,7 <u>14,92</u>	17,9 <u>15,14</u>
100-315A	18,5	180M	37,1 <u>5,63</u>	36,5 <u>11,03</u>	35,7 <u>11,94</u>	34,9 <u>12,80</u>	34,4 <u>13,21</u>	34,0 <u>13,60</u>	33,1 <u>14,33</u>	32,2 <u>15,01</u>	31,2 <u>15,69</u>	30,7 <u>16,02</u>	30,2 <u>16,32</u>	29,1 <u>16,86</u>	27,9 <u>17,32</u>	26,3 <u>17,76</u>	24,7 <u>18,15</u>	23,1 <u>18,49</u>

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																	
			0	84	96	102	108	120	132	144	150	156	168	180	192	204	216	228	240	252
			0	1400	1600	1700	1800	2000	2200	2400	2500	2600	2800	3000	3200	3400	3600	3800	4000	4200
			H (m) pump input power (kW)																	
100-400C	22	180L	42,4 <u>6,93</u>	40,6 <u>14,36</u>	39,8 <u>15,34</u>	39,3 <u>15,81</u>	38,8 <u>16,27</u>	37,8 <u>17,14</u>	36,7 <u>17,98</u>	35,5 <u>18,83</u>	34,9 <u>19,25</u>	34,3 <u>19,64</u>	32,8 <u>20,30</u>	31,4 <u>20,95</u>	30,3 <u>21,50</u>	29,1 <u>21,91</u>	27,7 <u>22,31</u>	25,8 <u>22,70</u>		
100-400B	30	200L	50,3 <u>9,32</u>	48,7 <u>18,20</u>	47,9 <u>19,51</u>	47,5 <u>20,14</u>	47,0 <u>20,75</u>	44,9 <u>21,93</u>	43,8 <u>23,04</u>	43,2 <u>24,07</u>	42,6 <u>24,56</u>	41,3 <u>25,03</u>	39,8 <u>25,95</u>	38,2 <u>26,80</u>	36,5 <u>27,61</u>	34,7 <u>28,36</u>	33,1 <u>29,01</u>	31,6 <u>29,56</u>	30,0 <u>30,00</u>	
100-400A	37	225S	58,3 <u>11,46</u>	56,0 <u>21,50</u>	55,2 <u>23,05</u>	54,8 <u>23,80</u>	54,3 <u>24,54</u>	53,4 <u>25,95</u>	52,4 <u>27,31</u>	51,3 <u>28,63</u>	50,7 <u>29,27</u>	50,1 <u>29,89</u>	48,7 <u>31,07</u>	47,3 <u>32,15</u>	45,8 <u>33,12</u>	44,3 <u>34,00</u>	42,7 <u>34,77</u>	40,9 <u>35,48</u>	38,8 <u>36,11</u>	36,7 <u>36,69</u>

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																
			0	102	108	120	132	144	150	156	168	180	192	204	216	228	240	252	276
			0	1700	1800	2000	2200	2400	2500	2600	2800	3000	3200	3400	3600	3800	4000	4200	4600
			H (m) pump input power (kW)																
125-250B	11	160M	19,6 <u>5,41</u>	20,2 <u>8,04</u>	20,0 <u>8,22</u>	19,7 <u>8,56</u>	19,2 <u>8,80</u>	18,8 <u>9,30</u>	18,5 <u>9,50</u>	18,2 <u>9,66</u>	17,6 <u>9,99</u>	16,9 <u>10,23</u>	16,1 <u>10,44</u>	15,2 <u>10,67</u>	14,3 <u>10,88</u>	13,3 <u>11,02</u>	12,2 <u>11,12</u>	11,1 <u>11,18</u>	
125-250A	15	160L	23,2 <u>6,18</u>	24,0 <u>9,71</u>	23,8 <u>9,92</u>	23,5 <u>10,36</u>	23,2 <u>10,80</u>	22,8 <u>11,24</u>	22,6 <u>11,47</u>	22,4 <u>11,70</u>	21,9 <u>12,16</u>	21,3 <u>12,60</u>	20,7 <u>13,02</u>	20,0 <u>13,42</u>	19,3 <u>13,77</u>	18,5 <u>14,08</u>	17,6 <u>14,34</u>	16,6 <u>14,57</u>	14,7 <u>14,94</u>



TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																	
			0	120	132	144	150	156	168	180	192	204	216	228	240	252	276	348	372	396
			0	2000	2200	2400	2500	2600	2800	3000	3200	3400	3600	3800	4000	4200	4600	5800	6200	6600
			H (m) pump input power (kW)																	
125-315C	22	180L	24,1 <u>7,23</u>	25,8 <u>12,72</u>	25,7 <u>13,39</u>	25,5 <u>14,05</u>	25,4 <u>14,38</u>	25,3 <u>14,70</u>	25,0 <u>15,34</u>	24,7 <u>15,95</u>	24,4 <u>16,49</u>	24,1 <u>16,99</u>	23,7 <u>17,48</u>	23,3 <u>17,98</u>	22,8 <u>18,49</u>	22,2 <u>18,99</u>	21,0 <u>19,96</u>	15,7 <u>22,32</u>		
125-315B	30	200L	31,5 <u>9,52</u>	33,0 <u>16,73</u>	33,0 <u>17,53</u>	32,9 <u>18,36</u>	32,8 <u>18,77</u>	32,7 <u>19,15</u>	32,4 <u>19,84</u>	32,1 <u>20,43</u>	31,7 <u>21,01</u>	31,3 <u>21,67</u>	31,0 <u>22,39</u>	30,6 <u>23,13</u>	30,1 <u>23,83</u>	29,6 <u>24,48</u>	28,3 <u>25,71</u>	24,2 <u>29,14</u>	22,2 <u>30,13</u>	
125-315A	37	225S	38,6 <u>11,88</u>	39,6 <u>20,51</u>	39,5 <u>21,40</u>	39,2 <u>22,29</u>	39,0 <u>22,73</u>	38,8 <u>23,17</u>	38,4 <u>24,03</u>	38,1 <u>24,84</u>	37,9 <u>25,60</u>	37,6 <u>26,36</u>	37,3 <u>27,14</u>	37,0 <u>27,97</u>	36,6 <u>28,82</u>	36,2 <u>29,66</u>	35,2 <u>31,26</u>	29,6 <u>35,58</u>	28,2 <u>36,82</u>	
125-400C	45	225M	46,2 <u>13,91</u>	47,6 <u>24,65</u>	47,5 <u>25,83</u>	47,2 <u>27,03</u>	47,0 <u>27,62</u>	46,9 <u>28,20</u>	46,5 <u>29,31</u>	46,1 <u>30,30</u>	45,7 <u>31,22</u>	45,2 <u>32,17</u>	44,7 <u>33,24</u>	44,2 <u>34,42</u>	43,7 <u>35,62</u>	43,2 <u>36,73</u>	42,4 <u>38,53</u>	36,5 <u>43,95</u>	33,8 <u>45,52</u>	
125-400B	55	250M	53,4 <u>16,79</u>	54,5 <u>28,74</u>	54,3 <u>30,15</u>	54,1 <u>31,55</u>	54,0 <u>32,25</u>	53,9 <u>32,94</u>	53,5 <u>34,30</u>	53,2 <u>35,60</u>	52,7 <u>36,85</u>	52,3 <u>38,07</u>	51,7 <u>39,30</u>	51,2 <u>40,56</u>	50,6 <u>41,82</u>	50,0 <u>43,06</u>	48,8 <u>45,43</u>	44,6 <u>51,75</u>	42,0 <u>53,55</u>	39,1 <u>55,27</u>
125-400A	75	280S	58,6 <u>18,95</u>	59,5 <u>31,66</u>	59,4 <u>33,20</u>	59,2 <u>34,74</u>	59,1 <u>35,52</u>	59,0 <u>36,29</u>	58,7 <u>37,81</u>	58,3 <u>39,30</u>	57,8 <u>40,77</u>	57,4 <u>42,22</u>	56,8 <u>43,66</u>	56,3 <u>45,09</u>	55,7 <u>46,50</u>	55,1 <u>47,87</u>	53,9 <u>50,49</u>	49,9 <u>57,63</u>	47,2 <u>59,76</u>	45,0 <u>61,83</u>

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																			
			0	144	150	156	168	180	192	204	216	228	240	252	276	348	372	396	444	492	540	564
			0	2400	2500	2600	2800	3000	3200	3400	3600	3800	4000	4200	4600	5800	6200	6600	7400	8200	9000	9400
			H (m) pump input power (kW)																			
150-315D	30	200L	25,7 <u>12,22</u>	28,3 <u>18,44</u>	28,3 <u>18,74</u>	28,3 <u>19,04</u>	28,2 <u>19,63</u>	28,1 <u>20,19</u>	27,9 <u>20,71</u>	27,7 <u>21,22</u>	27,5 <u>21,72</u>	27,2 <u>22,23</u>	26,8 <u>22,73</u>	26,5 <u>23,25</u>	25,8 <u>24,37</u>	24,7 <u>27,81</u>	23,8 <u>28,75</u>	22,7 <u>29,56</u>	19,6 <u>30,78</u>			
150-315C	37	225S	29,6 <u>14,01</u>	32,2 <u>21,16</u>	32,2 <u>21,49</u>	32,3 <u>21,84</u>	32,2 <u>22,52</u>	32,1 <u>23,20</u>	31,9 <u>23,85</u>	31,6 <u>24,45</u>	31,3 <u>25,02</u>	31,0 <u>25,58</u>	30,7 <u>26,14</u>	30,2 <u>26,73</u>	28,6 <u>28,01</u>	27,9 <u>31,79</u>	27,0 <u>32,95</u>	24,7 <u>34,00</u>	21,8 <u>35,84</u>			
150-315B	45	225M	34,0 <u>16,47</u>	36,3 <u>24,33</u>	36,2 <u>24,72</u>	36,2 <u>25,12</u>	36,1 <u>25,92</u>	36,0 <u>26,72</u>	35,7 <u>27,47</u>	35,5 <u>28,17</u>	35,4 <u>28,85</u>	35,2 <u>29,51</u>	34,9 <u>30,15</u>	34,5 <u>30,83</u>	32,8 <u>32,25</u>	32,2 <u>36,29</u>	31,3 <u>37,54</u>	29,3 <u>38,77</u>	26,9 <u>41,13</u>	23,6 <u>43,09</u>		
150-315A	55	250M	39,4 <u>18,39</u>	41,0 <u>27,78</u>	41,0 <u>28,22</u>	40,8 <u>28,66</u>	40,8 <u>29,55</u>	40,8 <u>30,43</u>	40,8 <u>31,31</u>	40,6 <u>32,18</u>	40,3 <u>33,05</u>	40,0 <u>33,92</u>	39,7 <u>34,77</u>	39,5 <u>35,59</u>	39,2 <u>37,10</u>	37,6 <u>41,75</u>	36,6 <u>43,40</u>	35,8 <u>45,02</u>	34,1 <u>48,12</u>	28,9 <u>50,36</u>	27,2 <u>52,60</u>	

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)																		
			0	168	180	192	204	216	228	240	252	276	348	372	396	444	492	540	564	588	612
			0	2800	3000	3200	3400	3600	3800	4000	4200	4600	5800	6200	6600	7400	8200	9000	9400	9800	10200
			H (m) pump input power (kW)																		
150-400C	75	280S	45,6 <u>20,78</u>	47,8 <u>35,35</u>	47,7 <u>36,41</u>	47,6 <u>37,46</u>	47,4 <u>38,54</u>	47,2 <u>39,58</u>	47,0 <u>40,43</u>	46,7 <u>41,65</u>	46,5 <u>42,62</u>	45,8 <u>44,48</u>	43,9 <u>50,44</u>	43,1 <u>52,51</u>	42,0 <u>54,34</u>	39,2 <u>57,61</u>	35,8 <u>60,59</u>	31,5 <u>63,18</u>	28,7 <u>64,43</u>		
150-400B	75	280S	52,8 <u>26,57</u>	54,4 <u>41,90</u>	54,2 <u>43,10</u>	53,9 <u>44,29</u>	53,5 <u>45,48</u>	53,2 <u>46,65</u>	52,9 <u>47,81</u>	52,6 <u>48,96</u>	51,8 <u>50,10</u>	50,3 <u>52,35</u>	49,8 <u>58,79</u>	49,8 <u>60,86</u>	48,9 <u>62,94</u>	46,1 <u>66,80</u>	42,9 <u>70,20</u>	39,1 <u>73,30</u>	36,7 <u>74,72</u>	34,3 <u>76,14</u>	
150-400A	90	280M	59,0 <u>29,82</u>	60,3 <u>47,01</u>	60,2 <u>48,30</u>	60,0 <u>49,59</u>	59,8 <u>50,88</u>	59,9 <u>52,18</u>	59,4 <u>53,48</u>	59,1 <u>54,78</u>	58,8 <u>56,10</u>	58,1 <u>58,76</u>	56,4 <u>66,15</u>	56,0 <u>68,45</u>	55,3 <u>70,93</u>	53,3 <u>75,79</u>	50,6 <u>79,82</u>	46,7 <u>83,73</u>	44,5 <u>85,61</u>	42,2 <u>87,41</u>	39,8 <u>89,16</u>



4CA-4CAX

4CA-4CAX ~ 1450 r.p.m.

















Machines complementing the existing range, not envisaged in the EN 733 standard

TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)							
			0	200	250	400	600	800	850	900
			0	3333	4167	6667	10000	13333	14167	15000
H (m)										
<i>pump input power (kW)</i>										
200-315D	37	225S	21,2 <i>18,00</i>	21,7 <i>24,31</i>	21,8 <i>26,11</i>	21,2 <i>31,21</i>	18,3 <i>36,07</i>	12,5 <i>37,00</i>		
200-315C	45	225M	26,6 <i>21,54</i>	26,6 <i>29,42</i>	26,4 <i>31,44</i>	25,9 <i>37,61</i>	23,1 <i>43,07</i>	16,9 <i>45,42</i>	14,6 <i>45,55</i>	
200-315B	55	250M	33,4 <i>25,04</i>	33,4 <i>36,30</i>	33,2 <i>38,91</i>	32,2 <i>46,32</i>	28,6 <i>52,72</i>	21,7 <i>55,67</i>	19,4 <i>55,62</i>	16,7 <i>55,25</i>
200-315A	75	280S	36,3 <i>27,90</i>	35,9 <i>39,49</i>	35,8 <i>42,13</i>	35,0 <i>50,07</i>	31,8 <i>58,82</i>	24,9 <i>62,36</i>	22,5 <i>62,45</i>	19,8 <i>62,15</i>
200-400C	90	280M	43,0 <i>31,27</i>	44,1 <i>45,90</i>	44,1 <i>50,14</i>	43,6 <i>62,49</i>	39,9 <i>77,58</i>	31,5 <i>89,60</i>		
200-400B	110	315S	49,5 <i>40,00</i>	50,8 <i>54,29</i>	51,0 <i>58,92</i>	50,6 <i>73,89</i>	47,2 <i>91,32</i>	39,5 <i>105,65</i>	36,6 <i>108,43</i>	
200-400A	132	315M	57,2 <i>49,00</i>	58,5 <i>65,01</i>	58,6 <i>70,26</i>	58,2 <i>87,26</i>	55,2 <i>107,05</i>	48,2 <i>124,54</i>	45,6 <i>128,46</i>	44,0 <i>132,15</i>









TYPE	P2 (kW)	Motor Size	Q (m³/h - l/min)													
			0	250	400	600	800	850	900	1100	1170	1200	1300	1400	1500	1600
			0	4167	6667	10000	13333	14167	15000	18333	19500	20000	21667	23333	25000	26667
H (m)																
<i>pump input power (kW)</i>																
250-315C	55	280M	26,1	25,5	25,3	24,1	22,3	21,7	21,0	16,8						
	75	280S	<i>28,00</i>	<i>37,82</i>	<i>44,23</i>	<i>51,71</i>	<i>57,65</i>	<i>58,82</i>	<i>59,57</i>	<i>59,89</i>						
250-315B	75	280S	33,2 <i>43,46</i>	33,0 <i>54,77</i>	32,7 <i>61,20</i>	31,8 <i>68,72</i>	29,6 <i>74,57</i>	28,6 <i>75,26</i>	27,5 <i>75,64</i>	21,7 <i>74,47</i>	19,0 <i>73,35</i>					
250-315A	90	280M	35,8 <i>46,41</i>	35,0 <i>57,61</i>	34,4 <i>64,50</i>	33,3 <i>73,28</i>	31,3 <i>78,44</i>	30,4 <i>79,01</i>	29,3 <i>79,32</i>	23,0 <i>78,27</i>	20,7 <i>77,03</i>	20,0 <i>76,36</i>				
250-400D	110	315S	38,3	39,9	39,9	39,0	36,9	36,1	35,2	30,6	28,6	27,7	24,3			
	132	315M	<i>48,00</i>	<i>61,74</i>	<i>71,25</i>	<i>84,15</i>	<i>95,73</i>	<i>98,36</i>	<i>100,80</i>	<i>108,97</i>	<i>111,27</i>	<i>112,17</i>	<i>114,78</i>			
250-400C	132	315M	44,0	45,8	45,9	44,9	42,7	42,0	41,2	37,2	35,4	34,5	31,3	27,4		
	160	315L	<i>53,83</i>	<i>71,89</i>	<i>83,20</i>	<i>98,11</i>	<i>112,06</i>	<i>115,25</i>	<i>118,20</i>	<i>128,07</i>	<i>130,85</i>	<i>131,93</i>	<i>135,08</i>	<i>137,50</i>		
250-400B	160	315L	50,0	51,7	51,8	51,0	49,0	48,4	47,6	43,9	42,3	41,5	38,5	34,8	30,3	
	200	315L	<i>64,57</i>	<i>84,18</i>	<i>97,49</i>	<i>115,36</i>	<i>131,10</i>	<i>134,76</i>	<i>138,27</i>	<i>151,48</i>	<i>155,58</i>	<i>157,12</i>	<i>161,60</i>	<i>164,88</i>	<i>167,09</i>	
250-400A	200	315L	55,7 <i>70,94</i>	57,4 <i>91,89</i>	57,5 <i>106,81</i>	56,5 <i>127,19</i>	54,5 <i>145,00</i>	53,8 <i>149,18</i>	53,0 <i>153,24</i>	49,4 <i>168,92</i>	47,9 <i>173,94</i>	47,1 <i>175,86</i>	44,3 <i>181,62</i>	40,8 <i>186,11</i>	36,6 <i>189,07</i>	31,7 <i>190,57</i>















CM-CMG-CMGX-CA-CAX ~ EN 733

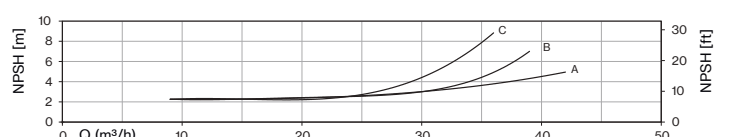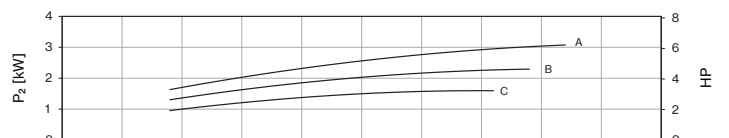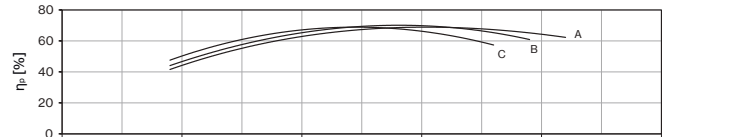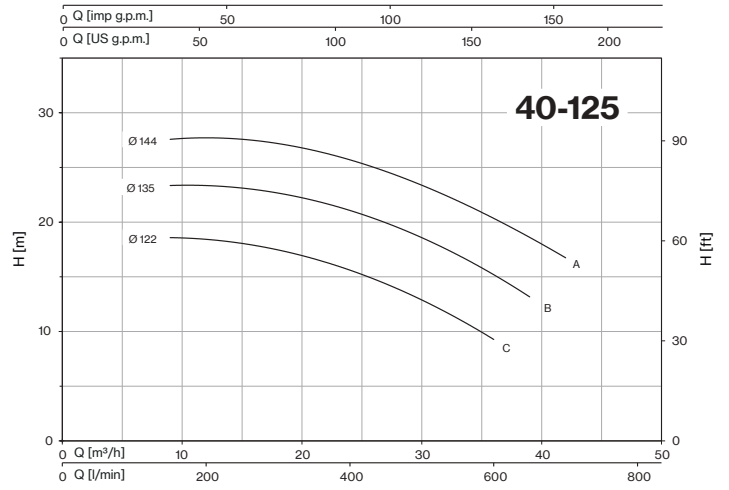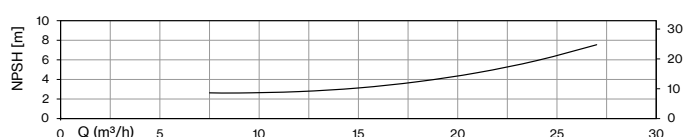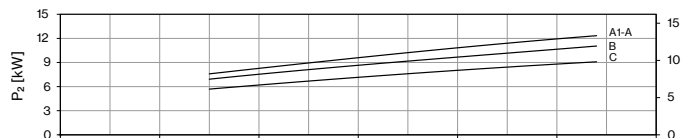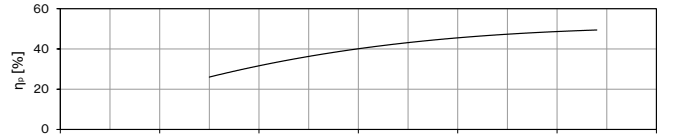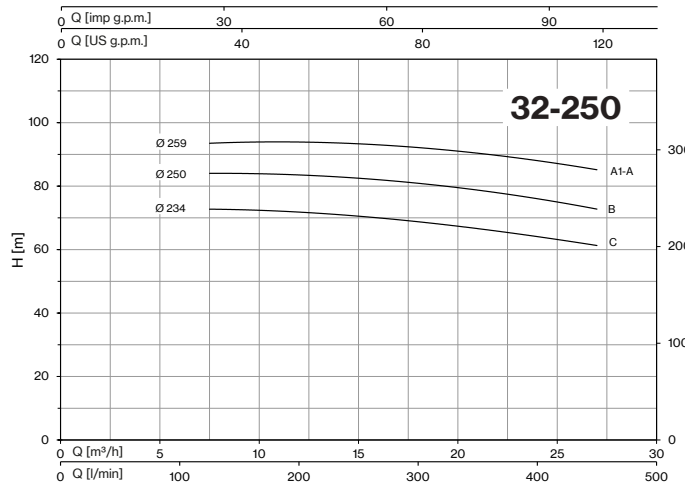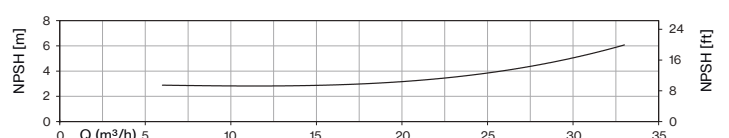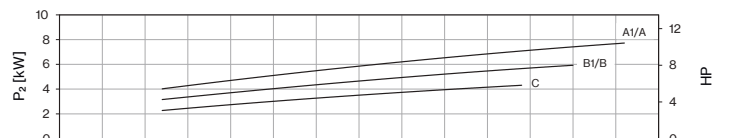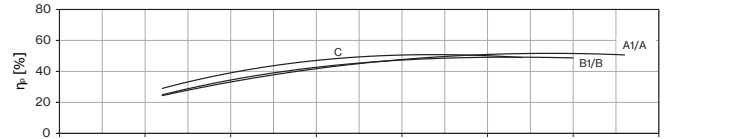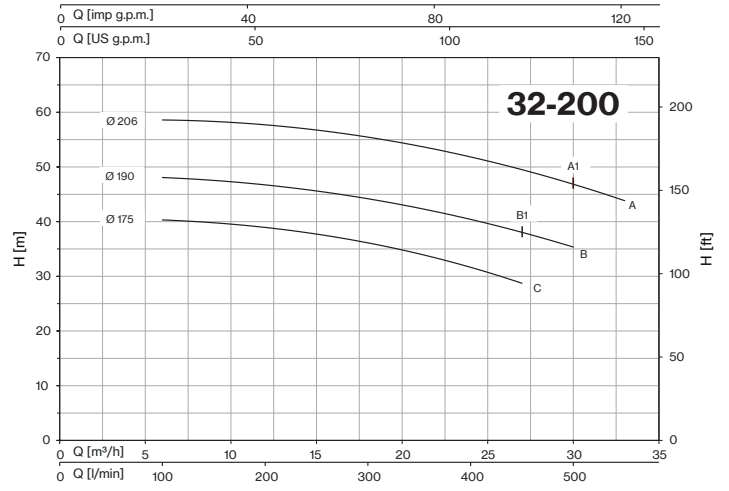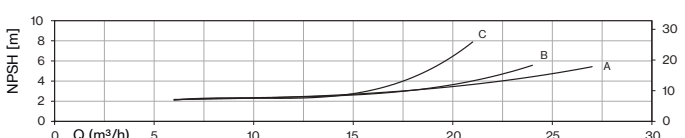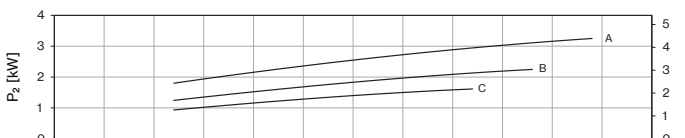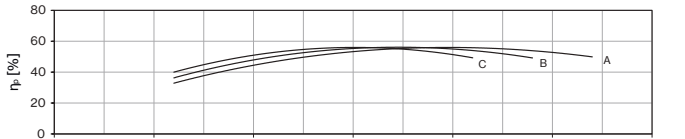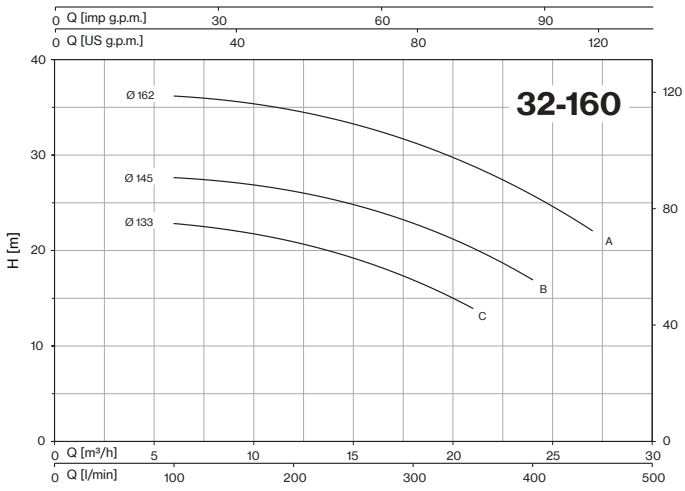

CM-CMG-CMGX-CA-CAX ~ EN 733

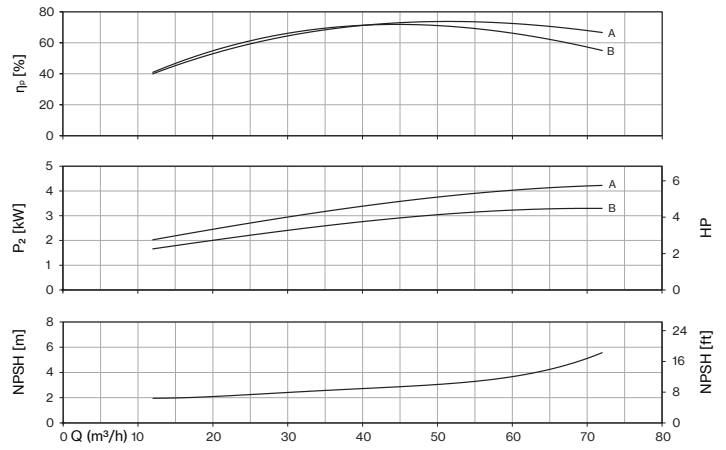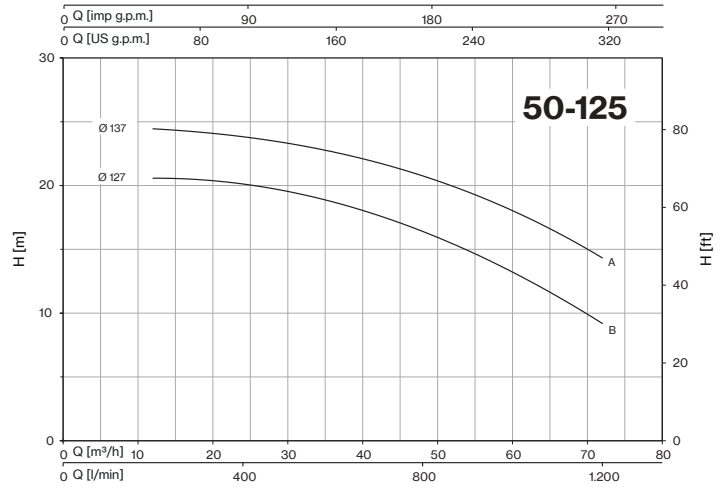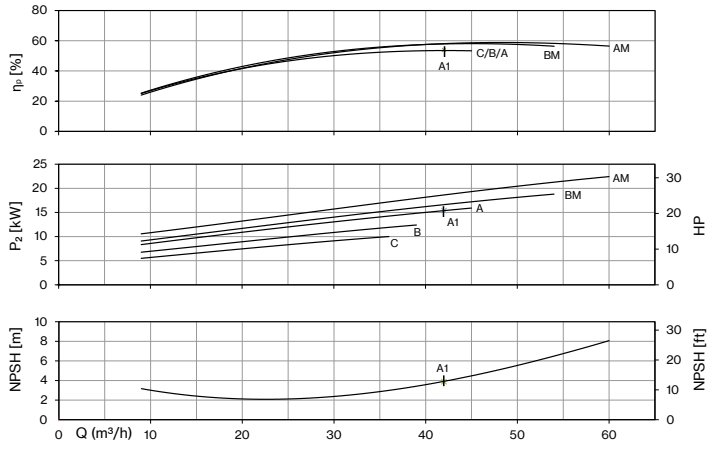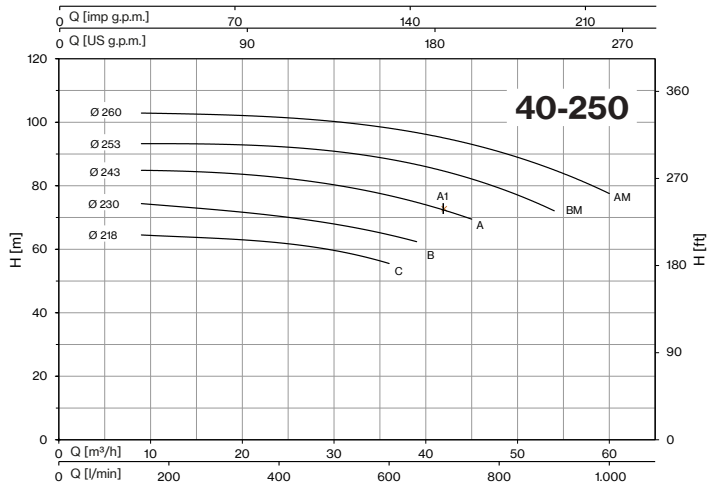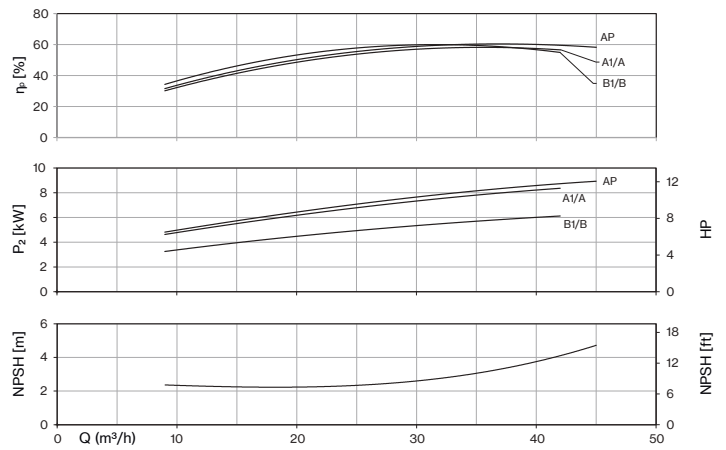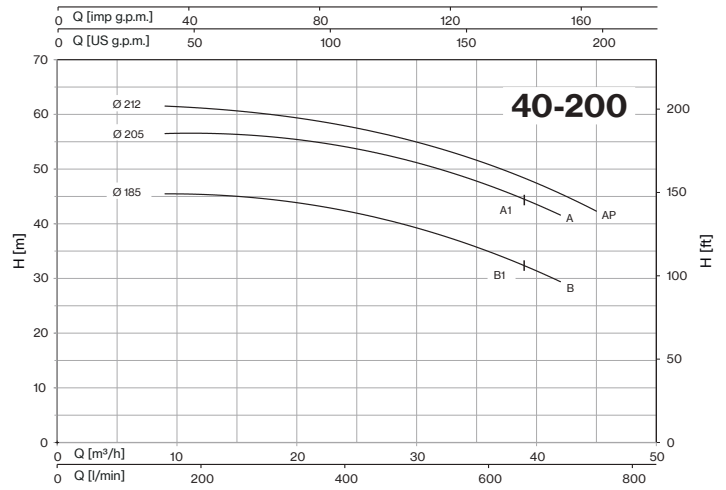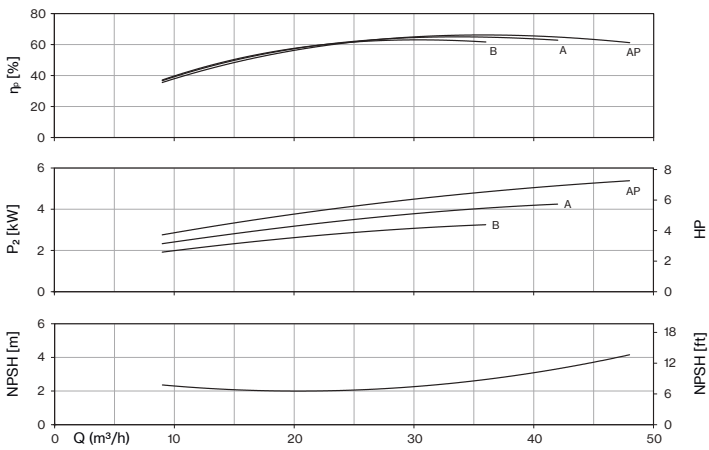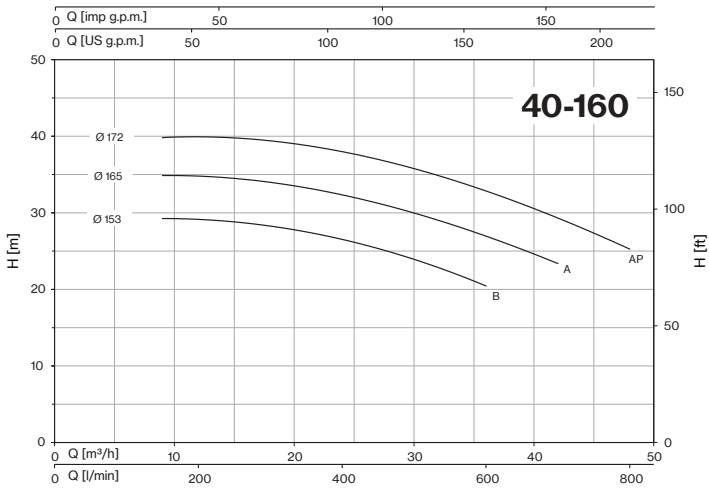
















CM-CMG-CMGX-CA-CAX ~ EN 733

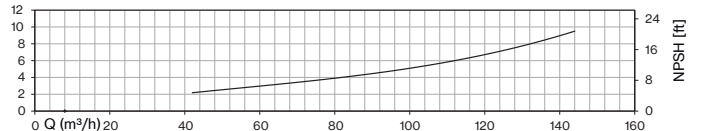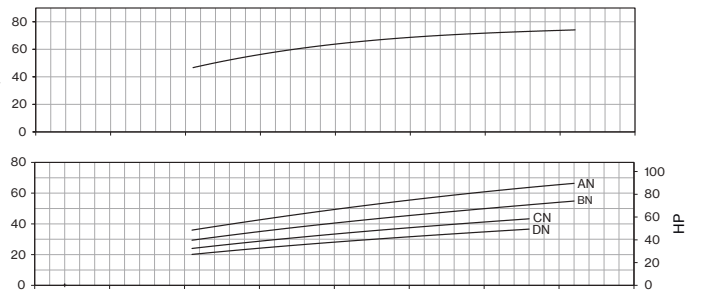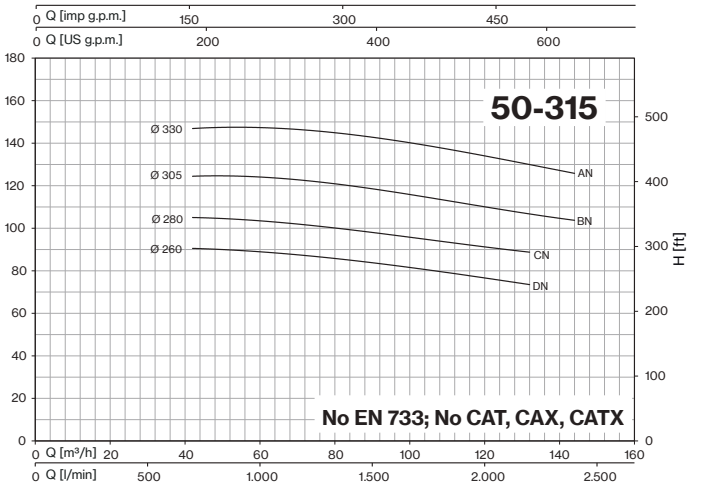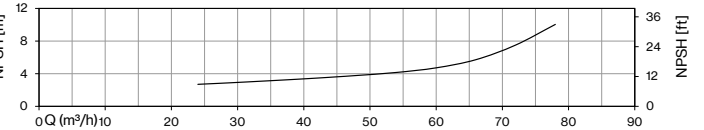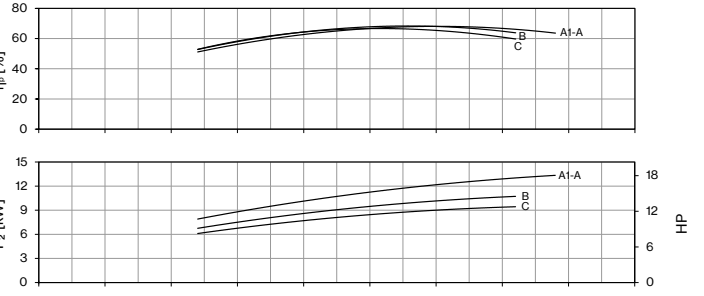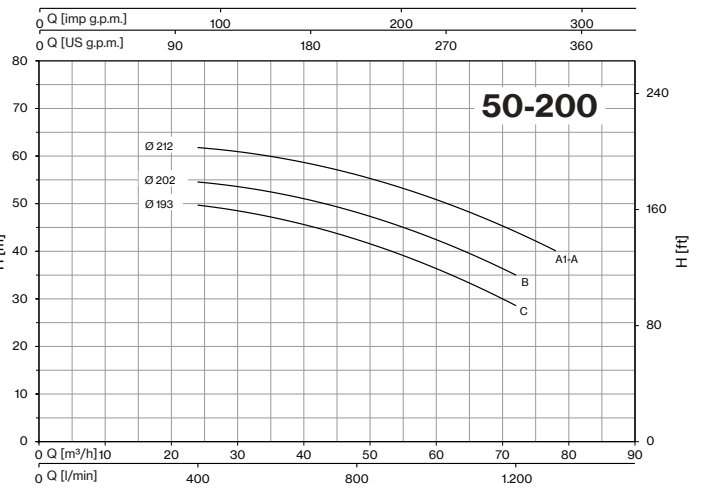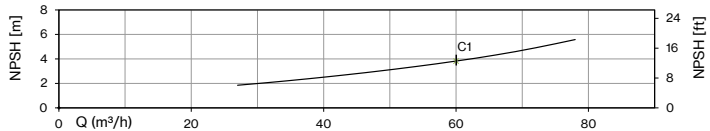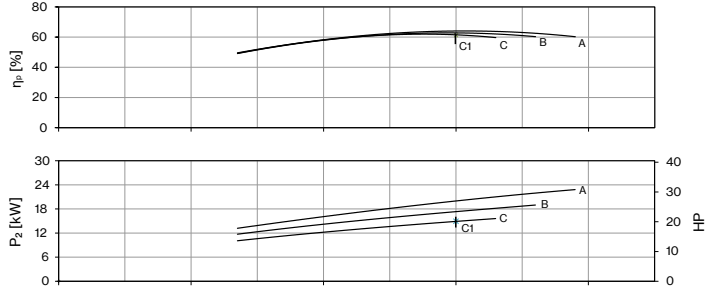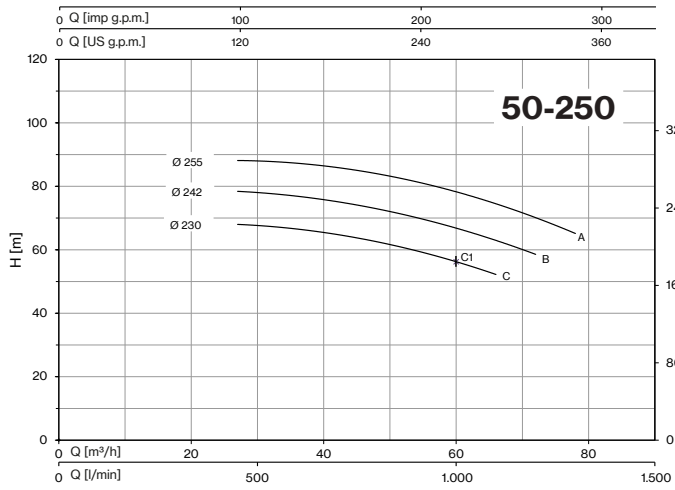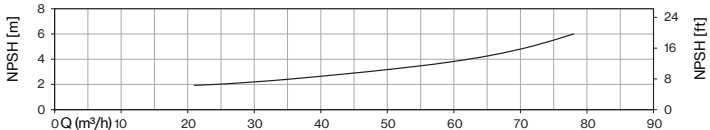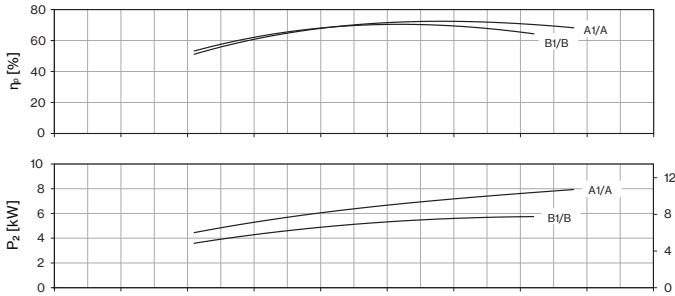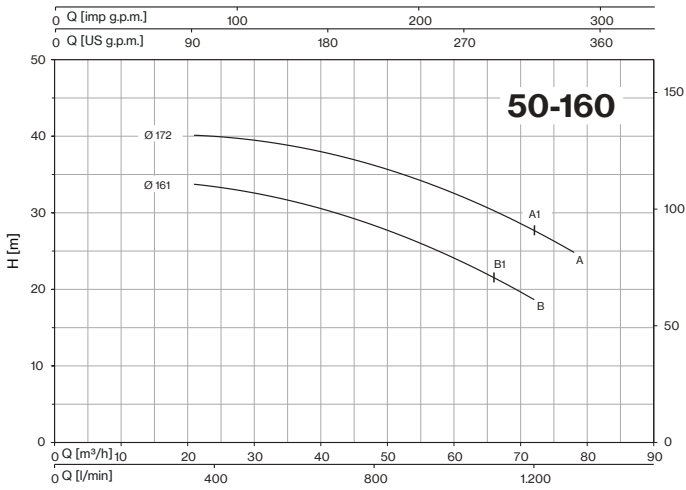





No EN 733; No CAT, CAX, CATX


















CM-CMG-CMGX-CA-CAX ~ EN 733


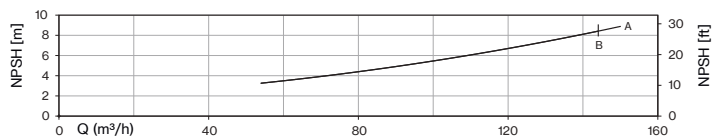
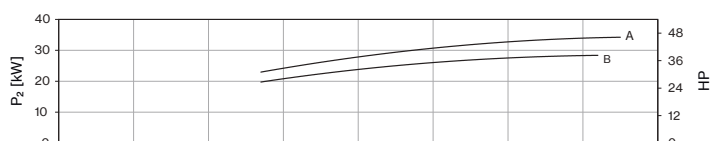
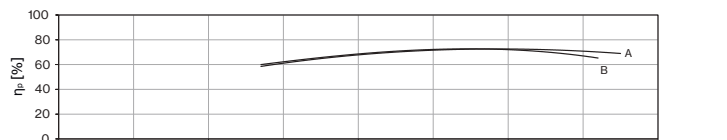
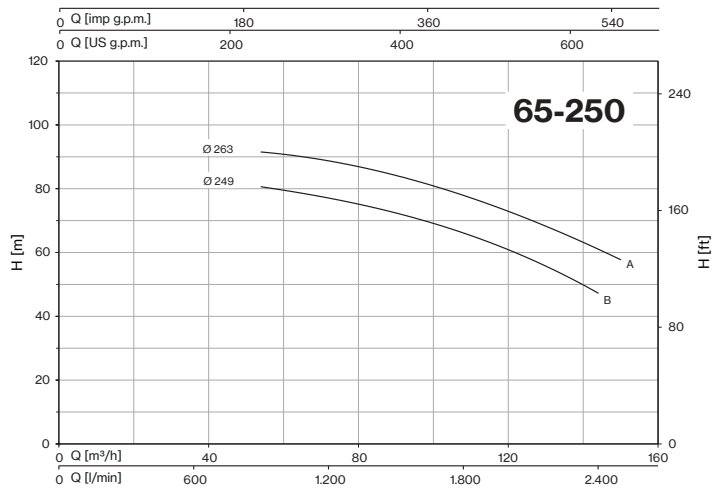
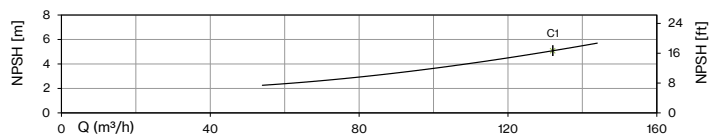
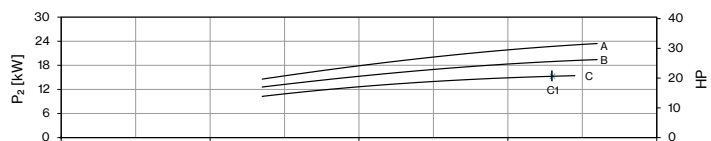
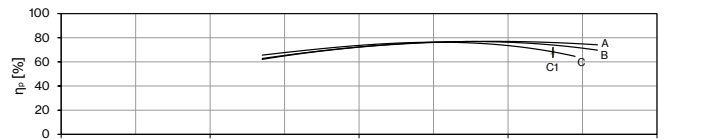
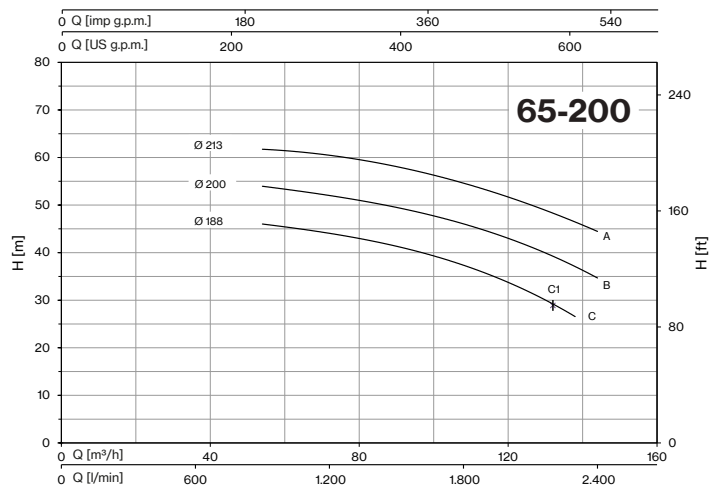
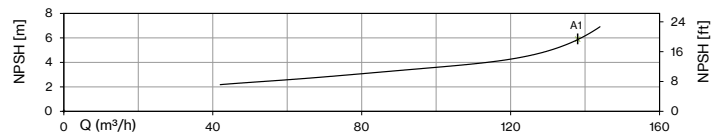
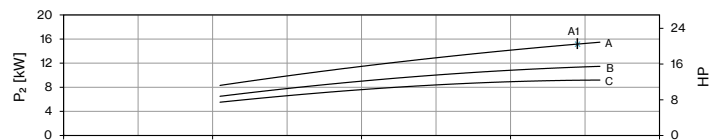
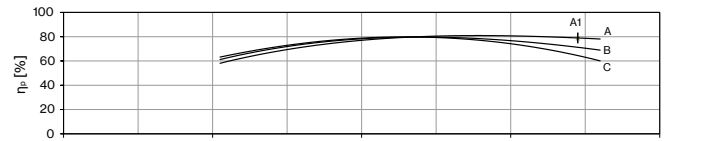
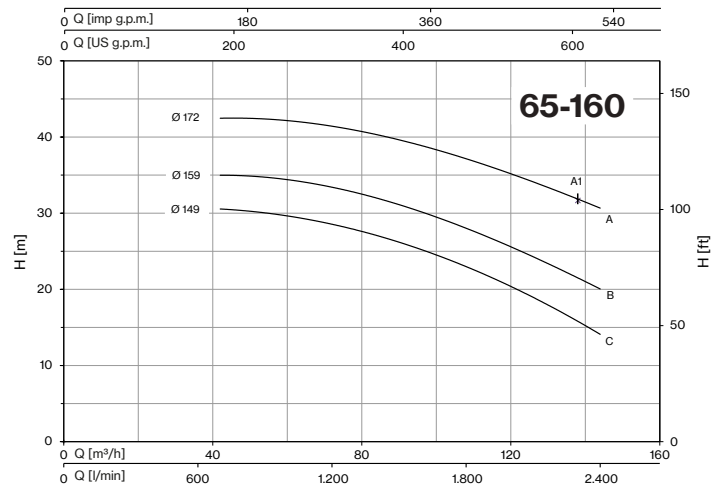
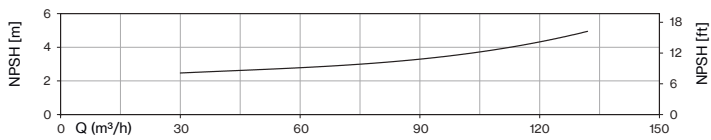
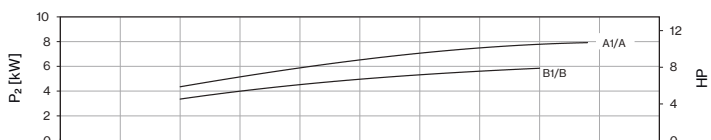
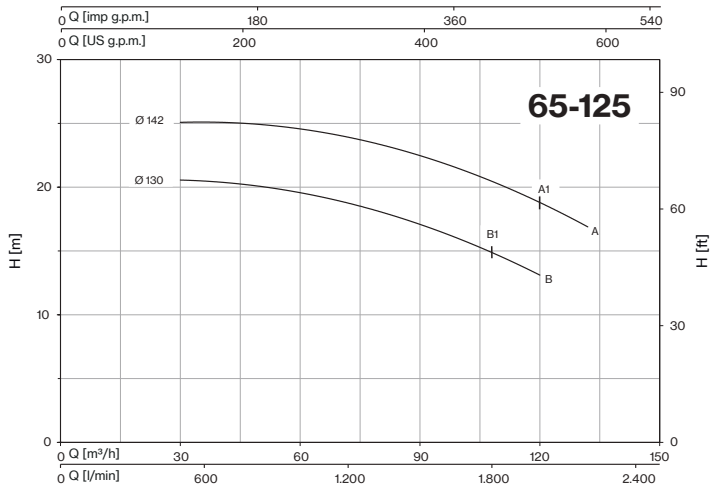


CM-CMG-CMGX-CA-CAX ~ EN 733












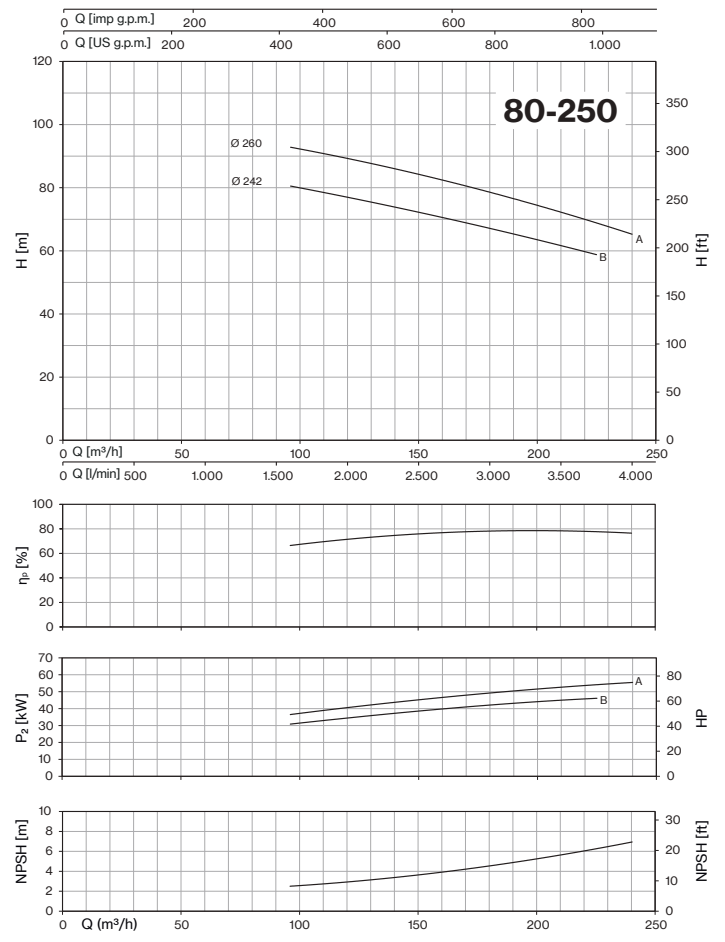
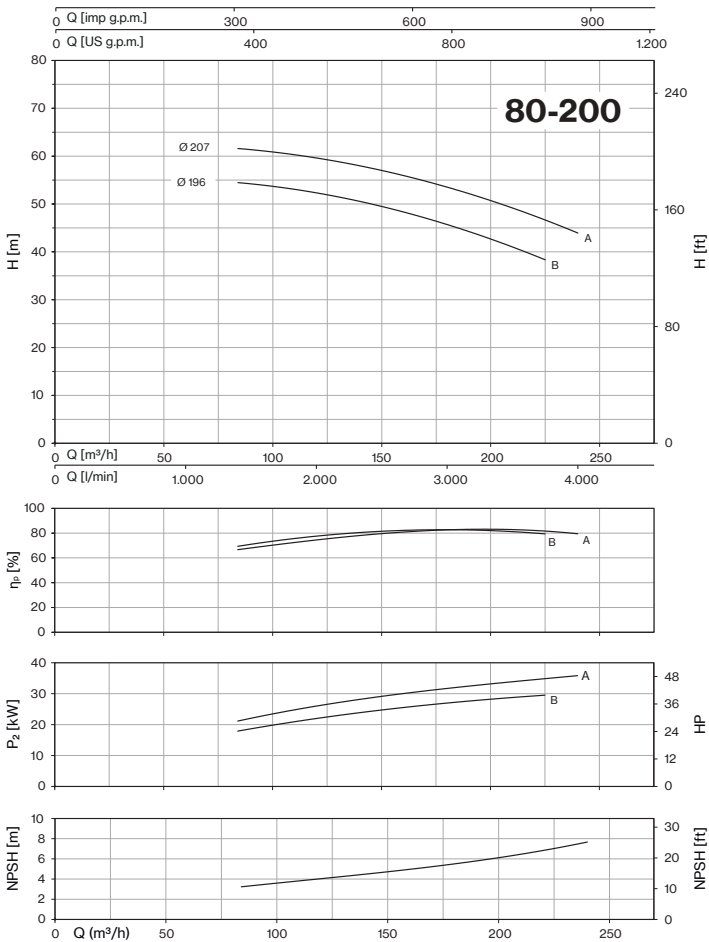
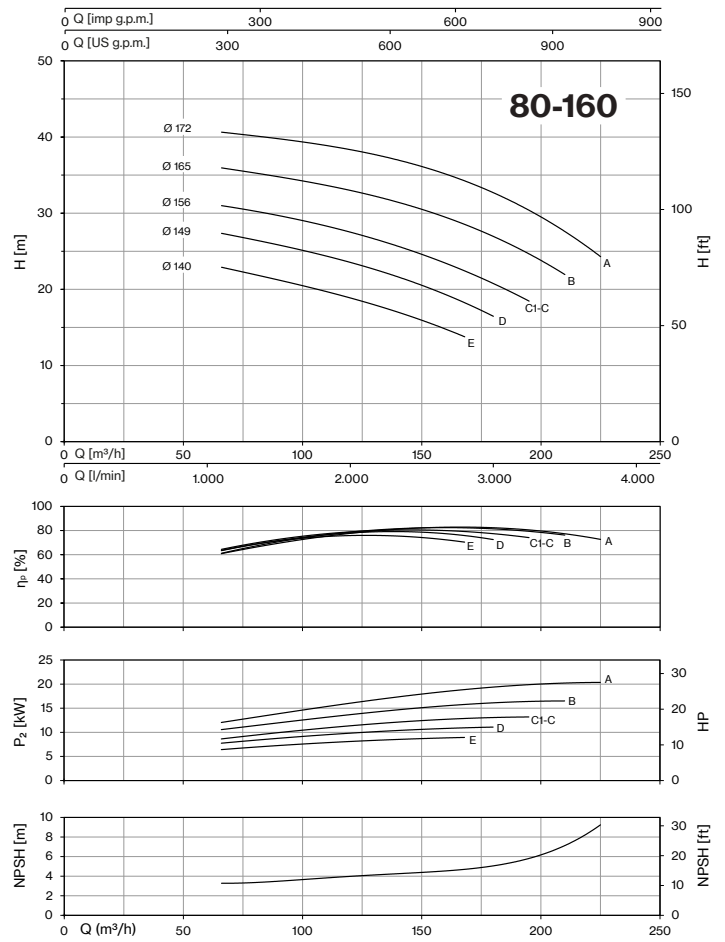
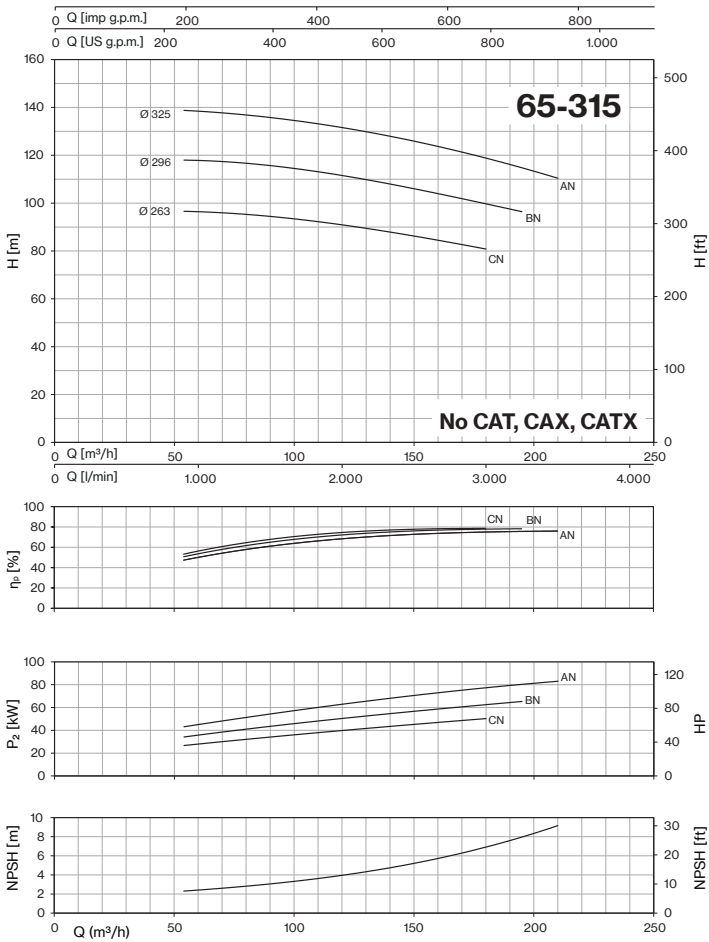










CM-CMG-CMGX-CA-CAX ~ EN 733

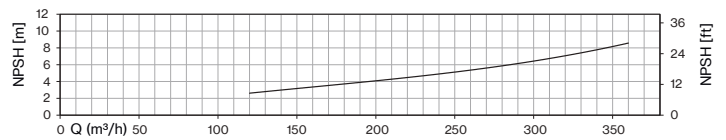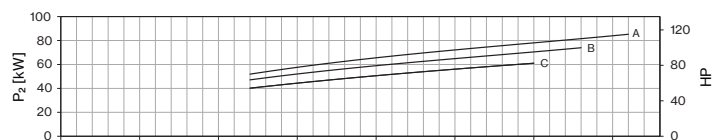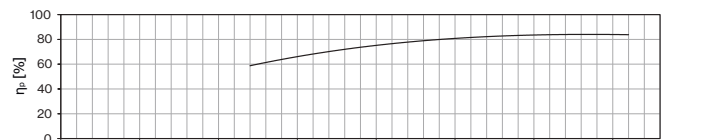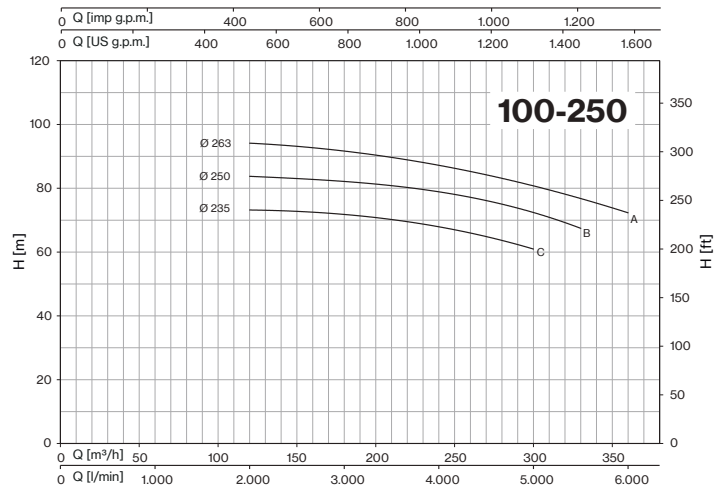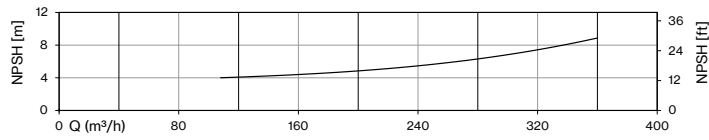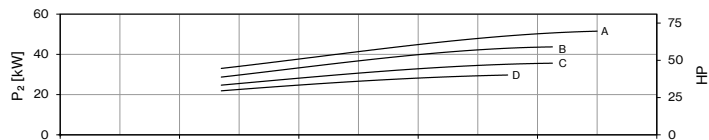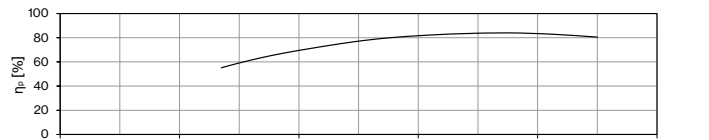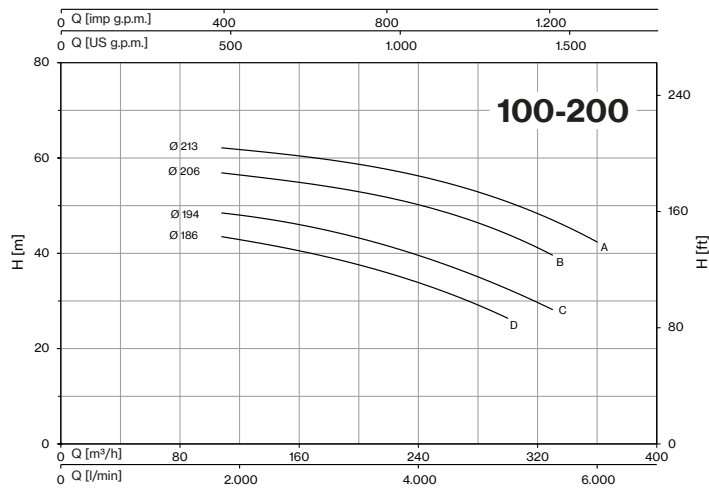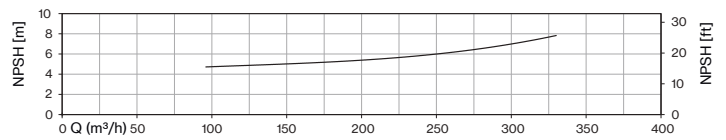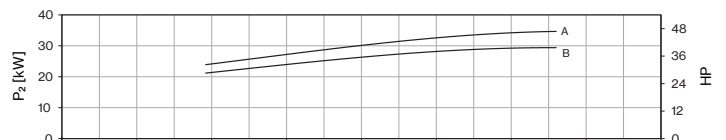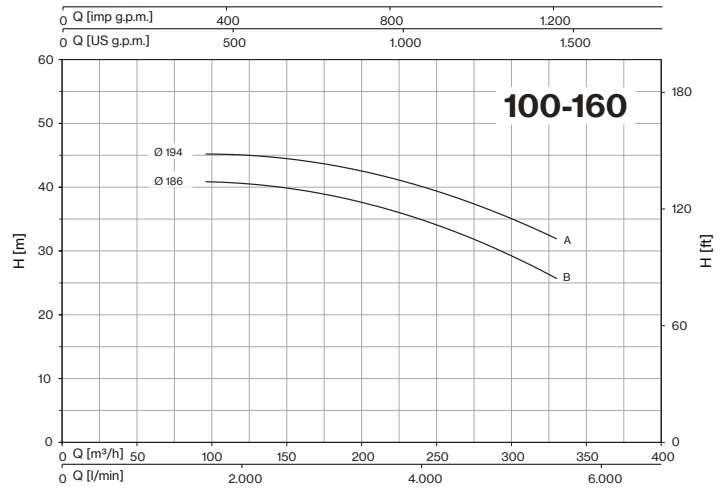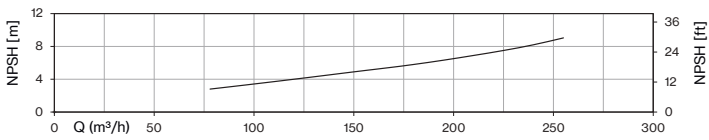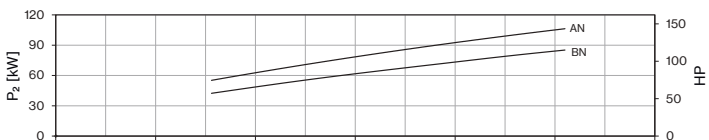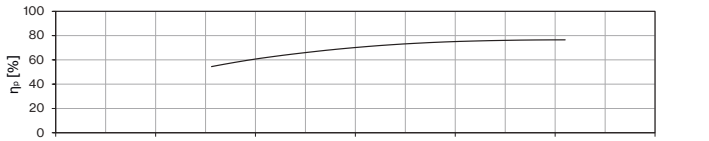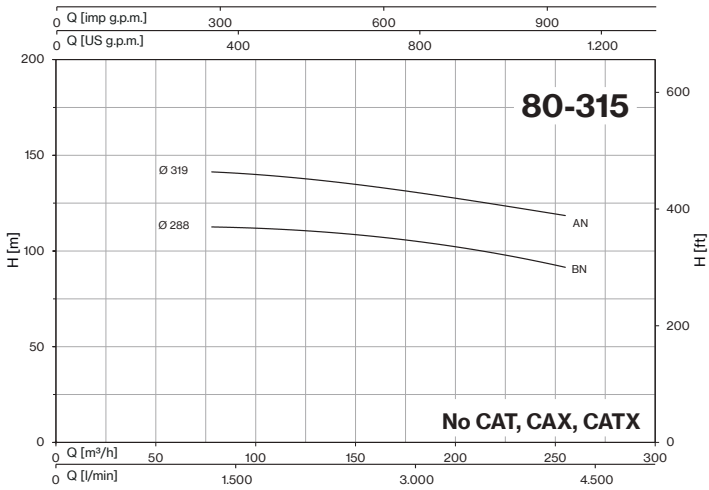

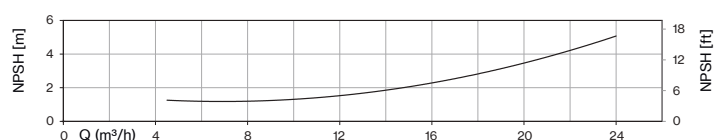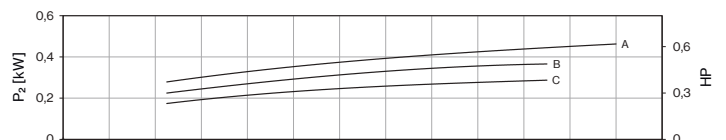
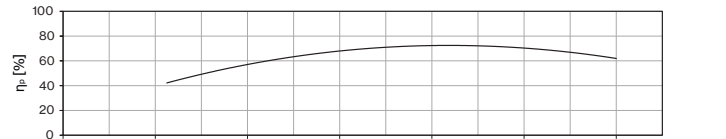
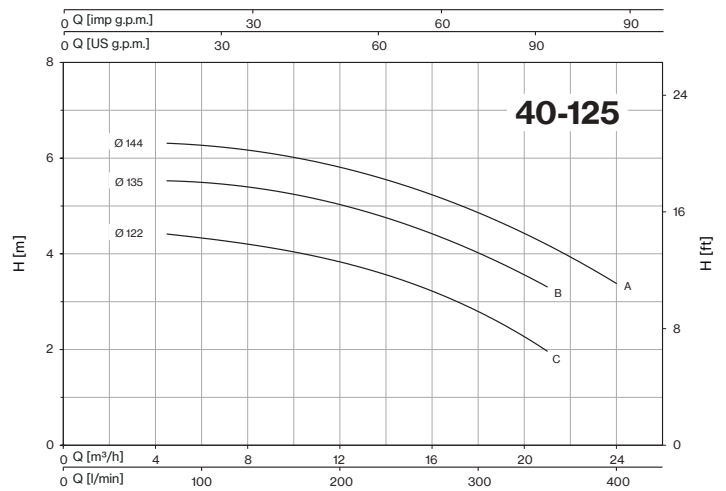
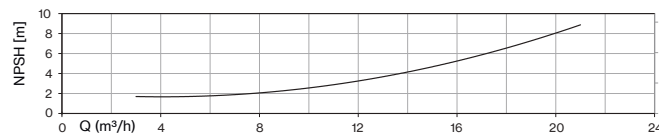
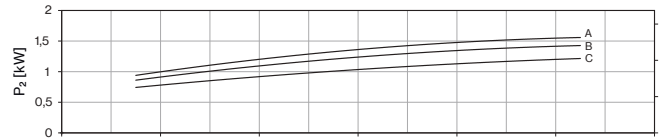
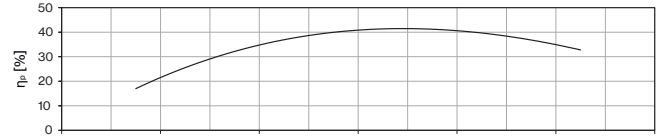
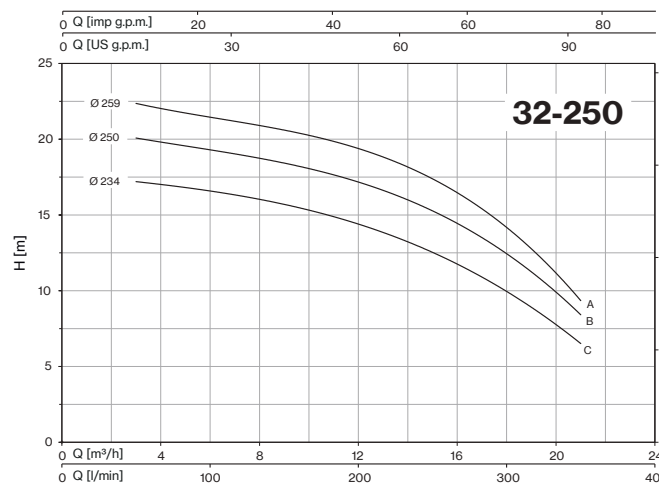
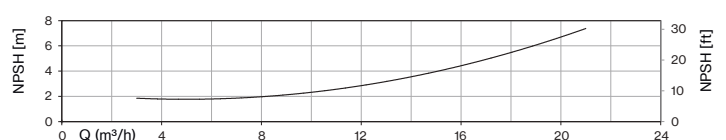
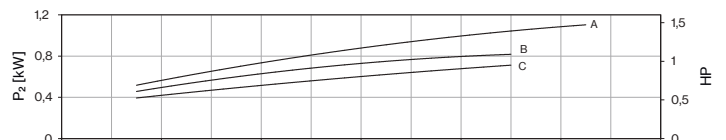
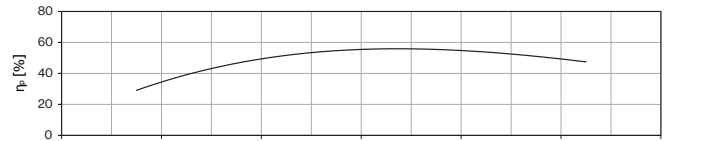
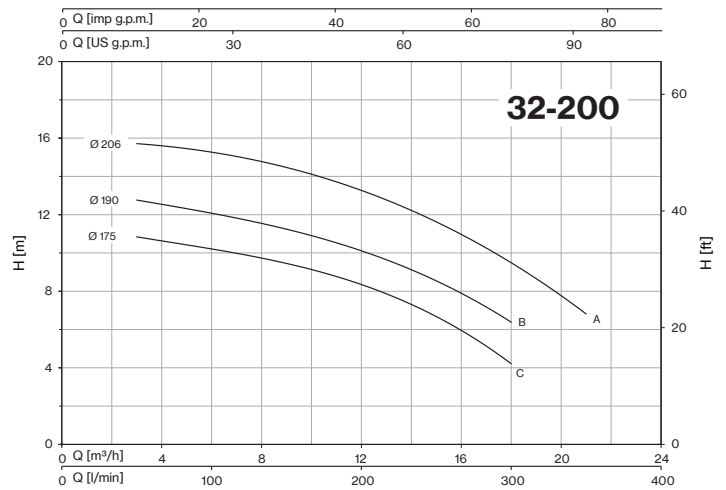
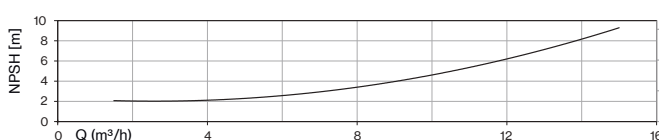
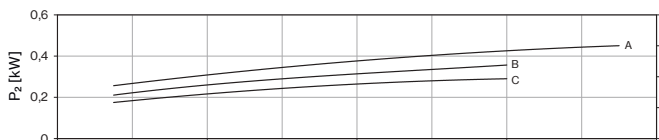
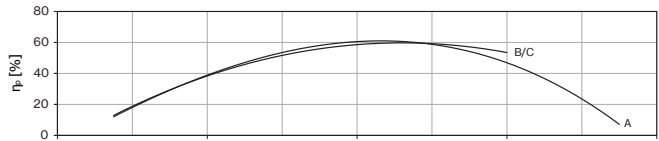
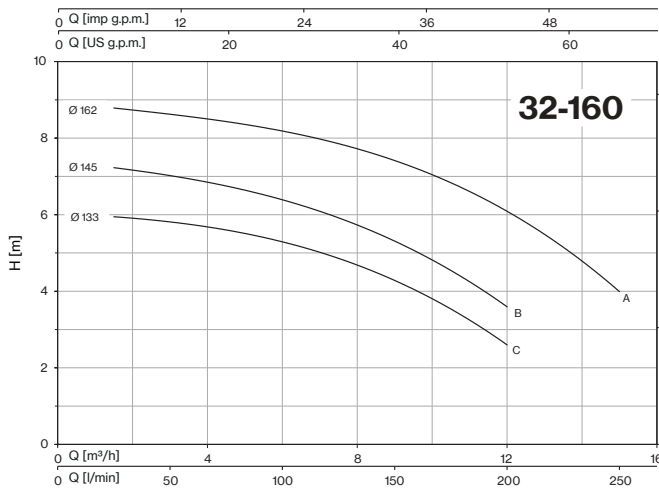


4CA-4CAX ~ EN 733

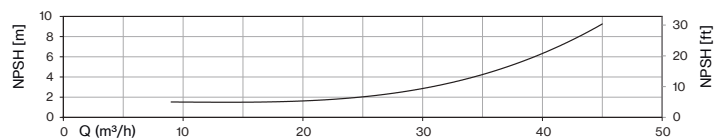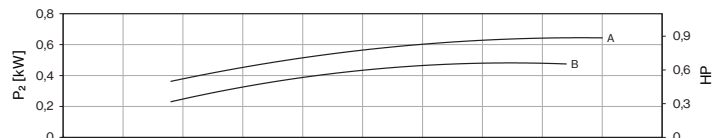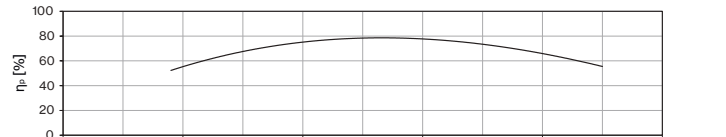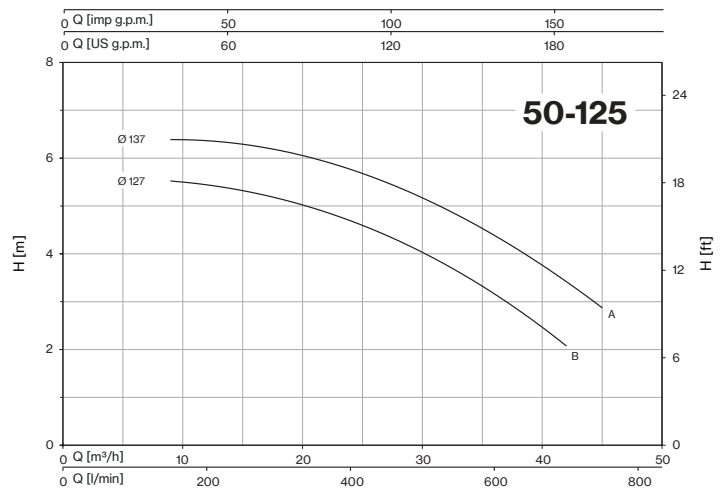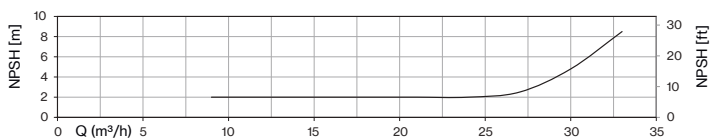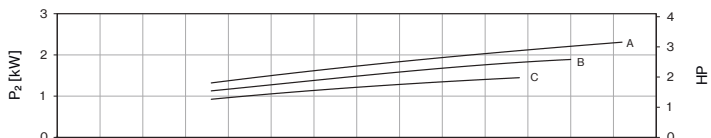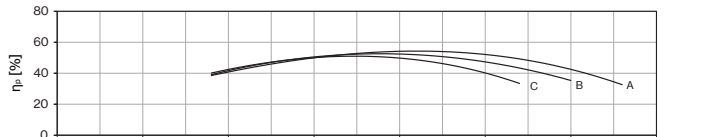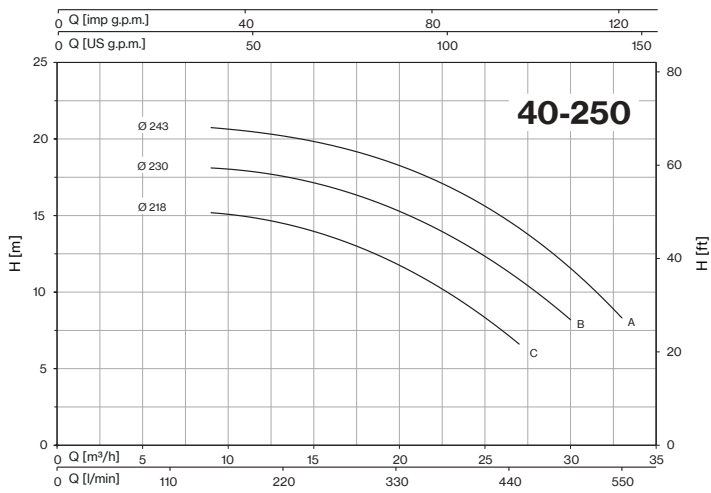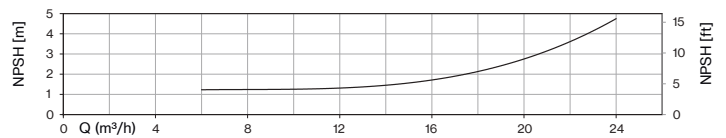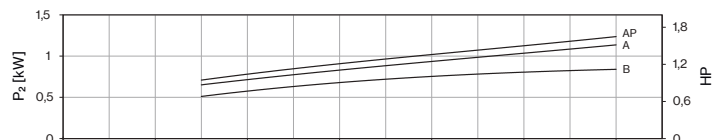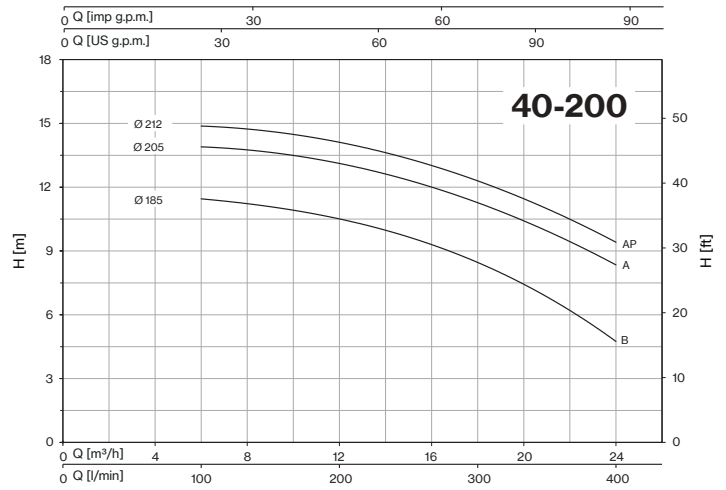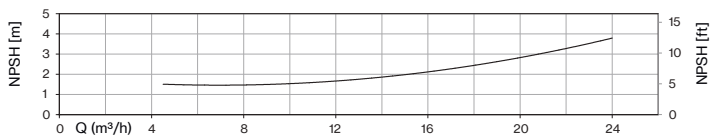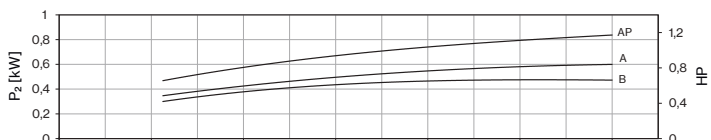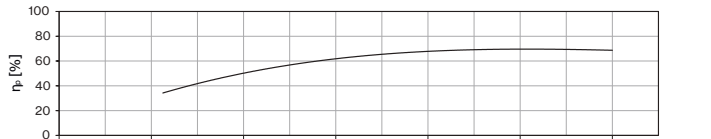
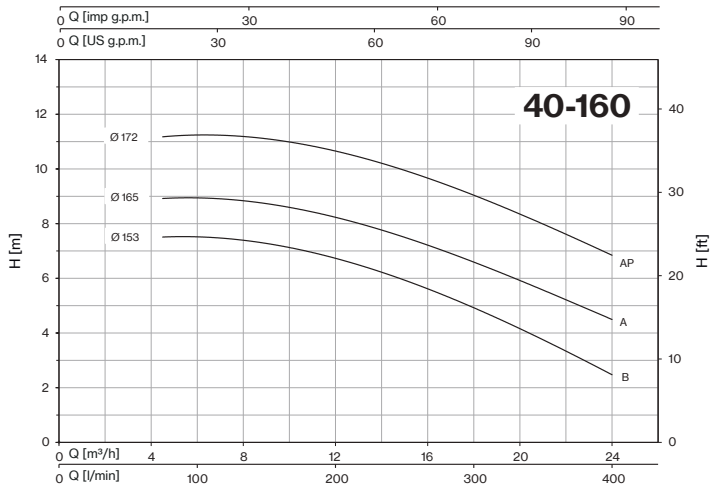


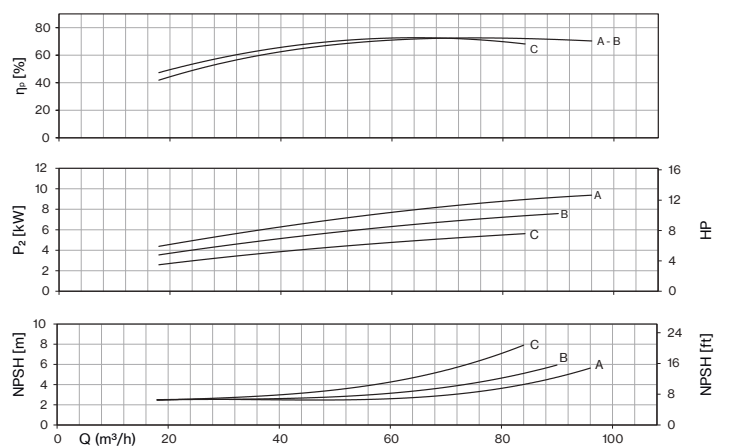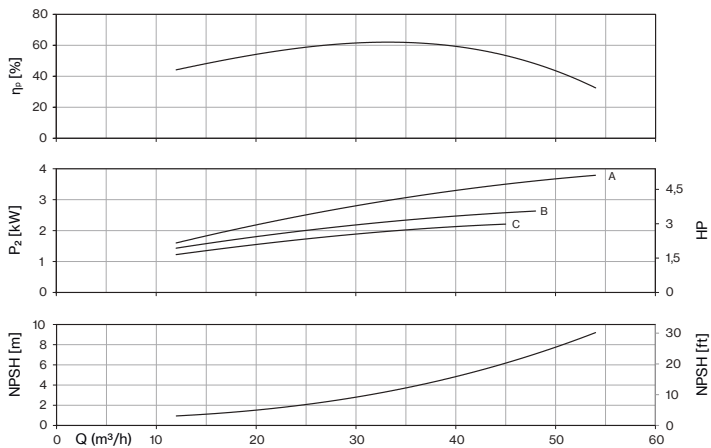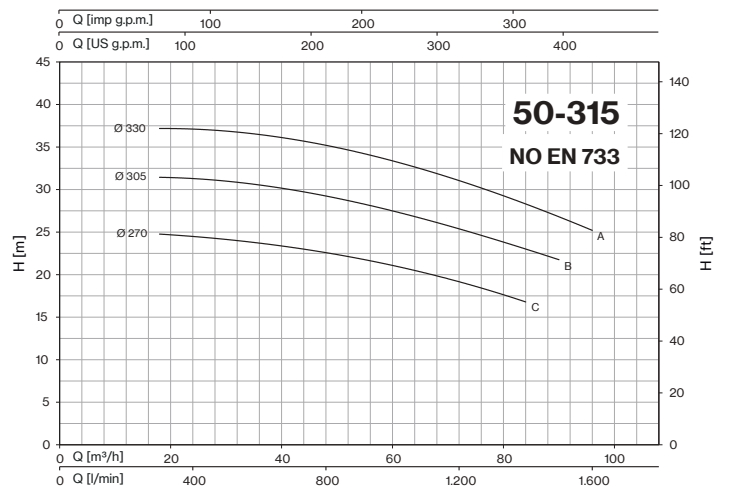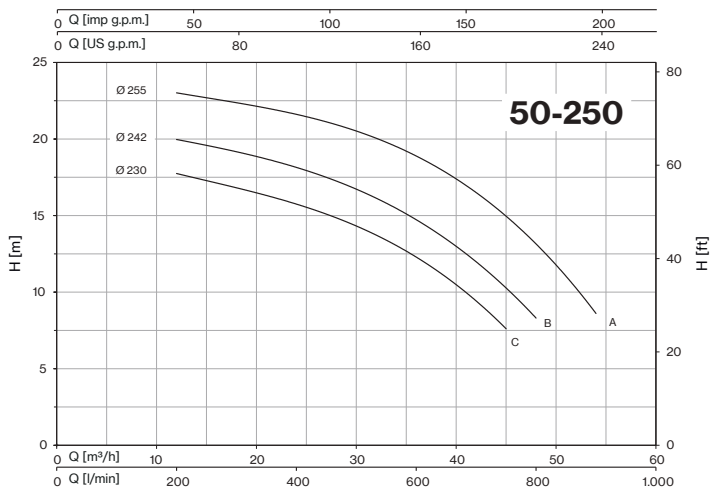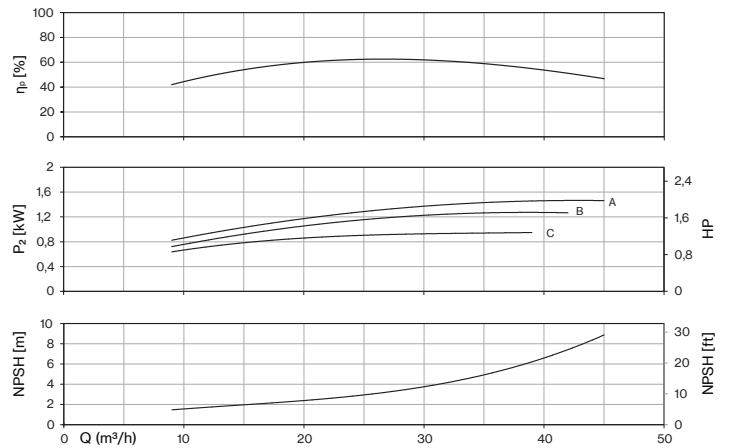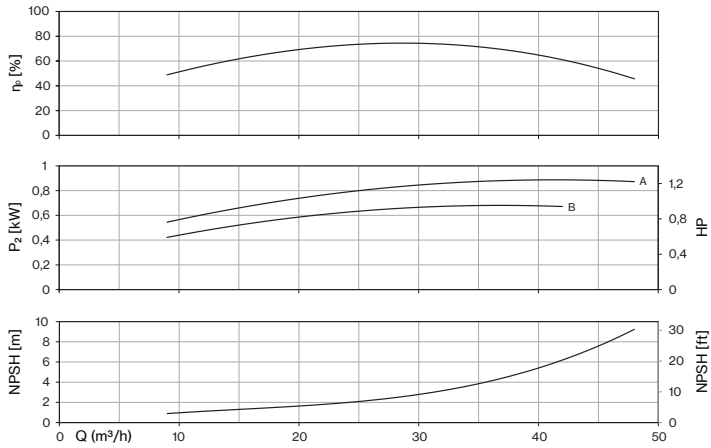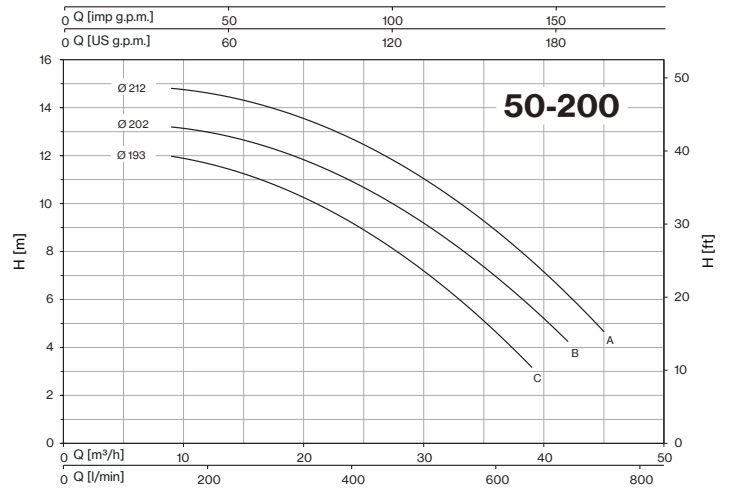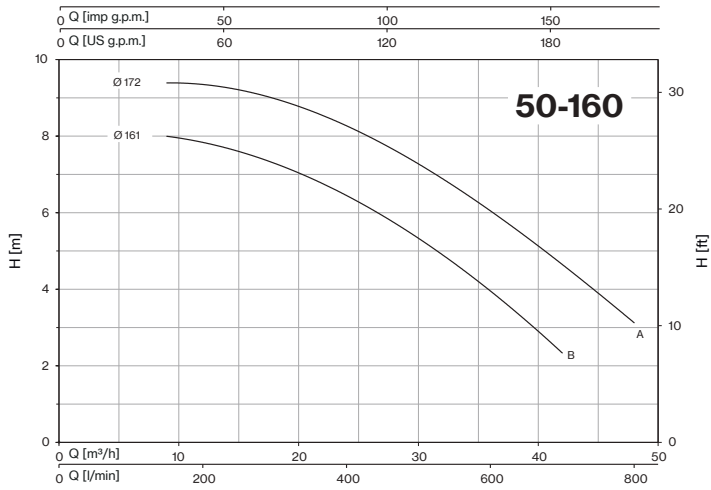



4CA-4CAX ~ EN 733

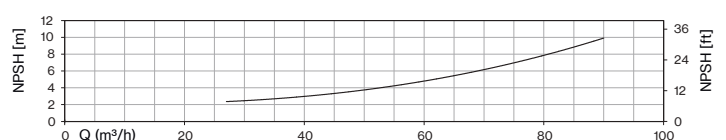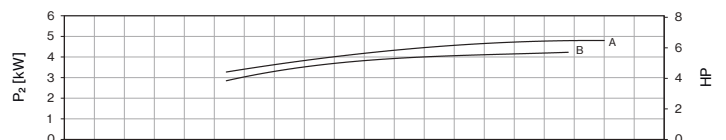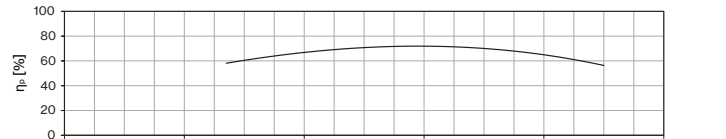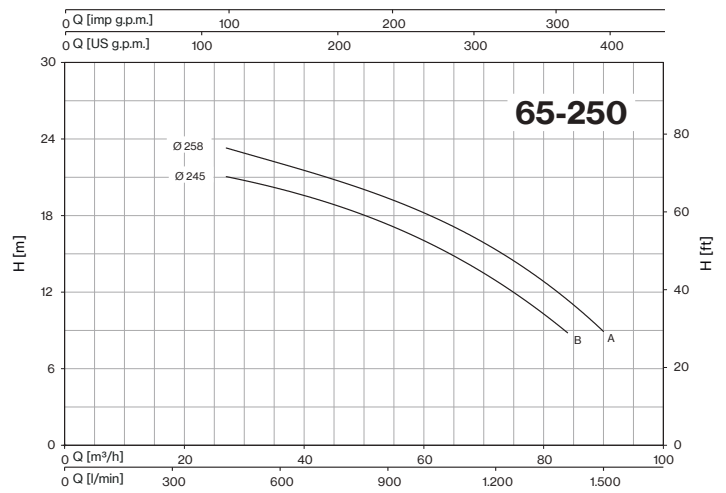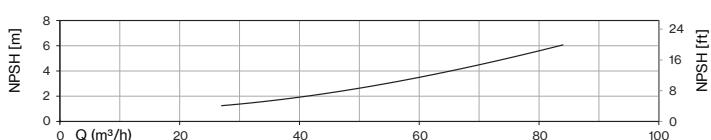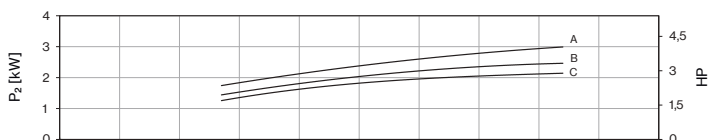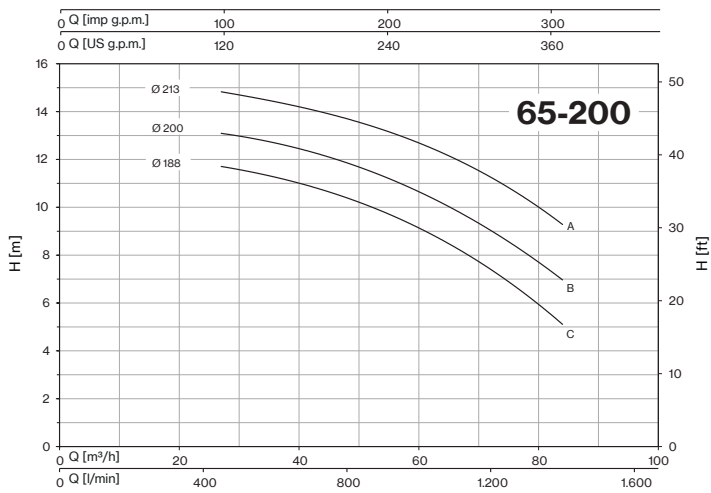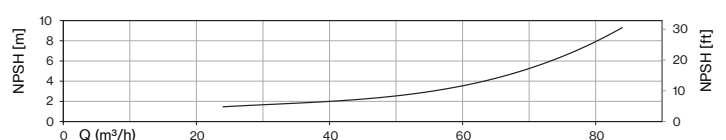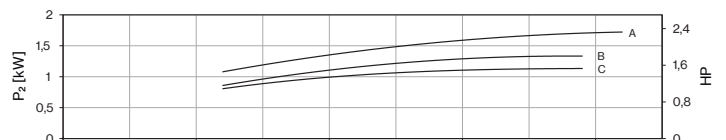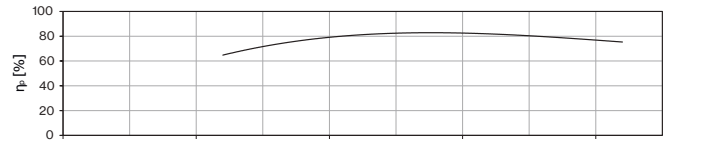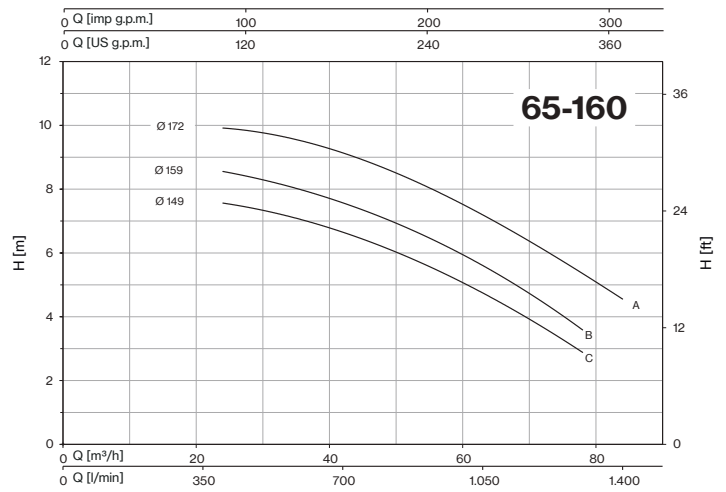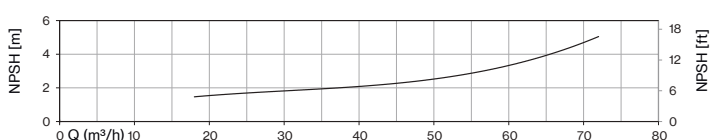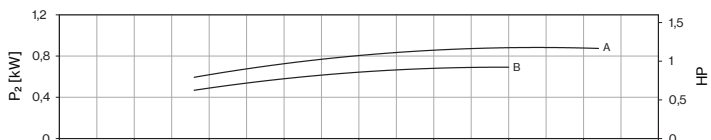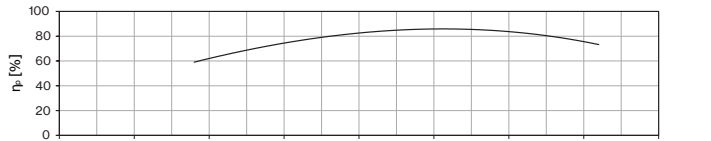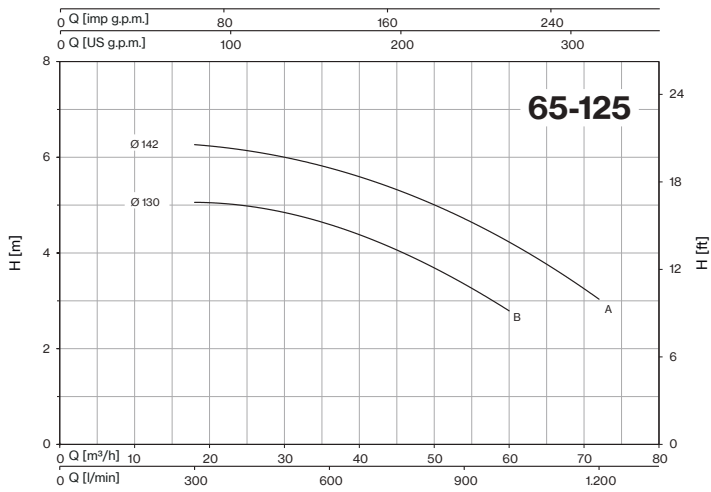









4CA-4CAX ~ EN 733















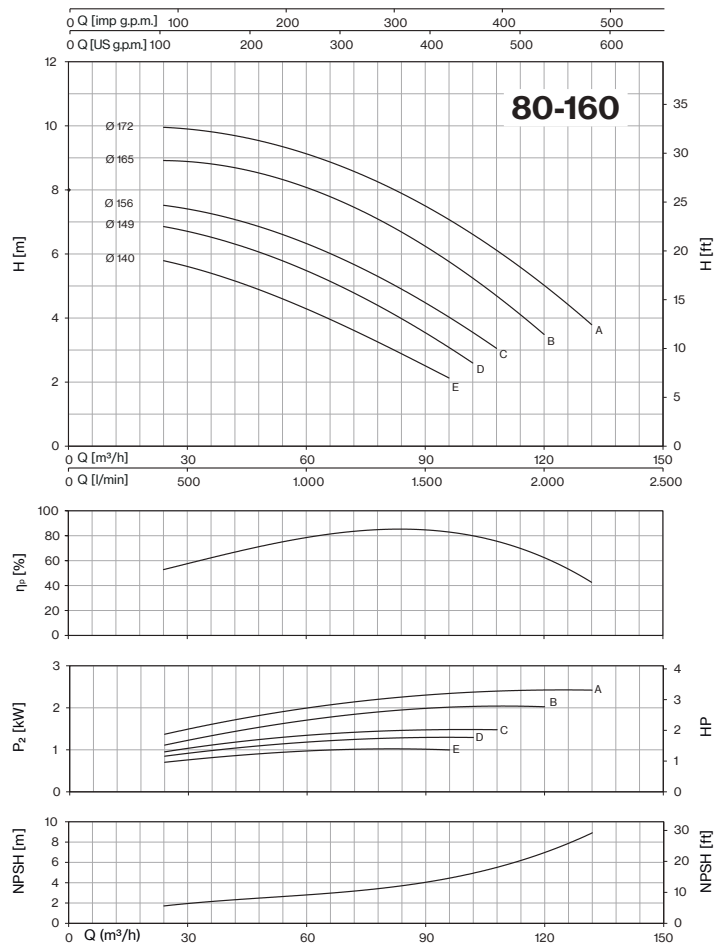
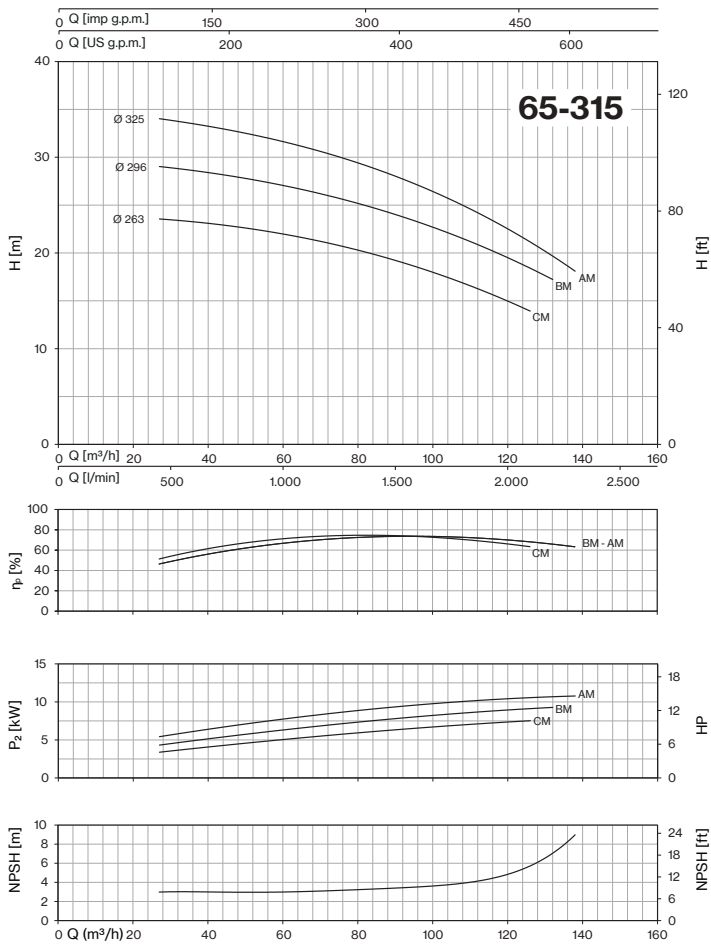


4CA-4CAX ~ EN 733

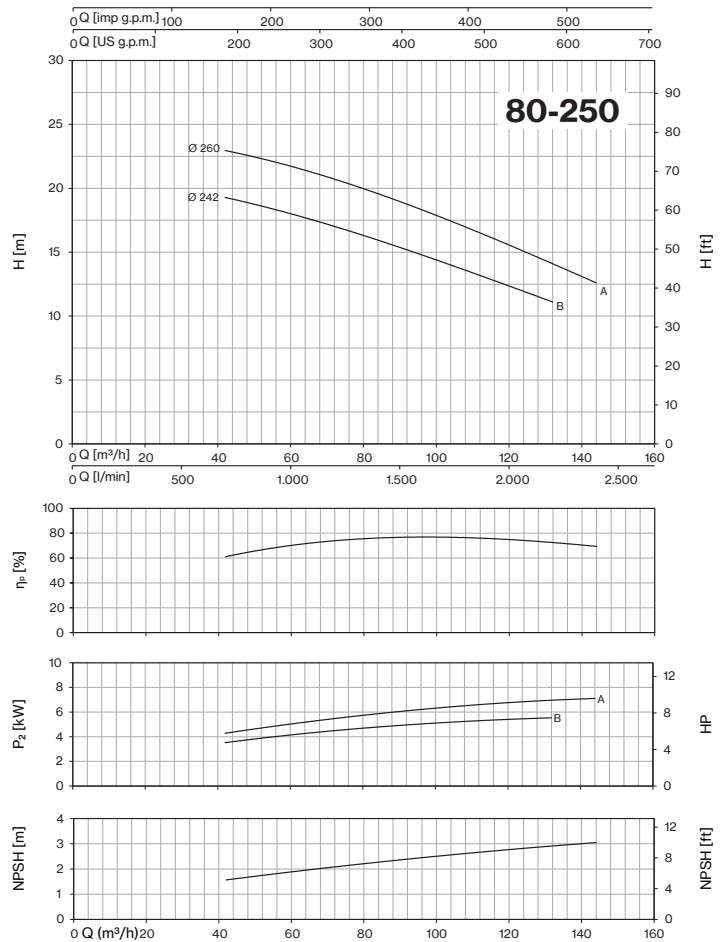
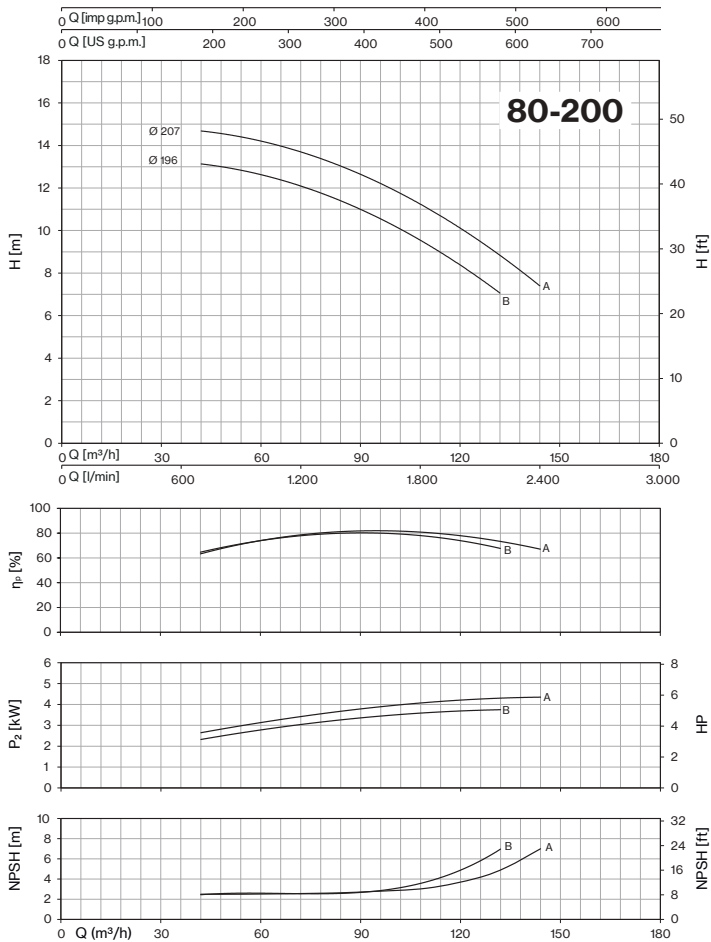


4CA-4CAX ~ EN 733

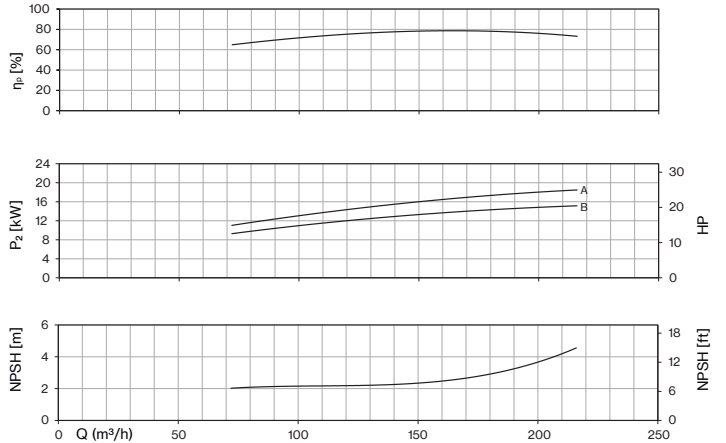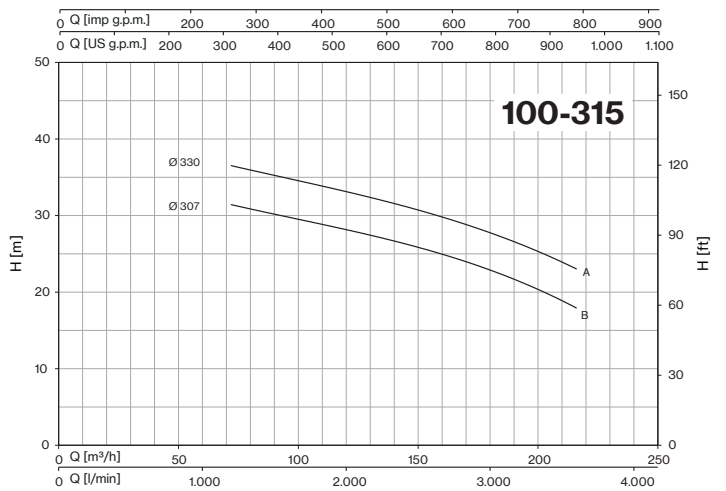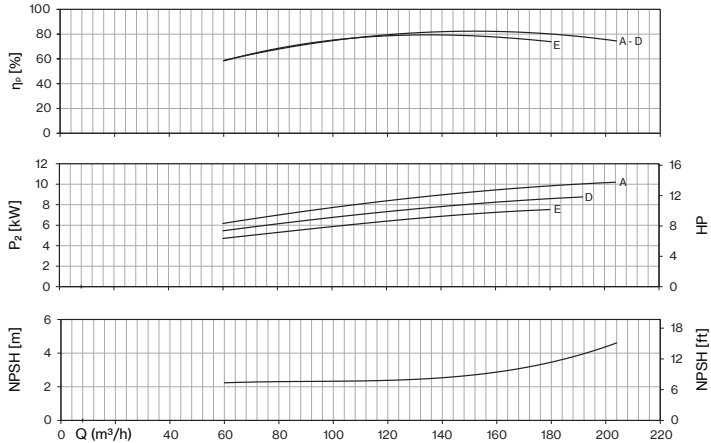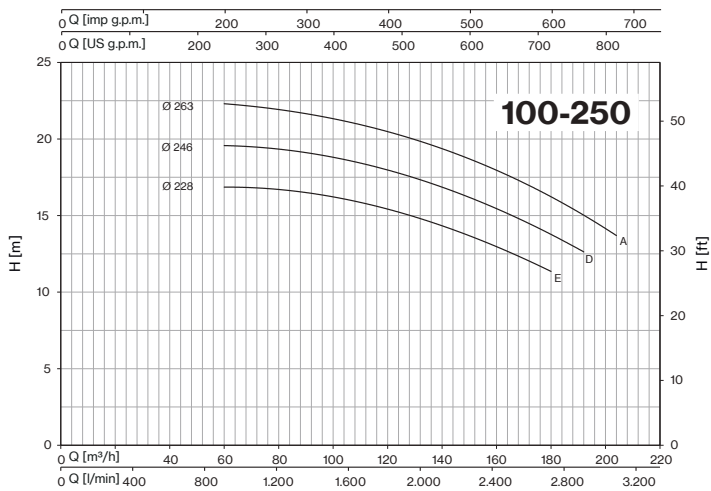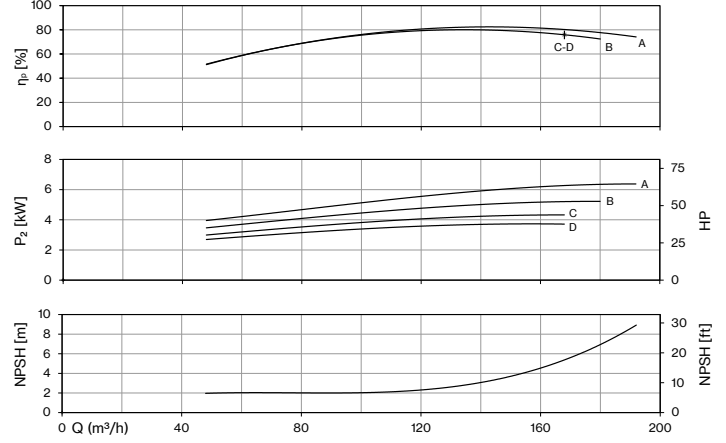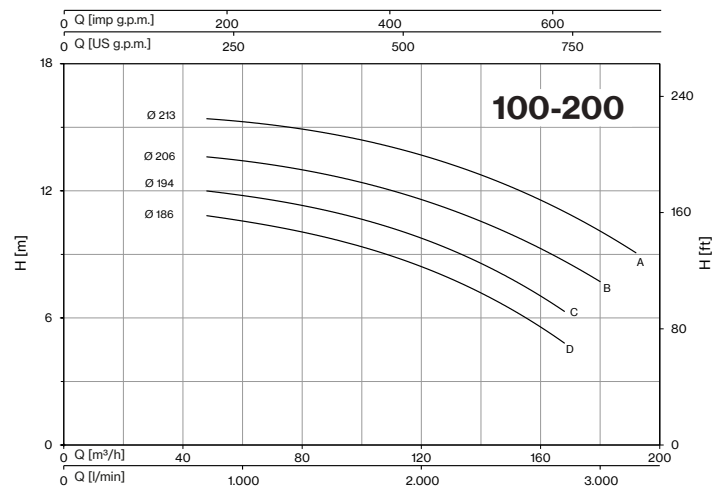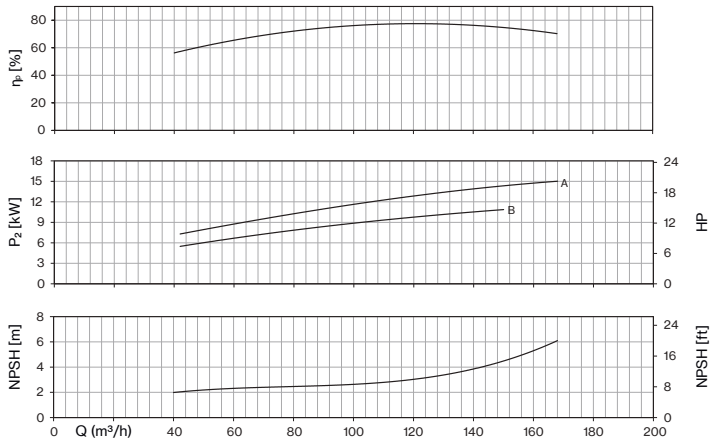
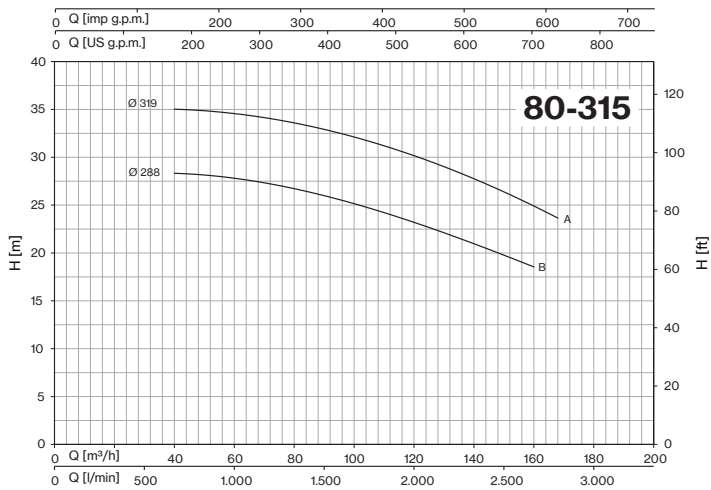


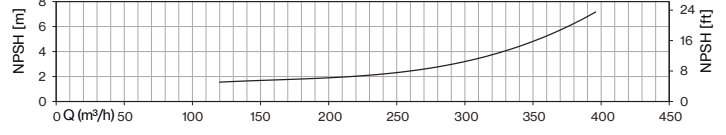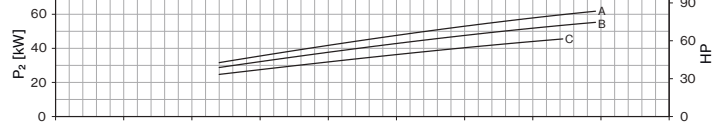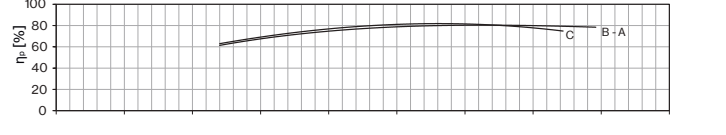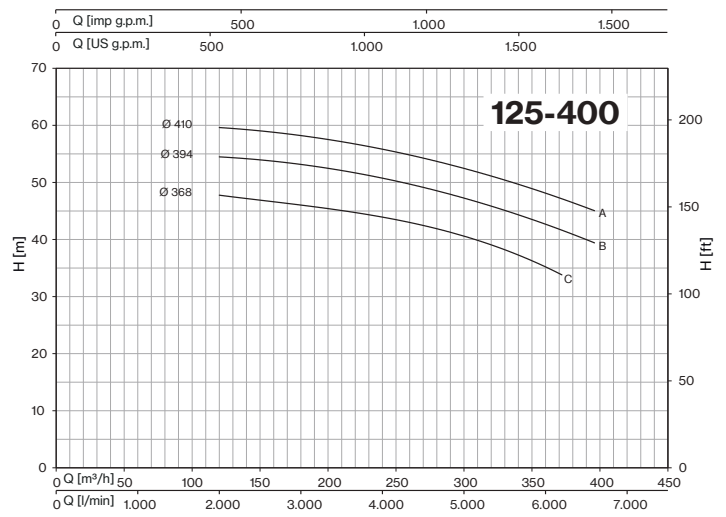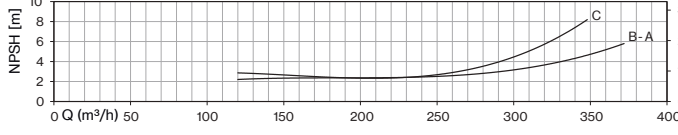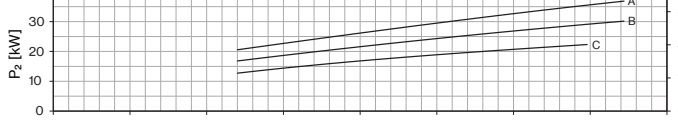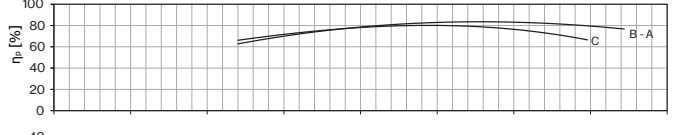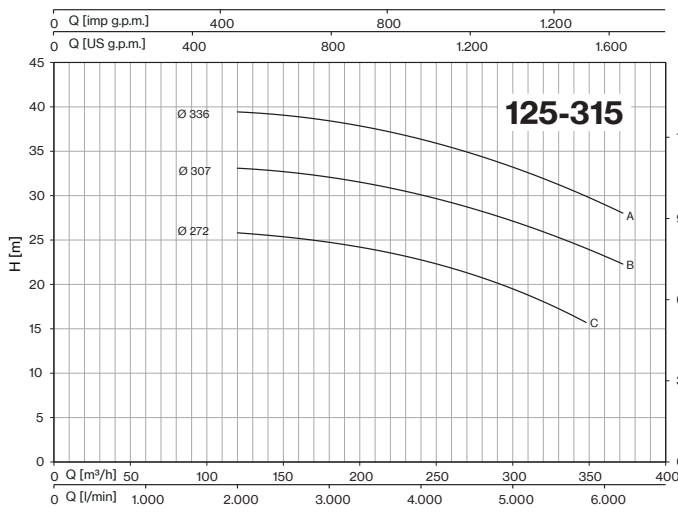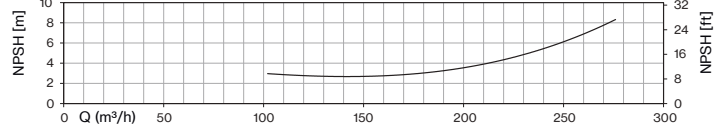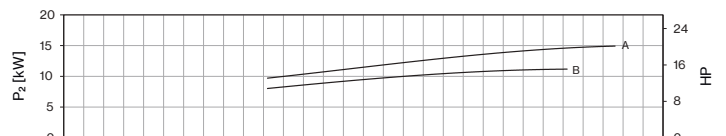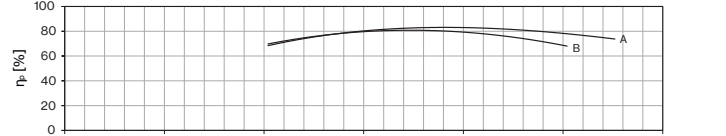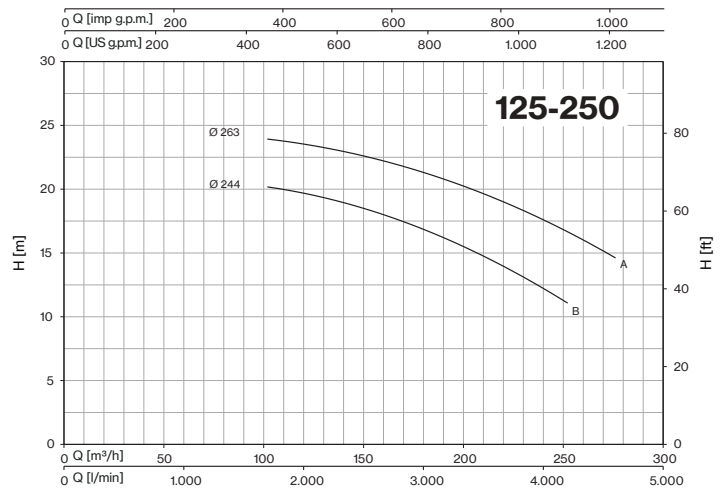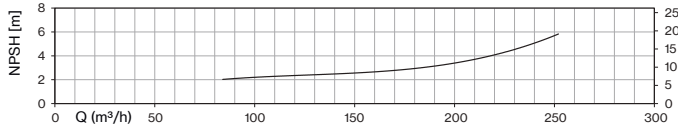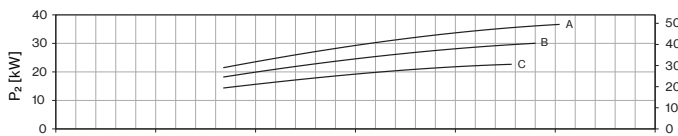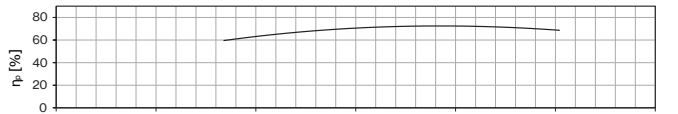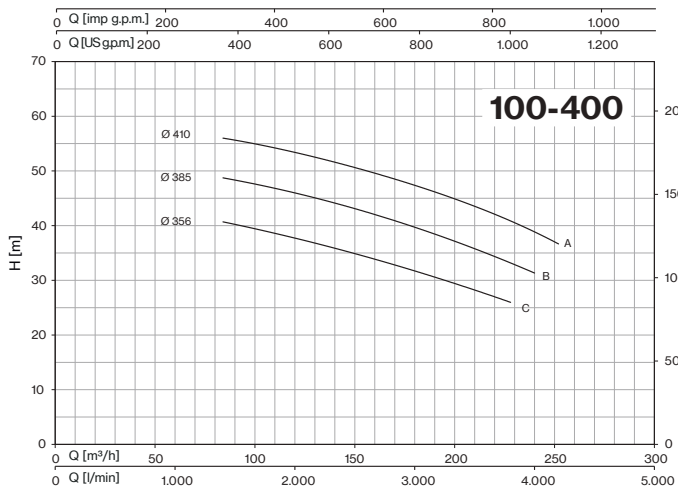



4CA-4CAX ~ EN 733

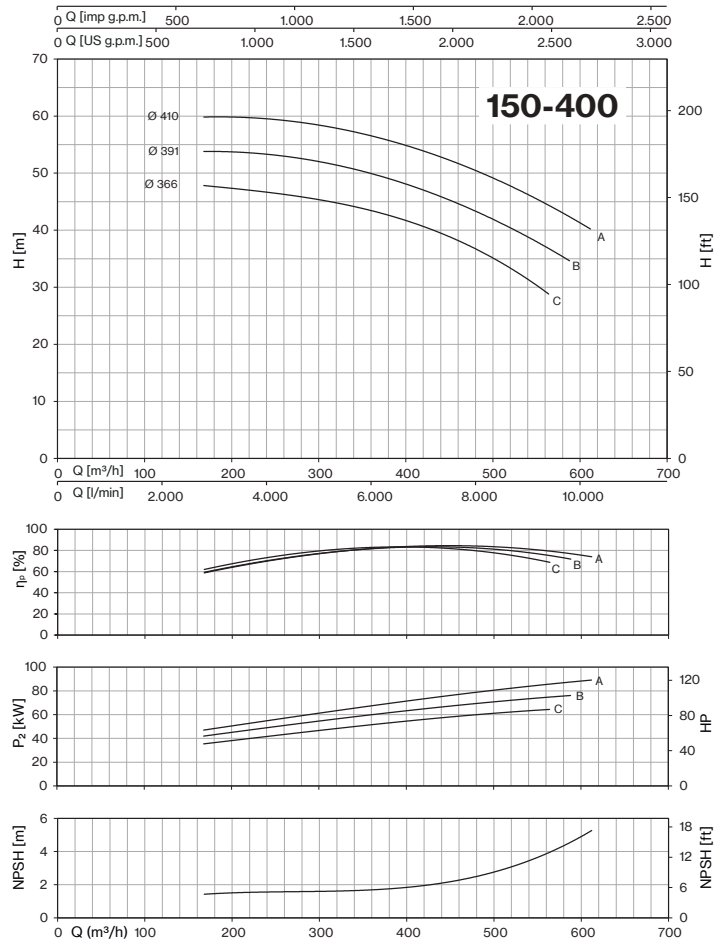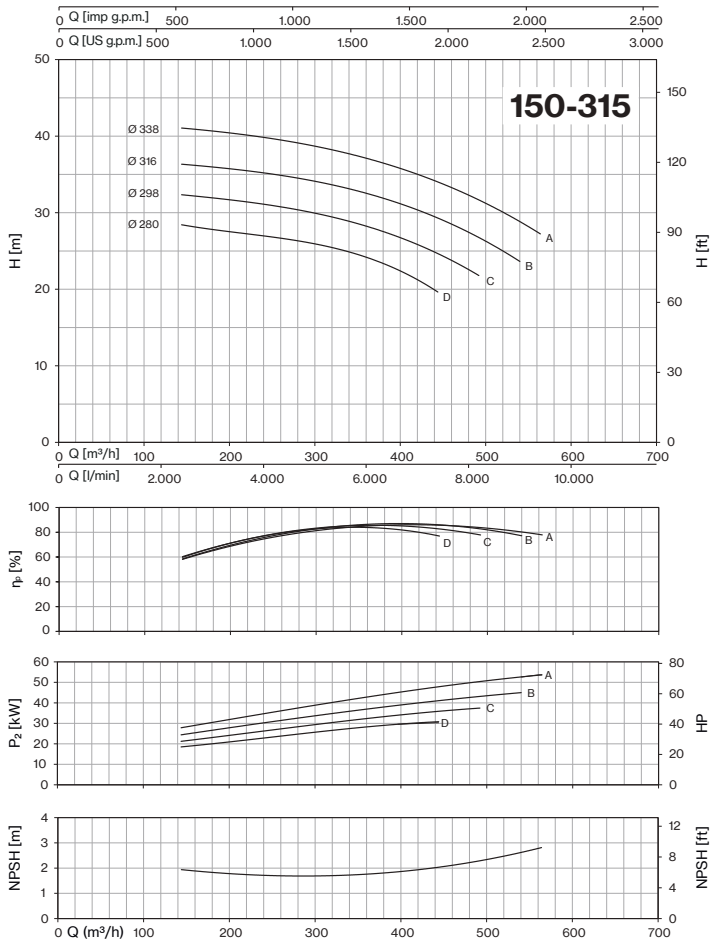



4CA-4CAX (No EN 733) ~ 1450 rpm

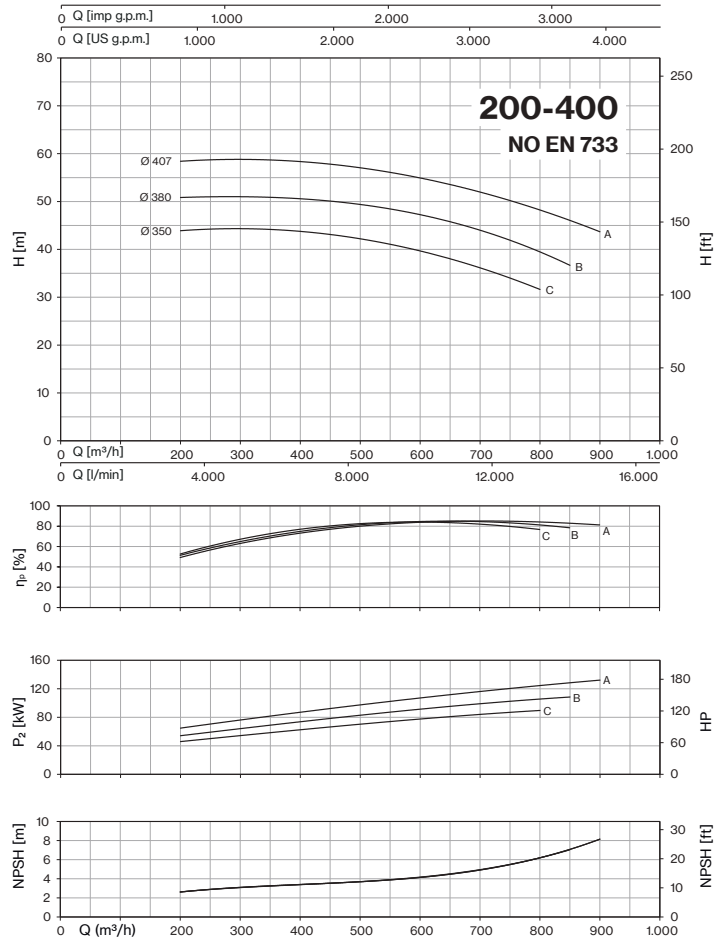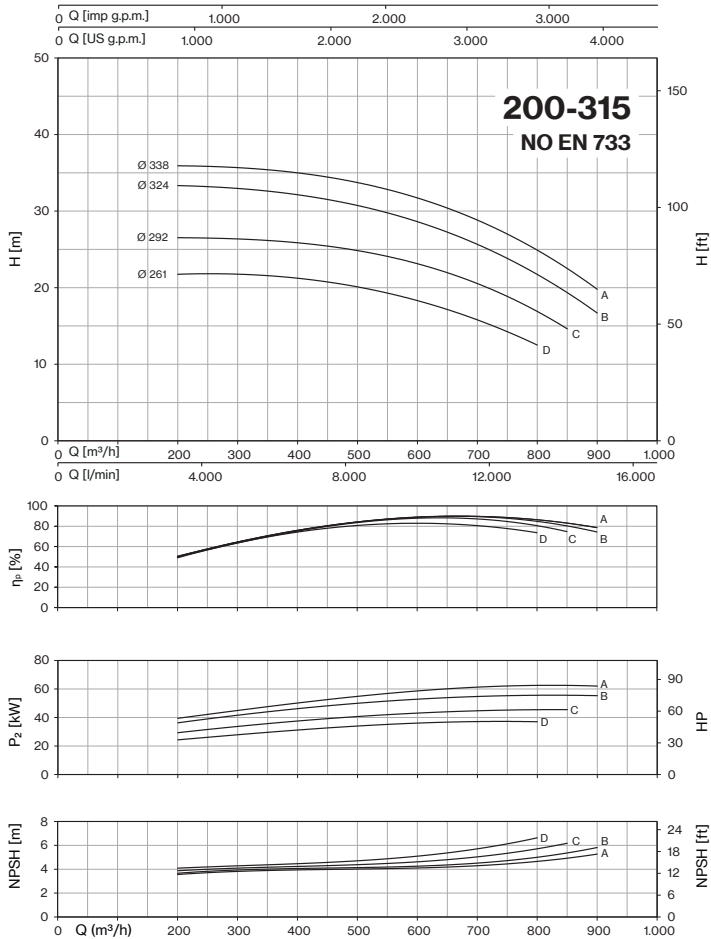

4CA-4CAX

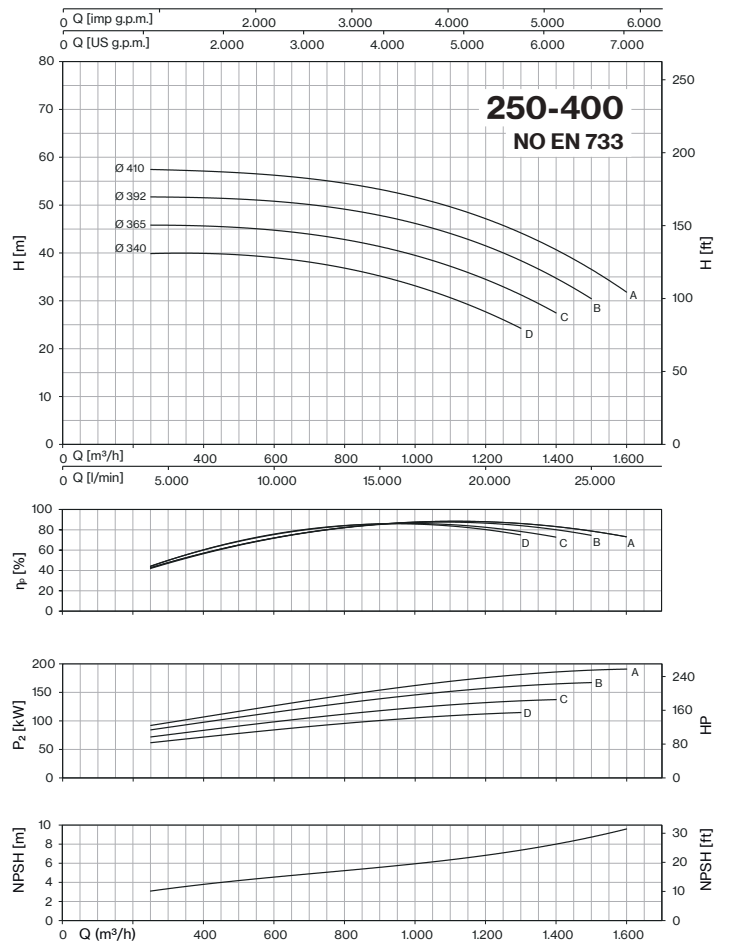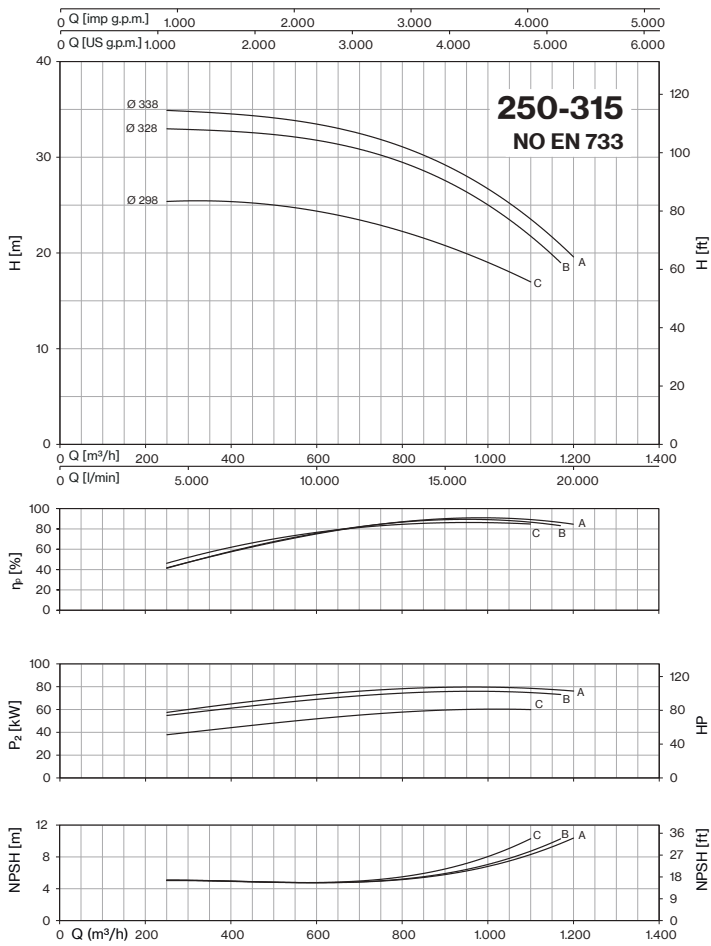



CM ~ EN 733

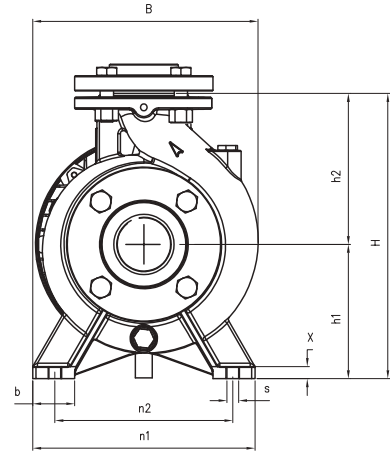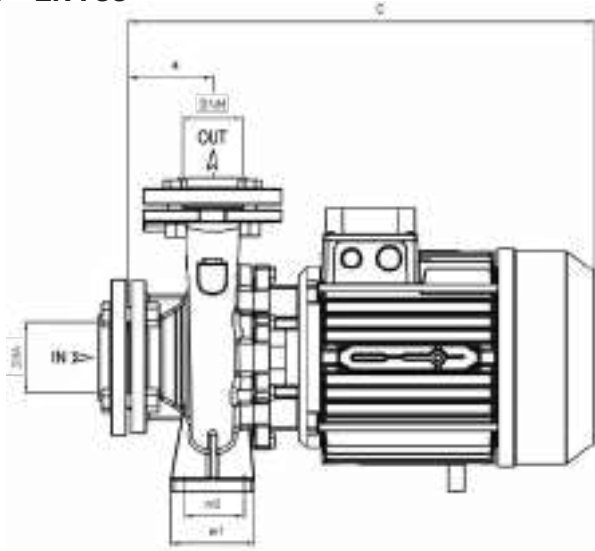


MEC	TYPE		DIMENSIONS (mm)														M			Kg		
	-1	-3	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H	DNA	DNM	I	L	M	-1	-3
90	32-160 C	32-160 C	80	132	160	100	70	240	190	50	12	14	530	240	292	50	32	551	250	341	41	41
90	32-160 B	32-160 B	80	132	160	100	70	240	190	50	12	14	530	240	292			551	250	341	44	44
90	-	32-160 A	80	132	160	100	70	240	190	50	12	14	530	240	292			551	250	341	-	47
112	32-200 C	-	80	160	180	100	70	240	190	50	12	14	574	268	340			602	263	395	65,5	-
100	-	32-200 C	80	160	180	100	70	240	190	50	12	14	540	268	340			602	263	395	-	56,5
112	-	32-200 B1	80	160	180	100	70	240	190	50	12	14	520	268	340			627	287	408	-	65,5
132	-	32-200 B	80	160	180	100	70	240	190	50	12	14	565	268	340			627	287	408	-	72
112	-	32-200 A1	80	160	180	100	70	240	190	50	12	14	520	268	340			627	287	408	-	72
132	-	32-200 A	80	160	180	100	70	240	190	50	12	14	565	268	340			627	287	408	-	79
132	-	32-250 C	100	180	225	125	95	320	250	65	12	14	625	305	405			666	346	471	-	101,5
132	-	32-250 B	100	180	225	125	95	320	250	65	14	14	625	305	405			666	346	471	-	105,5
132	-	32-250 A1	100	180	225	125	95	320	250	65	14	14	670	305	405			810	354	480	-	110
160	-	32-250 A	100	180	225	125	95	320	250	65	14	14	695	305	405	810	354	480	-	135,5		
90	40-125 C	40-125 C	80	112	140	100	70	210	160	50	12	14	535	220	252	65	40	551	250	341	41,5	41,5
90	40-125 B	40-125 B	80	112	140	100	70	210	160	50	12	14	535	220	252			551	250	341	44	44
90	-	40-125 A	80	112	140	100	70	210	160	50	12	14	535	220	252			551	250	341	-	47,5
100	40-160 B	-	80	132	160	100	70	240	190	50	12	14	535	245	292			551	250	341	56	-
100	-	40-160 B	80	132	160	100	70	240	190	50	12	14	535	245	292			551	250	341	-	52
112	40-160 A	-	80	132	160	100	70	240	190	50	15	14	579	245	292			602	263	395	64,5	-
100	-	40-160 A	80	132	160	100	70	240	190	50	15	14	535	245	292			602	263	395	-	56,5
112	-	40-160 AP	80	132	160	100	70	240	190	50	15	14	579	245	292			627	287	408	-	63
112	-	40-200 B1	100	160	180	100	70	265	212	50	15	14	597	273	340			627	287	408	-	68
132	-	40-200 B	100	160	180	100	70	265	212	50	15	14	590	273	340			627	287	408	-	74,5
112	-	40-200 A1	100	160	180	100	70	265	212	50	15	14	597	273	340			627	287	408	-	74
132	-	40-200 A	100	160	180	100	70	265	212	50	15	14	590	273	340			627	287	408	-	81
132	-	40-200 AP	100	160	180	100	70	265	212	50	15	14	628	273	340	666	346	471	-	93,5		
132	-	40-250 C	100	180	225	125	95	320	250	65	15	14	630	322	405	666	346	471	-	100,5		
132	-	40-250 B	100	180	225	125	95	320	250	65	15	14	630	322	405	666	346	471	-	105		
132	-	40-250 A1	100	180	225	125	95	320	250	65	15	14	675	322	405	810	354	480	-	109,5		
160	-	40-250 A	100	180	225	125	95	320	250	65	15	14	700	322	405	810	354	480	-	135		
132	-	40-250 BM	100	180	225	125	95	320	250	65	15	14	750	332	405	810	354	480	-	150		
160	-	40-250 AM	100	180	225	125	95	320	250	65	15	14	750	332	405	810	354	480	-	160,5		
100	50-125 B	-	100	132	160	100	70	240	190	50	12	14	525	250	292	65	50	602	263	395	57,5	-
100	-	50-125 B	100	132	160	100	70	240	190	50	12	14	560	250	292			602	263	395	-	53,5
112	50-125 A	-	100	132	160	100	70	240	190	50	12	14	610	250	292			602	263	395	65,5	-
100	-	50-125 A	100	132	160	100	70	240	190	50	12	14	560	250	292			602	263	395	-	57,5
112	-	50-160 B1	100	160	180	100	70	265	212	50	12	14	597	270	340			627	287	408	-	68,5
132	-	50-160 B	100	160	180	100	70	265	212	50	12	14	590	270	340			627	287	408	-	74,5
112	-	50-160 A1	100	160	180	100	70	265	212	50	12	14	597	270	340			627	287	408	-	74,5
132	-	50-160 A	100	160	180	100	70	265	212	50	12	14	590	270	340			627	287	408	-	81
132	-	50-200 C	100	160	200	100	70	265	215	50	12	14	635	290	360			666	346	471	-	98
132	-	50-200 B	100	160	200	100	70	265	215	50	12	14	635	290	360			666	346	471	-	102,5
132	-	50-200 A1	100	160	200	100	70	265	215	50	12	14	680	290	360			810	354	480	-	107
160	-	50-200 A	100	160	200	100	70	265	215	50	12	14	705	290	360			810	354	480	-	132,5



MEC	TYPE																							
	-1	-3	a	h1	h2	m1	m2	n1	n2	b	x	s	C	B	H	DNA	DNM	I	L	M	-1	-3		
132	-	50-250 C1	100	180	225	125	95	320	250	65	14	14	680	332	405	65	50	810	354	480	-	113,5		
160	-	50-250 C	100	180	225	125	95	320	250	65	14	14	705	332	405			810	354	480	-	139		
160	-	50-250 B	100	180	225	125	95	320	250	65	14	14	750	332	405			810	354	480	-	154		
160	-	50-250 A	100	180	225	125	95	320	250	65	14	14	750	332	405			810	354	480	-	164		
112	-	65-125 B1	100	160	180	125	95	280	212	65	14	14	612	280	340	80	65	627	287	408	-	70		
132	-	65-125 B	100	160	180	125	95	280	212	65	14	14	605	280	340			627	287	408	-	76,5		
112	-	65-125 A1	100	160	180	125	95	280	212	65	14	14	612	280	340			627	287	408	-	76,5		
132	-	65-125 A	100	160	180	125	95	280	212	65	14	14	605	280	340			627	287	408	-	83		
132	-	65-160 C	100	160	200	125	95	280	212	65	14	14	635	290	360			666	346	471	-	99,5		
132	-	65-160 B	100	160	200	125	95	280	212	65	14	14	635	290	360			666	346	471	-	103,5		
132	-	65-160 A1	100	160	200	125	95	280	212	65	14	14	680	290	360			810	354	480	-	107,5		
160	-	65-160 A	100	160	200	125	95	280	212	65	14	14	705	290	360			810	354	480	-	135		
132	-	65-200 C1	100	180	225	125	95	320	250	65	14	14	680	330	405			810	354	480	-	113		
160	-	65-200 C	100	180	225	125	95	320	250	65	14	14	705	330	405			810	354	480	-	138,5		
160	-	65-200 B	100	180	225	125	95	320	250	65	14	14	750	330	405			810	354	480	-	153		
160	-	65-200 A	100	180	225	125	95	320	250	65	14	14	750	330	405			810	354	480	-	163,5		
180	-	65-250 B	100	200	250	160	120	360	280	80	16	19	820	370	450			920	420	625	-	203,5		
180	-	65-250 A	100	200	250	160	120	360	280	80	16	19	860	370	450			920	420	625	-	226		
132	-	80-160 E	125	180	225	125	95	320	250	65	14	14	665	330	405			100	80	810	354	480	-	110
132	-	80-160 D	125	180	225	125	95	320	250	65	14	14	665	330	405					810	354	480	-	114
132	-	80-160 C1	125	180	225	125	95	320	250	65	14	14	710	330	405					810	354	480	-	118
160	-	80-160 C	125	180	225	125	95	320	250	65	14	14	735	330	405					810	354	480	-	143
160	-	80-160 B	125	180	225	125	95	320	250	65	14	14	780	330	405					810	354	480	-	157,5
160	-	80-160 A	125	180	225	125	95	320	250	65	14	14	780	330	405					810	354	480	-	168
180	-	80-200 B	125	180	250	125	95	345	280	65	16	14	840	355	430	920	420			625	-	200		
180	-	80-200 A	125	180	250	125	95	345	280	65	16	14	880	355	430	920	420			625	-	222		
180	-	100-160 B	125	200	280	160	120	360	280	80	18	18	842	390	480	125	100	920	420	625	-	208		
180	-	100-160 A	125	200	280	160	120	360	280	80	18	18	882	390	480	920	420	625	-	230,5				


DIMENSIONS (mm)				
DN	D	K	holes	
			n°	Ø
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18

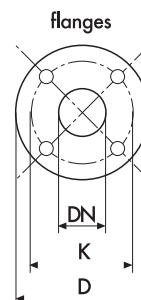

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
32-160	80×120×155	24	80×120×190	30
32-200 (C)	80×120×155	24	80×120×180	24
32-200 (A) (A1) (B) (B1)	100×120×140	18	100×120×185	24
32-250 (A)	85×110×120	6	85×110×170	9
32-250 (B) (C)	80×120×120	6	80×120×170	9
40-125	80×120×155	24	80×120×190	30
40-160	80×120×155	24	80×120×190	30
40-200	100×120×140	18	100×120×185	24
40-250 (A)	85×110×120	6	85×110×170	9
40-250 (B) (BM) (C)	80×120×120	6	80×120×170	9
50-125	80×120×120	24	80×120×180	24
50-160	100×120×140	18	100×120×185	24
50-200 (A)	85×110×120	6	85×110×170	9
50-200 (B) (C)	80×120×120	6	80×120×170	9
50-250	80×120×120	6	80×120×170	9
65-125	100×120×140	18	100×120×185	24
65-160	85×110×120	6	85×110×170	9
65-200	85×110×120	6	85×110×170	9
65-250	85×110×130	4	85×110×190	6
80-160	85×110×120	6	85×110×170	9
80-200	85×110×130	4	85×110×190	6
100-160	85×110×130	4	85×110×190	6





CMG-CMGX ~ EN 733

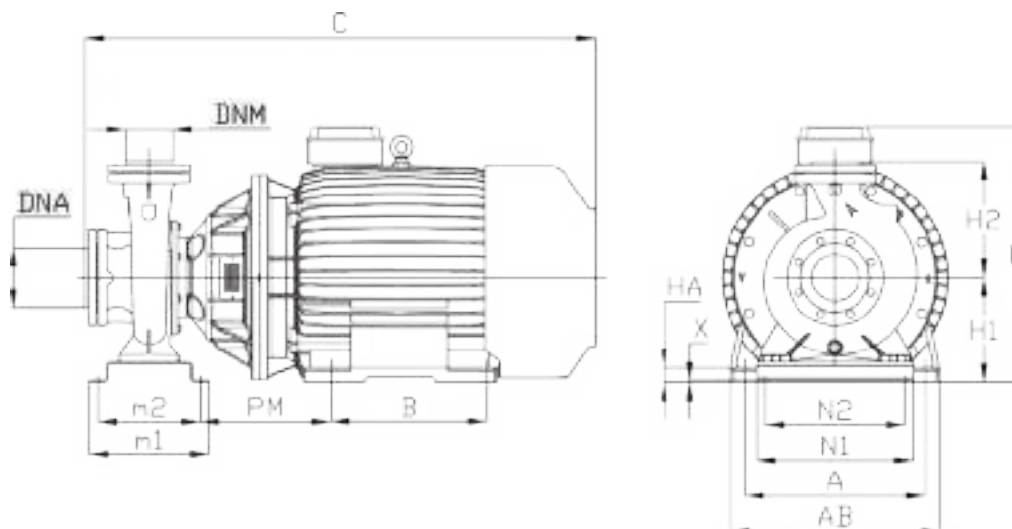

TYPE	DIMENSIONS (mm)															Kg
	m1	m2	N2	N1	H1	H2	H	A	AB	B	PM	C	HA	DNA	DNM	
80-250B	200	120	315	406	225	317	550	356	435	311	356	1130	28	100	80	418
80-250A	320	280	360	420	280	317	650	406	485	349	325	1240	58			505
100-200B	200	120	280	360	225	321	550	356	435	311	356	1130	28	125	100	417
100-200A	320	280	360	420	280	321	650	406	485	349	325	1240	60			505
100-250C	320	280	360	420	280	321	675	406	485	349	325	1315	60			516
100-250B	320	280	360	420	280	321	675	457	545	368	347	1315	35			645
100-250A	320	280	360	420	280	321	675	457	545	419	347	1370	35	680		


DIMENSIONS (mm)				
DN	D	K	holes	
			n°	Ø
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18

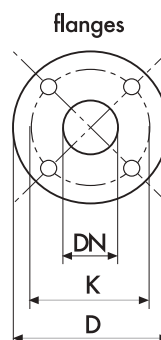

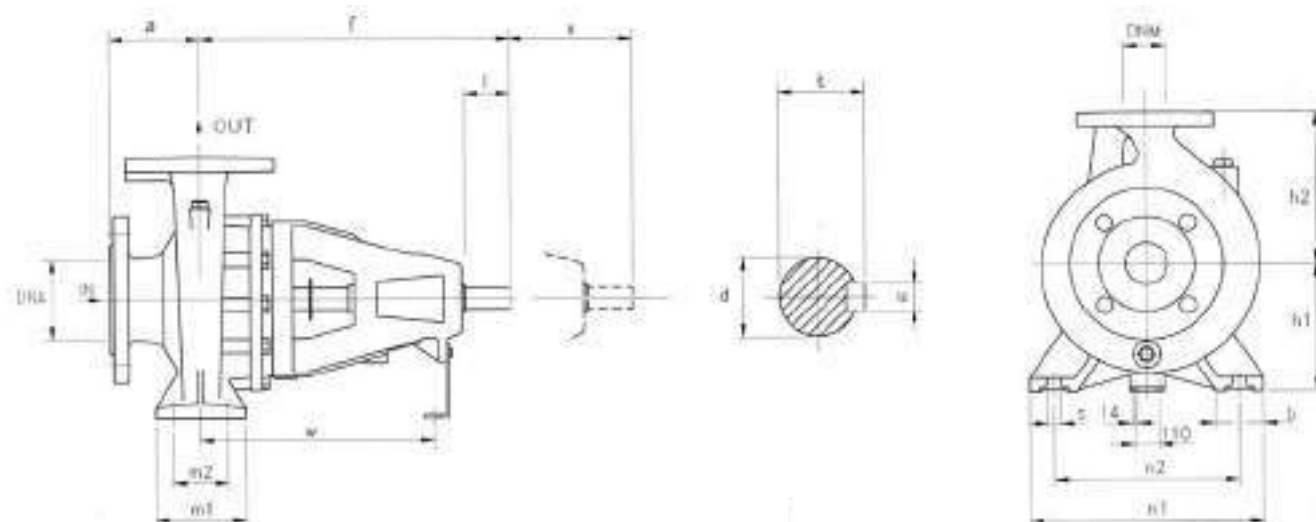


TYPE	DIMENSIONS (mm)																					
	a	f	h1	h2	m1	m2	n1	n2	s	b	l	d	t	u	x	w	DNA	DNM	I		L	M
32-160	80	360	132	160	100	70	240	190	14	50	50	24	27	8	100	260	50	32	535	320	445	38
32-200	80	360	160	180	100	70	240	190	14	50	50	24	27	8	100	260			535	320	445	41
32-250	100	360	180	225	125	95	320	250	14	65	65	24	27	8	100	260	65	40	545	405	545	49
40-125	80	360	112	140	100	70	210	160	14	50	50	24	27	8	100	260			535	320	445	37
40-160	80	360	132	160	100	70	240	190	14	50	50	24	27	8	100	260	65	40	535	320	445	40
40-200	100	360	160	180	100	70	265	212	14	50	50	24	27	8	100	260			535	320	445	44
40-250	100	360	180	225	125	95	320	250	14	65	50	24	27	8	100	260	80	50	545	405	545	49,5
50-125	100	360	132	160	100	70	240	190	14	50	50	24	27	8	100	260			535	320	445	39,5
50-160	100	360	160	180	100	70	265	212	14	50	50	24	27	8	100	260	80	50	535	320	445	44
50-200	100	360	160	200	100	70	265	215	14	50	50	24	27	8	100	260			535	320	445	47
50-250	100	360	180	225	125	95	320	250	14	65	50	24	27	8	100	260	80	50	545	405	545	53
50-315	125	470	225	280	125	95	345	280	14	65	80	32	35,3	10	100	340			655	465	620	94,5
65-125	100	360	160	180	125	95	280	212	14	65	65	24	27	8	100	260	80	65	535	320	445	44,5
65-160	100	360	160	200	125	95	280	212	14	65	65	24	27	8	100	260			535	320	445	49
65-200	100	360	180	225	125	95	320	250	14	65	65	24	27	8	140	260	80	65	545	405	545	54
65-250	100	470	200	250	160	120	360	280	19	80	80	32	35	10	140	340			545	405	545	76,5
65-315	125	470	225	280	160	120	400	315	19	80	80	32	35	10	140	340	100	80	655	465	620	96
80-160	125	360	180	225	125	95	320	250	14	65	50	24	27	8	140	260			545	405	545	58
80-200	125	470	180	250	125	95	345	280	14	65	80	32	35	10	140	340	100	80	680	405	545	74
80-250	125	470	200	280	160	120	400	315	18	80	80	32	35,3	10	140	340			655	465	585	91
80-315	125	470	250	315	160	120	400	315	18	80	80	32	35,3	10	140	340	125	100	655	465	620	106
100-200	125	470	200	280	160	120	360	280	18	80	80	32	35,3	10	140	340			655	465	620	95
100-250	140	470	225	280	160	120	400	315	18	80	80	32	35,3	10	140	340	150	125	655	465	620	103
100-315	140	470	250	315	160	120	400	315	18	80	80	32	35,3	10	140	340			655	465	620	122
100-400	140	530	280	355	200	150	500	400	22	100	110	42	45,3	12	140	370	200	150	720	775	855	183,5
125-250	140	470	315	355	200	150	400	315	22	100	110	32	45,3	12	140	370			655	465	620	132
125-315	140	530	280	355	200	150	500	400	22	100	110	42	45,3	12	140	370	250	200	720	775	855	176
125-400	140	530	315	400	200	150	500	400	22	100	110	42	45,3	12	140	370			720	775	855	198
150-315	160	530	280	400	200	150	550	450	22	100	110	42	45,3	12	140	370	300	250	655	465	620	191
150-400	160	530	315	450	200	150	550	450	22	100	110	42	45,3	12	140	370			720	775	855	218,5
200-315	180	706	355	450	250	190	634	500	28	134	110	55	58,3	16	208	523	300	250	800	1200	1150	345
200-400	180	706	355	500	250	190	634	500	28	134	110	55	58,3	16	214	523			800	1200	1150	346
250-315	225	711	400	500	250	200	694	560	28	134	110	55	58,3	16	214	528	300	250	800	1200	1070	401,5
250-400	225	706	400	550	250	200	694	560	28	134	110	55	58,3	16	220	523			800	1200	1120	393

DIMENSIONS (mm)				
DN	D	K	holes	
			n°	Ø
32	140	100	4	18
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18
100	220	180	8	18
125	250	210	8	18
150	285	240	8	23
200	340	295	8	23
250	395	350	12	23
300	445	400	12	23

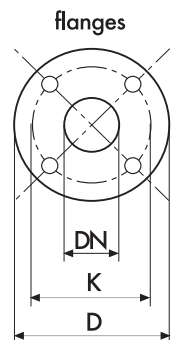

CA-CAX EN 733 ~ 2900 rpm

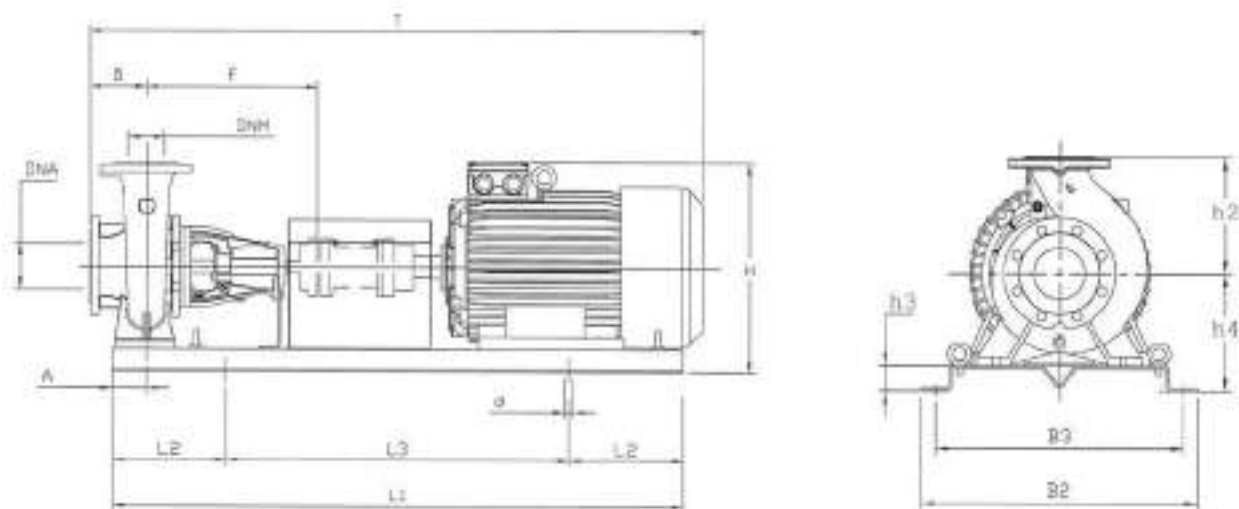


TYPE	kW	Motor Size	DIMENSIONS (mm)														Kg		
			a	f	h4	h2	h3	L1	L2	L3	B2	B3	A	d	T	H		DNA	DNM
32-160C	1,5	90S	80	360	182	160	50	900	150	600	390	350	60	18	855	342	50	32	82,1
32-160B	2,2	90L	80	360	182	160	50	900	150	600	390	350	60	18	920	342			87,7
32-160A	3	100L	80	360	182	160	50	900	150	600	390	350	60	18	920	362			96,7
32-160A	4	112M	80	360	182	160	50	900	150	600	390	350	60	18	940	375			104,7
32-200C	4	112M	80	360	210	180	50	900	150	600	390	350	60	18	940	403			108,7
32-200C	5,5	132S	80	360	210	180	50	1000	170	660	450	400	60	22	1020	433			116,1
32-200B	5,5	132S	80	360	210	180	50	1000	170	660	450	400	60	22	1020	433			116,1
32-200B	7,5	132S	80	360	210	180	50	1000	170	660	450	400	60	22	1020	433			144,3
32-200A	7,5	132S	80	360	210	180	50	1000	170	660	450	400	60	22	1020	433			144,3
32-250C	11	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495			207,3
32-250B	11	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	207,3		
32-250A	15	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	219,3		
40-125C	1,5	90S	80	360	162	140	50	900	150	600	390	350	60	18	855	317	65	40	82,2
40-125C	2,2	90L	80	360	162	140	50	900	150	600	390	350	60	18	920	317			87,8
40-125B	2,2	90L	80	360	162	140	50	900	150	600	390	350	60	18	920	317			87,8
40-125B	3	100L	80	360	162	140	50	900	150	600	390	350	60	18	920	342			96,8
40-125A	3	100L	80	360	162	140	50	900	150	600	390	350	60	18	920	342			96,8
40-160B	3	100L	80	360	182	160	50	900	150	600	390	350	60	18	920	362			99,8
40-160B	4	112M	80	360	182	160	50	900	150	600	390	350	60	18	940	375			107,8
40-160A	4	112M	80	360	182	160	50	900	150	600	390	350	60	18	940	375			107,8
40-160A	5,5	132S	80	360	182	160	50	1000	170	660	450	400	60	22	1020	405			115,2
40-160AP	5,5	132S	80	360	182	160	50	1000	170	660	450	400	60	22	1020	405			115,2
40-200B	5,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433	119,2		
40-200B	7,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433	147,4		
40-200A	7,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433	147,4		
40-200A	11	160M	100	360	210	180	50	1120	190	740	490	440	60	22	1168	475	198,4		
40-200 AP	7,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433	147,4		
40-200 AP	11	160M	100	360	210	180	50	1120	190	740	490	440	60	22	1168	475	198,4		
40-250C	11	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	208,9		
40-250B	11	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	208,9		
40-250B	15	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	220,9		
40-250A	15	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	220,9		
40-250A	18,5	160L	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	238,9		
40-250BM	18,5	160L	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495	238,9		
40-250AM	22	180M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	510	297,3		
50-125B	3	100L	100	360	182	160	50	900	150	600	390	350	60	18	940	362	65	50	99,7
50-125A	4	112M	100	360	182	160	50	900	150	600	390	350	60	18	960	375			107,7
50-160B	5,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433			119,6
50-160A	7,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433			147,8
50-200C	11	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			201,8
50-200B	11	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			201,8
50-200A	15	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			213,8
50-250C	15	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495			224,8
50-250B	18,5	160L	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495			242,8
50-250A	22	180M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	510			301,2
50-315DN	37	200L	125	470	275	280	50	1400	230	940	610	550	75	26	1455	585	80	50	415,0
50-315CN	45	225M	125	470	275	280	50	1400	230	940	610	550	75	26	1500	605			465,8
50-315BN	55	250M	125	470	310	280	85	1600	270	1060	660	600	75	26	1650	710			611,8
50-315AN	75	280S	125	470	310	280	85	1800	300	1200	730	670	75	26	1850	770	762,6		



TYPE	kW	Motor Size	DIMENSIONS (mm)															Kg	
			a	f	h4	h2	h3	L1	L2	L3	B2	B3	A	d	T	H	DNA		DNM
65-125B	5,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433	80	65	121,4
65-125A	7,5	132S	100	360	210	180	50	1000	170	660	450	400	60	22	1040	433			149,6
65-160C	11	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			205,1
65-160B	11	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			205,1
65-160A	15	160M	100	360	210	200	50	1120	190	740	490	440	60	22	1168	475			217,1
65-200C	15	160M	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495			227,5
65-200B	18,5	160L	100	360	230	225	50	1250	205	840	540	490	75	22	1275	495			245,5
65-200A	22	180M	100	360	230	225	50	1250	205	840	540	490	75	22	1290	510			303,3
65-250B	30	200L	100	470	250	250	50	1400	230	940	610	550	90	26	1470	560			377,8
65-250A	37	200L	100	470	250	250	50	1400	230	940	610	550	90	26	1470	560			397,8
65-315CN	55	250M	125	470	310	280	85	1600	270	1060	660	600	90	26	1645	710			614,2
65-315BN	75	280S	125	470	310	280	85	1800	300	1200	730	670	90	26	1835	770			765,0
65-315AN	90	280M	125	470	310	280	85	1800	300	1200	730	670	90	26	1835	770	839,2		
80-160E	11	160M	125	360	230	225	50	1250	205	840	540	490	75	22	1300	495	100	80	220,8
80-160D	11	160M	125	360	230	225	50	1250	205	840	540	490	75	22	1300	495			220,8
80-160C	15	160M	125	360	230	225	50	1250	205	840	540	490	75	22	1300	495			232,8
80-160B	18,5	160L	125	360	230	225	50	1250	205	840	540	490	75	22	1300	495			250,8
80-160A	22	180M	125	360	230	225	50	1250	205	840	540	490	75	22	1315	510			308,7
80-200B	30	200L	125	470	230	250	50	1400	230	940	610	550	75	26	1495	560			376,7
80-200A	37	200L	125	470	230	250	50	1400	230	940	610	550	75	26	1495	560			396,7
80-250B	45	225M	125	470	250	280	50	1400	230	940	610	550	90	26	1540	605			464,5
80-250A	55	250M	125	470	285	280	85	1600	270	1060	660	600	90	26	1645	710			610,5
80-315BN	90	280M	125	470	335	315	85	1800	300	1200	730	670	90	26	1835	770			850,5
80-315AN	110	315S	125	470	405	315	120	2000	300	1400	790	750	90	22	2020	925			1233
100-200D	30	200L	125	470	250	280	50	1400	230	940	610	550	90	26	1500	560			125
100-200C	37	200L	125	470	250	280	50	1400	230	940	610	550	90	26	1500	560	428		
100-200B	45	225M	125	470	250	280	50	1400	230	940	610	550	90	26	1540	605	471,5		
100-200A	55	250M	125	470	285	280	85	1600	270	1060	660	600	90	26	1645	710	617,5		
100-250C	55	250M	140	470	310	280	85	1600	270	1060	660	600	90	26	1660	710	625,5		
100-250C	75	280S	140	470	310	280	85	1800	300	1200	730	670	90	26	1850	770	776,3		
100-250B	75	280S	140	470	310	280	85	1800	300	1200	730	670	90	26	1850	770	776,3		
100-250A	90	280M	140	470	310	280	85	1800	300	1200	730	670	90	26	1850	770	850,5		



4CA-4CAX EN 733 ~ 1450 rpm

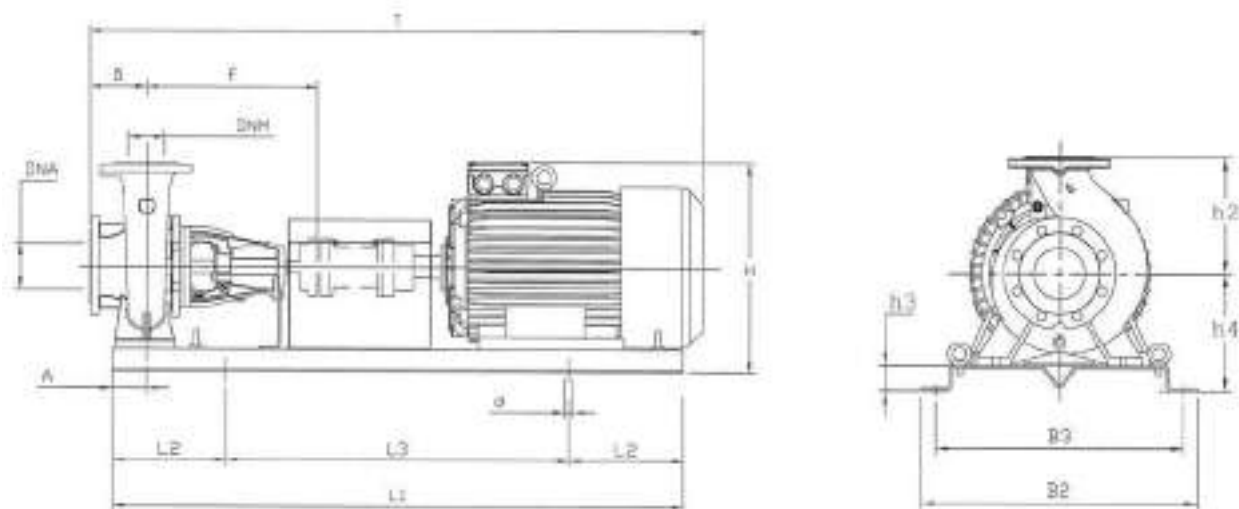


TYPE	kW	Motor Size	DIMENSIONS (mm)																Kg
			a	f	h4	h2	h3	L1	L2	L3	B2	B3	A	d	T	H	DNA	DNM	
32-160C	0,37	71M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			59,4
32-160B	0,37	71M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			59,4
32-160A	0,55	80M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			59,1
32-200C	0,75	80M	80	360	210	180	50	800	130	540	360	320	60	18	820	390			75,1
32-200B	1,1	90S	80	360	210	180	50	800	130	540	360	320	60	18	855	390	50	32	88,1
32-200A	1,1	90S	80	360	210	180	50	800	130	540	360	320	60	18	855	390			88,1
32-250C	1,5	90S	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			106,7
32-250B	1,5	90S	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			106,7
32-250A	2,2	100L	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			112,7
40-125C	0,37	71M	80	360	162	140	50	800	130	540	360	320	60	18	820	302			59,5
40-125B	0,37	71M	80	360	162	140	50	800	130	540	360	320	60	18	820	302			59,5
40-125A	0,55	80M	80	360	162	140	50	800	130	540	360	320	60	18	820	307			59,2
40-160B	0,55	80M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			62,2
40-160A	0,75	80M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			74,2
40-160AP	0,75	80M	80	360	182	160	50	800	130	540	360	320	60	18	820	342			74,2
40-160AP	1,1	90S	80	360	182	160	50	800	130	540	360	320	60	18	855	342			87,2
40-200B	1,1	90S	100	360	210	180	50	900	150	600	390	350	60	18	940	390	65	40	93,8
40-200A	1,1	90S	100	360	210	180	50	900	150	600	390	350	60	18	940	390			93,8
40-200A	1,5	90S	100	360	210	180	50	900	150	600	390	350	60	18	940	390			98,8
40-200AP	1,1	90S	100	360	210	180	50	900	150	600	390	350	60	18	940	390			93,8
40-200AP	1,5	90S	100	360	210	180	50	900	150	600	390	350	60	18	940	390			98,8
40-250C	1,5	90S	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			108,3
40-250B	2,2	100L	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			114,3
40-250A	2,2	100L	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			114,3
50-125B	0,55	80M	100	360	182	160	50	800	130	540	360	320	60	18	840	342			62,1
50-125A	0,75	80M	100	360	182	160	50	800	130	540	360	320	60	18	840	342			74,1
50-160B	0,75	80M	100	360	210	180	50	800	130	540	360	320	60	18	840	390			78,6
50-160A	1,1	90S	100	360	210	180	50	800	130	540	360	320	60	18	875	390			91,6
50-200C	1,1	90S	100	360	210	200	50	900	150	600	390	350	60	18	940	410			97,2
50-200B	1,5	90S	100	360	210	200	50	900	150	600	390	350	60	18	940	410			102,2
50-200A	1,5	90S	100	360	210	200	50	900	150	600	390	350	60	18	940	410		50	102,2
50-250C	2,2	100L	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			118,2
50-250B	3	100L	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			122,2
50-250A	4	112M	100	360	230	225	50	1000	170	660	450	400	75	22	1025	455			128,2
50-315C	5,5	132S	125	470	275	280	50	1120	190	740	490	440	75	22	1170	555			200,1
50-315B	7,5	132M	125	470	275	280	50	1120	190	740	490	440	75	22	1200	555		80	186,6
50-315A	11	160M	125	470	275	280	50	1250	205	840	540	490	75	22	1303	555			260,1




TYPE	kW	Motor Size	DIMENSIONS (mm)															DNA	DNM	Kg	
			a	f	h4	h2	h3	L1	L2	L3	B2	B3	A	d	T	H					
65-125B	0,75	80M	100	360	210	180	50	800	130	540	360	320	60	18	840	390	80	65	80,4		
65-125A	1,1	90S	100	360	210	180	50	800	130	540	360	320	60	18	875	390			93,4		
65-160C	1,5	90S	100	360	210	200	50	900	150	600	390	350	60	18	940	410			105,5		
65-160B	1,5	90S	100	360	210	200	50	900	150	600	390	350	60	18	940	410			105,5		
65-160A	2,2	100L	100	360	210	200	50	900	150	600	390	350	60	18	940	410			111,5		
65-200C	2,2	100L	100	360	230	225	50	1120	190	740	490	440	75	22	1145	455			124,8		
65-200B	3	100L	100	360	230	225	50	1120	190	740	490	440	75	22	1145	455			128,8		
65-200A	3	100L	100	360	230	225	50	1120	190	740	490	440	75	22	1145	455			128,8		
65-250B	4	112M	100	470	250	250	50	1120	190	740	490	440	90	22	1130	500			159,0		
65-250B	5,5	132S	100	470	250	250	50	1120	190	740	490	440	90	22	1175	500			183,0		
65-250A	5,5	132S	100	470	250	250	50	1120	190	740	490	440	90	22	1175	500			183,0		
65-315CM	7,5	132M	125	470	275	280	50	1250	205	840	540	490	90	22	1285	555			194,0		
65-315BM	11	160M	125	470	275	280	50	1250	205	840	540	490	90	22	1343	555			262,5		
65-315AM	11	160M	125	470	275	280	50	1250	205	840	540	490	90	22	1343	555			262,5		
80-160E	1,1	90S	125	360	230	225	50	1000	170	660	450	400	75	22	1050	455			100	80	115,1
80-160D	1,5	90S	125	360	230	225	50	1000	170	660	450	400	75	22	1050	455					120,1
80-160C	1,5	90S	125	360	230	225	50	1000	170	660	450	400	75	22	1050	455	120,1				
80-160B	2,2	100L	125	360	230	225	50	1000	170	660	450	400	75	22	1050	455	126,1				
80-160A	3	100L	125	360	230	225	50	1000	170	660	450	400	75	22	1050	455	130,1				
80-200B	4	112M	125	470	230	250	50	1120	190	740	490	440	75	22	1170	480	157,8				
80-200A	5,5	132S	125	470	230	250	50	1120	190	740	490	440	75	22	1200	480	181,8				
80-250B	5,5	132S	125	470	250	280	50	1250	205	840	540	490	90	22	1285	530	203,8				
80-250A	7,5	132M	125	470	250	280	50	1250	205	840	540	490	90	22	1285	530	190,3				
80-315B	11	160M	125	470	300	315	50	1250	205	840	540	490	90	22	1343	615	273,8				
80-315A	15	160L	125	470	300	315	50	1400	230	940	610	550	90	26	1435	615	305,8				
100-200D	4	112M	125	470	250	280	50	1120	190	740	490	440	90	22	1130	480	125	100			161,0
100-200C	5,5	132S	125	470	250	280	50	1120	190	740	490	440	90	22	1200	530					185,0
100-200B	5,5	132S	125	470	250	280	50	1120	190	740	490	440	90	22	1200	530					186,0
100-200A	7,5	132M	125	470	250	280	50	1120	190	740	490	440	90	22	1240	530					198,0
100-250E	7,5	132M	140	470	275	280	50	1250	205	840	540	490	90	22	1300	555					205,3
100-250D	7,5	132M	140	470	275	280	50	1250	205	840	540	490	90	22	1300	555			205,3		
100-250D	11	160M	140	470	275	280	50	1250	205	840	540	490	90	22	1358	555			273,8		
100-250A	11	160M	140	470	275	280	50	1250	205	840	540	490	90	22	1358	555			273,8		
100-315B	15	160L	140	470	300	315	50	1400	230	940	610	550	90	26	1450	615			327,7		
100-315A	18,5	180M	140	470	300	315	50	1400	230	940	610	550	90	26	1450	615			348,3		
100-400C	22	180L	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720			469,5		
100-400B	30	200L	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720			540,8		
100-400A	37	225S	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720			554,3		
125-250B	11	160M	140	470	300	355	50	1250	205	840	540	490	90	22	1358	655			150	125	308,1
125-250A	15	160L	140	470	300	355	50	1400	230	940	610	550	90	26	1450	655					340,1
125-315C	22	180L	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720					464,4
125-315B	30	200L	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720	535,8				
125-315A	37	225S	140	530	365	355	85	1600	270	1060	660	600	110	26	1630	720	549,3				
125-400C	45	225M	140	530	400	400	85	1600	270	1060	660	600	110	26	1630	800	659,2				
125-400B	55	250M	140	530	400	400	85	1600	270	1060	660	600	110	26	1630	800	756,0				
125-400A	75	280S	140	530	400	400	85	1800	300	1200	730	670	110	26	1830	805	939,4				
150-315D	30	200L	160	530	365	400	85	1800	300	1200	730	670	110	26	1850	765	200	150	570,7		
150-315C	37	225S	160	530	365	400	85	1800	300	1200	730	670	110	26	1850	765			584,2		
150-315B	45	225M	160	530	365	400	85	1800	300	1200	730	670	110	26	1850	765			672,1		
150-315A	55	250M	160	530	365	400	85	1800	300	1200	730	670	110	26	1850	765			768,9		
150-400C	75	280S	160	530	400	450	85	1800	300	1200	730	670	110	26	1850	850			951,4		
150-400B	75	280S	160	530	400	450	85	1800	300	1200	730	670	110	26	1850	850			962,8		
150-400A	90	280M	160	530	400	450	85	1800	300	1200	730	670	110	26	1850	850			1057,8		




CM Serie-Mechanical seal and bearings


MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL			
					E	V	2E	2V
	32-160, 40-125	20mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	- - -	SiC SiC EPDM	SiC SiC FKM
	40-250M	28mm	Rotating face Stationary face Elastomer	Ceramic Graphite EPDM	- - -	- - -	SiC SiC EPDM	SiC SiC FKM
	32-200, 32-250, 40-160, 40-160P, 40-200, 40-200P, 40-250, 50-125, 50-160, 50-200, 50-250, 65-125, 65-160, 65-200, 80-160	28mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	Ceramic Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	65-250, 80-200, 100-160	40mm	Rotating face Stationary face Elastomer	CrNi-steel Graphite NBR	CrNi-steel Graphite EPDM	CrNi-steel Graphite FKM	SiC SiC EPDM	SiC SiC FKM

BEARINGS	PUMP MODEL	TYPE	
	32-200C, 40-160B, 40-160A, 50-125B, 50-125A	6204-ZZ	6206-ZZ C3
	32-160C, 32-160B, 32-160A, 40-125C, 40-125B, 40-125A	6205-ZZ C3	6203-ZZ
	1- 32-200C, 32-200B1, 32-200B, 32-200A1, 32-200A, 32-250C, 32-250B, 1- 40-160A, 40-160AP, 40-200B1, 40-200B, 40-200A1, 40-200A, 40-200AP, 40-250C, 40-250B, 1- 50-125A, 50-160B1, 50-160B, 50-160A1, 50-160A, 50-200C, 50-200B, 65-125B1, 65-125B, 65-125A1, 65-125A, 65-160C, 65-160B, 80-160E, 80-160D	6206-ZZ C3	6306-ZZ C3
	32-250A1, 40-250A1, 50-200A1, 50-200C1, 65-160A1, 65-200C1, 80-160C1	6308-ZZ C3	6306-ZZ C3
	32-250A, 40-250A, 40-250BM, 40-250AM, 50-200A, 50-250C, 50-250B, 50-250A, 65-160A, 65-200C, 65-200B, 65-200A, 80-160C, 80-160B, 80-160A	6308-ZZ C3	6309-ZZ C3
	65-250B, 65-250A, 80-200B, 80-200A, 100-160B, 100-160A	6309-ZZ C3	6310-ZZ C3





CMG Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL			
					E	V	2E	2V
	80-250, 100-200, 100-250	45mm	<i>Rotating face</i> <i>Stationary face</i> <i>Elastomer</i>	CrNi-steel Graphite NBR	CrNi-steel Graphite EPDM	CrNi-steel Graphite FKM	SiC SiC EPDM	SiC SiC FKM


MOTOR BEARINGS	PUMP MODEL	TYPE	
	80-250, 100-200	6313-ZZ C3	6313-ZZ C3
	80-250, 100-200, 100-250	6314-ZZ C3	6314-ZZ C3


CA-4CA Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL			
					E	V	2E	2V
	32-160, 40-125	20mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	- - -	SiC SiC EPDM	SiC SiC FKM
	40-250M	28mm	Rotating face Stationary face Elastomer	Ceramic Graphite EPDM	- - -	- - -	SiC SiC EPDM	SiC SiC FKM
	32-200, 32-250, 40-160, 40-200, 40-250, 50-125, 50-160, 50-200, 50-250, 65-125A, 65-160, 65-200, 80-160	28mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	Ceramic Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	50-315, 65-250, 65-315M, 80-200, 80-315, 100-315	40mm	Rotating face Stationary face Elastomer	CrNi-steel Graphite NBR	CrNi-steel Graphite EPDM	CrNi-steel Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	50-315N, 65-315N, 80-315N	40mm	Rotating face Stationary face Elastomer	Graphite SiC FKM	Graphite SiC EPDM	- - -	- - -	- - -
	80-250, 100-200, 100-250, 100-250, 125-250	45mm	Rotating face Stationary face Elastomer	CrNi-steel Graphite NBR	CrNi-steel Graphite EPDM	CrNi-steel Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	100-400, 125-315, 125-400, 150-315, 150-400	55mm	Rotating face Stationary face Elastomer	Graphite SiC FKM	- - -	- - -	SiC SiC EPDM	SiC SiC FKM
	200-315, 200-400, 250-315, 250-400	70mm	Rotating face Stationary face Elastomer	Graphite SiC FKM	- - -	- - -	SiC SiC EPDM	SiC SiC FKM

PUMP BEARINGS	PUMP MODEL	TYPE	
	32-160, 32-200, 32-250, 40-125, 40-160, 40-200, 40-250, 40-250M, 50-125, 50-160, 50-200, 50-250, 65-125, 65-160, 65-200, 80-160	6306-ZZ C3	6306-ZZ C3
	50-315, 65-250, 65-315, 80-200, 80-315, 100-315	3208-ZZ C3	3208-ZZ C3
	50-315N, 65-315N, 80-250, 80-315N, 100-200, 100-250, 100-250, 125-250	6209-ZZ C3	6309-ZZ C3
	100-400, 125-315, 125-400, 150-315, 150-400	6211-ZZ C3	6311-ZZ C3
	200-315, 200-400, 250-315, 250-400, 250-400	6313-ZZ C3	6313-ZZ C3



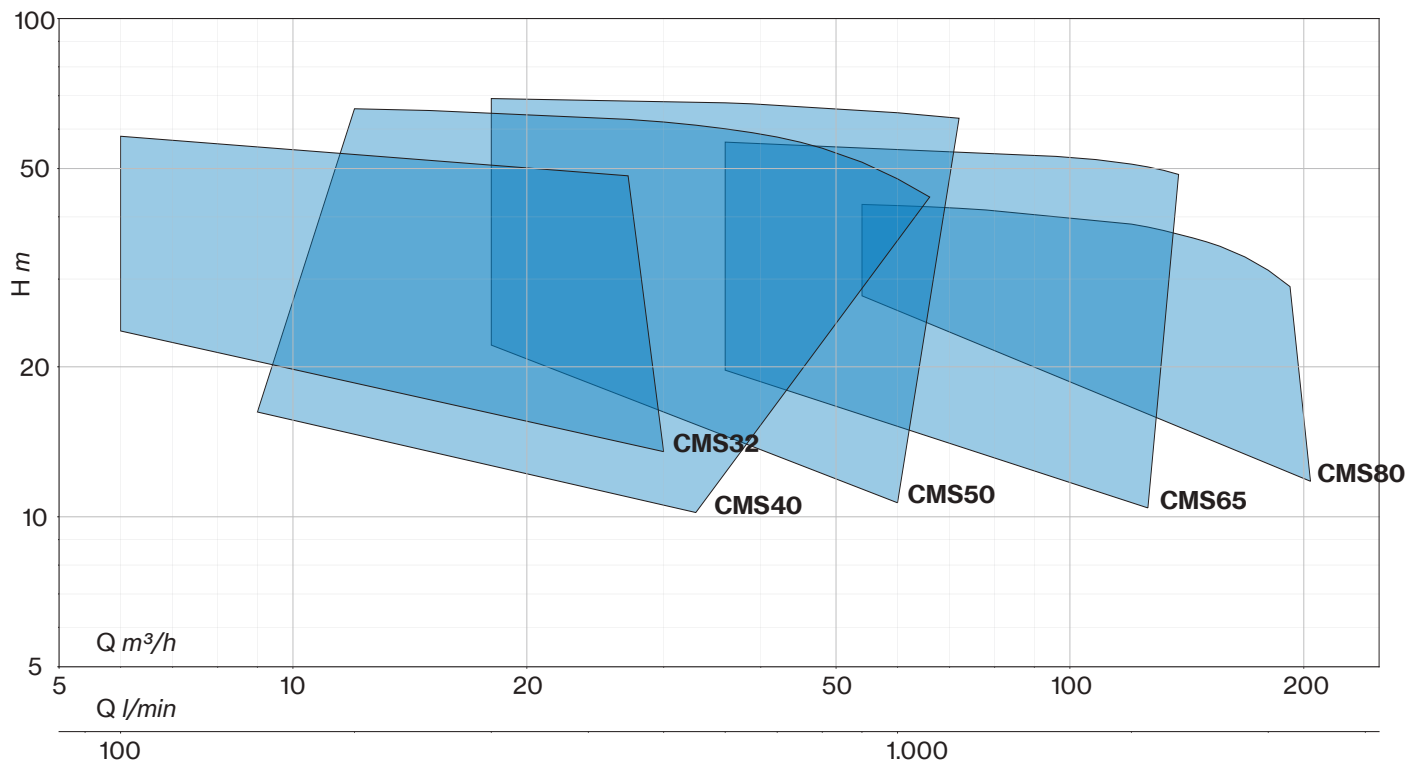

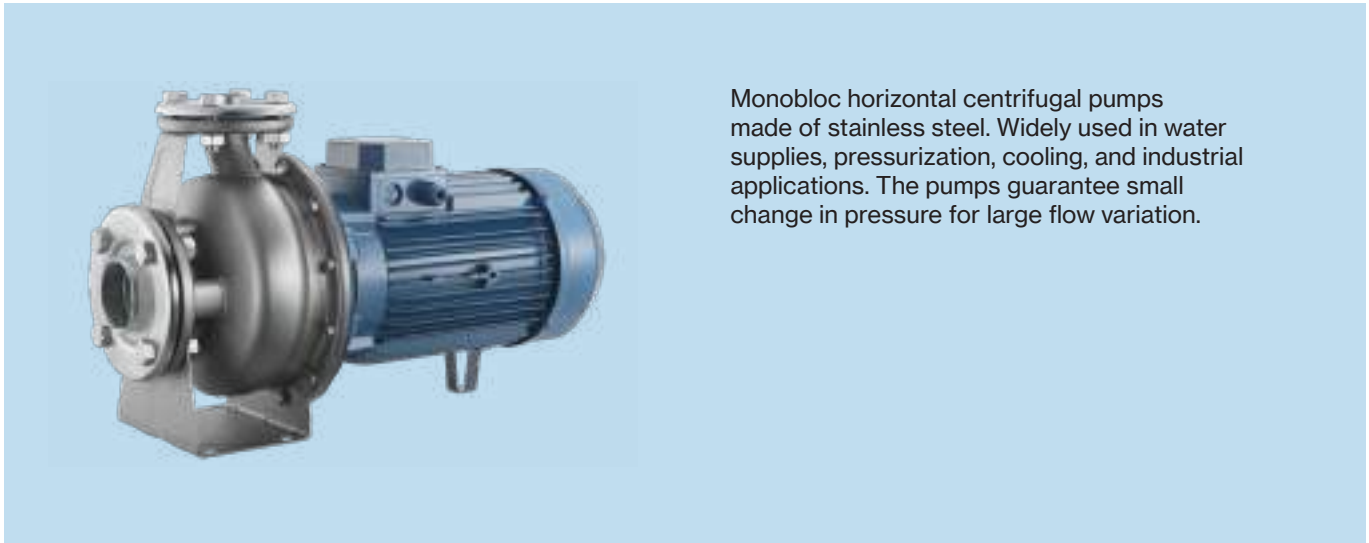

Monobloc horizontal centrifugal pumps made of stainless steel. Widely used in water supplies, pressurization, cooling, and industrial applications. The pumps guarantee small change in pressure for large flow variation.




Construction features

Pump body	stainless steel AISI 304
Motor bracket	cast iron
Impeller	stainless steel AISI 304
Mechanical seal	ceramic-graphite-NBR
Mechanical seal housing	stainless steel AISI 304
Pump shaft end	stainless steel AISI 304
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 10 bar

Motor

2 poles induction motor	3~ 230/400V - 50Hz P ≤ 4kW
	3~ 400/690V - 50Hz P > 4kW
	1~ 230V-50Hz
Insulation class	F
Protection degree	IPX5
Motor efficiency	IE3

CMS 32 BE / 1,5 -2E -WF

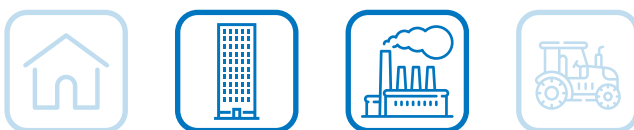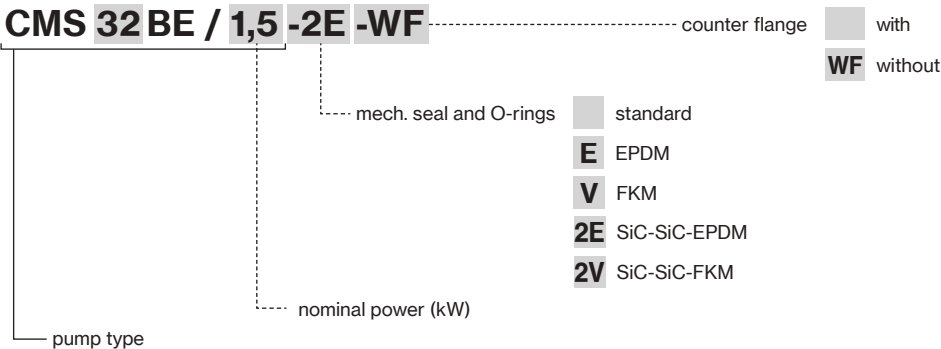

TYPE	P2		1~		3~		Q (m³/h - l/min)									
			P ₁ max kW	A 1-230V 50 Hz	P ₁ max kW	A 3-400V 50 Hz	0	6	9	12	15	18	21	24	27	30
	0	100					150	200	250	300	350	400	450	500		
	HP	kW	H (m)													
32BE/1,5	2	1,5	2,0	9,2	1,9	3,6	23,9	23,6	23,3	22,7	21,7	20,4	18,8	17,1	15,4	13,5
32BE/2,2	3	2,2	2,4	11,0	2,3	4,5	29,5	28,9	28,2	27,4	26,4	24,9	22,9	20,9	18,7	16,4
32CE/3	4	3	-	-	3,4	6,3	36,9	34,8	33,9	33,0	31,9	30,7	29,3	27,8	26,1	24,3
32CE/4	5,5	4	4,9	22,2	4,8	8,8	49,7	46,6	45,0	43,9	42,8	41,6	40,5	39,3	37,7	
32CE/5,5	7,5	5,5	-	-	6,6	11,7	63,9	58,0	56,3	55,0	53,6	52,1	50,7	49,5	48,3	

TYPE	P2		1~		3~		Q (m³/h - l/min)																		
			P ₁ max kW	A 1-230V 50 Hz	P ₁ max kW	A 3-400V 50 Hz	0	9	12	15	18	21	24	27	30	33	36	39	42	45	48	54	60	66	
	0	150					200	250	300	350	400	450	500	550	600	650	700	750	800	900	1000	1100			
	HP	kW	H (m)																						
40BE/1,5	2	1,5	1,8	8,5	1,7	3,3	16,4	16,2	15,9	15,6	14,9	14,2	13,4	12,5	11,4	10,2									
40BE/2,2	3	2,2	2,5	11,6	2,4	4,7	21,5	21,6	21,5	21,2	20,7	20,0	19,1	18,1	17,0	15,8	14,6	13,4							
40BE/3	4	3	-	-	3,4	6,3	27,1		26,9	26,6	26,2	25,6	24,8	23,8	22,7	21,5	20,3	19,0	17,7	16,3					
40BE/4	5,5	4	4,3	19,7	4,1	7,8	36,6		34,8	34,4	33,6	32,4	31,0	29,5	27,8	25,8	23,7	21,5	19,3	17,0					
40CE/5,5	7,5	5,5	-	-	5,5	10,2	44,4		42,6	42,1	41,4	40,4	39,4	38,2	36,8	35,2	33,4	31,5	29,5	27,5	25,4	21,0			
40CE/7,5	10	7,5	-	-	7,4	13,5	54,0		52,4	51,5	50,2	49,0	47,8	46,6	45,3	43,9	42,2	40,3	38,3	36,2	34,0	29,1	24,5		
40CE/11	15	11	-	-	12,2	20,0	68,5		65,9	65,4	64,7	64,0	63,4	62,8	62,0	61,1	60,1	59,0	57,8	56,5	54,9	51,5	47,7	43,8	













TYPE	P2		1~		3~		Q (m³/h - l/min)																		
			P ₁ max kW	A 1-230V 50 Hz	P ₁ max kW	A 3-400V 50 Hz	0	18	21	24	27	30	33	36	39	42	45	48	54	60	66	72	78		
	0	300					350	400	450	500	550	600	650	700	750	800	900	1000	1100	1200	1300				
	HP	kW	H (m)																						
50AE/3	4	3	-	-	2,9	5,7	22,3	22,1	21,7	21,2	20,7	20,2	19,7	19,0	18,2	17,2	16,2	15,1	12,9	10,7					
50AE/4	5,5	4	4,4	20,0	4,2	8,0	26,0	25,8	25,6	25,3	25,1	24,9	24,6	24,2	23,6	22,9	22,2	21,4	19,8	18,1	16,4				
50BE/5,5	7,5	5,5	-	-	6,4	11,5	34,9	34,6	34,3	33,9	33,5	33,3	33,0	32,6	32,1	31,4	30,7	30,0	28,4	26,7	24,8	22,7			
50CE/7,5	10	7,5	-	-	8,2	14,6	39,8	39,5	39,1	38,5	37,9	37,5	37,4	37,3	37,2	36,9	36,5	36,0	34,7	33,1	31,4	29,7	27,9		
50CE/11	15	11	-	-	12,4	20,3	55,8	55,4	55,0	54,5	53,9	53,4	52,9	52,4	51,8	51,1	50,4	49,8	48,7	47,3	45,7	43,9	41,9		
50CE1/15	20	15	-	-	15,0	25,1	65,9	63,1	62,7	62,7	62,4	62,2	61,8	61,3	60,7	60,0	59,4	58,8	57,6	56,4	55,0	53,4			
50CE/15	20	15	-	-	15,2	25,6	65,9	63,1	62,7	62,7	62,4	62,2	61,8	61,3	60,7	60,0	59,4	58,8	57,6	56,4	55,0	53,4			
50CE/18,5	25	18,5	-	-	18,2	30,6	69,6	69,1	68,5	68,3	68,2	68,1	67,9	67,7	67,4	66,9	66,3	65,9	65,4	64,7	63,8	63,1			















TYPE	P2		3~		Q (m³/h - l/min)																			
			P ₁ max kW	A 3-400V 50 Hz	0	36	39	42	45	48	54	60	66	72	78	84	90	96	108	120	126	132	138	
	0	600			650	700	750	800	900	1000	1100	1200	1300	1400	1500	1600	1800	2000	2100	2200	2300			
	HP	kW	H (m)																					
65AE/5,5	7,5	5,5	6,2	11,2	20,3	19,7	19,6	19,5	19,4	19,3	19,1	18,7	18,3	17,7	17,1	16,4	15,8	15,1	13,7	11,6	10,4			
65AE/7,5	10	7,5	8,4	15,0	25,1	24,2	24,0	23,9	23,8	23,6	23,5	23,3	23,1	22,5	21,9	21,2	20,4	18,9	17,2	16,2	15,0			
65BE/11	15	11	11,5	19,0	34,8	34,0	33,9	33,7	33,4	33,0	32,7	32,3	32,0	31,9	31,6	31,1	30,4	29,6	27,9	26,2	25,6			
65BE1/15	20	15	15,1	25,3	41,9	41,3	41,2	41,0	40,8	40,5	39,9	39,5	39,1	38,8	38,7	38,6	38,3	37,9	37,0	36,0	35,8			
65BE/15	20	15	15,5	26,1	41,9	41,3	41,2	41,0	40,8	40,5	39,9	39,5	39,1	38,8	38,7	38,6	38,3	37,9	37,0	36,0	35,8			
65CE/18,5	25	18,5	18,8	31,6	49,7	49,0	48,7	48,4	48,2	48,0	47,6	47,3	47,2	47,1	46,9	46,6	46,2	45,9	45,0	43,5	42,5			
65CE/22	30	22	23,3	39,6	58,1	56,5	56,2	55,9	55,7	55,4	54,9	54,3	53,9	53,7	53,5	53,4	53,2	52,9	52,1	51,0	50,4	49,6	48,7	

TYPE	P2		3~		Q (m³/h - l/min)																					
			P ₁ max kW	A 3-400V 50 Hz	0	54	60	66	72	78	84	90	96	108	120	126	132	138	144	150	156	168	180	192	204	216
	0	900			1000	1100	1200	1300	1400	1500	1600	1800	2000	2100	2200	2300	2400	2500	2600	2800	3000	3200	3400	3600		
	HP	kW	H (m)																							
80BE/11	15	11	12,1	19,9	27,3	27,8	27,6	27,3	26,9	26,4	25,9	25,3	24,6	23,3	22,0	21,4	20,9	20,3	19,7	19,2	18,6	17,3	15,7	13,9	11,8	
80BE1/15	20	15	14,9	25,0	32,2	32,8	32,6	32,3	32,0	31,6	31,1	30,6	30,1	28,9	27,7	27,0	26,3	25,7	25,1	24,5	23,9	22,5	20,9	19,3	17,8	
80BE/15	20	15	15,0	25,5	32,2	32,8	32,6	32,3	32,0	31,6	31,1	30,6	30,1	28,9	27,7	27,0	26,3	25,7	25,1	24,5	23,9	22,5	20,9	19,3	17,8	
80BE/18,5	25	18,5	20,0	33,2	38,4	38,7	38,5	38,2	37,9	37,5	37,1	36,7	36,3	35,6	34,6	33,9	33,2	32,5	31,9	31,3	30,7	29,4	28,1	26,7	25,1	23,3
80CE/22	30	22	21,7	36,4	41,9	42,4	42,1	41,9	41,6	41,3	40,9	40,5	40,0	39,4	38,7	38,2	37,6	36,9	36,3	35,6	34,9	33,2	31,2	29,0		
















CMS

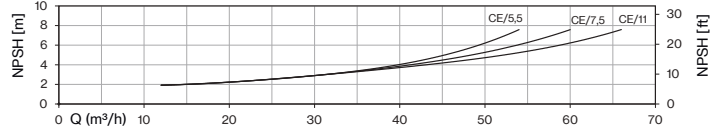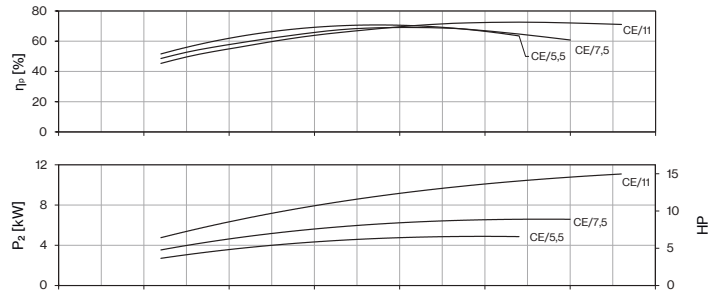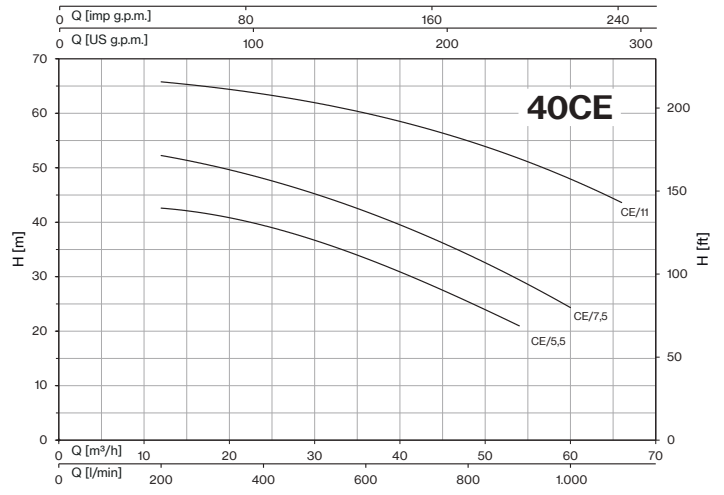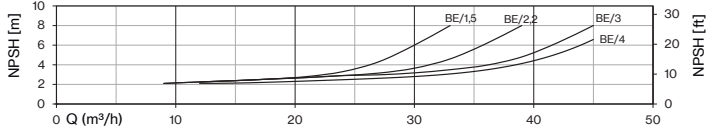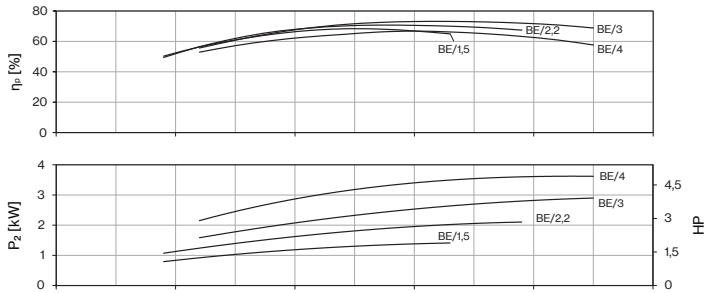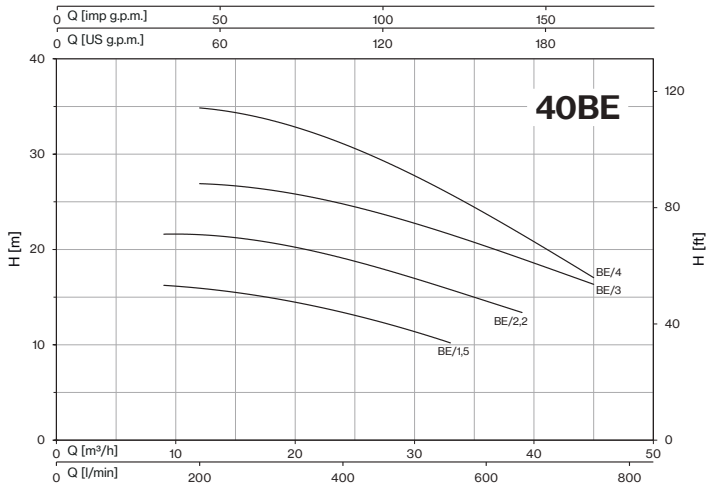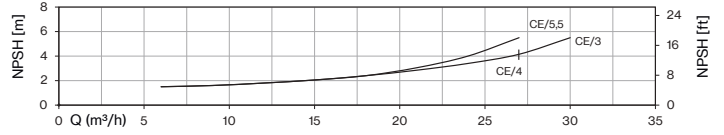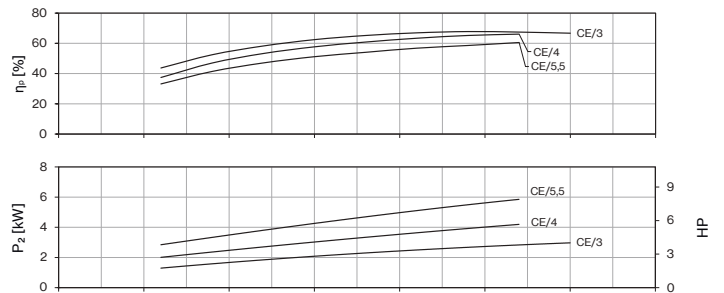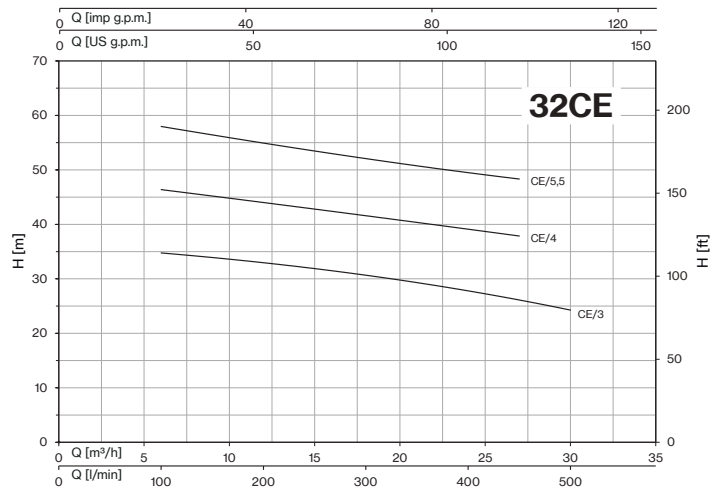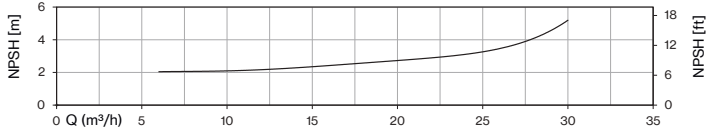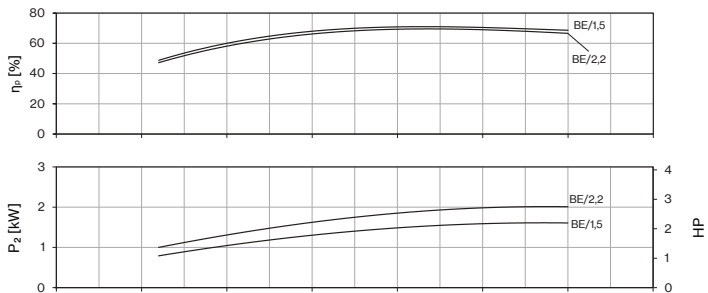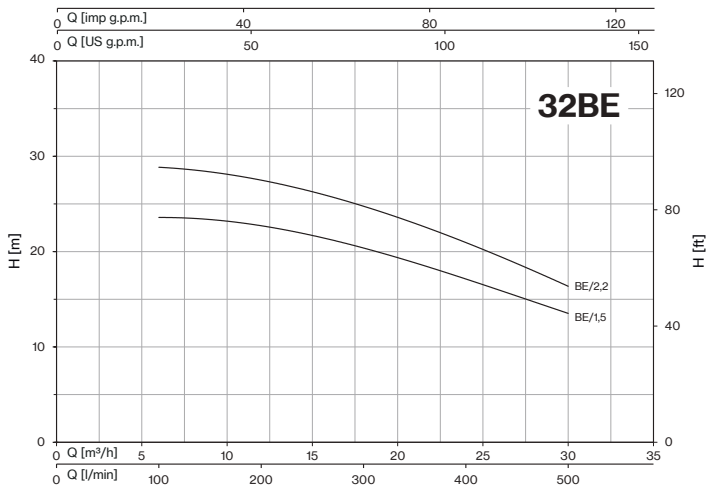

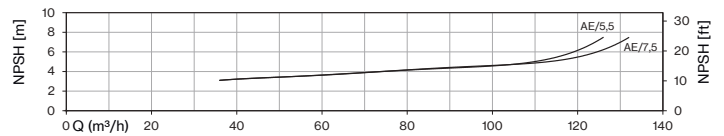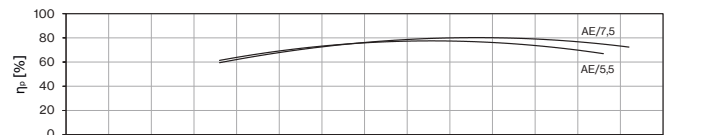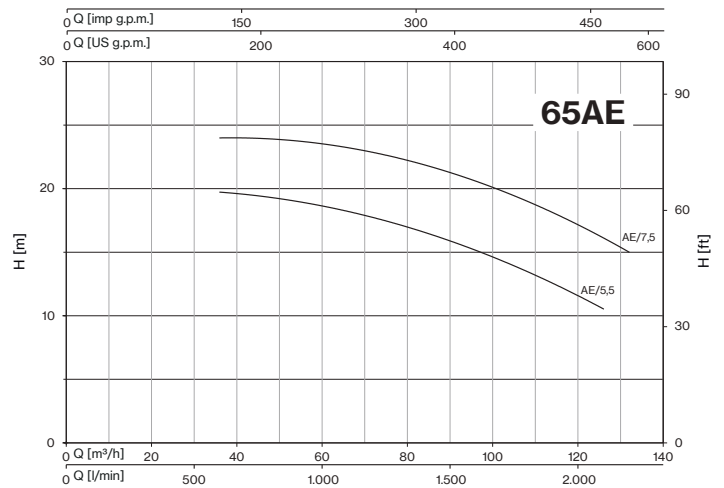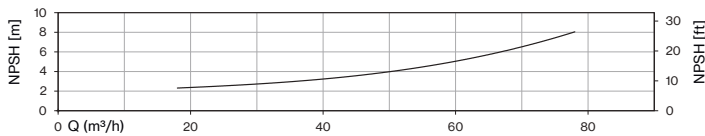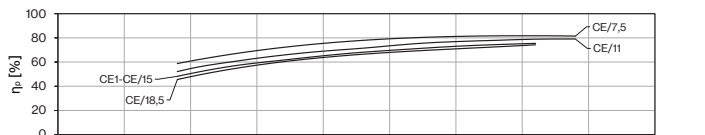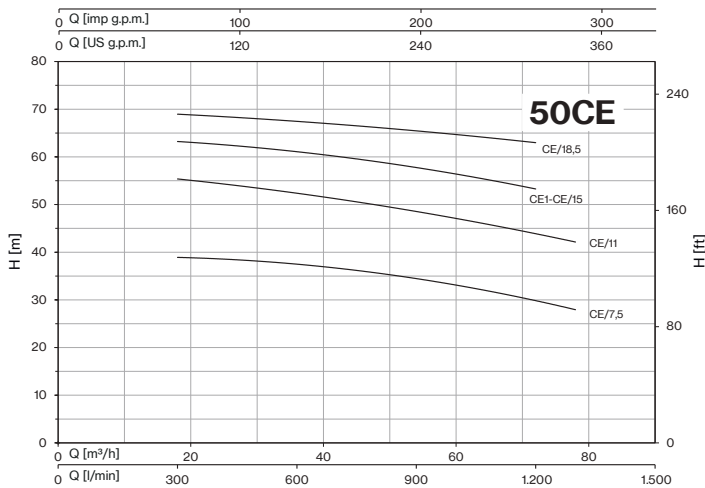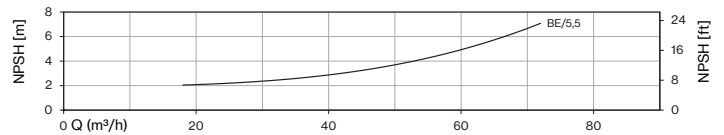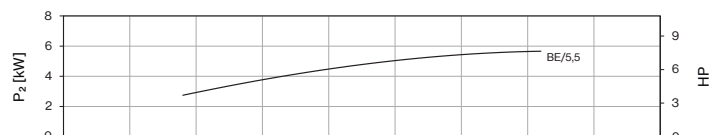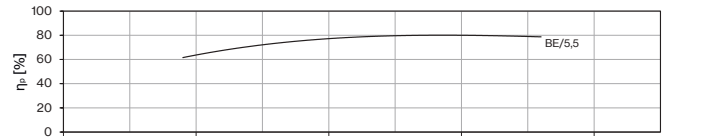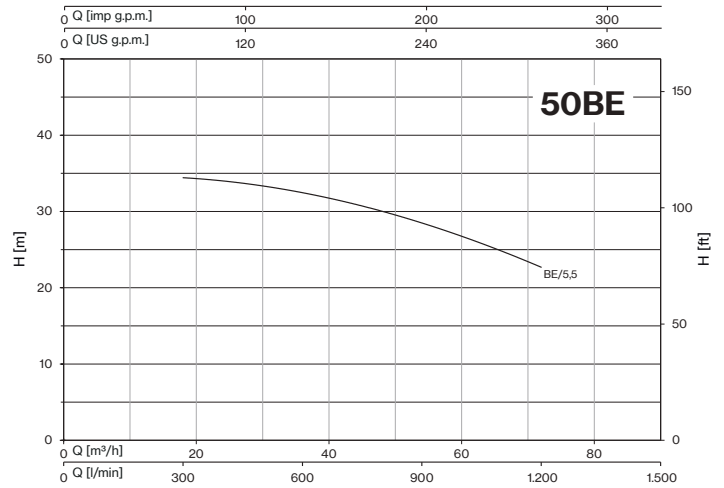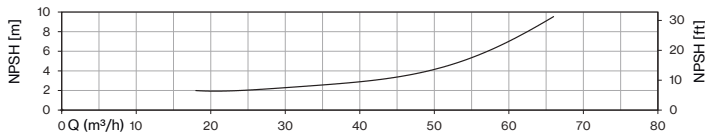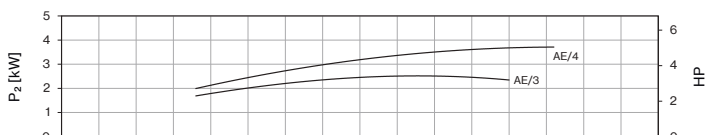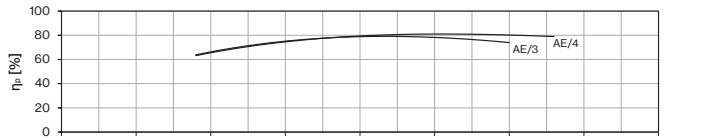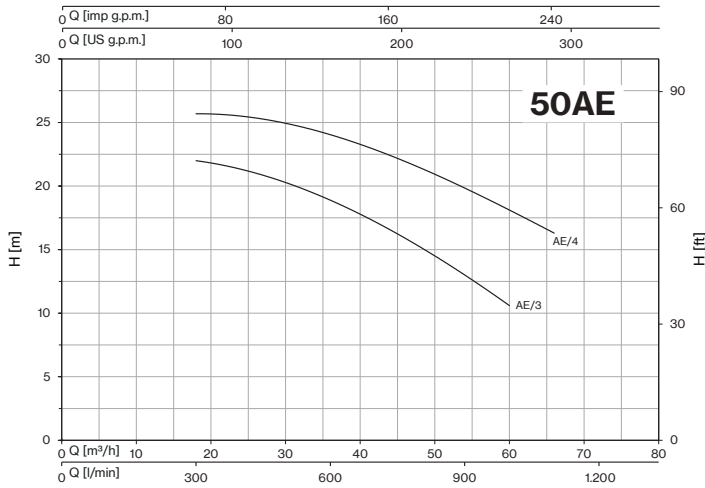


CMS

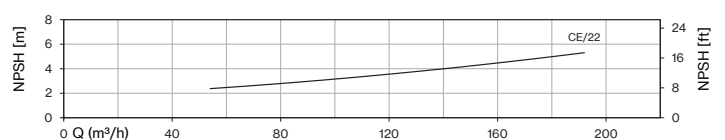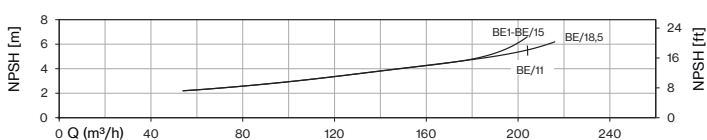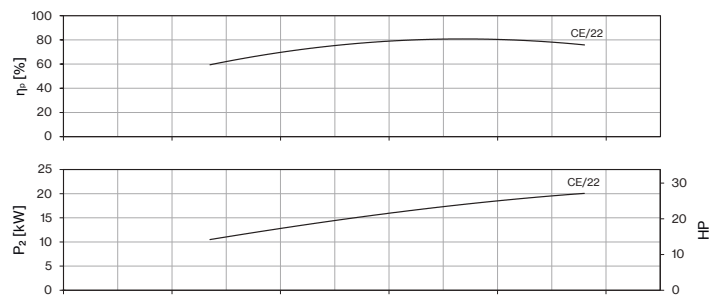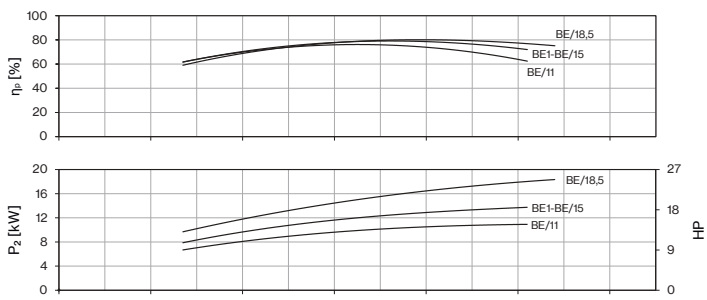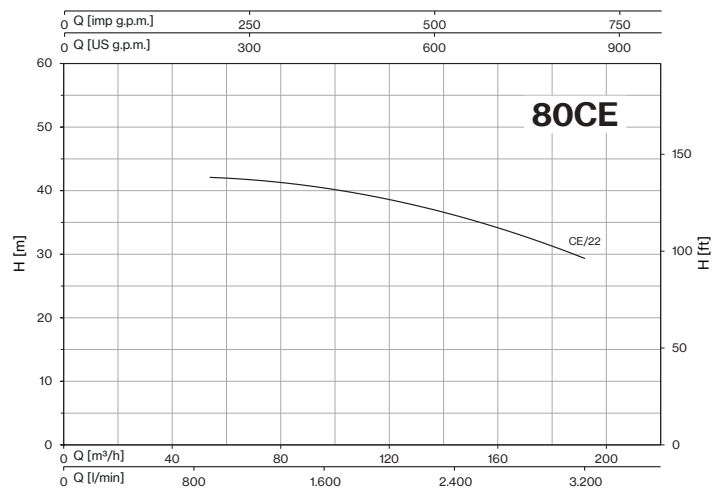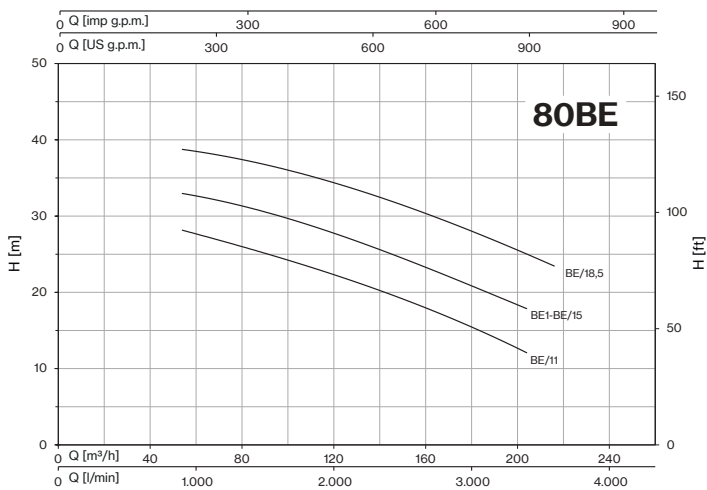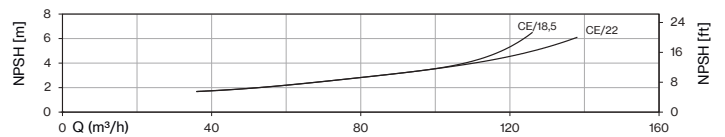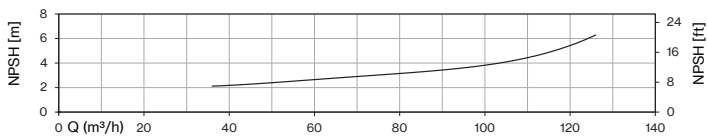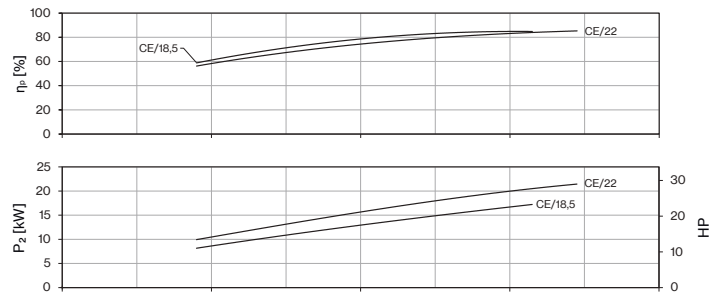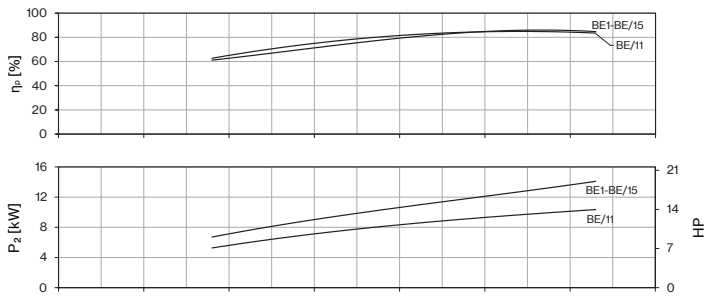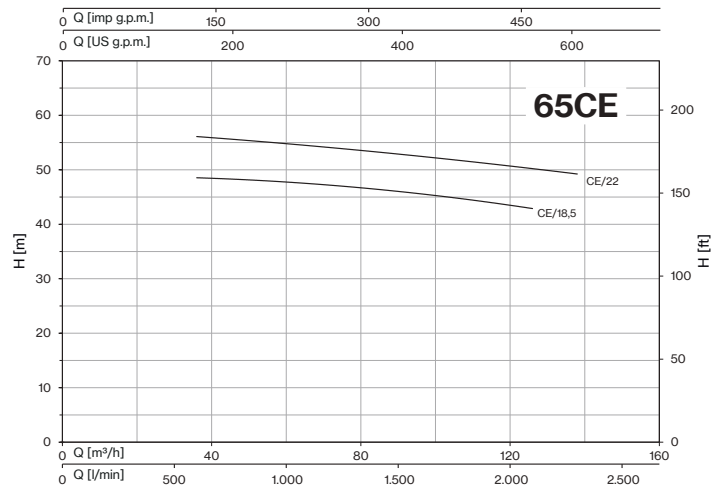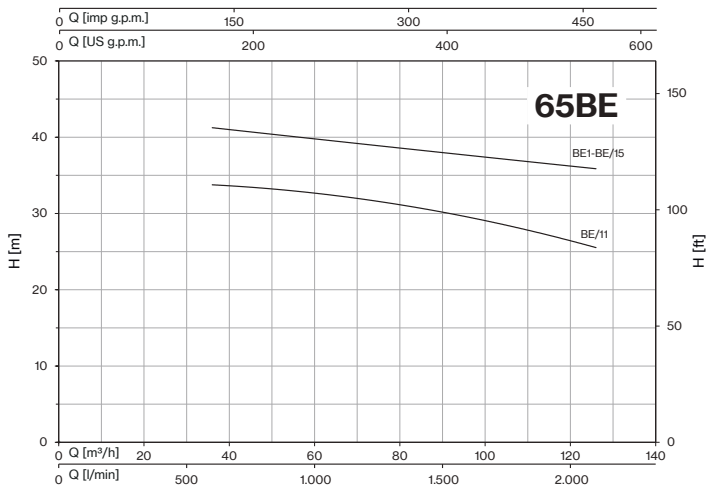

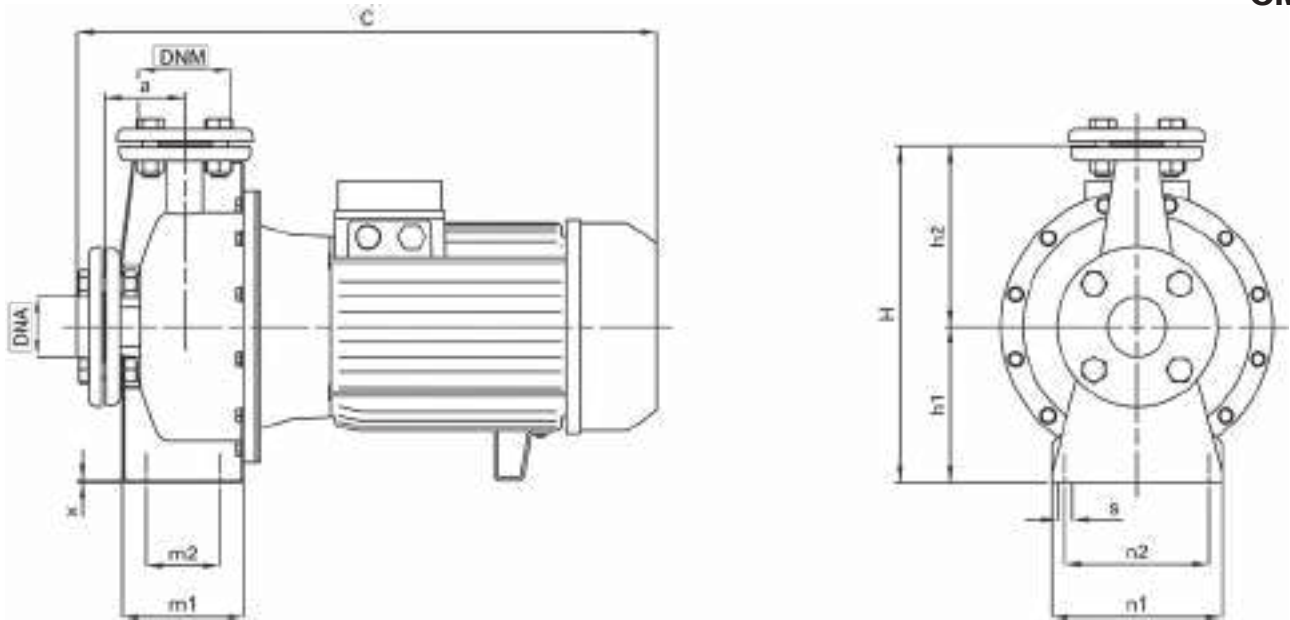
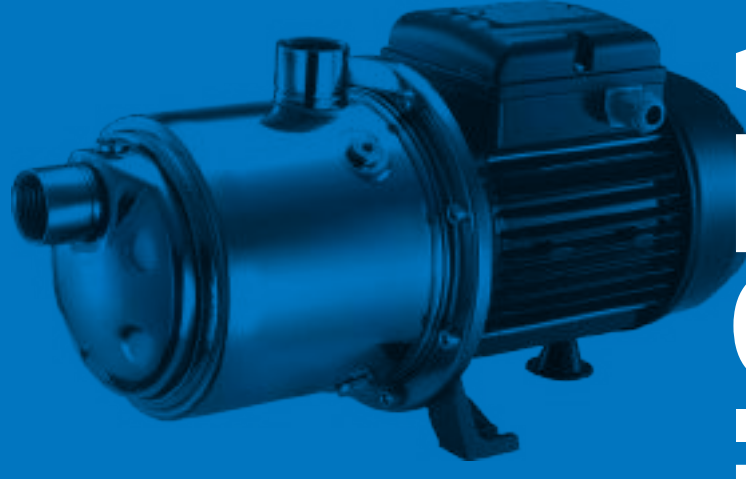
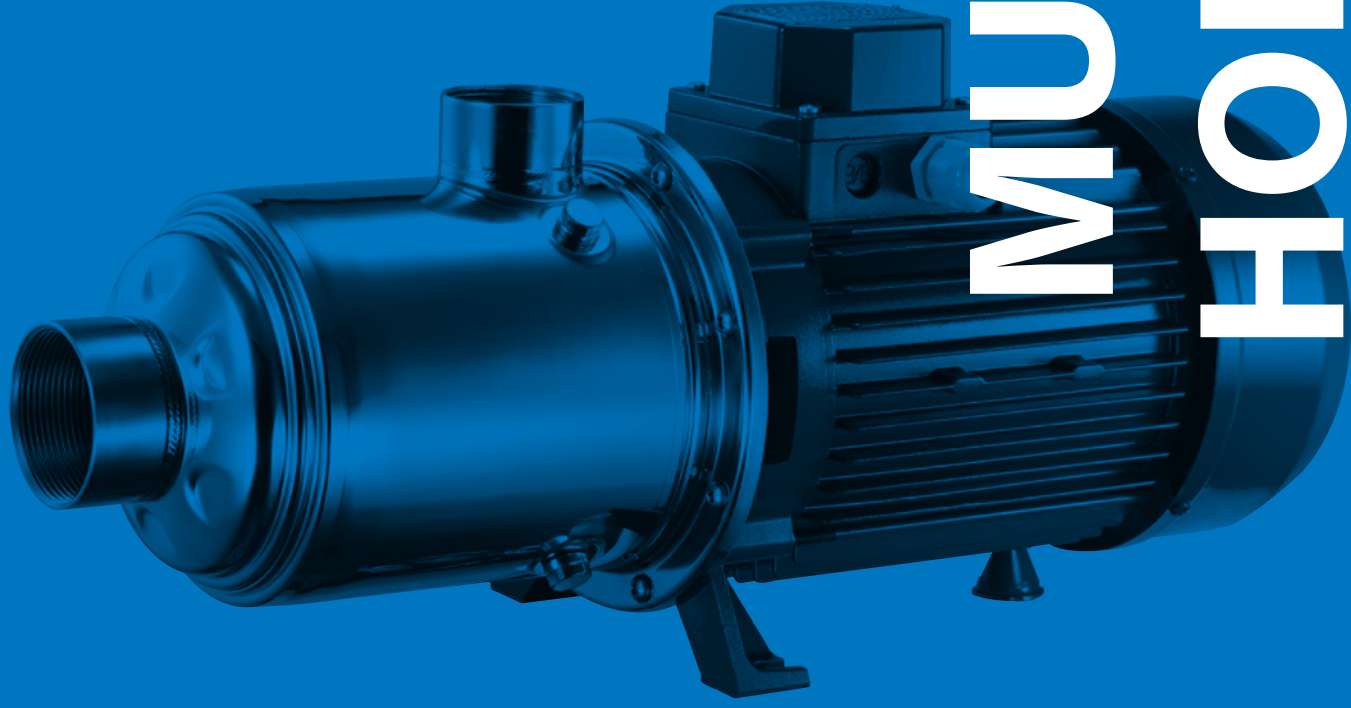


TYPE	DIMENSIONS (mm)																Kg		
	a	h1	h2	m1	m2	n1	n2	x	s	C (1~)	C (3~)	H	DNA	DNM	I	L	M	1~	3~
32BE/1,5	80	132	140	125	75	175	148	2	10	530	530	272	50	32	555	255	345	30,5	29
32BE/2,2	80	132	140	125	75	175	148	2	10	530	530	272			555	255	345	35	31,5
32CE/3	80	160	180	125	75	175	148	2	10	-	535	340			625	310	430	-	37
32CE/4	80	160	180	125	75	175	148	2	10	600	555	340			625	310	430	53	44,5
32CE/5,5	80	160	180	125	75	175	148	2	10	-	600	340	625	310	430	-	53,5		
40BE/1,5	80	132	160	125	75	175	148	2	10	535	535	292	65	40	555	255	345	31	29,5
40BE/2,2	80	132	160	125	75	175	148	2	10	535	535	292			555	255	345	35,5	32
40BE/3	80	132	160	125	75	175	148	2	10	-	535	292			555	255	345	-	35,5
40BE/4	80	132	160	125	75	175	148	2	10	595	550	292			555	255	345	51,5	43,5
40CE/5,5	100	160	180	140	93	175	148	2	10	-	615	340	625	310	430	-	54		
40CE/7,5	100	160	180	140	93	175	148	2	10	-	615	340	625	310	430	-	60		
40CE/11	100	160	180	140	93	175	148	2	10	-	645	340	670	350	525	-	83,5		
50AE/3	100	132	160	125	75	175	148	2	10	-	535	292	65	50	555	255	345	-	36
50AE/4	100	132	160	125	75	175	148	2	10	600	555	292			555	255	345	52	43,5
50BE/5,5	100	160	180	140	93	175	148	2	10	-	615	340			625	310	430	-	54
50CE/7,5	100	160	200	140	93	175	148	2	10	-	615	360			625	310	430	-	60
50CE/11	100	160	200	140	93	175	148	2	10	-	645	360	670	350	525	-	83,5		
50CE/15	100	160	200	140	93	175	148	2	10	-	690	360	820	360	525	-	88		
50CE/15	100	160	200	140	93	175	148	2	10	-	725	360	820	360	525	-	115		
50CE/18,5	100	160	200	140	93	175	148	2	10	-	770	360	820	360	525	-	129		
65AE/5,5	100	160	180	140	93	175	148	2	10	-	615	340	80	65	625	310	430	-	53,5
65AE/7,5	100	160	180	140	93	175	148	2	10	-	615	340			625	310	430	-	59,5
65BE/11	100	160	200	140	93	175	148	2	10	-	645	360			670	350	525	-	85
65BE/15	100	160	200	140	93	175	148	2	10	-	690	360			820	360	525	-	89
65BE/15	100	160	200	140	93	175	148	2	10	-	725	360	820	360	525	-	116		
65CE/18,5	100	180	225	140	93	175	148	2	10	-	770	405	820	360	525	-	130,5		
65CE/22	100	180	225	140	93	175	148	2	10	-	770	405	820	360	525	-	141		
80BE/11	125	180	225	167	93	175	148	2	10	-	685	405	100	80	820	360	525	-	87
80BE/15	125	180	225	167	93	175	148	2	10	-	730	405			820	360	525	-	91
80BE/15	125	180	225	167	93	175	148	2	10	-	765	405			820	360	525	-	118
80BE/18,5	125	180	225	167	93	175	148	2	10	-	810	405			870	400	570	-	132,5
80CE/22	125	180	250	167	93	175	148	2	10	-	810	430	870	400	570	-	143		

CMS Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL			
					E	V	2E	2V
	32BE/1,5 - 32BE/2,2 - 32CE/3 - 40BE/1,5 - 40BE/2,2 - 40BE/3 - 50AE/3	20mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	- - -	SiC SiC EPDM	SiC SiC FKM
	32CE/4 - 32CE/5,5 - 40BE/4 - 40CE/5,5 - 40CE/7,5 - 40CE/11 - 50AE/4 - 50BE/5,5 - 50CE/7,5 - 50CE/11 - 50CE/15 - 50CE1/15 - 50CE/18,5 - 65AE/5,5 - 65AE/7,5 - 65BE/11 - 65BE1/15 - 65BE/15 - 65CE/18,5 - 65CE/22 - 80BE/11 - 80BE1/15 - 80BE/15 - 80BE/18,5 - 80CE/22	28mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Ceramic Graphite EPDM	Ceramic Graphite FKM	SiC SiC EPDM	SiC SiC FKM

BEARINGS	PUMP MODEL	TYPE	
	32CE/4 - 40BE/4 - 50AE/4	6204-ZZ	6206-ZZ C3
	32BE/1,5 - 32BE/2,2 - 32CE/3 - 40BE/1,5 - 40BE/2,2 - 40BE/3 - 50AE/3	6205-ZZ C3	6203-ZZ
	1- 32CE/4 - 32CE/5,5 - 1- 40BE/4 - 40CE/5,5 - 40CE/7,5 - 1- 50AE/4 - 50BE/5,5 - 50CE/7,5 - 65AE/5,5 - 65AE/7,5	6206-ZZ C3	6306-ZZ C3
	40CE/11 - 50CE/11 - 65BE/11 - 80BE/11	6206-ZZ C3	6308-ZZ C3
	65BE1/15 - 50CE1/15 - 80BE1/15	6308-ZZ C3	6306-ZZ C3
	50CE/15 - 50CE/18,5 - 65BE/15 - 65CE/18,5 - 65CE/22 - 80BE/15 - 80BE/18,5 - 80CE/22	6308-ZZ C3	6309-ZZ C3



MULTISTAGE HORIZONTAL

MULTISTAGE HORIZONTAL PUMPS

ULTRA 3/ULTRA 3S



ULTRA 5/ULTRA 5S



ULTRA 7/ULTRA 7S



ULTRA 9/ULTRA 9S

ULTRA 18/ULTRA 18S


Range of horizontal multistage pumps, not self-priming, with axial suction and radial delivery threads, pump body in AISI 304 and hydraulic part in Noryl (ULTRA) and in AISI 304 (ULTRA S).

Applications:

- Handling of uncharged liquids
- For pressurization systems
- Irrigation
- Drinking water treatment
- Food industry
- Heating and conditioning
- Industrial washing systems



MULTISTAGE

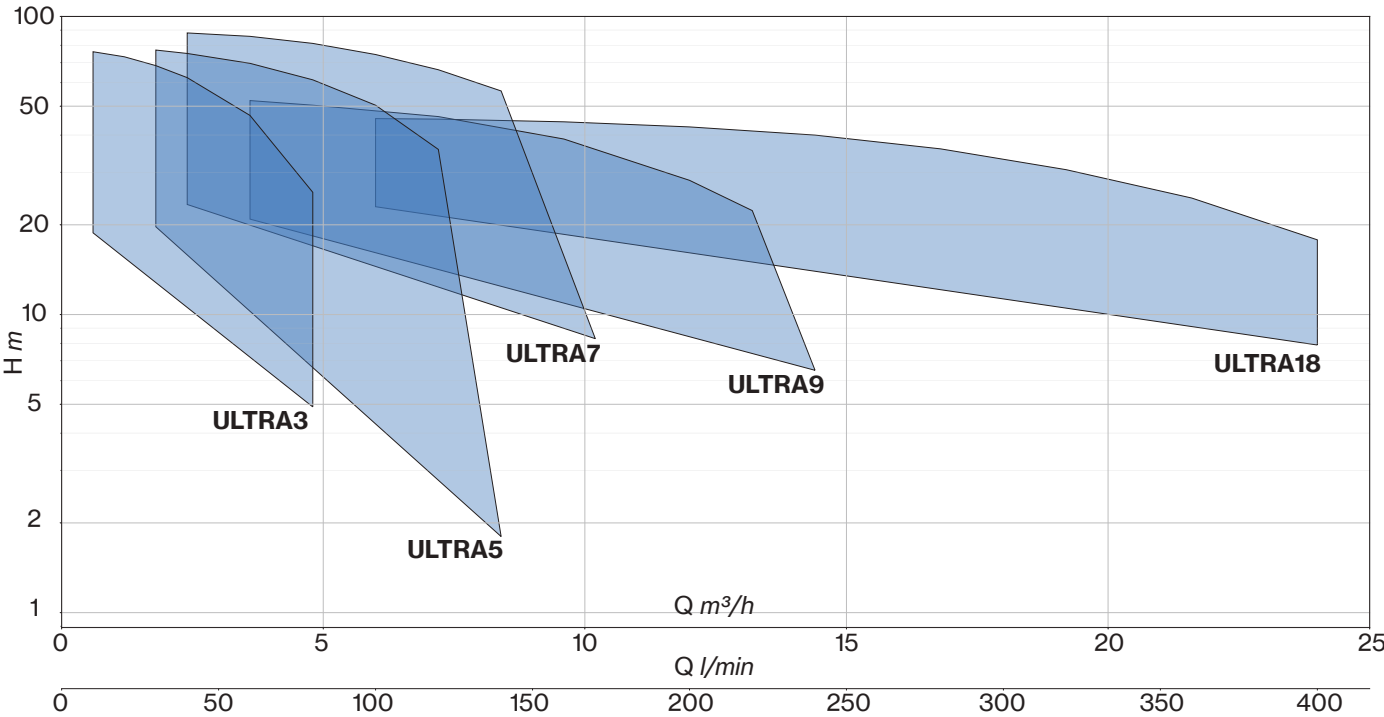

ULTRA

Multistage Horizontal


Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, heating and air conditioning, washing system.

Construction features

Pump body, mechanical seal housing	stainless steel AISI 304
Motor bracket	aluminum
Impellers, diffusers	Noryl®
Mechanical seal	ceramic-graphite-EPDM ≤ 6 impellers graphite-silicon carbide-EPDM ≥ 7 impellers
Motor shaft	stainless steel AISI 303
Liquid temperature	-5 ÷ +35 °C
Operating pressure	max 8,5 bar

Motor

	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz (with thermal protection up to 1,85 kW)
Insulation class	F
Protection degree	IPX4

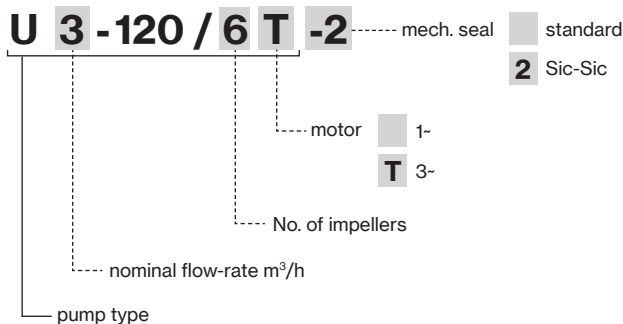

ULTRA 3



ULTRA 5



ULTRA 7



ULTRA 9



ULTRA 18



TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1-	3-					1-	3-	0	0,6	1,2	1,8	2,4	3,6	4,8
						1- 230V 50 Hz	3- 400V 50 Hz	0	10	20	30	40	60	80
		HP	kW	1-	3-	H (m)								
U 3-50/2	U 3-50/2T	0,5	0,37	0,45	0,46	2	0,9	20,2	18,8	17,3	15,3	13,7	9,5	4,9
U 3-70/3	U 3-70/3T	0,7	0,51	0,65	0,63	2,9	1,2	30,0	27,9	25,4	23,0	20,3	14,0	6,7
U 3-90/4	U 3-90/4T	0,9	0,66	0,9	0,88	4	1,8	40,8	38,3	35,1	31,8	27,9	19,8	10,4
U 3-100/5	U 3-100/5T	1	0,75	1,06	1,01	4,8	1,9	52,2	48,9	45,1	40,8	36,0	25,4	14,0
U 3-120/6	U 3-120/6T	1,2	0,9	1,23	1,23	5,6	2,6	62,8	58,7	54,5	49,6	43,9	32,1	18,3
U 3-150/7	U 3-150/7T	1,5	1,1	1,3	1,2	6,1	3,0	77,1	76,1	73,2	68,4	62,3	46,5	25,7

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1-	3-					1-	3-	0	1,8	2,4	3,6	4,8	6	7,2	8,4
						1- 230V 50 Hz	3- 400V 50 Hz	0	30	40	60	80	100	120	140
		HP	kW	1-	3-	H (m)									
U 5-70/2	U 5-70/2T	0,7	0,51	0,61	0,58	2,7	1,1	22,0	19,7	18,7	16,6	14,0	10,8	6,8	1,8
U 5-80/3	U 5-80/3T	0,8	0,6	0,86	0,79	3,9	1,5	33,4	30,3	29,0	26,0	22,5	17,6	12,0	3,9
U 5-120/4	U 5-120/4T	1,2	0,9	1,13	1,13	5,2	2,5	45,3	41,3	39,6	35,6	30,8	24,9	17,6	6,4
U 5-150/5	U 5-150/5T	1,5	1,1	1,4	1,4	6,6	3,1	57,6	55,6	54,2	50,5	45,0	37,0	27,4	
U 5-180/6	U 5-180/6T	2	1,5	1,6	1,6	7,4	3,3	69,1	66,5	64,8	60,1	53,2	43,8	32,0	
U 5-200/7	U 5-200/7T	2	1,5	1,9	1,8	8,6	3,6	80,6	77,1	75,1	69,6	61,3	50,4	35,8	













TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)								
1-	3-					1-	3-	0	2,4	3,6	4,8	6	7,2	8,4	9,6	10,2
						1- 230V 50 Hz	3- 400V 50 Hz	0	40	60	80	100	120	140	160	170
		HP	kW	1-	3-	H (m)										
U 7-100/2	U 7-100/2T	1	0,75	0,97	0,9	4,4	1,7	24,8	23,4	22,0	20,5	18,7	16,3	13,6	10,2	8,3
U 7-120/3	U 7-120/3T	1,2	0,9	1,32	1,3	5,9	2,6	36,7	34,0	32,0	29,6	26,5	23,0	18,6	13,8	11,0
U 7-180/4	U 7-180/4T	2	1,5	1,7	1,6	7,9	3,3	49,6	48,4	46,7	43,8	39,9	34,9	28,9		
U 7-250/5	U 7-250/5T	2,5	1,85	2,2	2,0	9,9	4,0	63,2	62,1	60,3	56,9	52,1	46,2	39,0		
U 7-300/6	U 7-300/6T	3	2,2	2,5	2,4	11,5	4,7	76,0	75,1	73,1	69,2	63,6	56,8	48,2		
-	U 7-350/7T	3,5	2,57	-	2,8	-	5,1	89,0	88,0	85,8	81,2	74,5	66,3	56,2		




TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1-	3-					1-	3-	0	3,6	4,8	7,2	9,6	12	13,2	14,4
						1- 230V 50 Hz	3- 400V 50 Hz	0	60	80	120	160	200	220	240
		HP	kW	1-	3-	H (m)									
U 9-100/2	U 9-100/2T	1	0,75	0,98	0,92	4,4	1,7	23,0	20,9	20,0	17,9	15,0	11,1	8,9	6,5
U 9-150/3	U 9-150/3T	1,5	1,1	1,4	1,4	6,6	3,1	35,0	32,8	31,7	28,5	24,1	17,9	14,3	
U 9-200/4	U 9-200/4T	2	1,5	1,8	1,7	8,3	3,5	45,8	42,1	40,7	37,3	31,3	23,0	17,9	
U 9-250/5	U 9-250/5T	2,5	1,85	2,3	2,1	10,4	4,1	56,9	52,2	50,4	46,1	38,8	28,2	22,3	

TYPE		P2		P1 (kW)	A	Q (m³/h - l/min)									
3-	3-					0	6	7,2	9,6	12	14,4	16,8	19,2	21,6	24
						0	100	120	160	200	240	280	320	360	400
		HP	kW	3-	3- 400V 50 Hz	H (m)									
U 18-180/2T		2	1,5	1,6	3,3	23,6	23,0	22,4	21,9	20,6	18,6	17,0	13,8	11,2	7,9
U 18-250/3T		2,5	1,85	2,2	4,2	34,7	32,9	32,6	31,6	30,1	28,0	24,7	20,6	15,9	10,7
U 18-400/4T		4	3	3,0	5,8	47,1	45,4	45,2	44,3	42,6	40,0	36,0	30,6	24,6	17,8



ULTRA

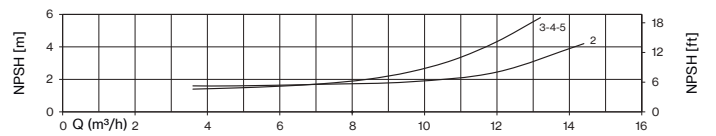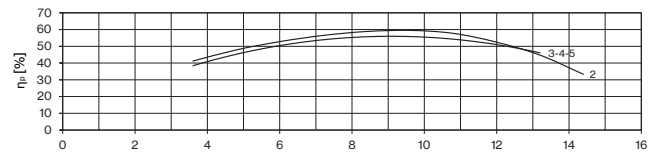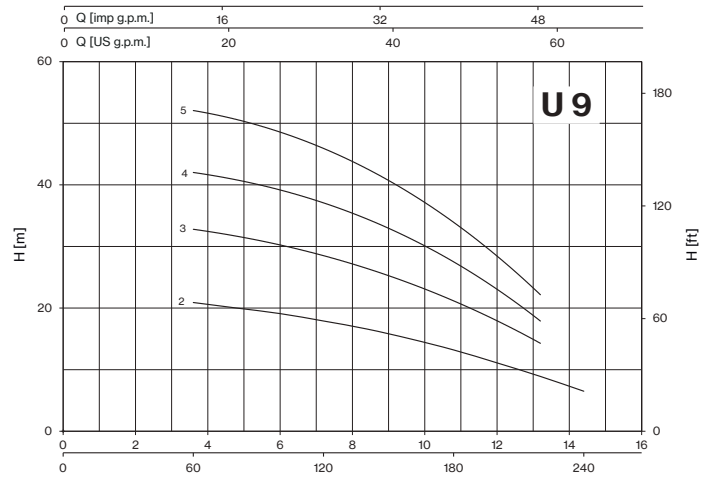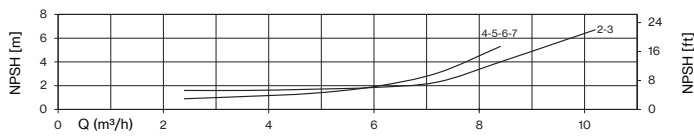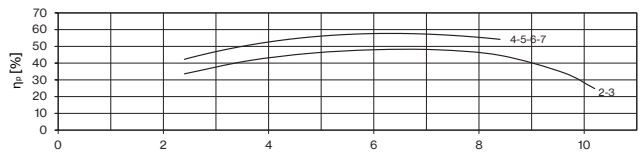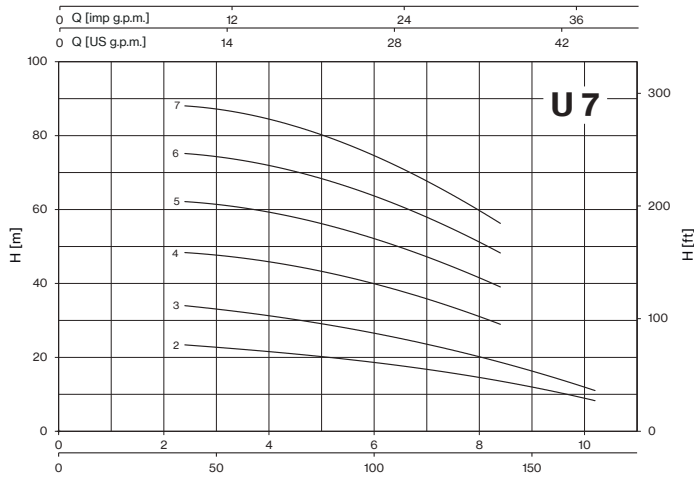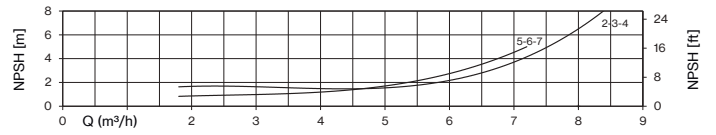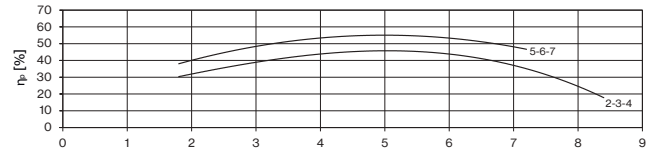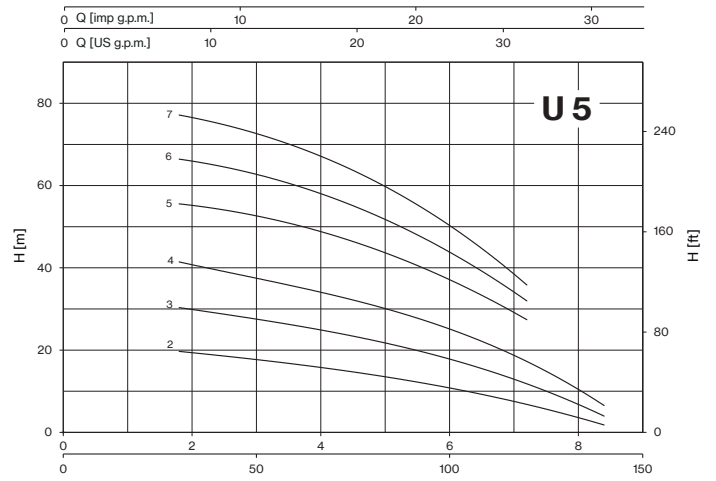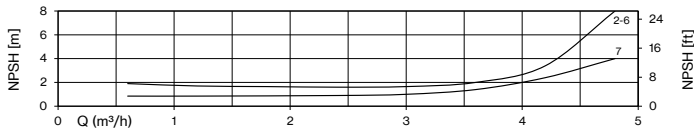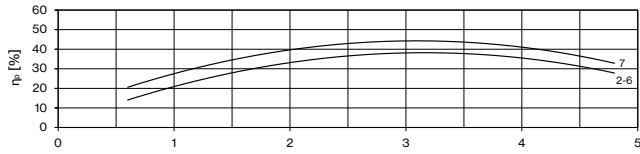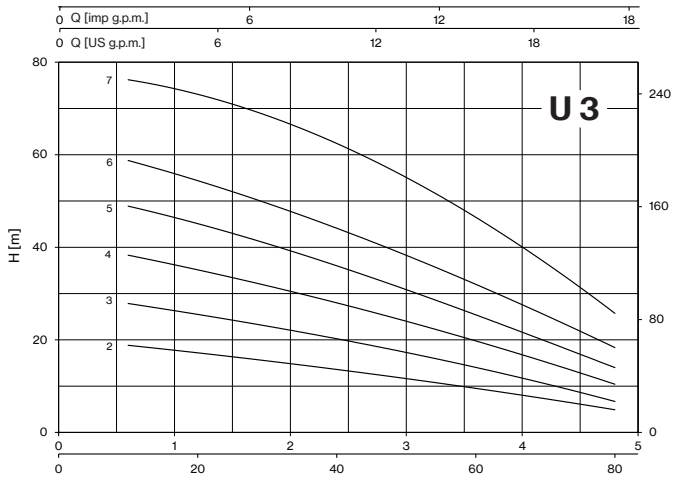


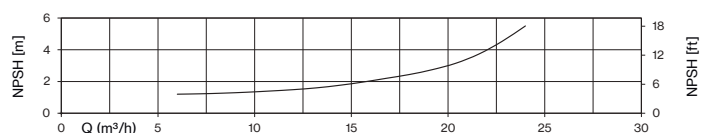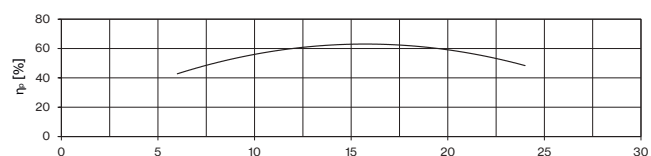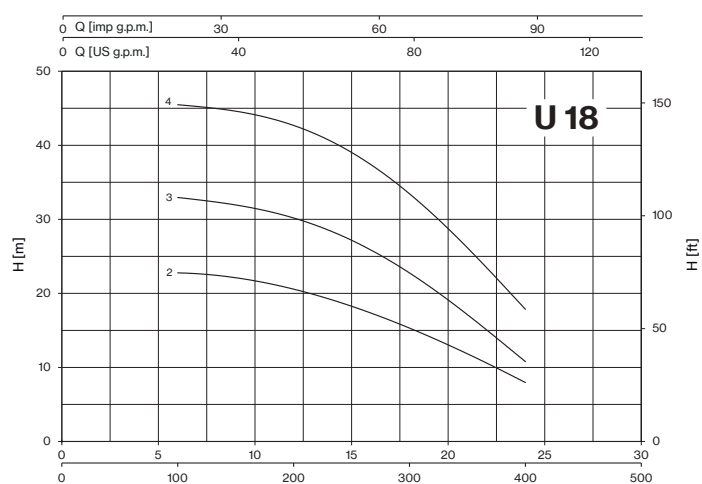


LOTS				
TYPE	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3-50/2-90/4	80×120×150	84	80×120×175	96
U 3-100/5-120/6	85×110×160	70	85×110×185	80
U 3-150/7	80×120×150	42	80×120×175	49
U 5-70/2	80×120×150	84	80×120×175	96
U 5-80/3-120/4	85×110×160	70	85×110×185	80
U 5-150/5	90×110×150	54	90×110×170	63
U 5-180/6-200/7	80×120×150	42	80×120×175	49
U 7-100/2-120/3	85×110×160	70	85×110×185	80
U 7-180/4-250/5	90×110×150	54	90×110×170	63
U 7-300/6T	80×120×150	42	80×120×175	49
U 7-300/6 M-350/7T	80×120×145	35	80×120×170	42
U 9-100/2	85×110×160	70	85×110×185	80
U 9-150/3-200/4	90×110×150	54	90×110×170	63
U 9-250/5	80×120×150	42	80×120×175	49
U 18-180/2-250/3	90×110×150	54	90×110×170	63
U 18-400/4	80×120×145	35	80×120×170	42



ULTRA

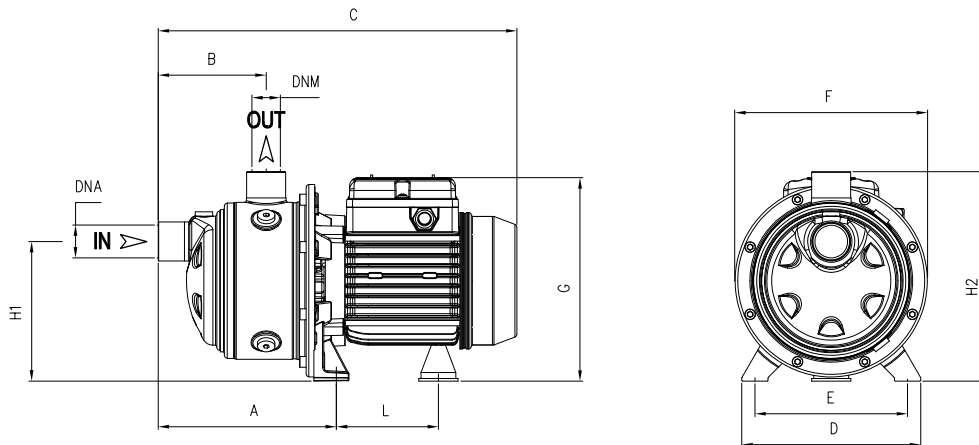

TYPE		DIMENSIONS (mm)												Kg	
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM	-1	-3
U 3-50/2	U 3-50/2T	166,8	103	333	164	140	178	190	93,7	128	192	1" G	1" G	6,5	6
U 3-70/3	U 3-70/3T	166,8	103	333	164	140	178	190	93,7	128	192			7	7
U 3-90/4	U 3-90/4T	190,8	127	357	164	140	178	190	93,7	128	192			8,5	8,5
U 3-100/5	U 3-100/5T	214,8	151	404	164	140	178	203	104,7	128	192			10,5	10,5
U 3-120/6	U 3-120/6T	238,8	175	428	164	140	178	203	104,7	128	192			11,5	11,5
U 3-150/7	U 3-150/7T	262,8	199	513	164	140	201	211	128,2	134	198			14,5	14
U 5-70/2	U 5-70/2T	166,8	103	333	164	140	178	195	93,7	128	192			7	7
U 5-80/3	U 5-80/3T	166,8	103	357	164	140	178	203	93,7	128	192			9,5	10,5
U 5-120/4	U 5-120/4T	190,8	127	380	164	140	178	203	104,7	128	192			11	11
U 5-150/5	U 5-150/5T	214,8	151	466	164	140	201	211	128,2	134	198			17,5	17,5
U 5-180/6	U 5-180/6T	238,8	175	489	164	140	201	211	128,2	134	198			17,5	18
U 5-200/7	U 5-200/7T	262,8	199	513	164	140	201	211	128,2	134	198			17	18

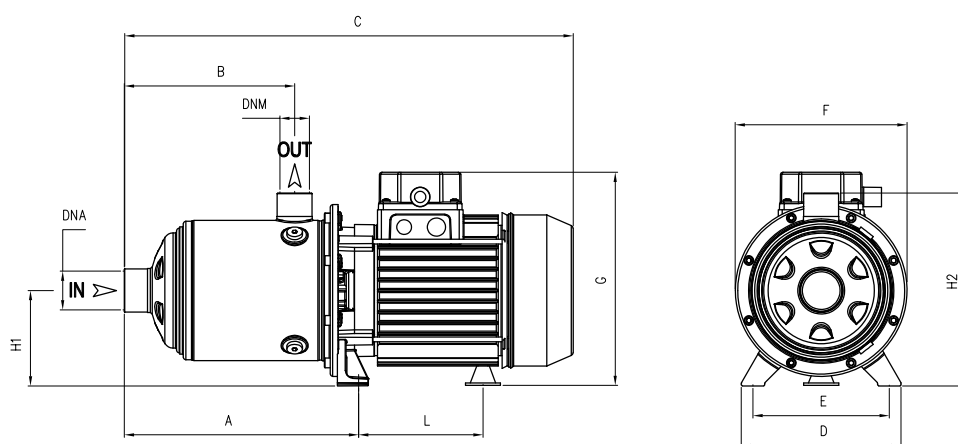

TYPE		DIMENSIONS (mm)												Kg					
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM	-1	-3				
U 7-100/2	U 7-100/2T	166,8	103	356	164	140	178	203	104,7	92	192	1" 1/4 G	1" G	10	10				
U 7-120/3	U 7-120/3T	166,8	103	356	164	140	178	203	104,7	92	192			10,5	10,5				
U 7-180/4	U 7-180/4T	190,8	127	441	164	140	201	211	128,2	98	198			16	17				
U 7-250/5	U 7-250/5T	214,8	151	466	164	140	201	211	128,2	98	198			17,5	16,5				
U 7-300/6	U 7-300/6T	238,8	175	543 T 489	164	140	201	229 T 211	148,2 T 128,2	103 T 98	203 T 198			24,5	18				
-	U 7-350/7T	262,8	199	567	164	140	201	229	148,2	103	203			-	22				
U 9-100/2	U 9-100/2T	185,8	118	375	164	140	178	203	104,7	98	192			1" 1/2 G	1" 1/4 G	10	10		
U 9-150/3	U 9-150/3T	185,8	118	405	164	140	201	211	128,2	98	198					17	17		
U 9-200/4	U 9-200/4T	215,8	148	466	164	140	201	211	128,2	98	198					16	17,5		
U 9-250/5	U 9-250/5T	245,8	178	494	164	140	201	211	128,2	98	198					17,5	16,5		
-	U 18-180/2T	201	141	462	164	140	201	211	128,2	98	198					-	14		
-	U 18-250/3T	238,5	141	462	164	140	201	211	128,2	98	198					2" G	1" 1/2 G	-	16
-	U 18-400/4T	276	178,5	554	164	140	201	229	148,2	103	203					-	-	-	24



ULTRA S

Multistage Horizontal


Stainless steel multistage horizontal pumps. Pumping of clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, heating and air conditioning, washing system.

Construction features

Pump body, mechanical seal housing	stainless steel AISI 304
Motor bracket	aluminum
Impellers, diffusers	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM ≤ 6 impellers graphite-silicon carbide-EPDM ≥ 7 impellers
Motor shaft	stainless steel AISI 303
Liquid temperature	-15 ÷ +110 °C
Operating pressure	max 8,5 bar

Motor

	3~ 230/400V - 50Hz
2 poles induction motor	1- 230V - 50Hz (with thermal protection up to 1,85 kW)
Insulation class	F
Protection degree	IPX4

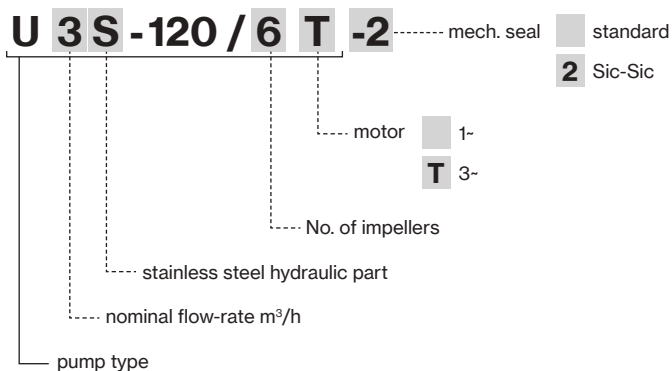

ULTRA 3S



ULTRA 5S



ULTRA 7S



ULTRA 9S



ULTRA 18S



ULTRA S

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	0,6	1,2	1,8	2,4	3,6	4,8
								0	10	20	30	40	60	80
		HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz	H (m)						
U 3S-50/2	U 3S-50/2T	0,5	0,37	0,41	0,41	1,8	0,9	21,7	20,9	19,3	17,8	15,9	11,4	5,8
U 3S-70/3	U 3S-70/3T	0,7	0,51	0,61	0,58	2,7	1,1	32,7	31,2	29,2	26,7	23,9	17,2	9,0
U 3S-90/4	U 3S-90/4T	0,9	0,66	0,83	0,8	3,6	1,7	44,3	42,8	40,0	36,4	33,2	24,5	13,9
U 3S-100/5	U 3S-100/5T	1	0,75	0,99	0,92	4,4	1,7	55,3	53,5	50,3	46,5	42,1	31,6	17,7
U 3S-120/6	U 3S-120/6T	1,2	0,9	1,11	1,11	5,1	2,5	66,6	64,4	60,8	56,0	50,7	38,1	22,4
U 3S-150/7	U 3S-150/7T	1,5	1,1	1,4	1,4	6,6	3,1	75,6	73,3	69,4	64,8	58,9	44,4	26,1













TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	1,8	2,4	3,6	4,8	6	7,2	8,4
								0	30	40	60	80	100	120	140
		HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz	H (m)							
U 5S-70/2	U 5S-70/2T	0,7	0,51	0,6	0,58	2,6	1,1	22,3	20,4	19,5	17,5	14,8	11,7	7,8	2,8
U 5S-80/3	U 5S-80/3T	0,8	0,6	0,8	0,75	3,8	1,4	34,0	31,1	29,9	27,0	23,6	19,1	13,1	6,0
U 5S-120/4	U 5S-120/4T	1,2	0,9	1,09	1,08	4,9	2,4	45,5	42,2	40,7	37,2	32,9	27,4	19,8	10,4
U 5S-150/5	U 5S-150/5T	1,5	1,1	1,4	1,3	6,6	3,1	55,9	52,8	51,4	48,1	43,4	37,3	28,3	16,4
U 5S-180/6	U 5S-180/6T	2	1,5	1,6	1,6	7,4	3,3	67,0	63,3	61,6	57,6	51,9	44,2	33,6	20,4
U 5S-200/7	U 5S-200/7T	2	1,5	1,9	1,8	8,6	3,6	77,8	73,5	71,3	66,3	59,6	50,7	38,0	22,4

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	2,4	3,6	4,8	6	7,2	9,6	10,8
								0	40	60	80	100	120	160	180
		HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz	H (m)							
U 7S-100/2	U 7S100/2T	1	0,75	0,91	0,84	4,1	1,6	23,6	22,6	21,8	20,5	18,8	16,7	10,6	6,7
U 7S-120/3	U 7S-120/3T	1,2	0,9	1,23	1,22	5,6	2,5	35,6	33,9	32,8	31,2	28,1	24,7	15,7	10,0
U 7S-180/4	U 7S-180/4T	2	1,5	1,8	1,7	8,3	3,5	46,7	46,0	45,2	43,1	40,3	36,9	25,5	
U 7S-250/5	U 7S-250/5T	2,5	1,85	2,2	2,1	9,9	4,0	58,5	57,6	56,6	54,1	50,8	46,1	31,8	
U 7S-300/6	U 7S-300/6T	3	2,2	2,6	2,5	12,1	4,8	70,6	69,9	68,7	65,8	61,8	56,6	39,3	
-	U 7S-350/7T	3,5	2,57	-	2,9	-	5,3	82,8	82,0	80,6	77,2	72,3	66,0	46,4	


TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)								
1~	3~					1~	3~	0	3,6	4,8	6	7,2	9,6	12	13,2	14,4
								0	60	80	100	120	160	200	220	240
		HP	kW	1~	3~	1- 230V 50 Hz	3- 400V 50 Hz	H (m)								
U 9S-100/2	U 9S-100/2T	1	0,75	0,99	0,95	4,5	1,6	23,9	21,0	20,0	18,8	17,7	15,0	11,0	8,7	6,0
U 9S-150/3	U 9S-150/3T	1,5	1,1	1,5	1,4	7,0	3,1	35,1	32,8	31,8	30,6	29,0	24,9	18,9	15,2	
U 9S-200/4	U 9S-200/4T	2	1,5	1,8	1,8	8,3	3,6	45,8	42,7	41,5	39,7	37,8	32,7	24,6	19,8	
U 9S-250/5	U 9S-250/5T	2,5	1,85	2,3	2,2	10,4	4,2	57,1	53,1	51,6	49,5	47,2	40,6	30,2	24,4	

TYPE		P2		P1 (kW)		A		Q (m³/h - l/min)							
3~	3~					0	6	7,2	9,6	12	14,4	16,8	19,2	21,6	24
						0	100	120	160	200	240	280	320	360	400
		HP	kW	3~	3- 400V 50 Hz	H (m)									
U 18S-180/2T		2	1,5	1,6	3,3	23,8	22,3	21,8	20,6	19,1	17,5	15,7	13,5	10,9	7,8
U 18S-250/3T		2,5	1,85	2,3	4,3	33,8	31,6	31,0	29,4	27,4	25,4	23,2	20,4	16,3	11,5
U 18S-400/4T		4	3	3,1	5,9	46,3	44,2	43,4	41,4	39,1	36,7	34,1	30,8	25,6	19,0



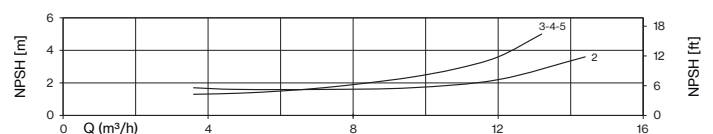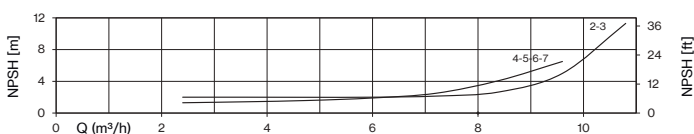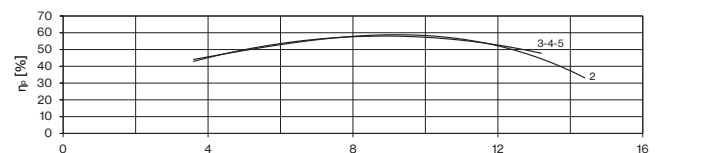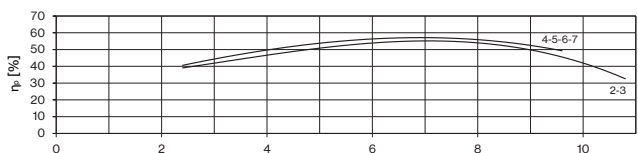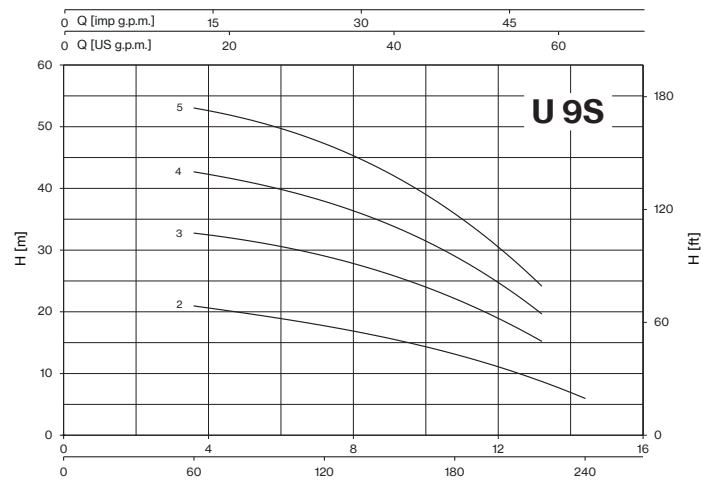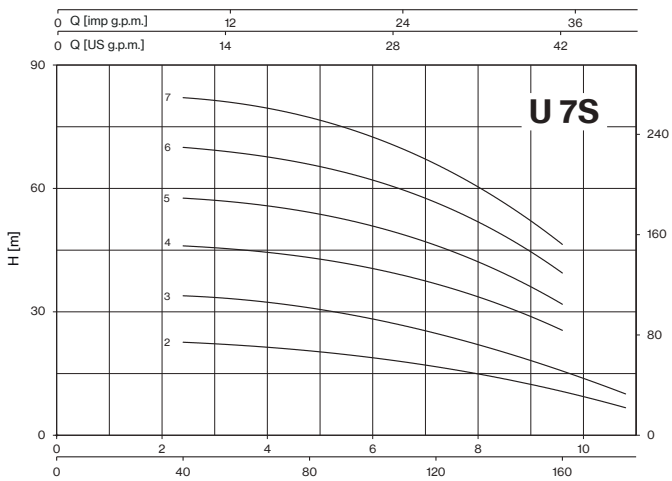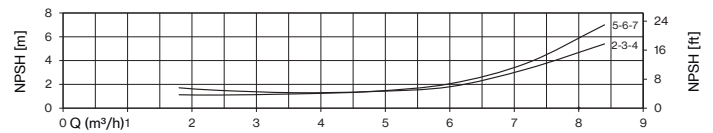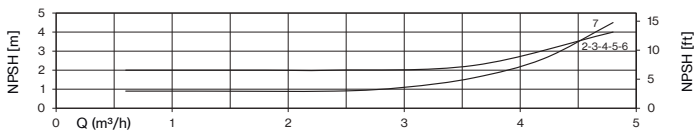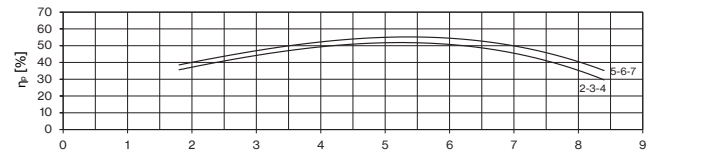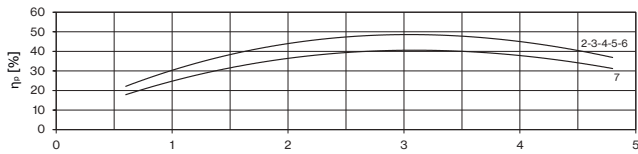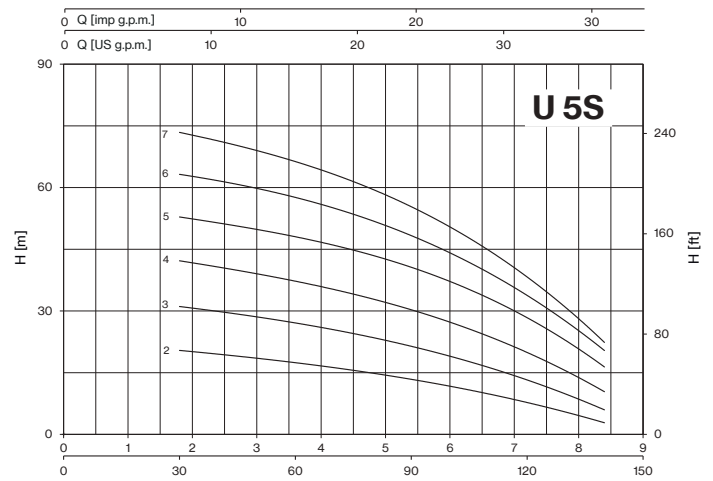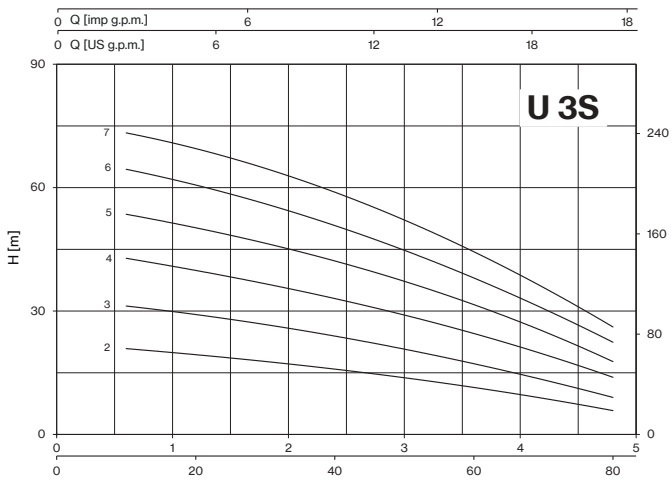


ULTRA S

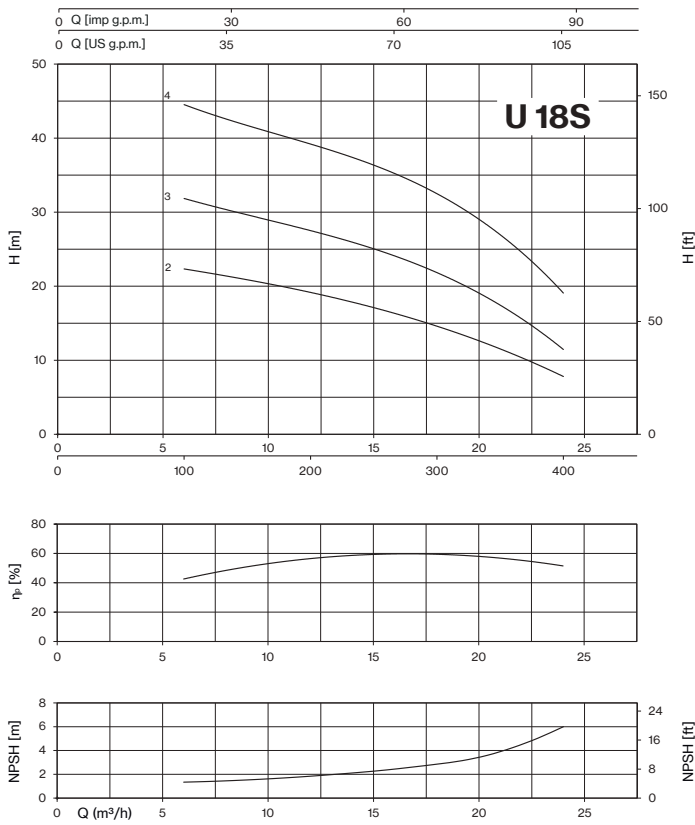


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3S-50/2-90/4	80×120×150	84	80×120×175	96
U 3S-100/5-120/6	85×110×160	70	85×110×185	80
U 3S-150/7	80×120×150	42	80×120×175	49
U 5S-70/2	80×120×150	84	80×120×175	96
U 5S-80/3-120/4	85×110×160	70	85×110×185	80
U 5S-150/5	90×110×150	54	90×110×170	63
U 5S-180/6-200/7	80×120×150	42	80×120×175	49
U 7S-100/2-120/3	85×110×160	70	85×110×185	80
U 7S-180/4-250/5	90×110×150	54	90×110×170	63
U 7S-300/6T	80×120×150	42	80×120×175	49
U 7S-300/6-350/7T	80×120×145	35	80×120×170	42
U 9S-100/2	85×110×160	70	85×110×185	80
U 9S-150/3-200/4	90×110×150	54	90×110×170	63
U 9S-250/5	80×120×150	42	80×120×175	49
U 18S-180/2-250/3	90×110×150	54	90×110×170	63
U 18S-400/4	80×120×145	35	80×120×170	42



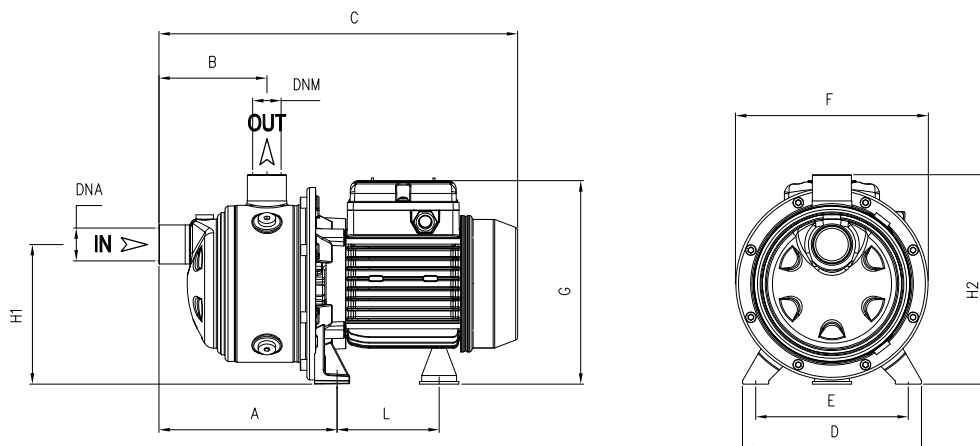


TYPE		DIMENSIONS (mm)												Kg	
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM	-1	-3
U 3S-50/2	U 3S-50/2T	166,8	103	333	164	140	178	190	93,7	128	192	1" G	1" G	7	7
U 3S-70/3	U 3S-70/3T	166,8	103	333	164	140	178	190	93,7	128	192			8	8
U 3S-90/4	U 3S-90/4T	190,8	127	357	164	140	178	190	93,7	128	192			9,5	9,5
U 3S-100/5	U 3S-100/5T	214,8	151	404	164	140	178	203	104,7	128	192			12	12
U 3S-120/6	U 3S-120/6T	238,8	175	428	164	140	178	203	104,7	128	192			13	13
U 3S-150/7	U 3S-150/7T	262,8	199	513	164	140	201	211	128,2	134	198			19,5	20
U 5S-70/2	U 5S-70/2T	166,8	103	333	164	140	178	195	93,7	128	192			7,5	7,5
U 5S-80/3	U 5S-80/3T	166,8	103	357	164	140	178	203	93,7	128	192			10	10
U 5S-120/4	U 5S-120/4T	190,8	127	380	164	140	178	203	104,7	128	192			12	12
U 5S-150/5	U 5S-150/5T	214,8	151	466	164	140	201	211	128,2	134	198			18,5	18,5
U 5S-180/6	U 5S-180/6T	238,8	175	489	164	140	201	211	128,2	134	198	19	19,5		
U 5S-200/7	U 5S-200/7T	262,8	199	513	164	140	201	211	128,2	134	198	18,5	20		

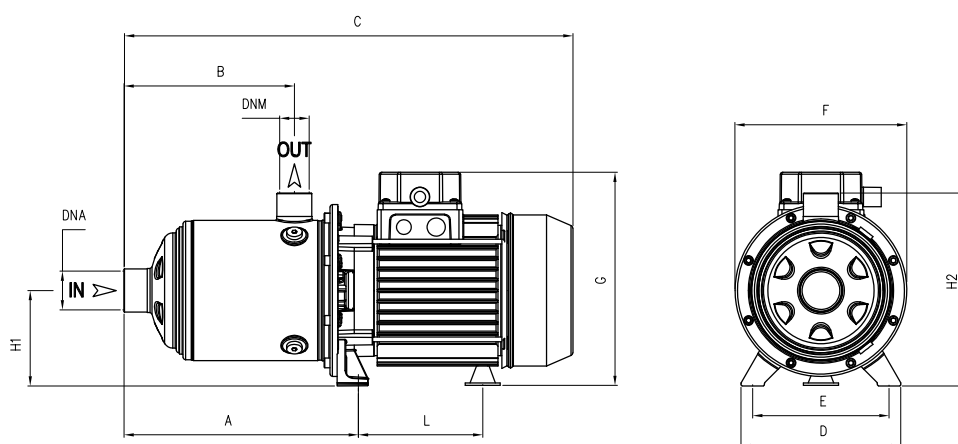


TYPE		DIMENSIONS (mm)												Kg	
-1	-3	A	B	C	D	E	F	G	L	H1	H2	DNA	DNM	-1	-3
U 7S-100/2	U 7S100/2T	166,8	103	356	164	140	178	203	104,7	92	192	1" ¼ G	1" G	10,5	10,5
U 7S-120/3	U 7S-120/3T	166,8	103	356	164	140	178	203	104,7	92	192			11,5	11,5
U 7S-180/4	U 7S-180/4T	190,8	127	441	164	140	201	211	128,2	98	198			17	18
U 7S-250/5	U 7S-250/5T	214,8	151	466	164	140	201	211	128,2	98	198			18,5	17,5
U 7S-300/6	U 7S-300/6T	238,8	175	543 T 489	164	140	201	229 T 211	148,2 T 128,2	103 T 98	203 T 198			26	19,5
-	U 7S-350/7T	262,8	199	567	164	140	201	229	148,2	103	203	-	23,5		
U 9S-100/2	U 9S-100/2T	185,8	118	375	164	140	178	203	104,7	98	192	1" ½ G	1" ¼ G	10,5	10,5
U 9S-150/3	U 9S-150/3T	185,8	118	405	164	140	201	211	128,2	98	198			18	18
U 9S-200/4	U 9S-200/4T	215,8	148	466	164	140	201	211	128,2	98	198			17,5	18,5
U 9S-250/5	U 9S-250/5T	245,8	178	494	164	140	201	211	128,2	98	198			19	18
-	U 18S-180/2T	201	141	462	164	140	201	211	128,2	98	198			-	15
-	U 18S-250/3T	238,5	141	462	164	140	201	211	128,2	98	198	2" G	1" ½ G	-	17,5
-	U 18S-400/4T	276	178,5	554	164	140	201	229	148,2	103	203	-	-	-	26



ULTRA (S) Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL
					2
	U3-50/2, U3-70/3, U3-90/4, U3-100/5, U3-120/6, U5-70/2, U5-80/3, U5-120/4, U5-150/5, U5-180/6, U7-100/2, U7-120/3, U7-180/4, U7-250/5, U7-300/6, U9-100/2, U9-150/3, U9-200/4, U9-250/5, U18-180/2, U18-250/3, U18-400/4	14mm / S	Rotating face Stationary face Elastomer	Graphite Ceramic EPDM	SiC SiC EPDM
	U3-150/7, U5-200/7, U7-350/7	14mm	Rotating face Stationary face Elastomer	Graphite SiC EPDM	SiC SiC EPDM

BEARINGS	PUMP MODEL	TYPE	
	U3-50/2, U3-70/3, U3-90/4, U5-70/2	6201-ZZ	6202-ZZ
	U3-100/5, U3-120/6, U5-80/3, U5-120/4, U7-100/2, U7-120/3, U9-100/2	6202-ZZ	6302-ZZ C3
	U3-150/7, U5-150/5, U5-180/6, U5-200/7, U7-180/4, U7-250/5, 3- U7-300/6, U9-150/3, U9-200/4, U9-250/5, U18-180/2, U18-250/3	6203-ZZ	6304-ZZ C3
	1- U7-300/6, U7-350/7, U18-400/4	6203-ZZ	6305-ZZ C3

ULTRA + VSD

Horizontal booster pump with variable speed drive



DESCRIPTION

Horizontal pump of ULTRA series provided with single-phase variable speed drive EPIC or three-phase EPIC-A. This booster pump assures a desired pressure regardless of changes on flow demand making it suitable for low or missing pressure in domestic systems. A membrane tank downstream the system is required.

FEATURES

- EPIC or EPIC-A variable speed drive provided on board
- Three-phase horizontal pump of ULTRA series
- Pressure sensor
- Cable with plug


FUNCTIONING

If the pressure in the network drops the pump will start and gradually speeds up to provide with the set pressure. When the water demand decreases, the pressure will rise causing the pump speed to slow down and eventually to stop the pump if demand ceases. The pump will remain on standby waiting to start at the next water demand.


SELECTION

The table below shows the horizontal ULTRA pump models available for the assembly with EPIC or EPIC-A. Consult the catalog at the ULTRA series for pump specifics and characteristic curves.

3- PUMP TYPE		VSD TYPE	
ULTRA	ULTRA S	Power supply	
		1- 230V	3- 400V
U 3-50/2T	U 3S-50/2T	EPIC	EPIC-A 304
U 3-70/3T	U 3S-70/3T		
U 3-90/4T	U 3S-90/4T		
U 3-100/5T	U 3S-100/5T		
U 3-120/6T	U 3S-120/6T		
U 3-150/7T	U 3S-150/7T		
U 5-70/2T	U 5S-70/2T		
U 5-80/3T	U 5S-80/3T		
U 5-120/4T	U 5S-120/4T		
U 5-150/5T	U 5S-150/5T		
U 5-180/6T	U 5S-180/6T		
U 5-200/7T	U 5S-200/7T		
U 7-100/2T	U 7S-100/2T		
U 7-120/3T	U 7S-120/3T		
U 7-180/4T	U 7S-180/4T		
U 7-250/5T	U 7S-250/5T		
U 7-300/6T	U 7S-300/6T		
U 7-350/7T	U 7S-350/7T		
U 9-100/2T	U 9S-100/2T	EPIC	EPIC-A 304
U 9-150/3T	U 9S-150/3T		
U 9-200/4T	U 9S-200/4T	-	EPIC-A 306
U 9-250/5T	U 9S-250/5T		
U 18-180/2T	U 18S-180/2T	EPIC	EPIC-A 304
U 18-250/3T	U 18S-250/3T	-	EPIC-A 306
U 18-400/4T	U 18S-400/4T		

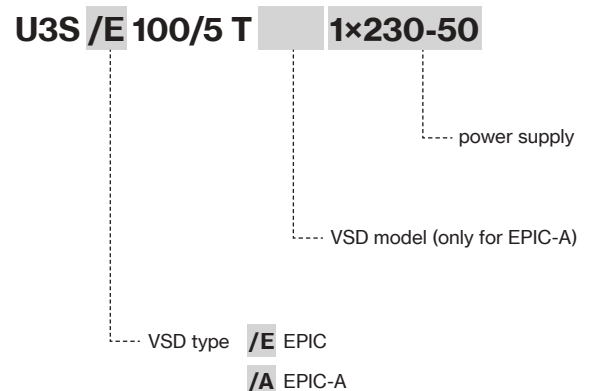




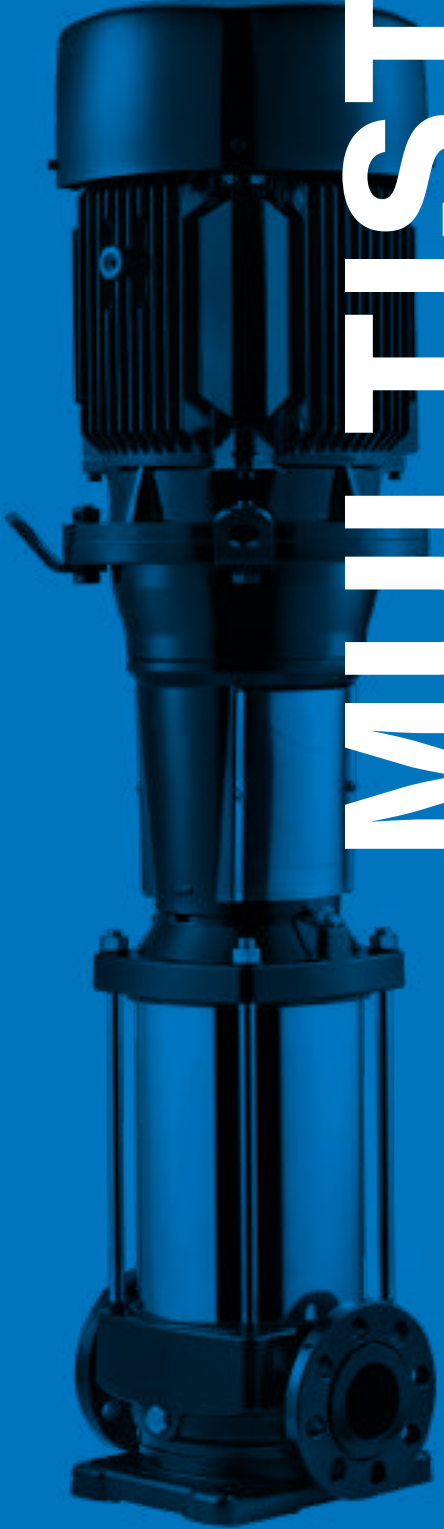

MULTISTAGE VERTICAL

MULTISTAGE VERTICAL PUMPS

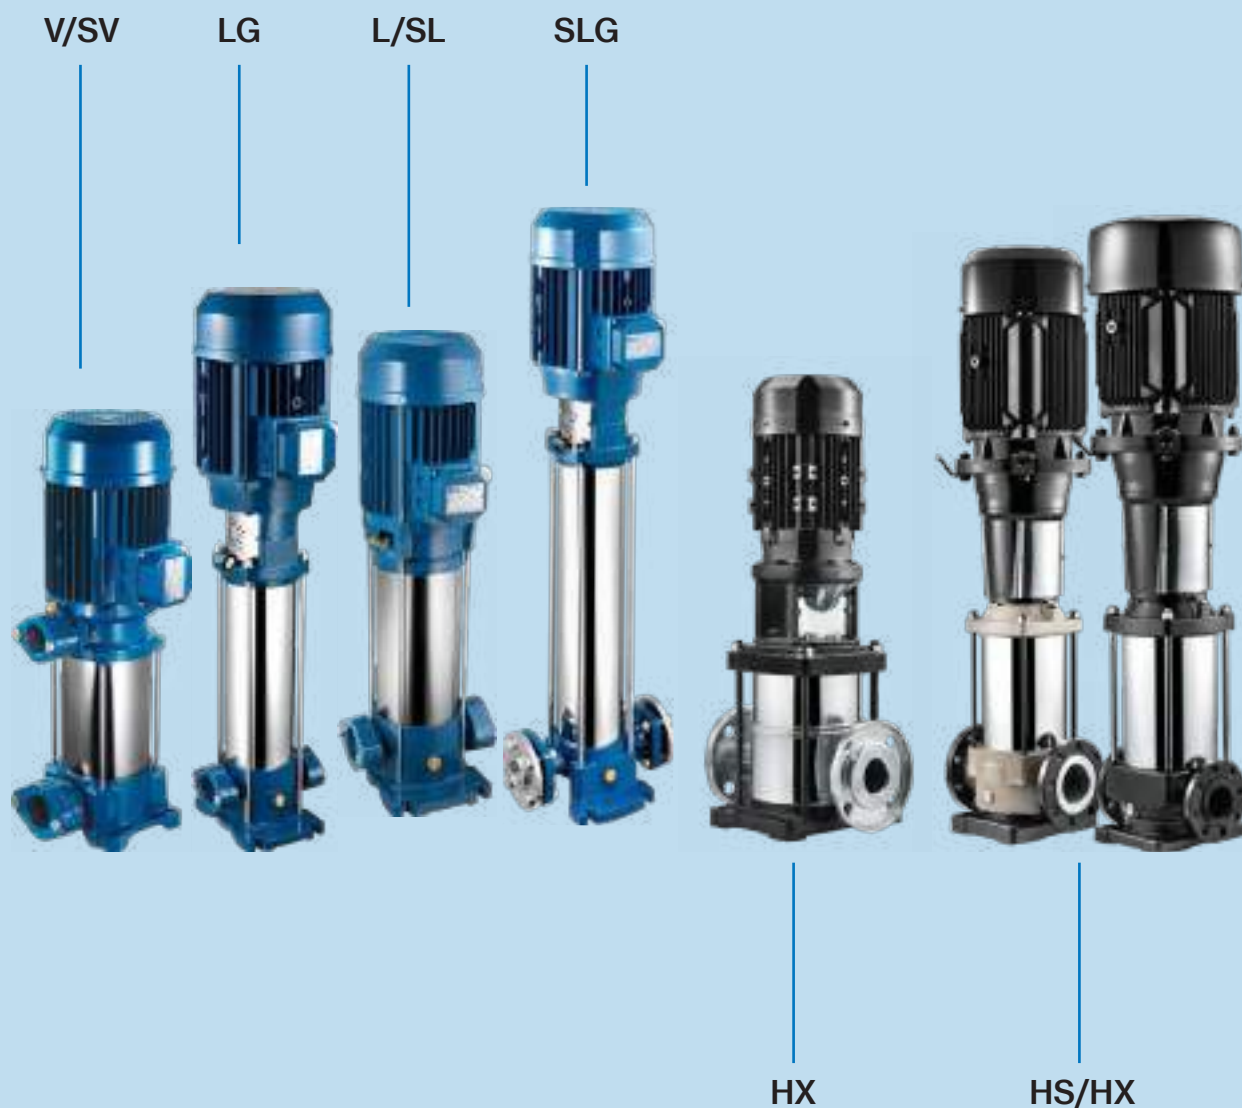


Family of vertical multistage monobloc pumps (V/L) with impellers in Noryl® or (SV/SL) in AISI 304; coupled pumps (LG) with impellers in Noryl® or (SLG) in AISI 304; coupled pumps (HS) with impellers in AISI 304 or (HX) in AISI 316.

Applications:

- Handling unloaded liquids
- Pressurization systems
- Residential and industrial irrigation and drinking water systems
- Washing systems



MULTISTAGE

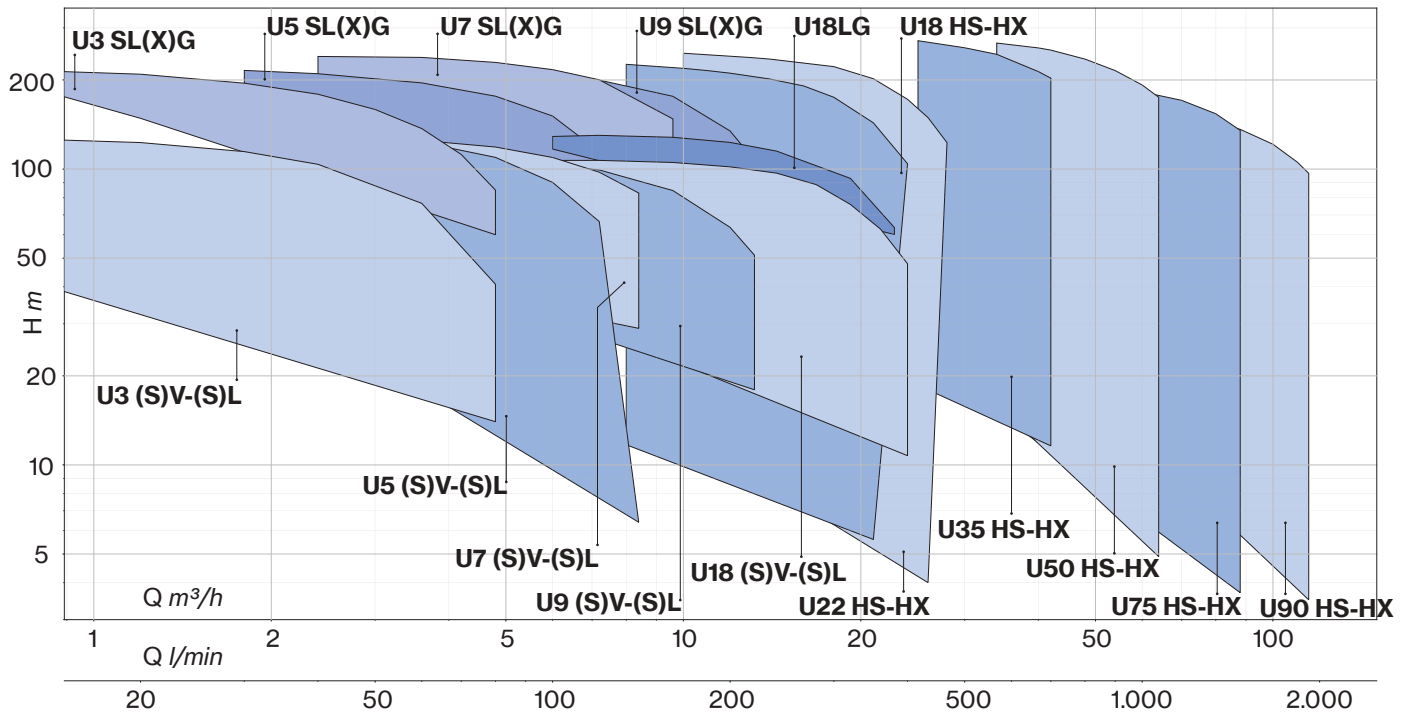

ULTRA V/L

Multistage Vertical

Stainless steel multistage vertical pumps. Pumping of clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.



ULTRA V



ULTRA 3-5-7 L

ULTRA 9-18 L




Construction features

Pump body	cast iron
Motor bracket	cast iron
Impellers, diffusers	Noryl®
Shell, motor shaft	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM graphite-silicon carbide-EPDM
Intermediate shaft guiding stage bush	ceramic-tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	+5 ÷ +35 °C
Max operating pressure	8 bar ≤ 6 impellers; 14 bar ≥ 7 impellers
Pump body gasket	EPDM

Motor

2 pole induction motor	3~ 230/400V - 50Hz P ≤ 4kW
	3~ 400/690V - 50Hz P > 4kW
	1~ 230V-50Hz (with thermal protection up to 1,85 kW)
Insulation class	F
Protection degree	IPX4 IPX5 ≥ 4,5 HP

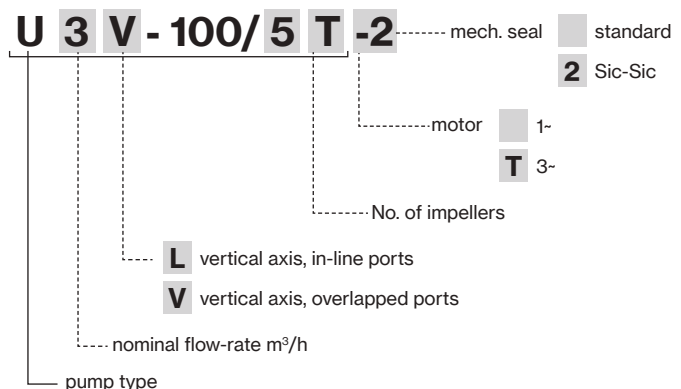

ULTRA LG

Multistage Vertical

Stainless steel multistage vertical pumps. Pumping of clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.

Construction features


Pump body	cast iron
Motor bracket	cast iron
Impellers, diffusers	Noryl®
Shell, motor shaft	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM graphite-silicon carbide-EPDM
Intermediate shaft guiding stage bush	ceramic-tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	+5 ÷ +35 °C
Max operating pressure	14 bar
Pump body gasket	EPDM

Motor

2 pole induction motor	3~ 400/690V - 50Hz P > 4kW
Insulation class	F
Protection degree	IPX5



U 18 L G - 920 / 10 T

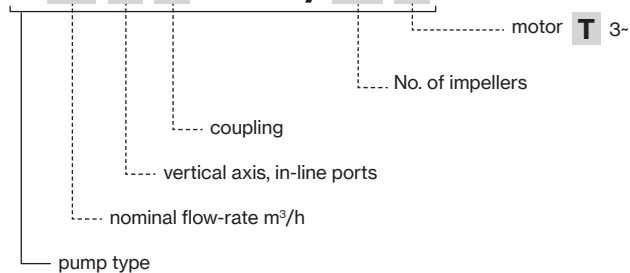

ULTRA V/L

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	0,6	1,2	1,8	2,4	3,6	4,8
						0	10	20	30	40	60	80		
		HP	kW	1~	3~	1- 230V 50 Hz	3-400V 50 Hz	H (m)						
U 3...-100/5	U 3...-100/5T	1	0,75	1,1	1	4,8	1,9	52,2	48,9	45,1	40,8	36,0	25,4	14,0
U 3...-120/6	U 3...-120/6T	1,2	0,9	1,2	1,2	5,6	2,6	62,8	58,7	54,5	49,6	43,9	32,1	18,3
U 3...-150/7	U 3...-150/7T	1,5	1,1	1,3	1,2	6,1	3,0	77,1	76,1	73,2	68,4	62,3	46,5	25,7
U 3...-180/8	U 3...-180/8T	2	1,5	1,5	1,4	7,0	3,1	88,1	87,2	83,5	77,6	70,2	51,3	26,0
U 3...-200/9	U 3...-200/9T	2	1,5	1,6	1,5	7,4	3,2	98,8	97,2	93,7	87,3	79,4	60,0	32,2
U 3...-250/10	U 3...-250/10T	2	1,5	1,7	1,7	7,9	3,5	109,3	108,2	103,6	96,3	87,5	65,3	34,5
U 3...-280/11	U 3...-280/11T	2,5	1,85	2,0	1,8	9,4	3,8	120,4	118,7	113,8	106,1	96,4	71,6	38,3
U 3...-300/12	U 3...-300/12T	2,5	1,85	2,1	2,0	9,8	4,0	130,3	128,5	122,9	114,6	103,8	76,6	40,8

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1~	3~	0	1,8	2,4	3,6	4,8	6	7,2	8,4
						0	30	40	60	80	100	120	140		
		HP	kW	1~	3~	1- 230V 50 Hz	3-400V 50 Hz	H (m)							
U 5...-120/4	U 5...-120/4T	1,2	0,9	1,13	1,13	5,2	2,5	45,3	41,3	39,6	35,6	30,8	24,9	17,6	6,4
U 5...-150/5	U 5...-150/5T	1,5	1,1	1,4	1,4	6,6	3,1	57,6	55,6	54,2	50,5	45,0	37,0	27,4	
U 5...-180/6	U 5...-180/6T	2	1,5	1,6	1,6	7,4	3,3	69,1	66,5	64,8	60,1	53,2	43,8	32,0	
U 5...-200/7	U 5...-200/7T	2	1,5	1,9	1,8	8,6	3,6	80,6	77,1	75,1	69,6	61,3	50,4	35,8	
U 5...-250/8	U 5...-250/8T	2,5	1,85	2,2	2,1	9,9	4,1	92,0	88,2	85,8	79,2	70,1	57,2	41,1	
U 5...-280/9	U 5...-280/9T	2,5	1,85	2,4	2,3	10,9	4,3	103,3	98,9	96,2	88,8	78,4	64,1	45,3	
U 5...-300/10	U 5...-300/10T	3	2,2	2,7	2,6	12,5	4,9	115,1	110,6	107,6	99,5	87,6	72,1	50,7	
U 5...-350/11	U 5...-350/11T	3,5	2,57	3,0	2,9	13,7	5,3	127,6	122,5	119,4	110,8	98,0	80,8	57,4	
-	U 5...-380/12T	4	3	-	3,2	-	6,0	140,3	135,4	132,1	123,2	109,5	90,1	66,5	

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	2,4	3,6	4,8	6	7,2	8,4
						0	40	60	80	100	120	140		
		HP	kW	1~	3~	1- 230V 50 Hz	3-400V 50 Hz	H (m)						
U 7...-180/4	U 7...-180/4T	2	1,5	1,7	1,6	7,9	3,3	49,6	48,4	46,7	43,8	39,9	34,9	28,9
U 7...-250/5	U 7...-250/5T	2,5	1,85	2,2	2,0	9,9	4,0	63,2	62,1	60,3	56,9	52,1	46,2	39,0
U 7...-300/6	U 7...-300/6T	3	2,2	2,5	2,4	11,5	4,7	76,0	75,1	73,1	69,2	63,6	56,8	48,2
-	U 7...-350/7T	3,5	2,57	-	2,8	-	5,1	89,0	88,0	85,8	81,2	74,5	66,3	56,2
-	U 7...-400/8T	4	3	-	3,1	-	5,9	102,3	101,0	98,2	92,4	84,4	74,6	62,4
-	U 7...-450/9T	4,5	3,37	-	3,6	-	6,5	115,2	114,4	111,4	105,6	97,1	86,3	73,1
-	U 7...-550/10T	5,5	4	-	4,0	-	7,7	128,1	128,0	124,9	118,7	109,4	97,6	83,0

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	3,6	4,8	7,2	9,6	12	13,2
						0	60	80	120	160	200	220		
		HP	kW	1~	3~	1- 230V 50 Hz	3-400V 50 Hz	H (m)						
U 9...-200/4	U 9...-200/4T	2	1,5	1,8	1,7	8,3	3,5	45,8	42,1	40,7	37,3	31,3	23,0	17,9
U 9...-250/5	U 9...-250/5T	2,5	1,85	2,3	2,1	10,4	4,1	56,9	52,2	50,4	46,1	38,8	28,2	22,3
U 9...-300/6	U 9...-300/6T	3	2,2	2,8	2,6	12,8	5,0	69,8	64,5	62,5	57,5	48,8	36,4	29,6
-	U 9...-400/7T	4	3	-	3,0	-	5,8	83,3	77,8	75,7	68,9	58,5	43,6	34,7
-	U 9...-450/8T	4,5	3,37	-	3,5	-	6,4	96,7	90,7	88,2	80,6	69,2	52,2	42,1
-	U 9...-500/9T	4,5	3,37	-	3,9	-	6,9	107,1	99,5	96,4	88,3	75,2	56,4	45,2
-	U 9...-550/10T	5,5	4	-	4,3	-	8,1	119,5	111,6	108,2	99,3	84,6	63,5	51,2





ULTRA V/L

TYPE	P2		P1 (kW)	A	Q (m ³ /h - l/min)											
					3~		0	6	7,2	9,6	12	14,4	16,8	19,2	21,6	24
					0	100	120	160	200	240	280	320	360	400		
3~	HP	kW	3~	3-400V 50 Hz	H (m)											
					U 18...-250/3T	2,5	1,85	2,2	4,2	34,7	32,9	32,6	31,6	30,1	28,0	24,7
U 18...-400/4T	4	3	3,0	5,8	47,1	45,4	45,2	44,3	42,6	40,0	36,0	30,6	24,6	17,8		
U 18...-450/5T	4,5	3,37	3,9	6,9	59,2	57,6	57,4	56,4	54,5	51,6	46,7	40,1	33,3	25,3		
U 18...-550/6T	5,5	4	4,6	8,4	71,4	69,7	69,6	68,2	65,7	62,2	56,3	48,0	39,4	29,4		
U 18...-750/8T	7,5	5,5	6,2	11,2	96,1	94,2	94,1	92,4	89,1	84,5	77,0	66,1	54,2	41,1		
U 18...-900/9T	10	7,5	6,9	12,8	108,5	106,9	107,0	105,3	101,7	96,8	88,6	75,9	62,6	47,8		













ULTRA LG


TYPE	P2		P1 (kW)	A	Q (m ³ /h - l/min)											
					3~		0	6	7,2	9,6	12	14,4	16,8	19,2	21,6	22,8
					0	100	120	160	200	240	280	320	360	380		
3~	HP	kW	3~	3-400V 50 Hz	H (m)											
					U 18LG-920/10T	10	7,5	7,7	14,0	120,4	116,8	118,3	116,6	112,6	104,4	96,3
U 18LG-1000/11T	10	7,5	8,3	13,6	132,4	128,9	130,0	128,0	123,0	115,0	103,9	93,0	72,6	63,4		

ULTRA V/L

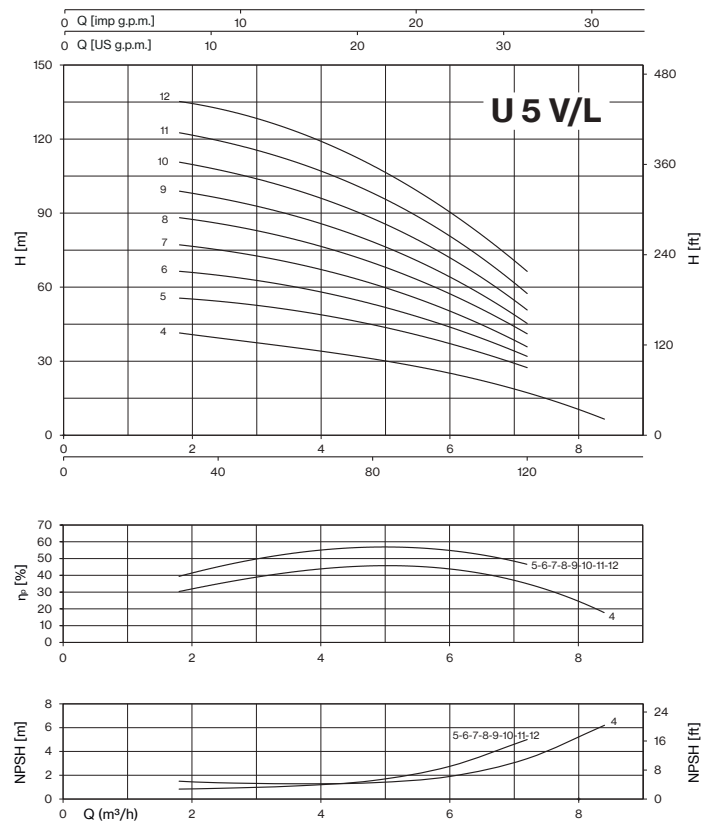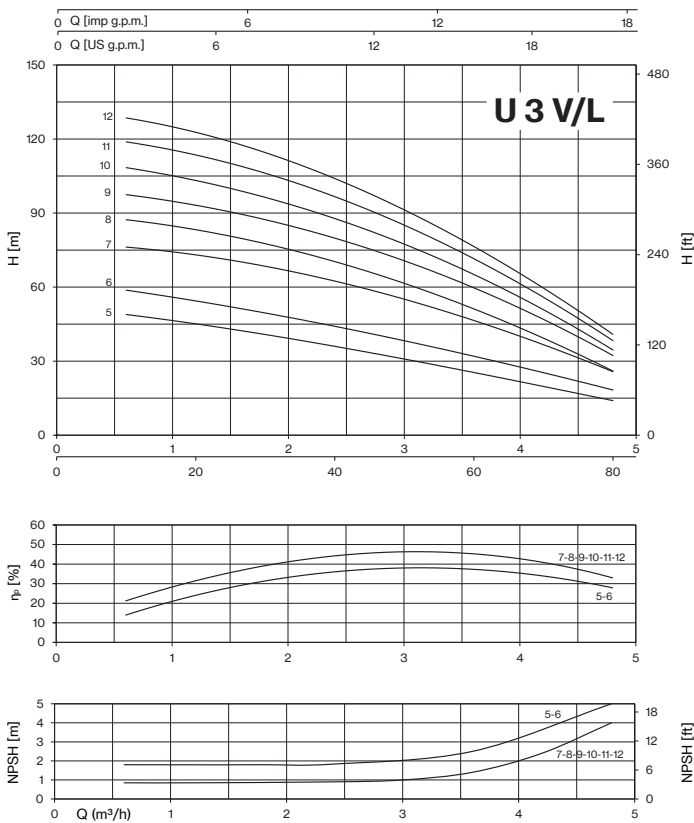

ULTRA V/L-LG

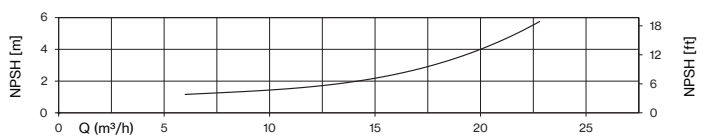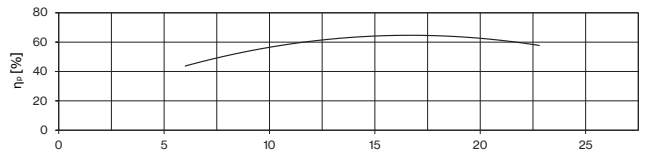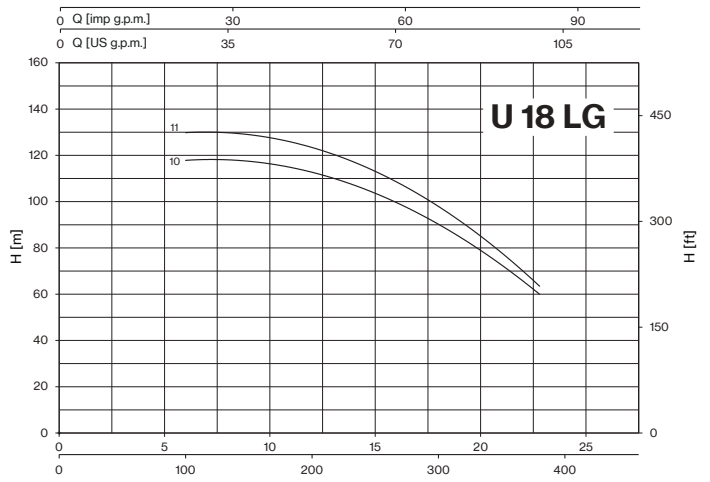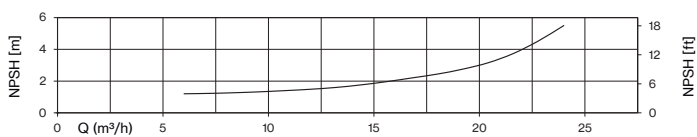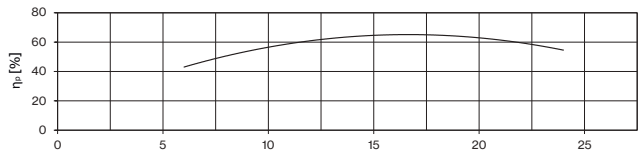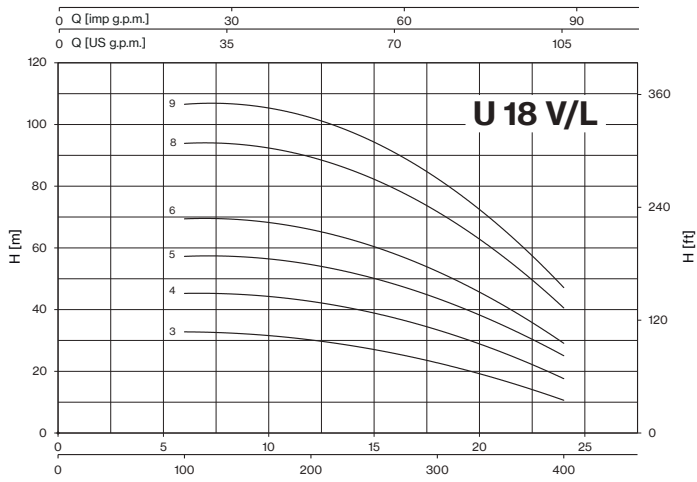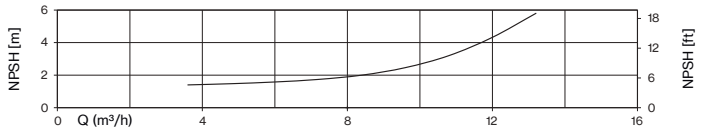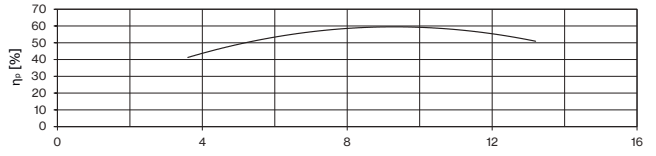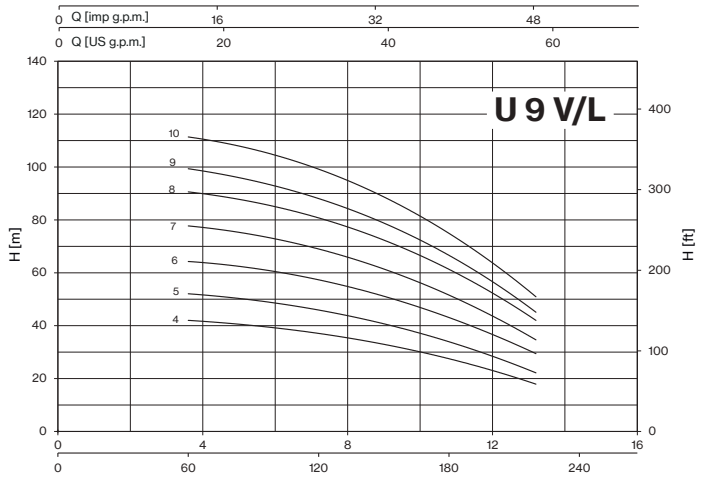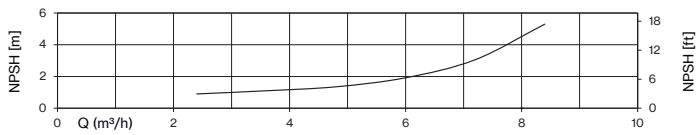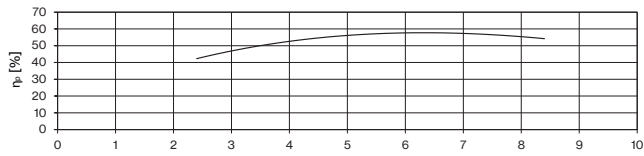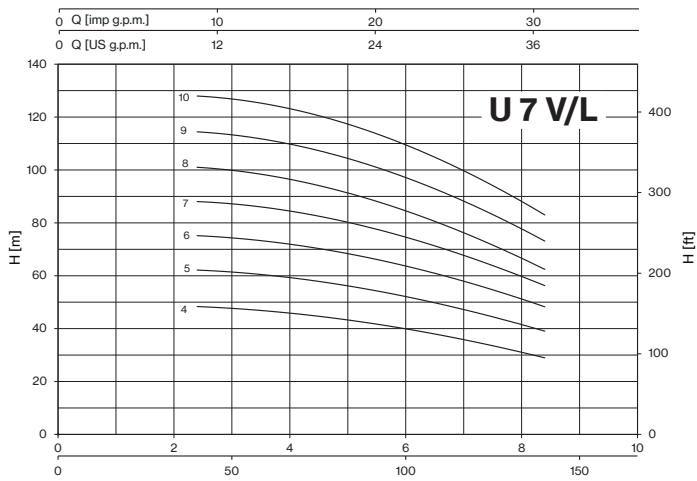


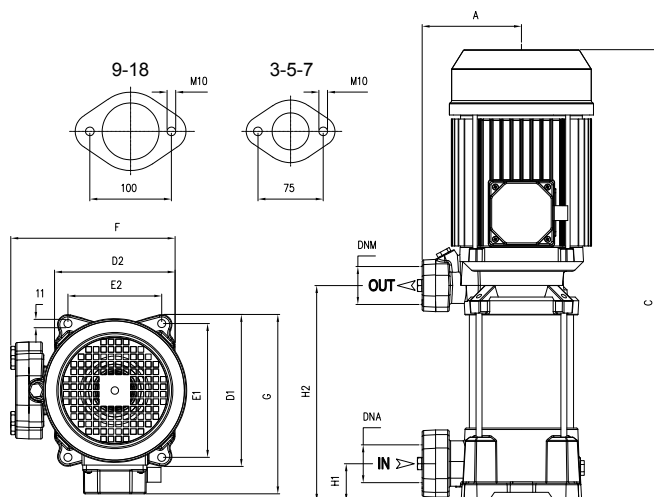

TYPE		DIMENSIONS (mm)												Kg	
~1	~3	A	C	D1	D2	E1	E2	F	G	H1	H2	DNA	DNM	~1	~3
U 3V-100/5	U 3V-100/5T	135	413	204	162	178,5	125	229	213	40	178			17,5	17,5
U 3V-120/6	U 3V-120/6T	135	437	204	162	178,5	125	229	213	40	202			18	18
U 3V-150/7	U 3V-150/7T	135	521	204	162	178,5	125	229	220	40	226			24,5	25
U 3V-180/8	U 3V-180/8T	135	545	204	162	178,5	125	229	220	40	250			24,5	24,5
U 3V-200/9	U 3V-200/9T	135	569	204	162	178,5	125	229	220	40	274	1" ¼ G	1" ¼ G	25	25,5
U 3V-250/10	U 3V-250/10T	135	593	204	162	178,5	125	229	220	40	298			27,5	27,5
U 3V-280/11	U 3V-280/11T	135	672 T 617	204	162	178,5	125	229	228 T 220	40	322			29,5	28
U 3V-300/12	U 3V-300/12T	135	696 T 641	204	162	178,5	125	229	228 T 220	40	346			29,5	25
U 5V-120/4	U 5V-120/4T	135	389	204	162	178,5	125	229	213	40	178			17,5	17,5
U 5V-150/5	U 5V-150/5T	135	473	204	162	178,5	125	229	220	40	202			24	24
U 5V-180/6	U 5V-180/6T	135	497	204	162	178,5	125	229	220	40	226			24,5	24,5
U 5V-200/7	U 5V-200/7T	135	521	204	162	178,5	125	229	220	40	250			23,5	24,5
U 5V-250/8	U 5V-250/8T	135	545	204	162	178,5	125	229	220	40	274	1" ¼ G	1" ¼ G	25	24
U 5V-280/9	U 5V-280/9T	135	624 T 569	204	162	178,5	125	229	228 T 220	40	298			29	24
U 5V-300/10	U 5V-300/10T	135	648 T 593	204	162	178,5	125	229	228 T 220	40	322			33	25,5
U 5V-350/11	U 5V-350/11T	135	672	204	162	178,5	125	229	228	40	346			33,5	30,5
-	U 5V-380/12T	135	696	204	162	178,5	125	229	228	40	370			32,5	32,5
U 7V-180/4	U 7V-180/4T	135	422	204	162	178,5	125	229	220	40	178			22,5	24
U 7V-250/5	U 7V-250/5T	135	473	204	162	178,5	125	229	220	40	202			24	23
U 7V-300/6	U 7V-300/6T	135	552 T 497	204	162	178,5	125	229	228 T 220	40	226	1" ¼ G	1" ¼ G	30,5	24,5
-	U 7V-350/7T	135	575	204	162	178,5	125	229	228	40	250			-	28,5
-	U 7V-400/8T	135	600	204	162	178,5	125	229	228	40	274			-	31,5
-	U 7V-450/9T	135	653	204	162	178,5	125	235	243	40	301			-	36,5
-	U 7V-550/10T	135	676	204	162	178,5	125	235	243	40	325			-	41,5
U 9V-200/4	U 9V-200/4T	135	473	204	162	178,5	125	229	220	40	202			22,5	24
U 9V-250/5	U 9V-250/5T	135	503	204	162	178,5	125	229	220	40	232			24	23
U 9V-300/6	U 9V-300/6T	135	588 T 533	204	162	178,5	125	229	228 T 220	40	262	1" ½ G	1" ¼ G	31	24,5
-	U 9V-400/7T	135	617	204	162	178,5	125	229	228	40	292			-	31,5
-	U 9V-450/8T	135	677	204	162	178,5	125	235	243	40	325			-	35,5
-	U 9V-500/9T	135	707	204	162	178,5	125	235	243	40	355			-	37
-	U 9V-550/10T	135	737	204	162	178,5	125	235	243	40	385			-	42
-	U 18V-250/3T	135	481	204	162	178,5	125	229	220	50	211	2" G	1" ½ G	-	24
-	U 18V-400/4T	135	573	204	162	178,5	125	229	228	50	248			-	32
-	U 18V-450/5T	135	640	204	162	178,5	125	235	243	50	289			-	37
-	U 18V-550/6T	135	678	204	162	178,5	125	235	243	50	326			-	42
-	U 18V-750/8T	135	815	204	162	178,5	125	255	253	50	401			-	52
-	U 18V-900/9T	135	852	204	162	178,5	125	255	253	50	439			-	58




ULTRA L

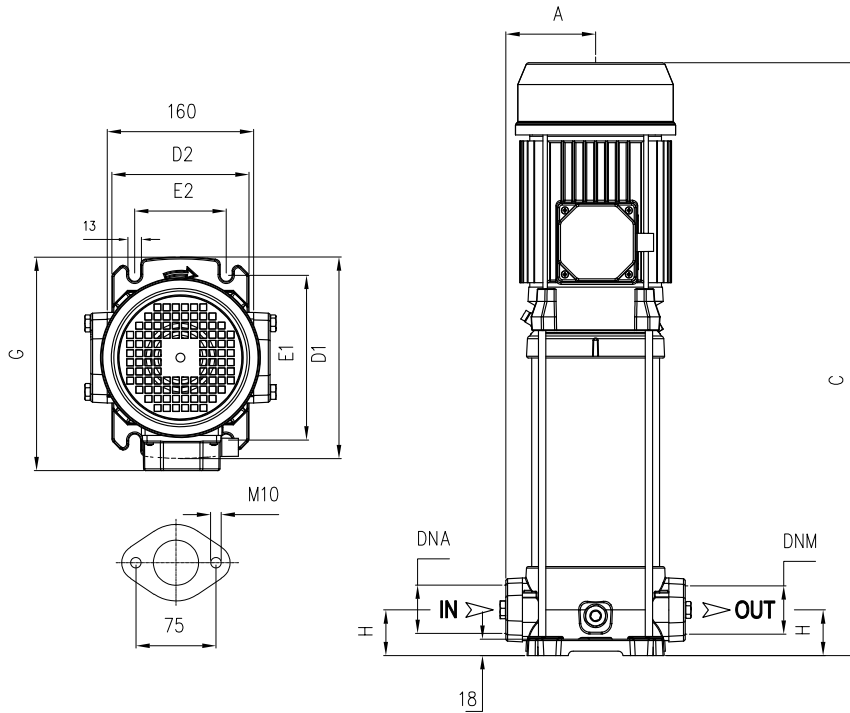

TYPE		DIMENSIONS (mm)										Kg			
-1	-3	A	C	D1	D2	E1	E2	G	H	DNA	DNM	-1	-3		
U 3L-100/5	U 3L-100/5T	98	429	220	150	180	100	228	50	1" ¼ G	1" ¼ G	19	19		
U 3L-120/6	U 3L-120/6T	98	453	220	150	180	100	228	50			20	20		
U 3L-150/7	U 3L-150/7T	98	537	220	150	180	100	228	50			26,5	27		
U 3L-180/8	U 3L-180/8T	98	561	220	150	180	100	228	50			26,5	26,5		
U 3L-200/9	U 3L-200/9T	98	585	220	150	180	100	228	50			28	28,5		
U 3L-250/10	U 3L-250/10T	98	609	220	150	180	100	228	50			27,5	27,5		
U 3L-280/11	U 3L-280/11T	98	688 T 633	220	150	180	100	236 T 228	50			32,5	28		
U 3L-300/12	U 3L-300/12T	98	712 T 657	220	150	180	100	236 T 228	50			33	28,5		
U 5L-120/4	U 5L-120/4T	98	405	220	150	180	100	221	50			1" ¼ G	1" ¼ G	19,5	19
U 5L-150/5	U 5L-150/5T	98	489	220	150	180	100	228	50					26,5	26,5
U 5L-180/6	U 5L-180/6T	98	513	220	150	180	100	228	50	26,5	26,5				
U 5L-200/7	U 5L-200/7T	98	537	220	150	180	100	228	50	25,5	27				
U 5L-250/8	U 5L-250/8T	98	561	220	150	180	100	228	50	27	26				
U 5L-280/9	U 5L-280/9T	98	640 T 585	220	150	180	100	236 T 228	50	31,5	27				
U 5L-300/10	U 5L-300/10T	98	664 T 609	220	150	180	100	236 T 228	50	35	28,5				
U 5L-350/11	U 5L-350/11T	98	687	220	150	180	100	236	50	35,5	32,5				
-	U 5L-380/12T	98	711	220	150	180	100	236	50	-	35,5				
U 7L-180/4	U 7L-180/4T	98	465	220	150	180	100	228	50	1" ¼ G	1" ¼ G			25	26
U 7L-250/5	U 7L-250/5T	98	489	220	150	180	100	228	50			26	25		
U 7L-300/6	U 7L-300/6T	98	568 T 513	220	150	180	100	236 T 228	50			33,5	26,5		
-	U 7L-350/7T	98	590	220	150	180	100	236	50			-	31		
-	U 7L-400/8T	98	614	220	150	180	100	236	50			-	34,5		
-	U 7L-450/9T	98	668	220	150	180	100	251	50			-	38,5		
-	U 7L-550/10T	98	692	220	150	180	100	251	50			-	43,5		



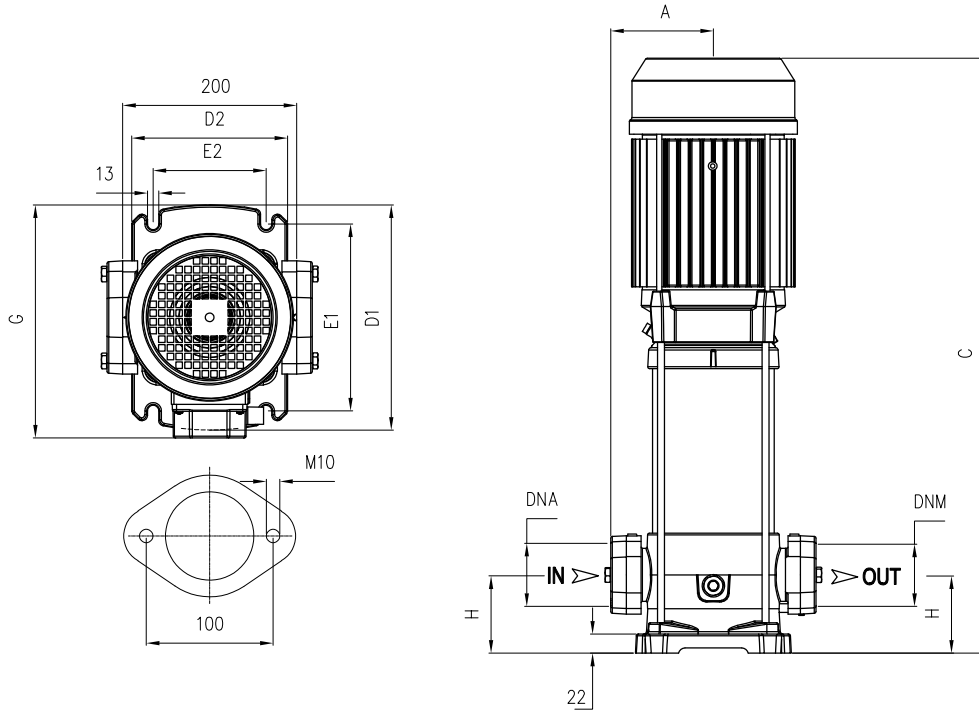


TYPE		DIMENSIONS (mm)										Kg	
-1	-3	A	C	D1	D2	E1	E2	G	H	DNA	DNM	-1	-3
U 9L-200/4	U 9L-200/4T	118	520	260	180	215	130	248	80	1" 1/2 G	1" 1/2 G	28,5	30
U 9L-250/5	U 9L-250/5T	118	550	260	180	215	130	248	80			30,5	29,5
U 9L-300/6	U 9L-300/6T	118	635 T 580	260	180	215	130	256 T 248	80			37,5	31
-	U 9L-400/7T	118	663	260	180	215	130	256	80			-	38
-	U 9L-450/8T	118	723	260	180	215	130	271	80			-	42,5
-	U 9L-550/10T	118	783	260	180	215	130	271	80			-	48
-	U 18L-250/3T	118	482	260	180	215	130	251	90	2" G	2" G	-	29,5
-	U 18L-400/4T	118	603	260	180	215	130	257	90			-	37,5
-	U 18L-450/5T	118	680	260	180	215	130	271	90			-	42
-	U 18L-550/6T	118	718	260	180	215	130	271	90			-	47
-	U 18L-750/8T	118	855	260	180	215	130	280	90			-	56,5
-	U 18L-900/9T	118	893	260	180	215	130	280	90			-	63

MODEL	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3V-100/5-200/9	80x120x150	42	80x120x175	49
U 3V-250/10-300/12	80x120x155	30	80x120x180	35
U 3V-300/12T	80x120x150	42	80x120x175	49
U 5V-120/4-250/8	80x120x150	42	80x120x175	49
U 5V-280/9 T-300/10T	80x120x150	42	80x120x175	49
U 5V-280/9-300/10	80x120x155	30	80x120x180	35
U 5V-350/11-380/12T	80x120x155	30	80x120x180	35
U 7V-180/4-350/7T	80x120x15	42	80x120x175	49
U 7V-400/8T	80x120x155	30	80x120x180	35
U 7V-450/9 T-550/10T	85x110x125	20	85x110x150	24
U 9V-200/4	80x120x150	42	80x120x175	49
U 9V-250/5-300/6T	80x120x150	42	80x120x175	49
U 9V-300/6 -400/7T	80x120x155	30	80x120x180	35
U 9V-450/8 T-550/10T	85x110x125	20	85x110x150	24
U 18V-250/3 T-400/4T	80x120x150	42	80x120x175	49
U 18V-450/5 T-550/6T	85x110x125	20	85x110x150	24
U 18V-750/8 T-900/9T	100x120x150	12	100x120x150	12

MODEL	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3L-100/5-180/8	85x110x150	36	85x110x170	42
U 3L-200/9-300/12	80x120x150	30	80x120x170	35
U 5L-120/4-250/8	85x110x150	36	85x110x170	42
U 5L-280/9-380/12T	80x120x150	30	80x120x170	35
U 7L-180/4-300/6T	85x110x150	36	85x110x170	42
U 7L-300/6-400/8T	80x120x150	30	80x120x170	35
U 7L-450/9T-550/10T	80x120x150	30	80x120x170	35
U 9L-200/4-400/7T	80x120x155	25	80x120x185	30
U 9L-450/8T-550/10T	85x110x150	20	85x110x150	20
U 18L-250/3T-400/4T	80x120x155	25	80x120x185	30
U 18L-450/5T-550/6T	85x110x150	20	85x110x150	20
U 18L-750/8 T-900/6T	85x110x150	20	85x110x150	20



ULTRA LG

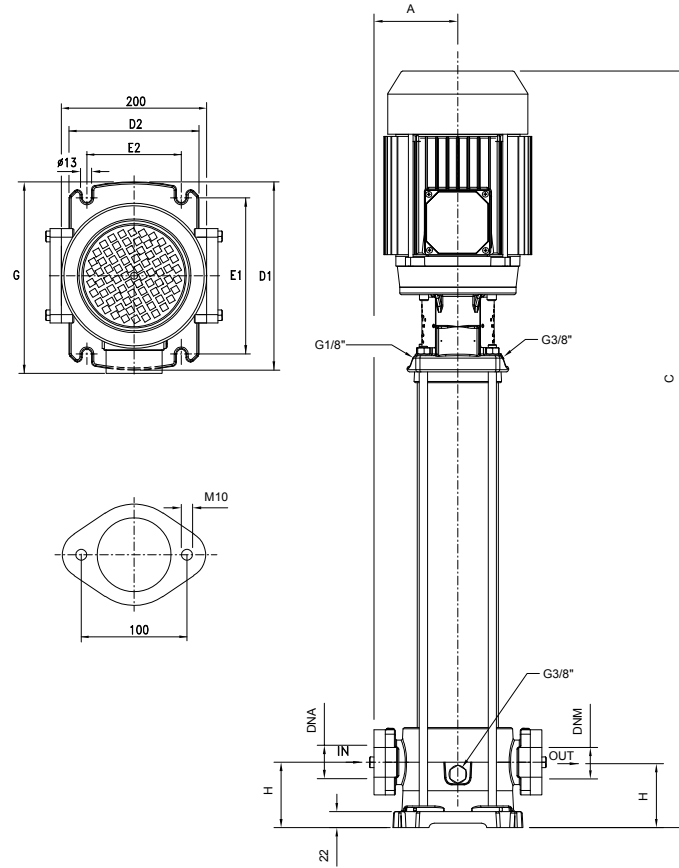

TYPE	DIMENSIONS (mm)										Kg	
	A	C	D1	D2	E1	E2	G	H	DNA	DNM		
-3												
U 18LG-920/10T	118	1019	260	180	215	130	307	90				68
U 18LG-1000/11T	118	1057	260	180	215	130	307	90	2" G	2" G		76

MODEL	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 18LG-920/10T - 1000/11T	100×120×150	12	100×120×150	12



ULTRA SV/SL/SLX

Multistage Vertical

Stainless steel multistage vertical pumps. Pumping of clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.




Construction features

Pump body	cast iron (SV/SL); stainless steel AISI 304 (SLX)
Motor bracket	cast iron
Impellers, diffusers, shell, motor shaft	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM graphite-silicon carbide-EPDM
Intermediate shaft guiding stage bush	ceramic-tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	+5 ÷ 90 °C (SV) -15 ÷ 110 °C (SL/SLX)
Max operating pressure	8 bar ≤ 6 impellers; 14 bar ≥ 7 impellers
Pump body gasket	EPDM

Motor

2 pole induction motor	3~ 230/400V - 50Hz P ≤ 4kW 3~ 400/690V - 50Hz P > 4kW
	1- 230V-50Hz (with thermal protection up to 1,85 kW)
Insulation class	F
Protection degree	IPX4 IPX5 ≥ 4,5 HP

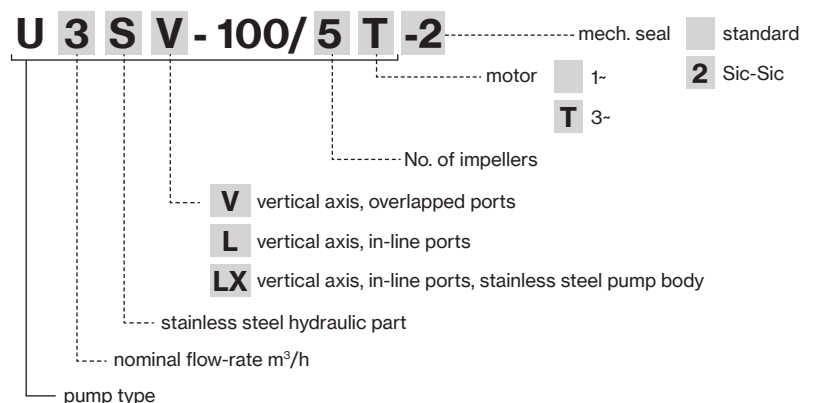

ULTRA SV/SL/SLX

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1~	3~	0	0,6	1,2	1,8	2,4	3,6	4,8
								0	10	20	30	40	60	80
		HP	kW	1~	3~	1- 230V 50 Hz	3-400V 50 Hz	H (m)						
U 3...-100/5	U 3...-100/5T	1	0,75	1	0,9	4,4	1,7	55,3	53,5	50,3	46,5	42,1	31,6	17,7
U 3...-120/6	U 3...-120/6T	1,2	0,9	1,1	1,1	5,1	2,5	66,6	64,4	60,8	56,0	50,7	38,1	22,4
U 3...-150/7	U 3...-150/7T	1,5	1,1	1,4	1,4	6,6	3,1	75,6	73,3	69,4	64,8	58,9	44,4	26,1
U 3...-180/8	U 3...-180/8T	2	1,5	1,5	1,5	7,0	3,2	86,7	83,9	79,3	73,9	67,3	51,0	29,9
U 3...-200/9	U 3...-200/9T	2	1,5	1,7	1,6	7,6	3,3	97,0	93,8	88,5	82,5	74,7	56,4	32,9
U 3...-250/10	U 3...-250/10T	2	1,5	1,9	1,7	8,6	3,5	107,2	103,4	97,3	90,5	82,0	61,5	35,6
U 3...-280/11	U 3...-280/11T	2,5	1,85	2,1	1,9	9,8	3,9	117,2	112,8	106,6	98,8	89,8	66,8	37,3
U 3...-300/12	U 3...-300/12T	2,5	1,85	2,2	2,1	10,2	4,1	126,4	121,3	114,5	106,1	95,9	71,7	40,0

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1- 230V 50 Hz	3-400V 50 Hz	0	1,8	2,4	3,6	4,8	6	7,2	8,4
								0	30	40	60	80	100	120	140
		HP	kW	1~	3~	H (m)									
U 5...-120/4	U 5...-120/4T	1,2	0,9	1,09	1,09	4,9	2,4	45,5	42,2	40,7	37,2	32,9	27,4	19,8	10,4
U 5...-150/5	U 5...-150/5T	1,5	1,1	1,4	1,3	6,6	3,1	55,9	52,8	51,4	48,1	43,4	37,3	28,3	16,4
U 5...-180/6	U 5...-180/6T	2	1,5	1,6	1,6	7,4	3,3	67,0	63,3	61,6	57,6	51,9	44,2	33,6	20,4
U 5...-200/7	U 5...-200/7T	2	1,5	1,9	1,8	8,6	3,6	77,8	73,5	71,3	66,3	59,6	50,7	38,0	22,4
U 5...-250/8	U 5...-250/8T	2,5	1,85	2,2	2,1	9,9	4,1	89,2	83,9	81,6	76,2	68,4	58,3	43,2	24,6
U 5...-280/9	U 5...-280/9T	2,5	1,85	2,4	2,3	10,9	4,3	99,7	93,7	90,9	84,1	75,2	64,1	47,4	25,9
U 5...-300/10	U 5...-300/10T	3	2,2	2,7	2,6	12,5	4,9	112,2	105,4	102,4	95,3	85,6	72,6	54,8	31,0
U 5...-350/11	U 5...-350/11T	3,5	2,57	3,0	2,9	13,7	5,3	125,1	117,6	114,3	106,1	95,5	80,9	60,9	34,8
-	U 5...-380/12T	4	3	-	3,2	-	6,0	135,7	128,9	125,6	117,7	106,3	91,3	70,2	41,5













TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)						
1~	3~					1- 230V 50 Hz	3-400V 50 Hz	0	2,4	3,6	4,8	6	7,2	9,6
								0	40	60	80	100	120	160
		HP	kW	1~	3~	H (m)								
U 7...-180/4	U 7...-180/4T	2	1,5	1,8	1,7	8,3	3,5	46,7	46,0	45,2	43,1	40,3	36,9	25,5
U 7...-250/5	U 7...-250/5T	2,5	1,85	2,2	2,1	9,9	4,0	58,5	57,6	56,6	54,1	50,8	46,1	31,8
U 7...-300/6	U 7...-300/6T	3	2,2	2,6	2,5	12,1	4,8	70,6	69,9	68,7	65,8	61,8	56,6	39,3
-	U 7...-350/7T	3,5	2,57	-	2,9	-	5,3	82,8	82,0	80,6	77,2	72,3	66,0	46,4
-	U 7...-400/8T	4	3	-	3,3	-	6,1	94,8	94,3	92,5	88,6	83,2	76,4	52,6
-	U 7...-450/9T	4,5	3,37	-	3,7	-	6,7	107,4	106,9	105,2	101,1	95,3	87,7	61,0
-	U 7...-550/10T	5,5	4	-	4,1	-	7,9	119,8	119,6	118,4	113,9	107,7	99,4	70,4

TYPE		P2		P1 (kW)		AMPERE		Q (m³/h - l/min)							
1~	3~					1- 230V 50 Hz	3-400V 50 Hz	0	3,6	4,8	6	7,2	9,6	12	13,2
								0	60	80	100	120	160	200	220
		HP	kW	1~	3~	H (m)									
U 9...-200/4	U 9...-200/4T	2	1,5	1,8	1,8	8,3	3,6	45,8	42,7	41,5	39,7	37,8	32,7	24,6	19,8
U 9...-250/5	U 9...-250/5T	2,5	1,85	2,3	2,2	10,4	4,2	57,1	53,1	51,6	49,5	47,2	40,6	30,2	24,4
U 9...-300/6	U 9...-300/6T	3	2,2	2,8	2,6	12,8	5,0	69,4	64,7	63,0	60,3	57,3	49,8	36,2	28,1
-	U 9...-400/7T	4	3	-	3,1	-	5,9	82,0	77,2	74,9	72,0	68,7	59,9	44,2	33,9
-	U 9...-450/8T	4,5	3,37	-	3,6	-	6,5	93,5	88,5	86,3	82,6	79,0	69,5	52,0	41,7
-	U 9...-500/9T	4,5	3,37	-	4	-	7	105,4	99,1	96,5	92,5	88,3	77,3	57,5	46,9
-	U 9...-550/10T	5,5	4	-	4,4	-	8,2	117,6	111,2	108,7	104,5	99,9	87,8	66,2	53,4


TYPE		P2		P1 (kW)		A		Q (m³/h - l/min)							
3~	3~					0	6	7,2	9,6	12	14,4	16,8	19,2	21,6	24
						0	100	120	160	200	240	280	320	360	400
		HP	kW	3~	3-400V 50 Hz	H (m)									
U 18...-250/3T		2,5	1,85	2,3	4,3	33,8	31,6	31,0	29,4	27,4	25,4	23,2	20,4	16,3	11,5
U 18...-400/4T		4	3	3,1	5,9	46,3	44,2	43,4	41,4	39,1	36,7	34,1	30,8	25,6	19,0
U 18...-450/5T		4,5	3,37	3,9	6,9	58,1	55,7	54,6	52,1	49,3	46,3	42,9	38,7	32,2	24,0
U 18...-550/6T		5,5	4	4,7	8,5	70,1	67,4	66,3	63,4	60,0	56,4	52,4	47,6	39,6	29,9
U 18...-750/8T		7,5	5,5	6,2	11,2	94,2	90,6	89,1	85,3	80,9	76,2	71,1	65,0	54,6	41,4
U 18...-900/9T		10	7,5	7	12,9	106,4	102,8	101,3	97,2	92,4	87,3	81,6	75,0	63,5	48,5




ULTRA SV/SL/SLX

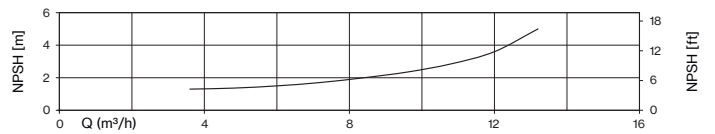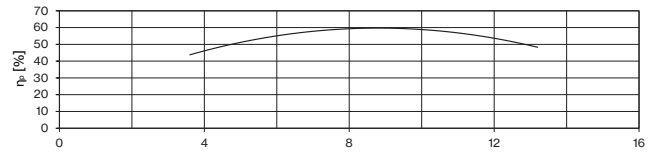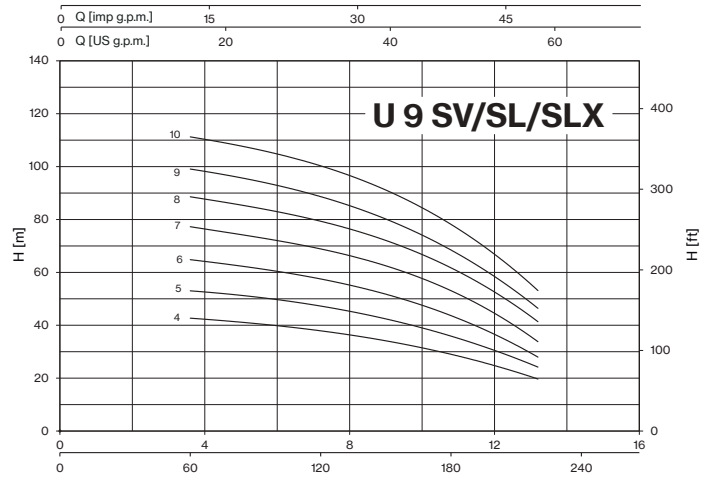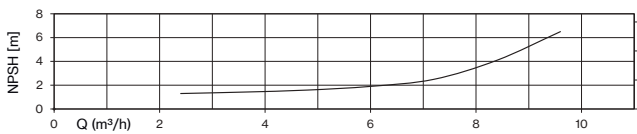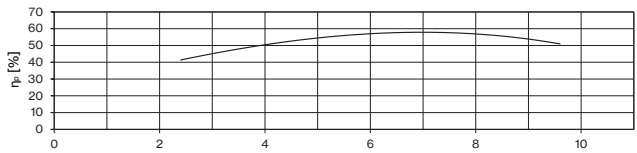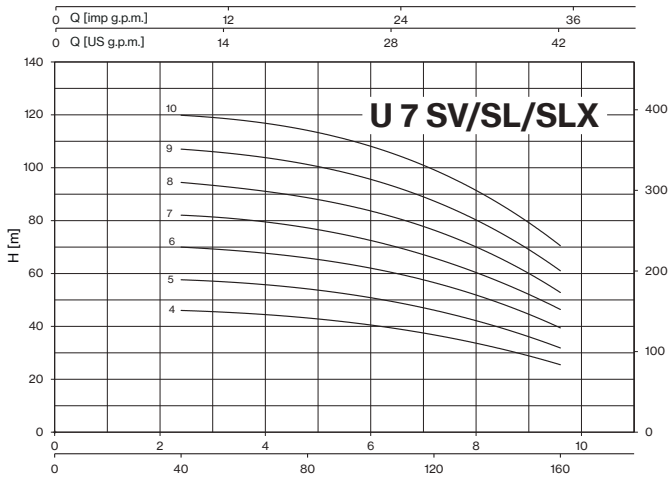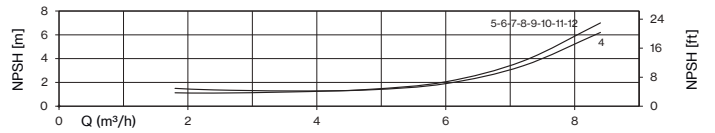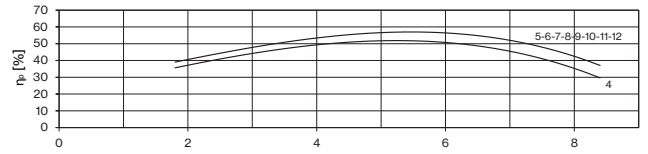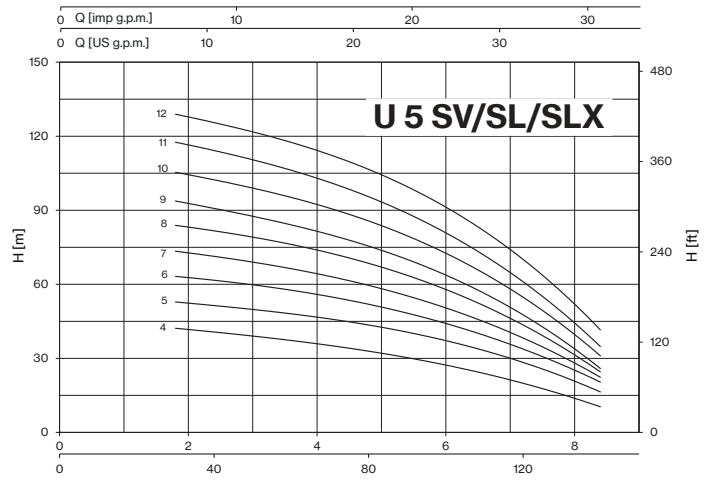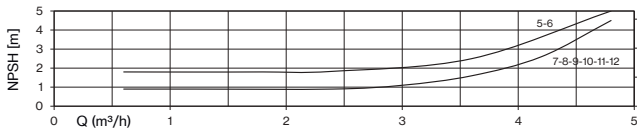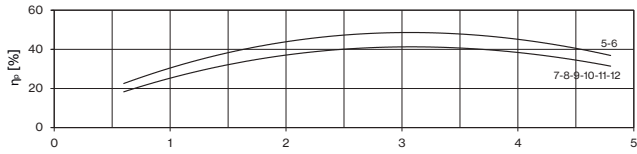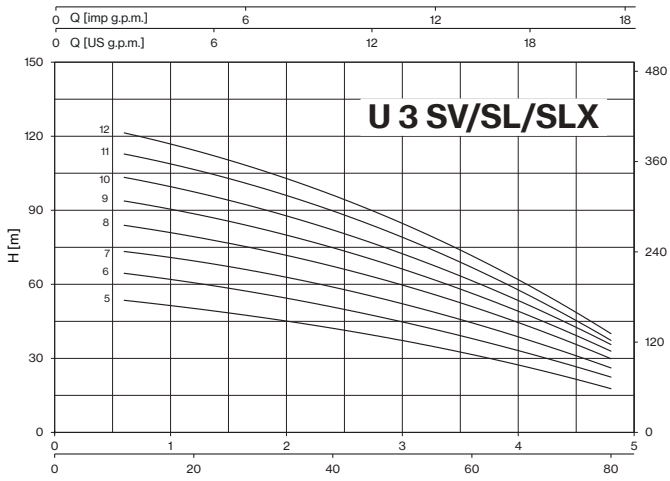

ULTRA SV/SL/SLX

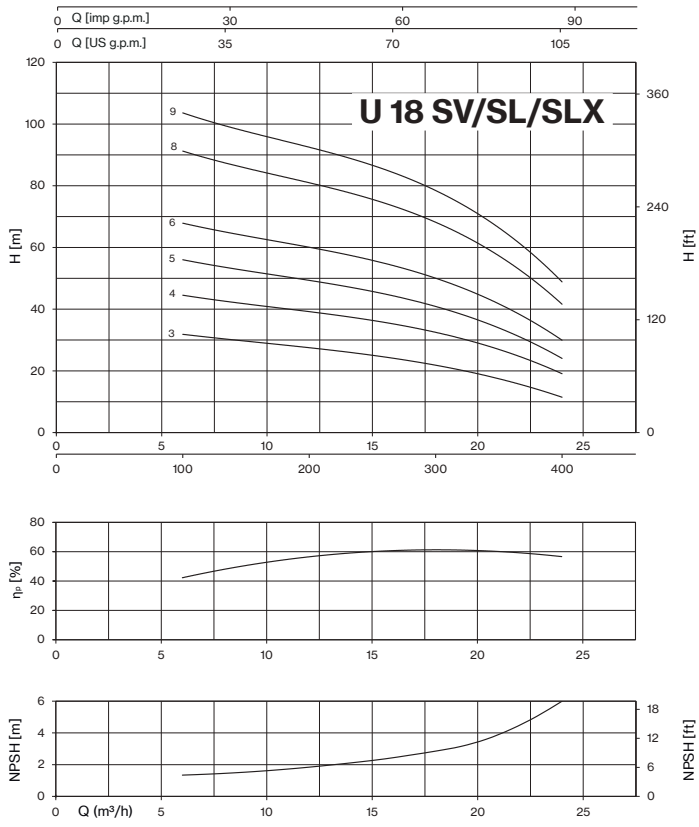


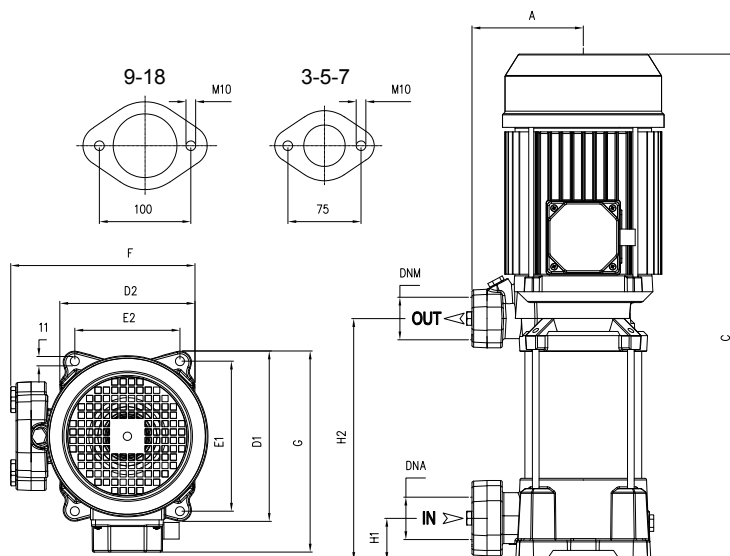

TYPE		DIMENSIONS (mm)												Kg	
-1	-3	A	C	D1	D2	E1	E2	F	G	H1	H2	DNA	DNM	-1	-3
U 3SV-100/5	U 3SV-100/5T	135	413	204	162	178,5	125	229	213	40	178	1" ¼ G	1" ¼ G	18,5	18,5
U 3SV-120/6	U 3SV-120/6T	135	437	204	162	178,5	125	229	213	40	202			19,5	19,5
U 3SV-150/7	U 3SV-150/7T	135	521	204	162	178,5	125	229	220	40	226			26,5	26,5
U 3SV-180/8	U 3SV-180/8T	135	545	204	162	178,5	125	229	220	40	250			26,5	26,5
U 3SV-200/9	U 3SV-200/9T	135	569	204	162	178,5	125	229	220	40	274			27,5	27,5
U 3SV-250/10	U 3SV-250/10T	135	593	204	162	178,5	125	229	220	40	298			28,5	28,5
U 3SV-280/11	U 3SV-280/11T	135	672 T 617	204	162	178,5	125	229	228 T 220	40	322			32	29
U 3SV-300/12	U 3SV-300/12T	135	696 T 641	204	162	178,5	125	229	228 T 220	40	346	32,5	28		
U 5SV-120/4	U 5SV-120/4T	135	389	204	162	178,5	125	229	213	40	178	1" ¼ G	1" ¼ G	18,5	18,5
U 5SV-150/5	U 5SV-150/5T	135	473	204	162	178,5	125	229	220	40	202			25,5	25,5
U 5SV-180/6	U 5SV-180/6T	135	497	204	162	178,5	125	229	220	40	226			26	26
U 5SV-200/7	U 5SV-200/7T	135	521	204	162	178,5	125	229	220	40	250			25,5	26,5
U 5SV-250/8	U 5SV-250/8T	135	545	204	162	178,5	125	229	220	40	274			27	26
U 5SV-280/9	U 5SV-280/9T	135	624 T 569	204	162	178,5	125	229	228 T 220	40	298			31	26,5
U 5SV-300/10	U 5SV-300/10T	135	648 T 593	204	162	178,5	125	229	228 T 220	40	322			35,5	28
U 5SV-350/11	U 5SV-350/11T	135	672	204	162	178,5	125	229	228	40	346	36	33		
-	U 5SV-380/12T	135	696	204	162	178,5	125	229	228	40	370	-	35,5		
U 7SV-180/4	U 7SV-180/4T	135	422	204	162	178,5	125	229	220	40	178	1" ¼ G	1" ¼ G	23,5	25
U 7SV-250/5	U 7SV-250/5T	135	473	204	162	178,5	125	229	220	40	202			25	24
U 7SV-300/6	U 7SV-300/6T	135	552 T 497	204	162	178,5	125	229	228 T 220	40	226			32,5	26
-	U 7SV-350/7T	135	575	204	162	178,5	125	229	228	40	250			-	30
-	U 7SV-400/8T	135	600	204	162	178,5	125	229	228	40	274			-	33,5
-	U 7SV-450/9T	135	653	204	162	178,5	125	235	243	40	301			-	39
-	U 7SV-550/10T	135	676	204	162	178,5	125	235	243	40	325			-	44
U 9SV-200/4	U 9SV-200/4T	135	473	204	162	178,5	125	229	220	40	202	1" ½ G	1" ¼ G	24	25
U 9SV-250/5	U 9SV-250/5T	135	503	204	162	178,5	125	229	220	40	232			25,5	24,5
U 9SV-300/6	U 9SV-300/6T	135	588 T 533	204	162	178,5	125	229	228 T 220	40	262			33	26,5
-	U 9SV-400/7T	135	617	204	162	178,5	125	229	228	40	292			-	33,5
-	U 9SV-450/8T	135	677	204	162	178,5	125	235	243	40	325			-	39
-	U 9SV-500/9T	135	707	204	162	178,5	125	235	243	40	355			-	39,5
-	U 9SV-550/10T	135	737	204	162	178,5	125	235	243	40	385			-	45
-	U 18SV-250/3T	135	481	204	162	178,5	125	229	220	50	211	2" G	1" ½ G	-	25
-	U 18SV-400/4T	135	573	204	162	178,5	125	229	228	50	248			-	33,5
-	U 18SV-450/5T	135	640	204	162	178,5	125	235	243	50	289			-	39,5
-	U 18SV-550/6T	135	678	204	162	178,5	125	235	243	50	326			-	44,5
-	U 18SV-750/8T	135	815	204	162	178,5	125	255	253	50	401			-	55,5
-	U 18SV-900/9T	135	852	204	162	178,5	125	255	253	50	439			-	62




ULTRA SL/SLX

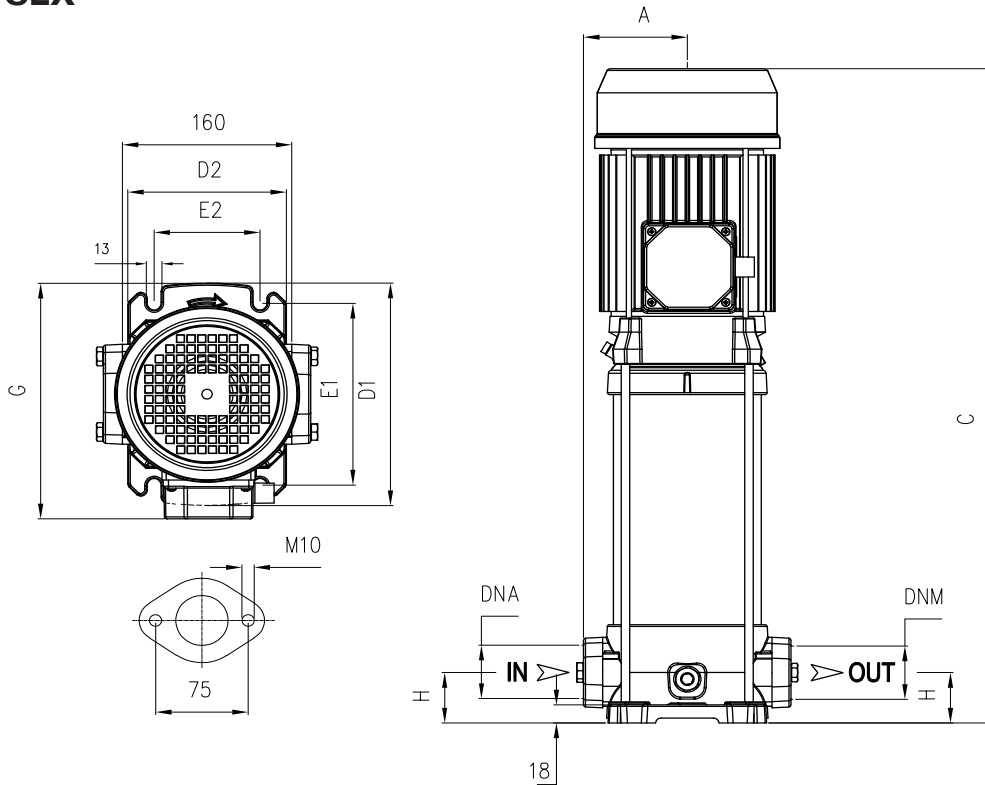

TYPE		DIMENSIONS (mm)										Kg			
		A	C	D1	D2	E1	E2	G	H	DNA	DNM	SL		SLX	
-1	-3											-1	-3	-1	-3
U 3...-100/5	U 3...-100/5T	98	429	220	150	180	100	228	50	1" ¼ G	1" ¼ G	19	19	19	19
U 3...-120/6	U 3...-120/6T	98	453	220	150	180	100	228	50			21,5	21,5	20	20
U 3...-150/7	U 3...-150/7T	98	537	220	150	180	100	228	50			28,5	28,5	27,5	27,5
U 3...-180/8	U 3...-180/8T	98	561	220	150	180	100	228	50			28,5	28,5	27,5	27,5
U 3...-200/9	U 3...-200/9T	98	585	220	150	180	100	228	50			30,5	30,5	29	29,5
U 3...-250/10	U 3...-250/10T	98	609	220	150	180	100	228	50			31,5	31,5	30,5	30,5
U 3...-280/11	U 3...-280/11T	98	688 T 633	220	150	180	100	236 T 228	50	1" ¼ G	1" ¼ G	35,5	32,5	34	31
U 3...-300/12T	U 3...-300/12T	98	712 T 657	220	150	180	100	236 T 228	50			36	31,5	34,5	30
U 5...-120/4	U 5...-120/4T	98	405	220	150	180	100	221	50			1" ¼ G	1" ¼ G	20	20
U 5...-150/5	U 5...-150/5T	98	489	220	150	180	100	228	50	27,5	27,5			26,5	26,5
U 5...-180/6	U 5...-180/6T	98	513	220	150	180	100	228	50	28	28			26,5	27
U 5...-200/7	U 5...-200/7T	98	537	220	150	180	100	228	50	27,5	28,5			26	27,5
U 5...-250/8	U 5...-250/8T	98	561	220	150	180	100	228	50	29	28			28	27
U 5...-280/9	U 5...-280/9T	98	640 T 585	220	150	180	100	236 T 228	50	34	29,5			33	28,5
U 5...-300/10	U 5...-300/10T	98	664 T 609	220	150	180	100	236 T 228	50	1" ¼ G	1" ¼ G	37,5	31	36,5	30
U 5...-350/11	U 5...-350/11T	98	687	220	150	180	100	236	50			38,5	35,5	37	34
-	U 5...-380/12T	98	711	220	150	180	100	236	50			-	39	-	37,5
U 7...-180/4	U 7...-180/4T	98	465	220	150	180	100	228	50	1" ¼ G	1" ¼ G	26	27	24,5	6
U 7...-250/5	U 7...-250/5T	98	489	220	150	180	100	228	50			27,5	26,5	26	25
U 7...-300/6	U 7...-300/6T	98	568 T 513	220	150	180	100	236 T 228	50			35	28	34	27
-	U 7...-350/7T	98	590	220	150	180	100	236	50			-	33	-	32
-	U 7...-400/8T	98	614	220	150	180	100	236	50			-	36,5	-	35,5
-	U 7...-450/9T	98	668	220	150	180	100	251	50			-	41	-	40
-	U 7...-550/10T	98	692	220	150	180	100	251	50	-	46,5	-	45		



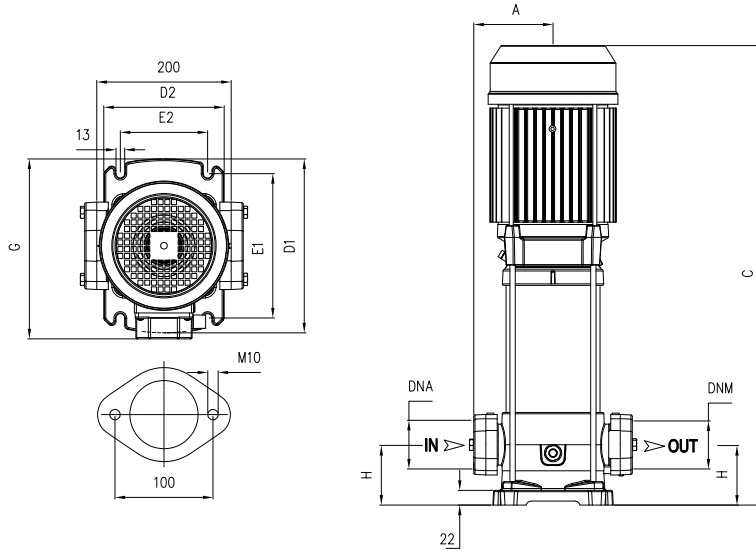

TYPE		DIMENSIONS (mm)										Kg			
												SL		SLX	
-1	-3	A	C	D1	D2	E1	E2	G	H	DNA	DNM	-1	-3	-1	-3
U 9...-200/4	U 9...-200/4T	118	520	260	180	215	130	248	80	1" 1/2 G	1" 1/2 G	30	31	28,5	29,5
U 9...-250/5	U 9...-250/5T	118	550	260	180	215	130	248	80			32	31	30,5	29,5
U 9...-300/6	U 9...-300/6T	118	635 T 580	260	180	215	130	256 T 248	80			39,5	33	38	31,5
-	U 9...-400/7T	118	663	260	180	215	130	256	80			-	40	-	38,5
-	U 9...-450/8T	118	723	260	180	215	130	271	80			-	45	-	43,5
-	U 9...-500/9T	118	763	260	180	215	130	271	80			-	45,5	-	44
-	U 9...-550/10T	118	783	260	180	215	130	271	80			-	51	-	49
-	U 18...-250/3T	118	482	260	180	215	130	251	90	2" G	2" G	-	30,5	-	29,5
-	U 18...-400/4T	118	603	260	180	215	130	257	90			-	39	-	37,5
-	U 18...-450/5T	118	680	260	180	215	130	271	90			-	44,5	-	43
-	U 18...-550/6T	118	718	260	180	215	130	271	90			-	49,5	-	48
-	U 18...-750/8T	118	855	260	180	215	130	280	90			-	60	-	58,5
-	U 18...-900/9T	118	893	260	180	215	130	280	90			-	66,5	-	65

MODEL	LOTS TRUCK		LOTS CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3SV-100/5-200/9	80x120x150	42	80x120x175	49
U 3SV-250/10-300/12	80x120x155	30	80x120x180	35
U 3SV-300/12T	80x120x150	42	80x120x175	49
U 5SV-120/4-250/8	80x120x150	42	80x120x175	49
U 5SV-280/9T-300/10T	80x120x150	42	80x120x175	49
U 5SV-280/9-300/10	80x120x155	30	80x120x180	35
U 5SV-350/11-380/12T	80x120x155	30	80x120x180	35
U 7SV-180/4-350/7T	80x120x150	42	80x120x175	49
U 7SV-400/8T	80x120x155	30	80x120x180	35
U 7SV-450/9T-550/10T	85x110x125	20	85x110x150	24
U 9SV-200/4	80x120x150	42	80x120x175	49
U 9SV-250/5-300/6T	80x120x150	42	80x120x175	49
U 9SV-300/6-400/7T	80x120x155	30	80x120x180	35
U 9SV-450/8 T-550/10T	85x110x125	20	85x110x150	24
U 18SV-250/3T-400/4T	80x120x150	42	80x120x175	49
U 18SV-450/5T-550/6T	85x110x125	20	85x110x150	24
U 18SV-750/8T-900/9T	100x120x150	12	100x120x150	12

MODEL	LOTS TRUCK		LOTS CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3SL/SLX-100/5-180/8	85x110x150	36	85x110x170	42
U 3SL/SLX-200/9-300/12	80x120x150	30	80x120x170	35
U 5SL/SLX-120/4-250/8	85x110x150	36	85x110x170	42
U 5SL/SLX-280/9-380/12T	80x120x150	30	80x120x170	35
U 7SL/SLX-180/4-300/6T	85x110x150	36	85x110x170	42
U 7SL/SLX-300/6-400/8T	80x120x150	30	80x120x170	35
U 7SL/SLX-450/9 T-550/10T	80x120x150	30	80x120x170	35
U 9SL/SLX-200/4-400/7T	80x120x155	25	80x120x185	30
U 9SL/SLX-450/8 T-550/10T	85x110x150	20	85x110x150	20
U 18SL/SLX-250/3 T-400/4T	80x120x155	25	80x120x185	30
U 18SL/SLX-450/5 T-550/6T	85x110x150	20	85x110x150	20
U 18SL/SLX-750/8 T-900/6T	85x110x150	20	85x110x150	20



ULTRA SLG/SLXG

Multistage Vertical

Stainless steel multistage vertical pumps. For non-loaded clean fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.



ULTRA 3-5-7-9 SLG



ULTRA 3-5-7 SLXG



ULTRA 9 SLXG



Construction features


Pump body	cast iron (SLG); stainless steel AISI 304 (SLXG)
Motor bracket	cast iron
Impellers, diffusers, shell, motor shaft	stainless steel AISI 304
Mechanical seal	ceramic-graphite-EPDM graphite-silicon carbide-EPDM
Intermediate shaft guiding stage bush	ceramic-tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	-15 ÷ +110 °C
Max operating pressure	25 bar
Pump body gasket	EPDM

Motor







2 pole induction motor	3- 230/400V - 50Hz P ≤ 4kW 3- 400/690V - 50Hz P > 4kW
Insulation class	F
Protection degree	IPX5



MODEL	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
U 3SLG/SLXG-350/14T-380/16T	100×120×150	12	100×120×150	12
U 3SLG/SLXG-400/18T-450/20T	100×135×150	12	100×135×150	12
U 5SLG/SLXG-400/14T-450/16T	100×120×150	12	100×120×150	12
U 5SLG/SLXG-550/18T-600/20T	100×135×150	12	100×135×150	12
U 7SLG/SLXG-750/12T-800/14T	100×120×150	12	100×120×150	12
U 7SLG/SLXG-900/16T-1000/20T	100×135×150	12	100×135×150	12
U 9SLG/SLXG-750/12T-800/14T	100×120×150	12	100×120×150	12
U 9SLG/SLXG-900/16T-1000/20T	100×135×150	12	100×135×150	12

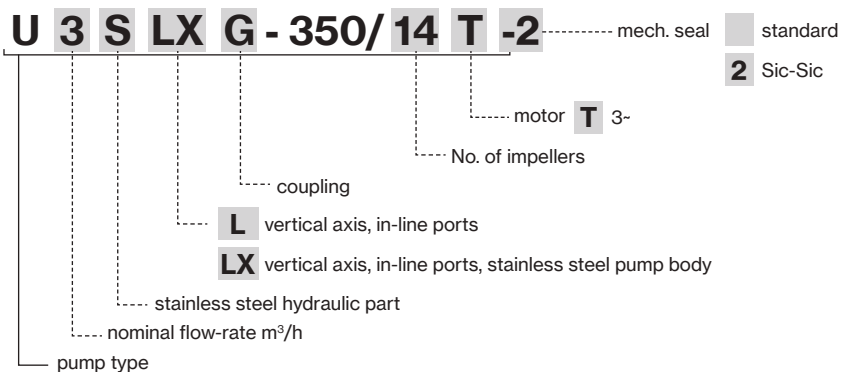

ULTRA SLG/SLXG

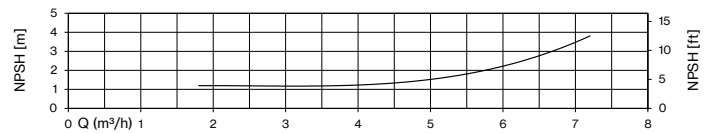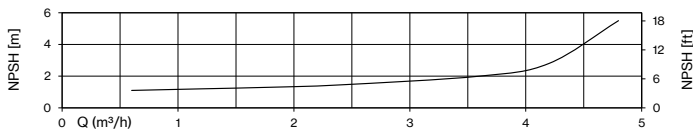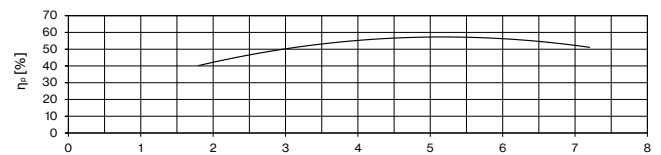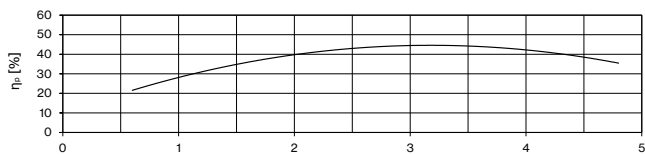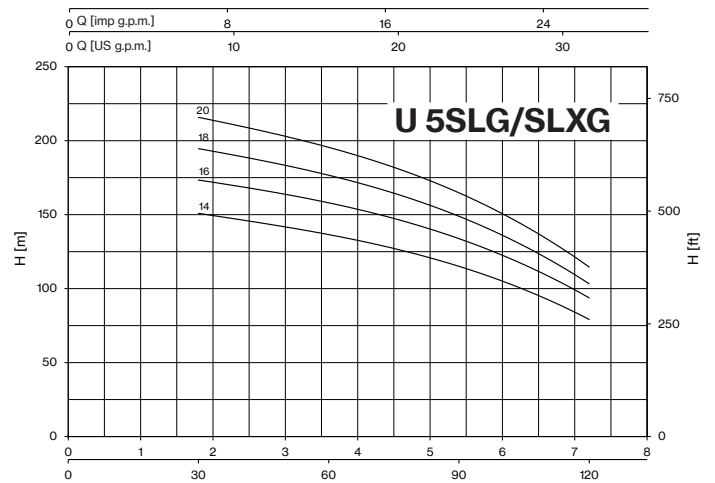
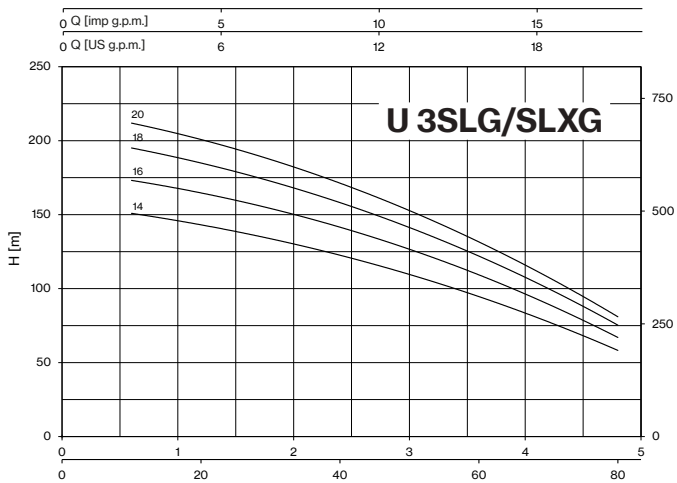


TYPE	P2		P1 (kW)	AMPERE 3~	Q (m³/h - l/min)						
					H (m)						
					HP	kW	3~	3~400V 50 Hz	0	0,6	1,2
U 3...-350/14T	3	2,2	2,5	4,7	154,8	150,9	143,2	133,7	122,5	94,7	58,2
U 3...-380/16T	4	3	2,9	5,5	177,5	173,2	164,6	154,5	141,3	109,4	67,0
U 3...-400/18T	4	3	3,2	6,0	200,3	195,1	184,9	172,8	158,0	122,1	75,3
U 3...-450/20T	4	3	3,6	6,5	218,3	211,9	200,6	187,4	171,4	131,5	81,0

TYPE	P2		P1 (kW)	AMPERE 3~	Q (m³/h - l/min)						
					H (m)						
					HP	kW	3~	3~400V 50 Hz	0	1,8	2,4
U 5...-400/14T	4	3	3,5	6,3	159,2	150,7	146,7	136,6	122,9	105,5	79,0
U 5...-450/16T	5,5	4	4,1	7,9	182,0	173,2	169,1	158,0	142,9	122,9	93,6
U 5...-550/18T	5,5	4	4,5	8,3	204,4	194,4	189,5	176,5	159,6	136,3	103,2
U 5...-600/20T	5,5	4	5,0	8,9	226,7	215,5	210,0	195,5	176,3	151,1	114,5



ULTRA SLG/SLXG

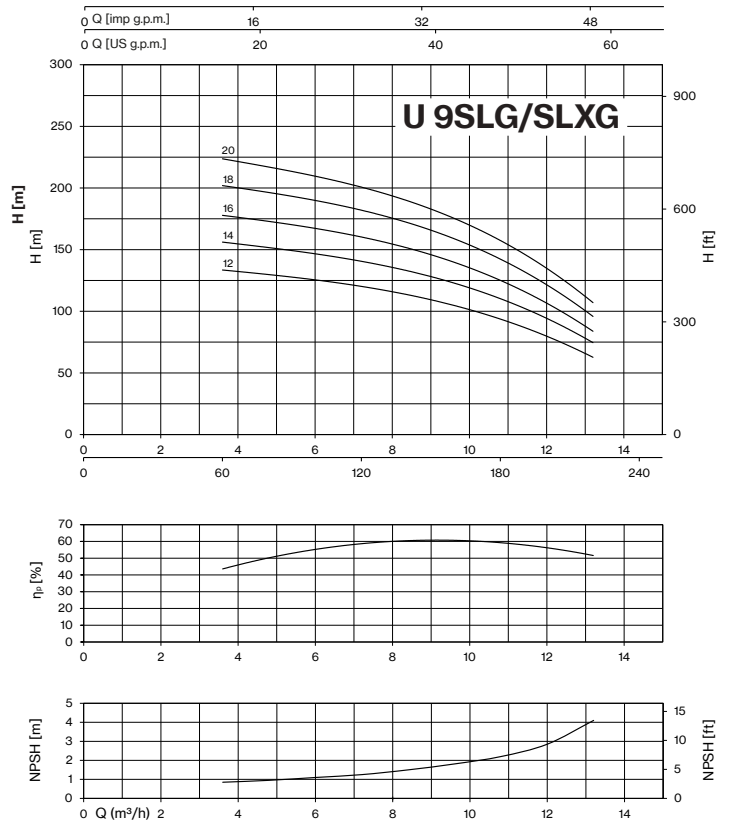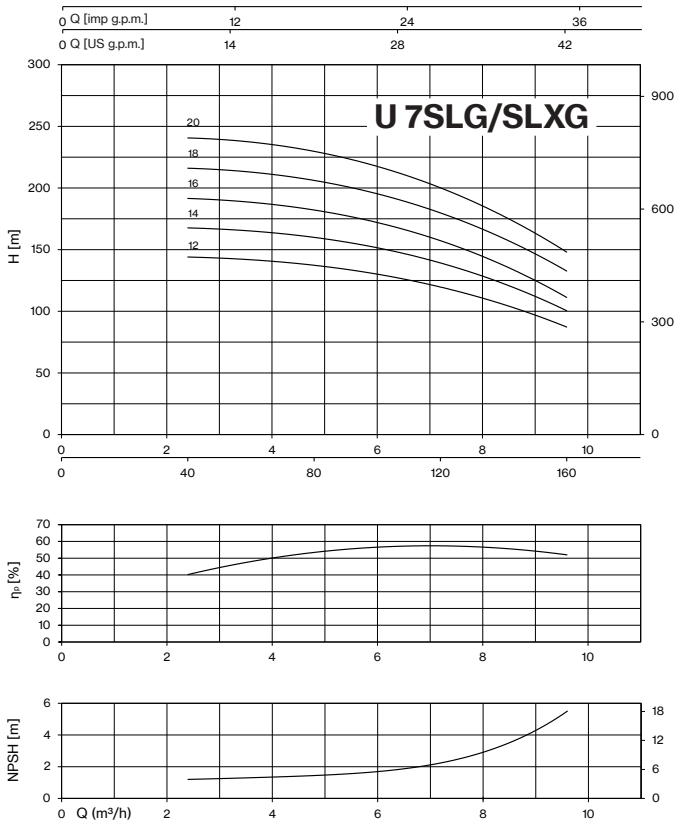


TYPE	P2		P1 (kW)	A 3~	Q (m³/h - l/min)						
					0	2,4	3,6	4,8	6	7,2	9,6
	HP	kW	3~	3-400V 50 Hz	0	40	60	80	100	120	160
U 7...-750/12T	7,5	5,5	5,1	9,9	143,7	143,7	142,6	137,0	129,6	119,8	87,0
U 7...-800/14T	7,5	5,5	5,9	10,9	167,6	167,3	165,9	159,6	151,0	139,5	100,3
U 7...-900/16T	7,5	5,5	6,7	12,0	191,5	191,2	189,3	181,7	171,5	157,7	111,1
U 7...-950/18T	10	7,5	7,4	12,4	215,5	215,7	213,9	205,8	194,7	179,8	132,3
U 7...-1000/20T	10	7,5	8,2	13,5	240,3	240,2	238,4	229,3	216,8	200,3	147,7


TYPE	P2		P1 (kW)	A 3~	Q (m³/h - l/min)							
					0	3,6	4,8	6	7,2	9,6	12	13,2
	HP	kW	3~	3-400V 50 Hz	0	60	80	100	120	160	200	220
U 9...-750/12T	7,5	5,5	5,3	10,1	141,3	133,2	130,4	125,4	119,7	105,1	79,6	62,7
U 9...-800/14T	7,5	5,5	6,1	11,1	165,5	155,7	152,6	146,5	139,9	123,4	94,0	74,6
U 9...-900/16T	10	7,5	6,9	12,8	188,7	177,6	173,6	167,1	159,7	140,4	106,2	83,9
U 9...-950/18T	10	7,5	7,6	12,7	213,8	201,6	197,3	189,6	181,2	159,9	121,0	96,0
U 9...-1000/20T	10	7,5	8,5	13,9	236,7	223,1	218,3	209,3	199,8	176,1	134,5	107,0



U 3-5-7 SLG/SLXG

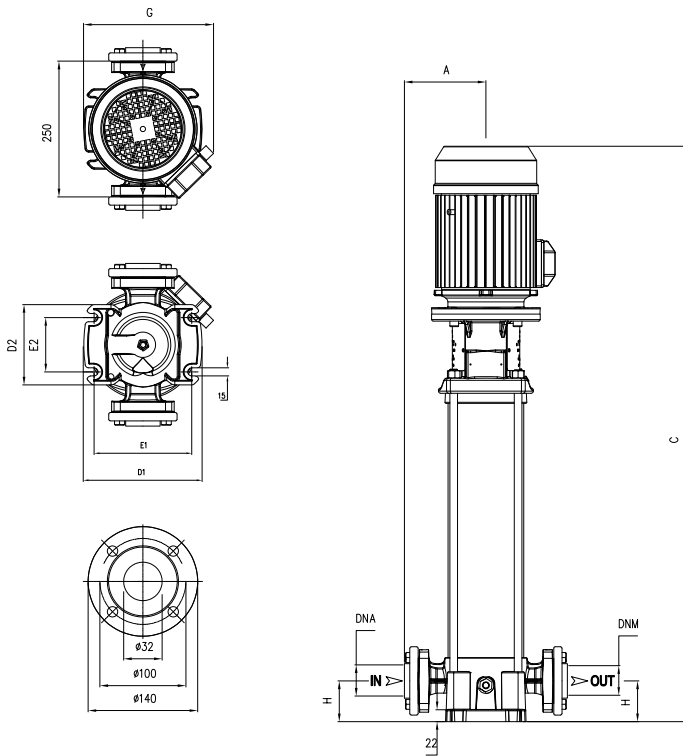


U 9 SLG/SLXG

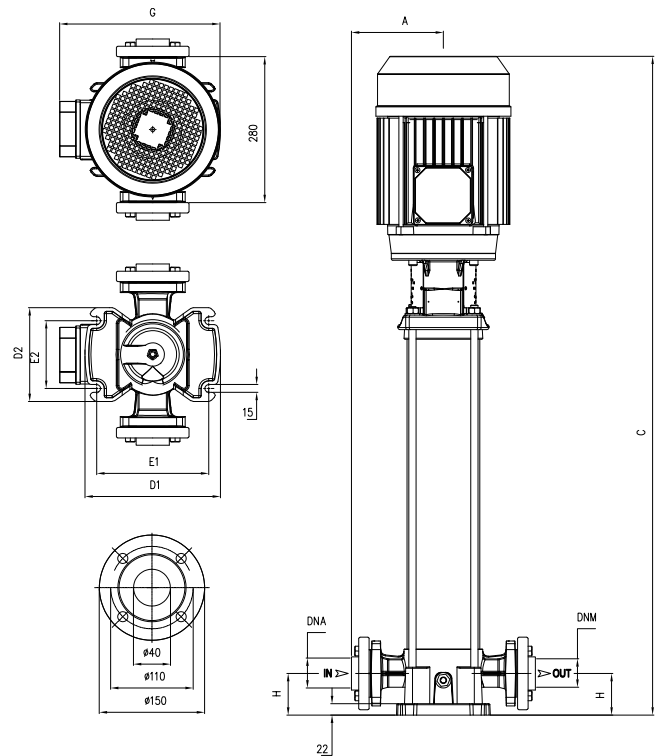


TYPE	DIMENSIONS (mm)										Kg	
	A	C	D1	D2	E1	E2	G	H	DNA	DNM	SLG	SLXG
U 3SLG-350/14T	155	932	220	150	180	100	236	75	1" ¼ G	1" ¼ G	54	
U 3SLG-380/16T	155	977	220	150	180	100	236	75			58,5	
U 3SLG-400/18T	155	1025	220	150	180	100	236	75			60,5	
U 3SLG-450/20T	155	1098	220	150	180	100	251	75			65,5	
U 3SLXG-350/14T	155	932	260	180	215	130	236	75	1" ¼ G	1" ¼ G	53,5	
U 3SLXG-380/16T	155	977	260	180	215	130	236	75			58	
U 3SLXG-400/18T	155	1025	260	180	215	130	236	75			60,5	
U 3SLXG-450/20T	155	1098	260	180	215	130	251	75			64,5	
U 5SLG-400/14T	155	932	220	150	180	100	251	75	1" ¼ G	1" ¼ G	57	
U 5SLG-450/16T	155	1000	220	150	180	100	251	75			66	
U 5SLG-550/18T	155	1048	220	150	180	100	251	75			68	
U 5SLG-600/20T	155	1098	220	150	180	100	260	75			70	
U 5SLXG-400/14T	155	932	260	180	215	130	251	75	1" ¼ G	1" ¼ G	56,5	
U 5SLXG-450/16T	155	1000	260	180	215	130	251	75			65,5	
U 5SLXG-550/18T	155	1048	260	180	215	130	251	75			68	
U 5SLXG-600/20T	155	1098	260	180	215	130	260	75			69	
U 7SLG-750/12T	155	940	220	150	180	100	260	75	1" ¼ G	1" ¼ G	70	
U 7SLG-800/14T	155	988	220	150	180	100	260	75			71,5	
U 7SLG-900/16T	155	1036	220	150	180	100	260	75			74	
U 7SLG-950/18T	155	1081	220	150	180	100	288	75			87,5	
U 7SLG-1000/20T	155	1128	220	150	180	100	288	75	1" ¼ G	1" ¼ G	87,5	
U 7SLXG-750/12T	155	940	260	180	215	130	260	75			70	
U 7SLXG-800/14T	155	988	260	180	215	130	260	75			71,5	
U 7SLXG-900/16T	155	1036	260	180	215	130	260	75			73,5	
U 7SLXG-950/18T	155	1081	260	180	215	130	288	75	1" ½ G	1" ½ G	87,5	
U 7SLXG-1000/20T	155	1128	260	180	215	130	288	75			88,5	
U 9...-750/12T	170	1027	260	180	215	130	280	80	1" ½ G	1" ½ G	74,5	73,5
U 9...-800/14T	170	1088	260	180	215	130	280	80			76,5	75
U 9...-900/16T	170	1147	260	180	215	130	280	80			83	82
U 9...-950/18T	170	1205	260	180	215	130	308	80			91,5	91
U 9...-1000/20T	170	1263	260	180	215	130	308	80			93,5	93



ULTRA V-SV-L-SL-LG-SLG Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL
					2
	U3-100/5, U3-120/6, U5-120/4, U5-150/5, U5-180/6, U7-180/4, U7-250/5, U7-300/6, U9-200/4, U9-250/5, U18-250/3, U18-400/4	14mm / S	Rotating face Stationary face Elastomer	Graphite Ceramic EPDM	SiC SiC EPDM
	U3-150/7, U3-180/8, U3-200/9, U3-250/10, U3-280/11, U3-300/12, U5-200/7, U5-250/8, U5-280/9, U5-300/10, U5-350/11, U5-380/12, U7-350/7, U7-400/8, U7-450/9, U7-550/10, U9-300/6, U9-400/7, U9-450/8, U9-500/9, U9-550/10	14mm	Rotating face Stationary face Elastomer	Graphite SiC EPDM	SiC SiC EPDM
	U18-450/5, U18-550/6, U18-750/8, U18-900/9, U18-920/10, U18-1000/11	14mm / L	Rotating face Stationary face Elastomer	Graphite SiC EPDM	SiC SiC EPDM
	U3-350/14, U3-380/16, U3-400/18, U3-450/20, U5-400/14, U5-450/16, U5-550/18, U5-600/20, U7-750/12, U7-800/14, U7-900/16, U7-950/18, U7-1000/20, U9-750/12, U9-800/14, U9-900/16, U9-950/18, U9-1000/20	14mm / Balanced seal	Rotating face Stationary face Elastomer	Tungsten carbide Graphite EPDM	- - -

BEARINGS	PUMP MODEL	TYPE	
	U3-100/5, U3-120/6, U5-120/4	6202-ZZ	6302-ZZ C3
	U3-150/7, U3-180/8, U3-200/9, U3-250/10, 3- U3-280/11, 3- U3-300/12, U5-150/5, U5-180/6, U5-200/7, U5-250/8, 3- U5-280/9, 3- U5-300/10, U7-180/4, U7-250/5, 3- U7-300/6, U9-200/4, U9-250/5, 3- U9-300/6, U18-250/3	6203-ZZ	6304-ZZ C3
	1- U3-280/11, 1- U3-300/12, 1- U5-280/9, 1- U5-300/10, U5-350/11, U5-380/12, 1- U7-300/6, U7-350/7, U7-400/8, 1- U9-300/6, U9-400/7, U18-400/4, U3-350/14, U3-380/16, U3-400/18, U5-400/14	6203-ZZ	6305-ZZ C3
	U7-450/9, U7-550/10, U9-450/8, U9-500/9, U9-550/10, U18-450/5, U18-550/6	6204-ZZ	6306-ZZ-C3
	U3-450/20, U5-450/16, U5-550/18, U5-600/20	6204-ZZ	3206-ZZ C3
	U7-750/12, U7-800/14, U7-900/16, U9-750/12, U9-800/14, U9-900/16, U18-750/8, U18-900/9, U18-920/10	6206-ZZ C3	3306-ZZ C3
	U7-950/18, U7-1000/20, U9-950/18, U9-1000/20, U18-1000/11	6206-ZZ C3	3308-ZZ C3



ULTRA HX

Multistage Vertical

Stainless steel multistage vertical pumps. Suitable for clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.



Construction features


Pump body	EN 1.4401 / AISI 316
Motor bracket	cast iron
Impellers, diffusers, shell, pump shaft	EN 1.4401 / AISI 316
Mechanical seal	silicon carbide-graphite-EPDM
Intermediate bush	tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	-15 ÷ +120 °C (Max 85° for domestic use)
Max operating pressure	max 26 bar
Pump body gasket	EPDM

Motor

2 pole induction motor	3~ 230/400V - 50Hz P ≤ 4kW, size B14 V1 3~ 400/690V - 50Hz P > 4kW, size B5 V1 IE3 efficiency class
Insulation class	F
Protection degree	IP55



U 18 H X - 100 / 1 T -2


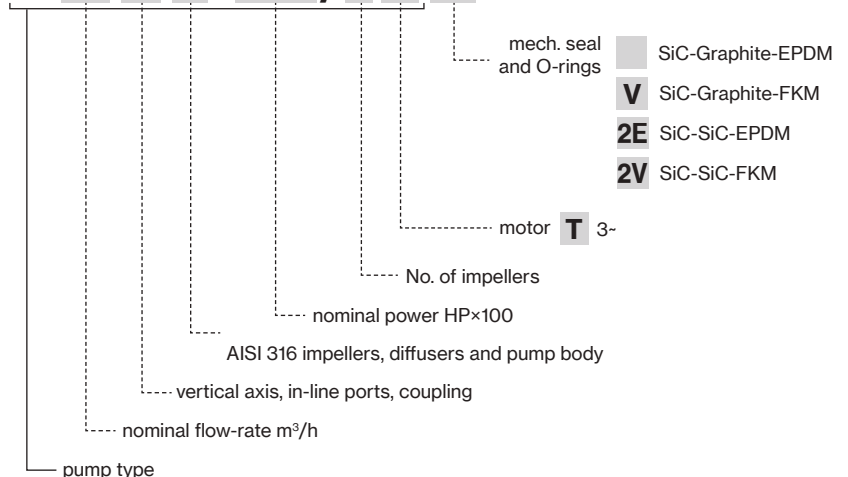


ULTRA 18-22



TYPE	P2		Q (l/min - m ³ /h - US gpm)												
			0	133,3	150	166,7	183,3	200	216,7	233,3	266,7	300	350	400	
			0	8	9	10	11	12	13	14	16	18	21	24	
			0	35,2	39,6	44,0	48,4	52,8	57,2	61,6	70,3	79,1	92,3	105,5	
HP		kW		H (m)											
U 18HX-100/1T	1	0,75	13,0	11,7	11,6	11,4	11,1	10,8	10,4	10,1	9,1	7,9	5,6		
U 18HX-200/2T	2	1,5	27,1	24,3	23,9	23,5	22,9	22,3	21,7	21,1	19,3	17,2	13,1	8,0	
U 18HX-300/3T	3	2,2	41,2	37,4	36,7	36,1	35,3	34,4	33,6	32,7	30,1	27,1	20,8	13,5	
U 18HX-400/4T	4	3	55,1	50,2	49,3	48,5	47,5	46,3	45,2	44,0	40,6	36,6	28,2	18,5	
U 18HX-550/5T	5,5	4	72,3	64,7	63,7	62,6	61,5	60,1	58,5	57,2	53,6	48,7	38,9	27,6	
U 18HX-750/6T	7,5	5,5	88,0	80,1	78,9	77,7	76,4	74,9	73,3	71,7	68,0	62,4	51,3	37,5	
U 18HX-750/7T	7,5	5,5	102,5	93,0	91,5	90,1	88,6	86,8	84,9	83,0	78,6	72,0	59,1	43,0	
U 18HX-1000/8T	10	7,5	116,9	105,9	104,2	102,6	100,8	98,8	96,5	94,4	89,3	81,7	66,9	48,5	
U 18HX-1000/9T	10	7,5	131,2	118,5	116,6	114,8	112,7	110,4	107,9	105,5	99,7	91,1	74,3	53,6	
U 18HX-1500/10T	15	11	147,3	134,1	132,1	130,1	127,9	125,5	122,8	120,2	114,1	104,8	86,3	63,4	
U 18HX-1500/11T	15	11	161,7	147,1	144,9	142,7	140,3	137,6	134,6	131,7	125,0	114,7	94,4	69,2	
U 18HX-1500/12T	15	11	176,2	160,0	157,6	155,2	152,6	149,6	146,3	143,2	135,7	124,5	102,3	74,8	
U 18HX-1500/13T	15	11	190,6	172,9	170,3	167,7	164,8	161,6	158,0	154,6	146,4	134,2	110,1	80,3	
U 18HX-1500/14T	15	11	204,9	185,7	182,9	180,0	176,9	173,4	169,5	165,9	157,0	143,8	117,8	85,7	
U 18HX-2000/15T	20	15	220,7	200,2	197,2	194,2	190,8	187,1	183,0	179,0	169,7	155,7	127,8	93,4	
U 18HX-2000/16T	20	15	235,1	213,1	209,8	206,6	203,0	199,0	194,6	190,4	180,3	165,3	135,6	98,9	
U 18HX-2000/17T	20	15	249,4	225,9	222,4	219,0	215,1	210,9	206,1	201,6	190,9	174,8	143,3	104,2	


TYPE	P2		Q (l/min - m ³ /h - US gpm)												
			0	166,7	183,3	200	216,7	233,3	266,7	300	350	400	433,3	466,7	
			0	10	11	12	13	14	16	18	21	24	26	28	
			0	44,0	48,4	52,8	57,2	61,6	70,3	79,1	92,3	105,5	114,3	123,1	
HP		kW		H (m)											
U 22HX-200/1T	2	1,1	14,3	12,9	12,8	12,5	12,2	11,9	11,4	10,5	9,0	6,7	4,0		
U 22HX-300/2T	3	2,2	29,7	26,9	26,6	26,3	26,0	25,5	24,5	23,3	20,7	17,1	13,9	10,6	
U 22HX-400/3T	4	3	45,0	40,9	40,4	39,9	39,2	38,5	37,2	35,5	31,6	25,8	21,5	16,6	
U 22HX-550/4T	5,5	4	62,2	55,7	54,9	54,2	53,7	52,8	50,9	49,0	44,0	36,8	31,1	25,2	
U 22HX-750/5T	7,5	5,5	78,6	70,8	69,9	69,0	68,5	67,4	65,1	62,8	56,9	47,9	41,0	33,5	
U 22HX-1000/6T	10	7,5	94,2	86,2	85,1	84,1	83,2	82,2	79,7	77,3	70,0	59,4	51,3	42,0	
U 22HX-1000/7T	10	7,5	109,5	99,8	98,5	97,4	96,3	95,1	92,2	89,2	80,6	68,2	58,7	47,9	
U 22HX-1500/8T	15	11	126,5	116,1	114,7	113,5	112,3	111,0	107,9	104,8	95,4	81,4	70,7	58,3	
U 22HX-1500/9T	15	11	142,0	130,2	128,6	127,2	125,9	124,4	120,8	117,3	106,7	90,8	78,7	64,8	
U 22HX-1500/10T	15	11	157,5	144,2	142,4	140,8	139,3	137,7	133,6	129,6	117,7	100,1	86,6	71,1	
U 22HX-2000/11T	20	15	174,0	159,4	157,4	155,7	154,1	152,3	147,9	143,5	130,5	111,2	96,4	79,3	
U 22HX-2000/12T	20	15	189,5	173,4	171,2	169,3	167,6	165,5	160,7	155,8	141,6	120,4	104,2	85,6	
U 22HX-2000/13T	20	15	204,9	187,3	184,9	182,8	180,9	178,7	173,4	168,1	152,5	129,5	111,9	91,7	
U 22HX-2000/14T	20	15	220,3	201,1	198,5	196,2	194,1	191,7	186,0	180,2	163,2	138,4	119,4	97,7	
U 22HX-2500/15T	25	18,5	237,4	218,1	215,4	213,1	211,0	208,6	202,6	196,8	179,4	153,1	133,0	109,7	
U 22HX-2500/16T	25	18,5	252,9	232,2	229,4	226,9	224,6	222,0	215,6	209,4	190,7	162,7	141,1	116,3	
U 22HX-2500/17T	25	18,5	268,5	246,3	243,3	240,6	238,2	235,4	228,6	221,9	202,0	172,1	149,2	122,8	



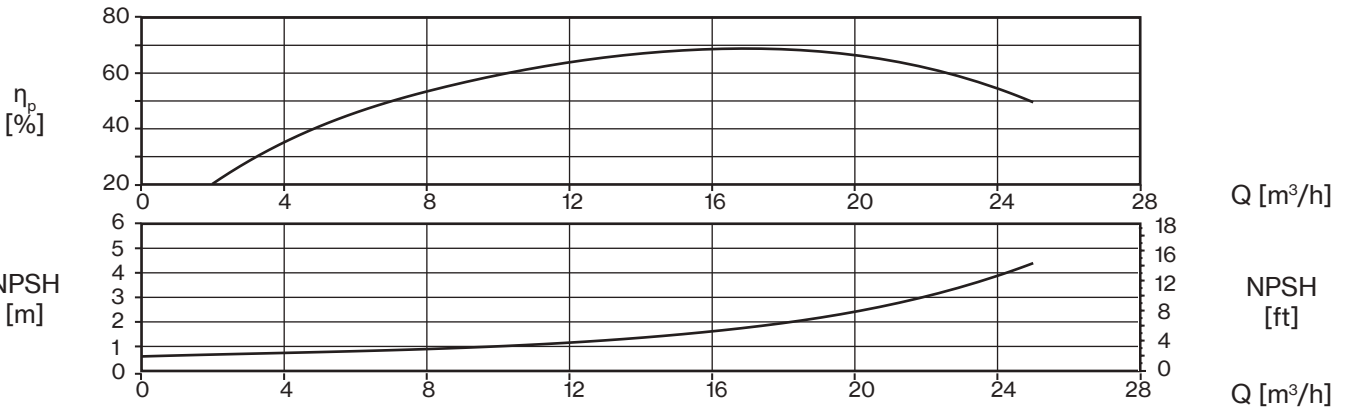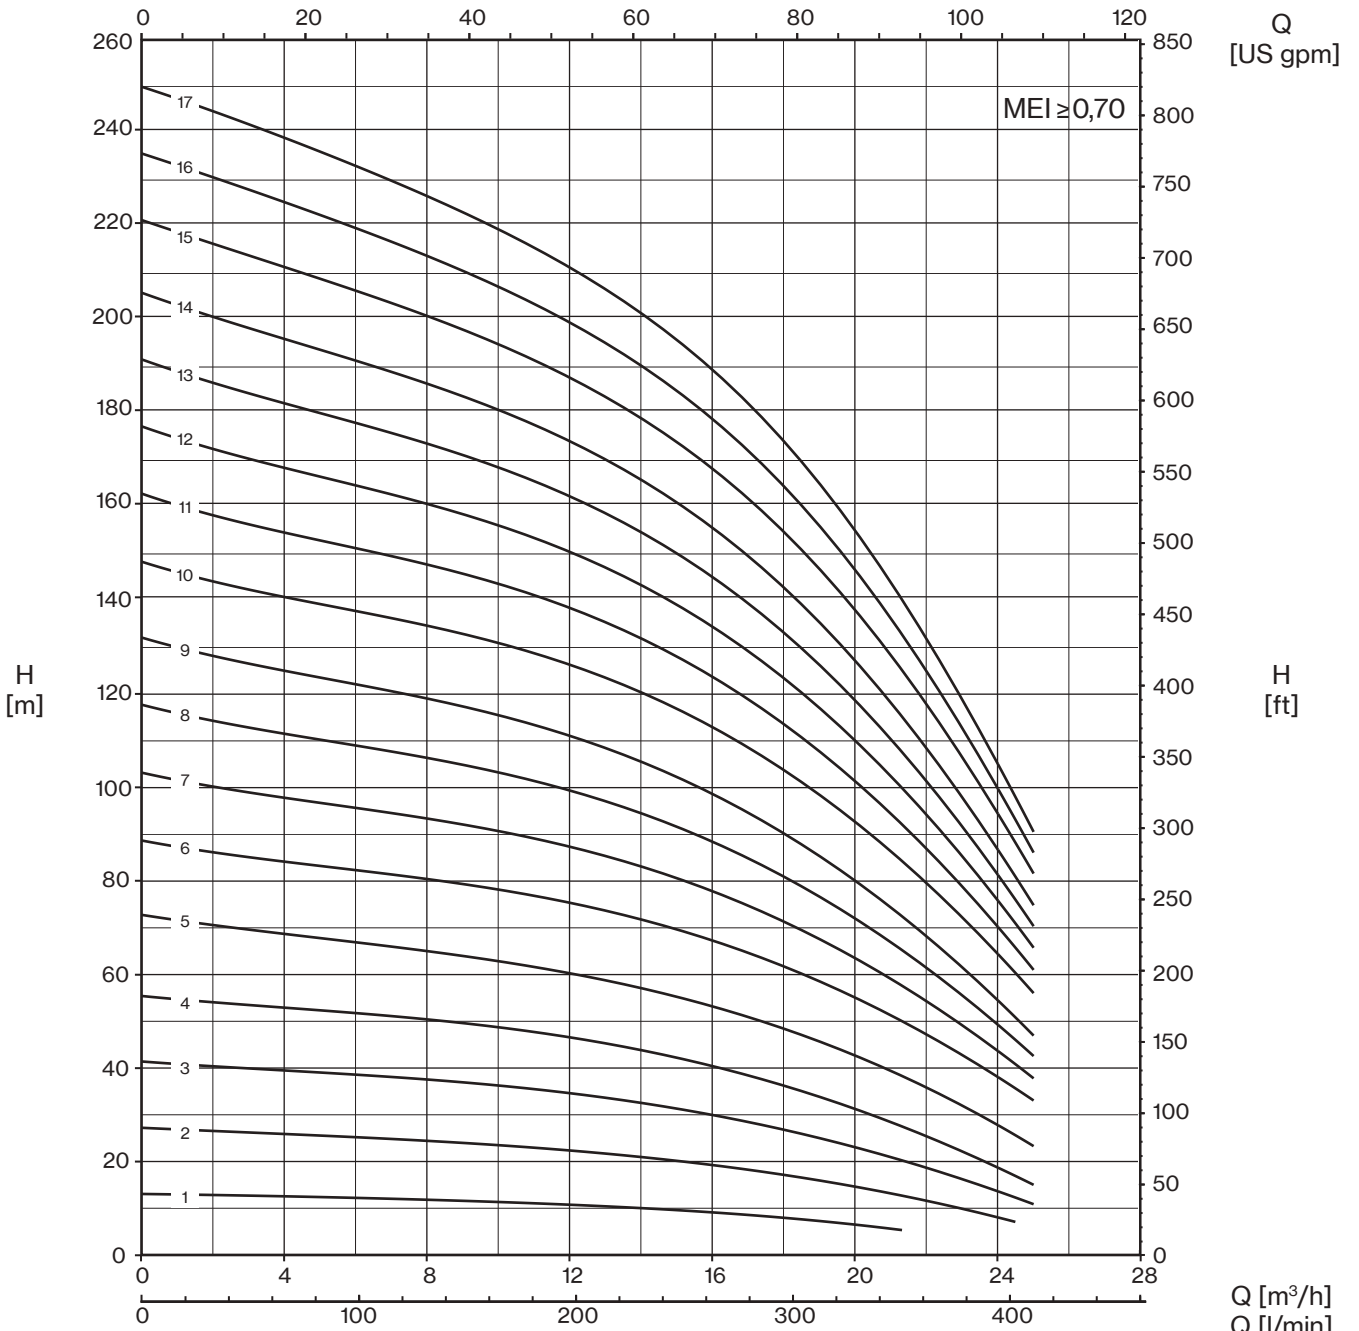

22 HX

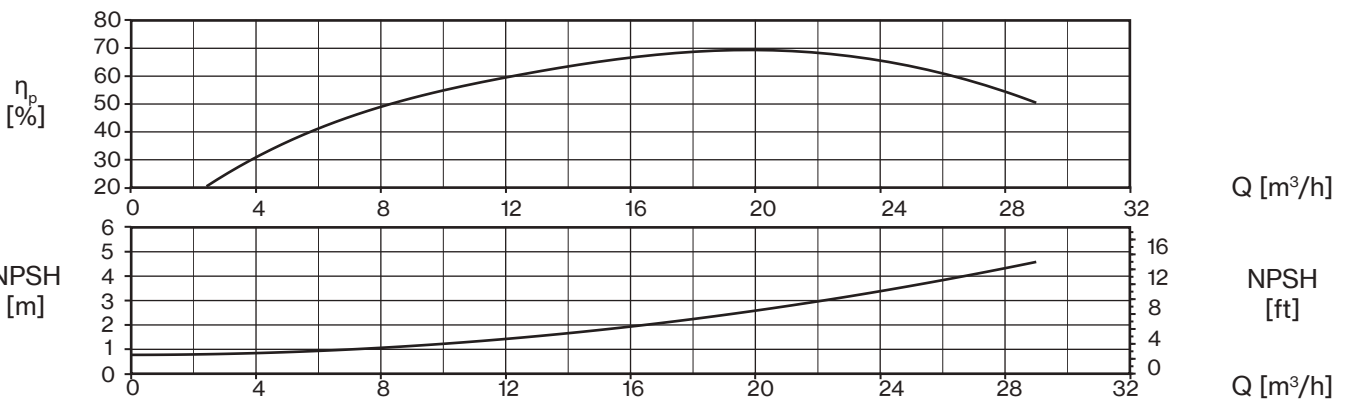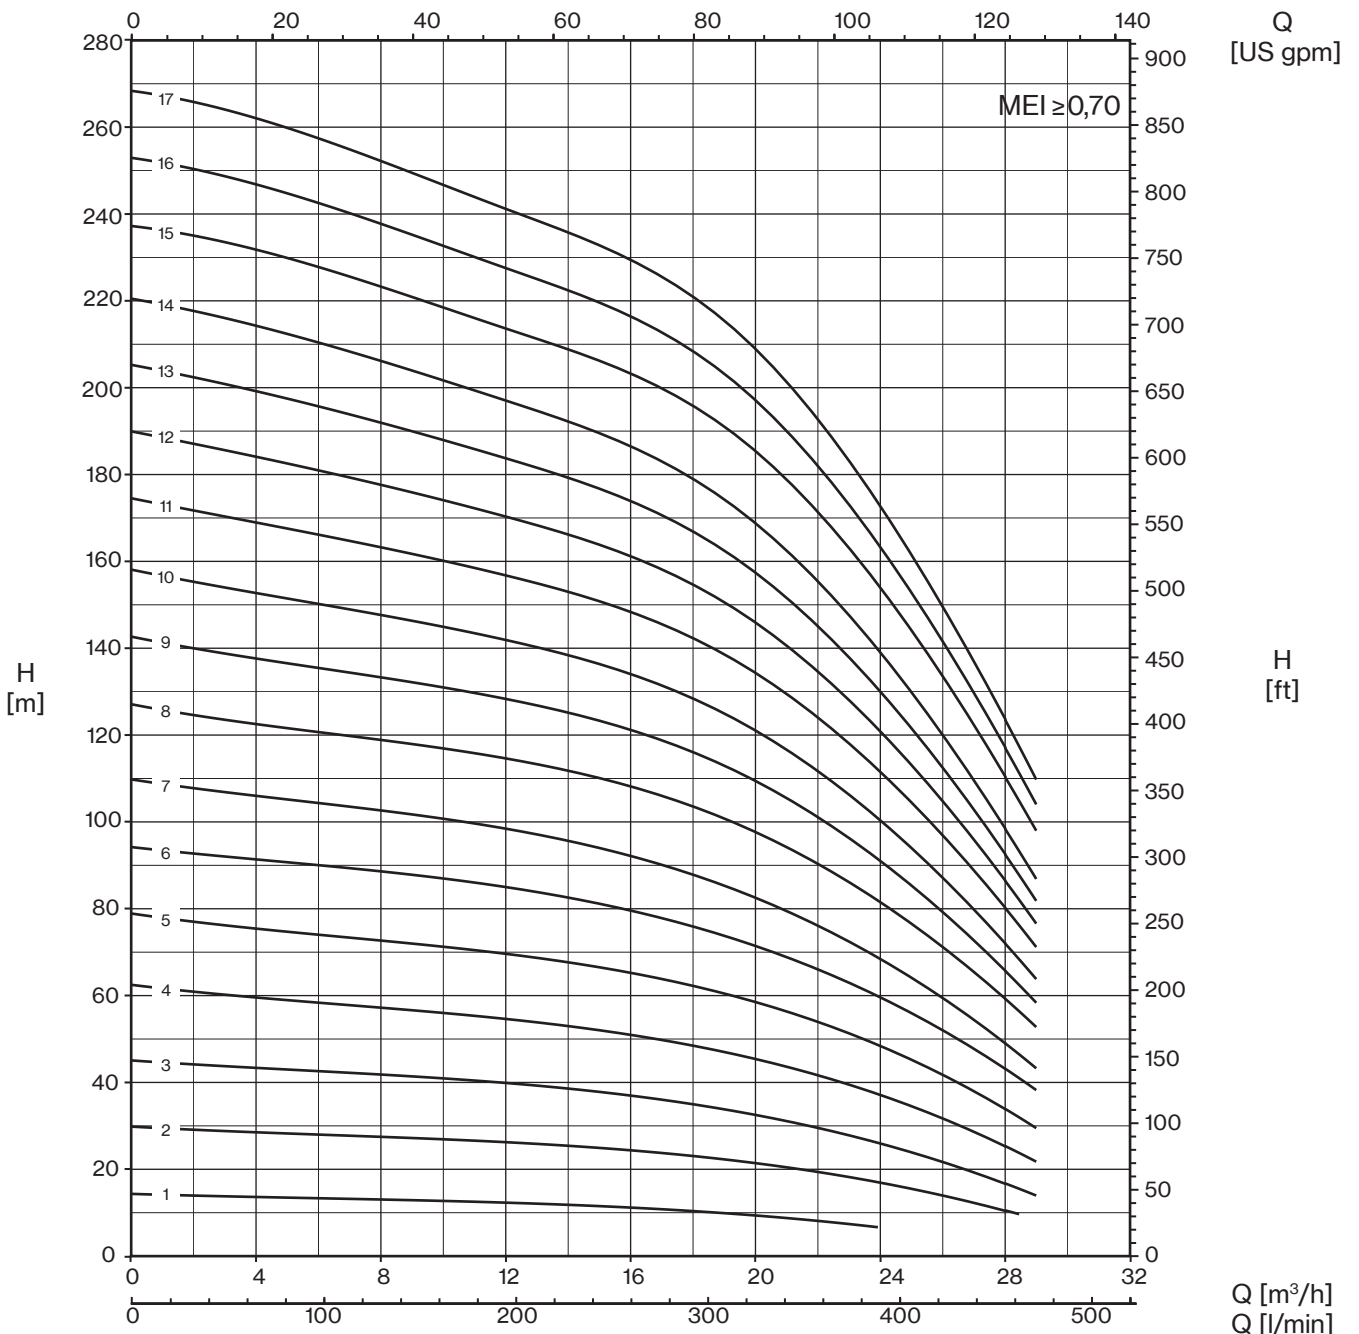

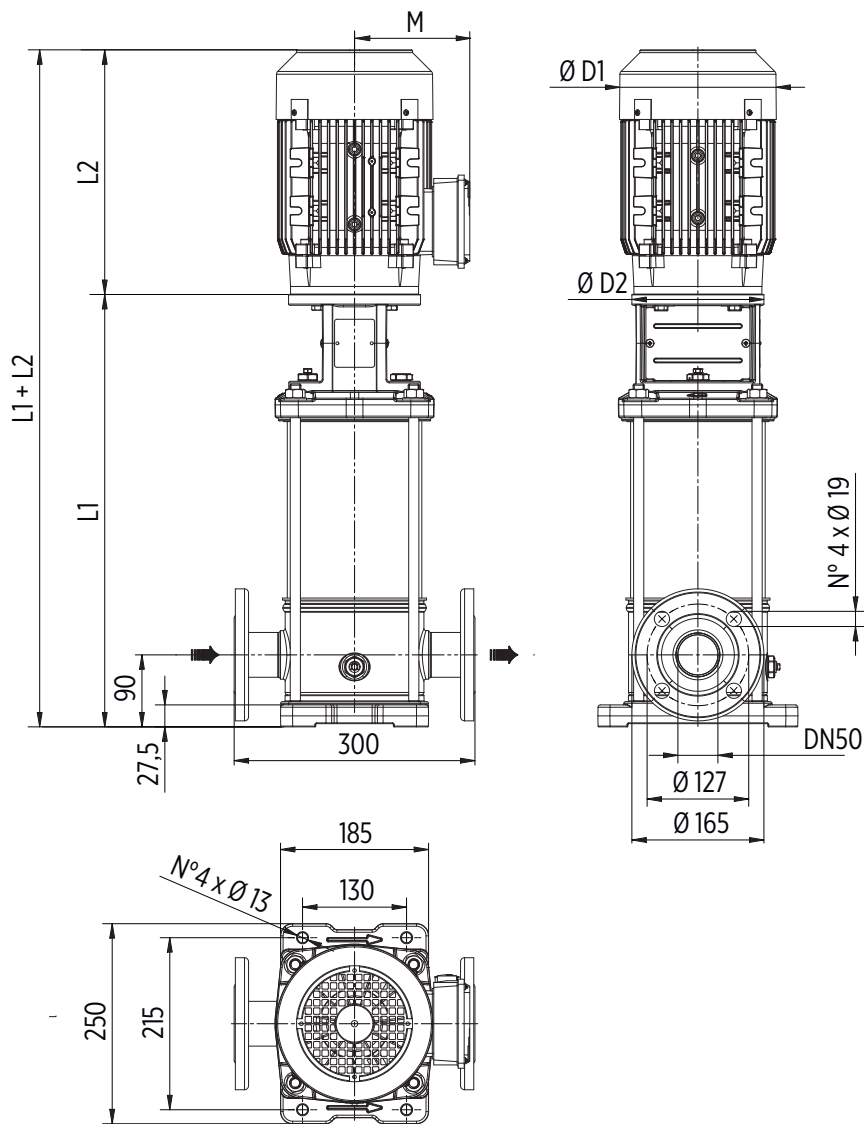


Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 18HX-100/1T	0,75	80	396	243	130	157	170	639	19	17	36
U 18HX-200/2T	1,5	90	396	280	145	177	170	676	20	23	43
U 18HX-300/3T	2,2	90	444	308	145	177	170	752	21,5	26	47,5
U 18HX-400/4T	3	100	492	333	157	205	170	825	22,5	35	57,5
U 18HX-550/5T	4	112	540	350	177	220	170	890	24	43	67
U 18HX-750/6T	5,5	132	800	400	197	256	300	1200	45,5	66	111,5
U 18HX-750/7T	5,5	132	848	400	197	256	300	1248	46,5	66	112,5
U 18HX-1000/8T	7,5	132	896	400	197	256	300	1296	48	73	121
U 18HX-1000/9T	7,5	132	944	400	197	256	300	1344	49,5	73	122,5
U 18HX-1500/10T	11	160	1012	503	255	315	350	1515	54	120	174
U 18HX-1500/11T	11	160	1060	503	255	315	350	1563	55,5	120	175,5
U 18HX-1500/12T	11	160	1108	503	255	315	350	1611	57	120	177
U 18HX-1500/13T	11	160	1156	503	255	315	350	1659	58,5	120	178,5
U 18HX-1500/14T	11	160	1204	503	255	315	350	1707	60	120	180
U 18HX-2000/15T	15	160	1252	503	255	315	350	1755	61	132	193
U 18HX-2000/16T	15	160	1300	503	255	315	350	1803	62,5	132	194,5
U 18HX-2000/17T	15	160	1348	503	255	315	350	1851	64	132	196



22 HX

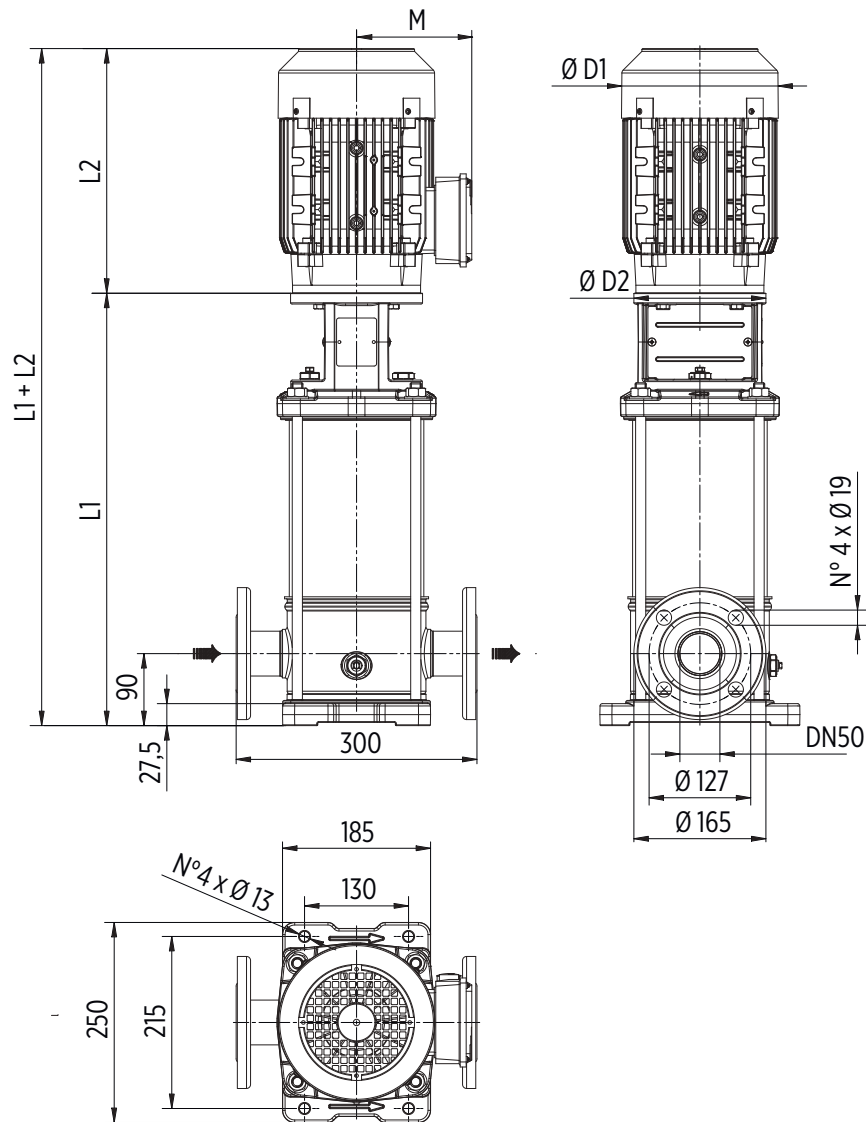

Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 22HX-200/1T	1,1	80	396	243	130	157	170	639	19	18	37
U 22HX-300/2T	2,2	90	396	308	145	177	170	704	20	26	46
U 22HX-400/3T	3	100	444	333	157	205	170	777	21,5	35	56,5
U 22HX-550/4T	4	112	492	350	177	220	170	842	22,5	43	65,5
U 22HX-750/5T	5,5	132	752	400	197	256	300	1152	44	66	110
U 22HX-1000/6T	7,5	132	800	400	197	256	300	1200	45,5	73	118,5
U 22HX-1000/7T	7,5	132	848	400	197	256	300	1248	46,5	73	119,5
U 22HX-1500/8T	11	160	916	503	255	315	350	1419	51,5	120	171,5
U 22HX-1500/9T	11	160	964	503	255	315	350	1467	53	120	173
U 22HX-1500/10T	11	160	1012	503	255	315	350	1515	54,5	120	174,5
U 22HX-2000/11T	15	160	1060	503	255	315	350	1563	55,5	132	187,5
U 22HX-2000/12T	15	160	1108	503	255	315	350	1611	57	132	189
U 22HX-2000/13T	15	160	1156	503	255	315	350	1659	58,5	132	190,5
U 22HX-2000/14T	15	160	1204	503	255	315	350	1707	60	132	192
U 22HX-2500/15T	18,5	160	1252	598	252	315	350	1850	61,5	150	211,5
U 22HX-2500/16T	18,5	160	1300	598	252	315	350	1898	62,5	150	212,5
U 22HX-2500/17T	18,5	160	1348	598	252	315	350	1946	64	150	214



ULTRA HS/HX

Multistage Vertical

Stainless steel multistage vertical pumps. Suitable for clean non-loaded fluids, pressurizing system, irrigation, drinking and glycol water, water treatment, food industry, heating and air conditioning, washing system.

Construction features

Pump body	HS: cast iron GJL-250 HX: EN 1.4401 / AISI 316
Motor bracket	cast iron
Seal plate housing	HS: EN 1.4301 / AISI 304 HX: EN 1.4401 / AISI 316
Impellers, diffusers, shell	HS: EN 1.4301 / AISI 304 HX: EN 1.4401 / AISI 316
Pump shaft	HS: EN 1.4057 / AISI 431 HX: EN 1.4460 / AISI 329
Mechanical seal	silicon carbide-graphite-EPDM
Intermediate bush	tungsten carbide
Ambient temperature	max 40 °C
Liquid temperature	-15 ÷ +120 °C (Max 85° for domestic use)
Max operating pressure	32 bar (U 35-50) 25 bar (U 75-90)
Pump body gasket	EPDM


Motor

2 pole induction motor	3- 230/400V - 50Hz P ≤ 4kW, size B14 V1 3- 400/690V - 50Hz P > 4kW, size B5 V1 IE3 efficiency class
Insulation class	F
Protection degree	IP55



ULTRA HS

ULTRA HX

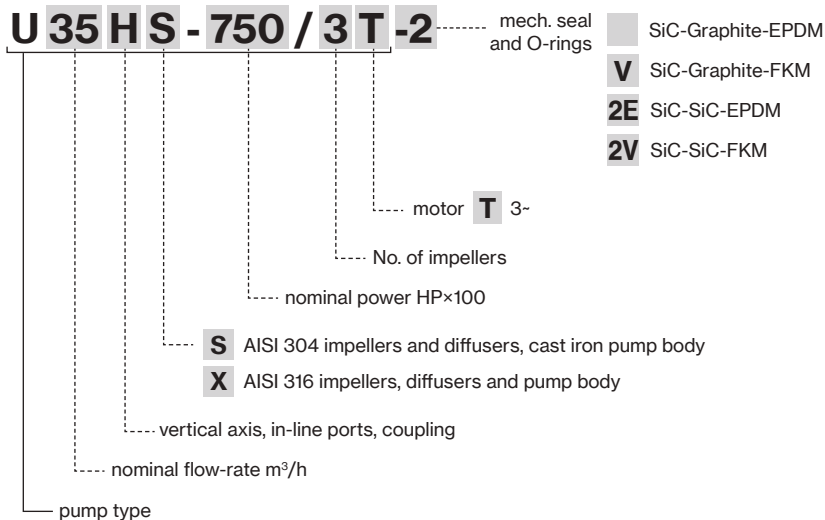

ULTRA 35-50

TYPE	P2		Q (l/min - m ³ /h - US gpm)									
			0	417	500	566,7	666,7	700	800	900	1000	1066,7
3-			0	25	30	34	40	42	48	54	60	64
	HP	kW	0	109,9	131,9	149,5	175,9	184,7	211,0	237,4	263,8	281,4
		H (m)										
U 35....-300/1T	3	2,2	24,8	18,6	17,2	15,8	12,7	11,6				
U 35....-550/2-2RT	5,5	4	36,2	29,3	26,3	23,1	17,8	15,7				
U 35....-550/2-1RT	5,5	4	42,8	34,3	31,6	28,8	23,4	21,3				
U 35....-750/2T	7,5	5,5	48,5	39,6	36,9	34,4	29,1	27,2				
U 35....-750/3-2RT	7,5	5,5	60,3	49,0	44,9	40,6	32,7	29,6				
U 35....-1000/3-1RT	10	7,5	67,5	54,1	50,1	46,1	38,0	35,0				
U 35....-1000/3T	10	7,5	72,2	58,2	54,2	50,3	42,4	39,5				
U 35....-1000/4-2RT	10	7,5	85,1	68,6	63,9	58,4	48,8	44,7				
U 35....-1500/4-1RT	15	11	92,8	75,3	70,2	65,2	54,8	50,8				
U 35....-1500/4T	15	11	99,4	81,0	76,3	71,8	62,2	58,5				
U 35....-1500/5-2RT	15	11	109,2	89,5	82,9	76,2	63,5	58,5				
U 35....-1500/5-1RT	15	11	115,1	93,6	87,0	80,6	67,5	62,4				
U 35....-2000/5T	20	15	121,1	99,3	93,1	87,4	74,9	70,0				
U 35....-2000/6-2RT	20	15	133,8	109,6	101,7	93,9	78,7	72,7				
U 35....-2000/6-1RT	20	15	139,7	113,7	105,8	98,3	82,7	76,6				
U 35....-2000/6T	20	15	145,6	119,3	111,9	105,0	90,1	84,2				
U 35....-2000/7-2RT	20	15	157,5	128,3	119,1	110,1	92,3	85,3				
U 35....-2000/7-1RT	20	15	163,3	132,3	123,2	114,4	96,2	89,1				
U 35....-2500/7T	25	18,5	169,2	137,9	129,1	121,0	103,5	96,6				
U 35....-2500/8-2RT	25	18,5	185,5	152,0	142,0	132,5	112,8	105,1				
U 35....-2500/8-1RT	25	18,5	191,9	156,4	146,6	137,4	117,4	109,6				
U 35....-2500/8T	25	18,5	198,4	162,5	153,0	144,6	125,4	117,8				
U 35....-3000/9-2RT	30	22	209,8	171,4	160,2	149,5	127,4	118,7				
U 35....-3000/9-1RT	30	22	216,2	175,8	164,7	154,4	131,9	123,1				
U 35....-3000/9T	30	22	222,7	181,8	171,1	161,5	139,8	131,3				
U 35....-3000/10-2RT	30	22	234,0	190,6	178,1	166,3	141,7	132,1				
U 35....-3000/10-1RT	30	22	240,3	194,9	182,6	171,1	146,1	136,4				
U 35....-4000/10T	40	30	246,8	200,9	188,9	178,2	154,0	144,5				
U 35....-4000/11-2RT	40	30	262,9	218,3	205,1	192,7	166,3	155,8				
U 35....-4000/11-1RT	40	30	269,5	222,9	209,9	197,8	171,2	160,5				
U 35....-4000/11T	40	30	276,2	229,2	216,5	205,3	179,4	169,1				
U 35....-4000/12-2RT	40	30	288,1	240,0	226,0	213,0	184,4	173,3				
U 35....-4000/12-1RT	40	30	294,7	244,8	230,9	218,4	189,7	178,6				
U 35....-4000/12T	40	30	301,4	251,1	237,8	226,0	197,6	188,0				
U 35....-4000/13-2RT	40	30	313,0	260,4	245,3	231,3	200,3	188,3				
U 35....-4000/13-1RT	40	30	319,6	265,2	250,2	236,6	205,6	193,6				
U 35....-4000/13T	40	30	326,3	271,5	257,0	244,2	213,5	202,9				
U 50....-400/1-1RT	4	3	19,6			16,0	14,6	14,0	12,1	9,7	7,0	4,9
U 50....-550/1T	5,5	4	25,1			20,4	19,0	18,5	16,8	14,8	12,5	10,4
U 50....-750/2-2RT	7,5	5,5	38,4			33,9	31,5	30,5	27,4	23,7	19,3	16,0
U 50....-1000/2T	10	7,5	49,0			42,0	39,8	38,8	35,5	31,8	27,5	24,1
U 50....-1500/3-2RT	15	11	63,0			55,9	52,7	51,4	46,8	41,5	35,1	30,3
U 50....-1500/3T	15	11	74,2			65,0	62,1	60,9	56,5	51,3	45,5	41,0
U 50....-2000/4-2RT	20	15	87,5			77,4	73,3	71,6	65,5	58,4	50,1	43,8
U 50....-2000/4T	20	15	97,5			86,4	82,8	81,3	75,4	68,5	60,8	54,7
U 50....-2500/5-2RT	25	18,5	112,1			99,9	95,0	92,9	85,5	76,7	66,6	58,8
U 50....-2500/5T	25	18,5	122,3			109,1	104,7	102,9	95,6	87,1	77,5	70,0
U 50....-3000/6-2RT	30	22	136,0			120,7	114,9	112,4	103,4	92,9	80,8	71,5
U 50....-3000/6T	30	22	146,0			129,8	124,5	122,2	113,3	103,0	91,6	82,5
U 50....-4000/7-2RT	40	30	162,6			146,4	140,1	137,3	127,2	115,2	101,3	90,8
U 50....-4000/7T	40	30	173,0			155,9	150,1	147,7	137,7	126,0	112,7	102,5
U 50....-4000/8-2RT	40	30	187,2			168,3	161,1	158,0	146,4	132,7	116,8	104,8
U 50....-4000/8T	40	30	197,5			177,7	171,1	168,2	156,8	143,4	128,2	116,5
U 50....-5000/9-2RT	50	37	211,7			190,2	182,2	178,7	165,7	150,3	132,6	119,1
U 50....-5000/9T	50	37	222,0			199,7	192,2	188,9	176,1	161,0	143,9	130,7
U 50....-5000/10-2RT	50	37	236,1			211,9	203,0	199,1	184,6	167,5	147,9	132,9
U 50....-5000/10T	50	37	246,4			221,3	212,9	209,3	195,0	178,1	159,1	144,4
U 50....-6000/11-2RT	60	45	261,5			235,3	225,7	221,5	205,7	187,0	165,5	149,1
U 50....-6000/11T	60	45	271,8			244,8	235,7	231,8	216,2	197,7	176,9	160,9
U 50....-6000/12-2RT	60	45	286,0			257,2	246,7	242,1	224,8	204,5	181,0	163,2
U 50....-6000/12T	60	45	296,3			266,6	256,7	252,4	235,3	215,2	192,4	174,9





TYPE	P2		Q (l/min - m³/h - US gpm)								
			0	500	666,7	750	833,3	1000	1166,7	1333,3	1466,7
			0	30	40	45	50	60	70	80	88
			0	131,9	175,9	197,9	219,8	263,8	307,8	351,7	386,9
3-	HP	kW	H (m)								
			U 75...-550/1-1RT	5,5	4	21,3	18,2	17,0	16,3	15,5	13,3
U 75...-750/1T	7,5	5,5	30,2	24,8	23,0	22,3	21,7	20,3	18,3	15,4	12,2
U 75...-1000/2-2RT	10	7,5	38,9	37,2	35,8	34,8	33,8	30,5	25,8	20,3	14,6
U 75...-1500/2-1RT	15	11	47,8	44,3	42,6	41,6	40,6	38,0	34,2	29,3	24,0
U 75...-1500/2T	15	11	59,3	51,2	48,0	46,8	45,5	43,2	39,9	35,3	30,8
U 75...-2000/3-2RT	20	15	67,3	63,0	60,6	59,1	57,6	53,4	47,2	39,5	31,4
U 75...-2000/3-1RT	20	15	75,5	69,2	66,3	64,8	63,2	59,5	54,1	46,9	38,7
U 75...-2500/3T	25	18,5	89,6	77,6	72,8	70,9	69,0	65,7	60,7	53,9	47,2
U 75...-2500/4-2RT	25	18,5	95,5	88,6	85,1	83,2	81,1	76,0	68,3	58,5	47,9
U 75...-3000/4-1RT	30	22	103,7	94,7	90,9	88,8	86,7	82,1	75,2	65,9	55,3
U 75...-3000/4T	30	22	111,8	100,8	96,7	94,5	92,4	88,4	82,3	73,3	62,9
U 75...-4000/5-2RT	40	30	125,3	116,2	111,8	109,5	107,0	101,1	92,1	80,4	68,0
U 75...-4000/5-1RT	40	30	133,9	122,7	117,9	115,5	113,0	107,6	99,5	88,4	76,2
U 75...-4000/5T	40	30	142,4	129,2	124,0	121,5	119,0	114,1	106,9	96,3	84,6
U 75...-4000/6-2RT	40	30	153,5	141,6	136,2	133,3	130,3	123,4	112,9	99,0	84,1
U 75...-5000/6-1RT	50	37	162,1	148,2	142,4	139,4	136,4	130,0	120,4	107,1	92,5
U 75...-5000/6T	50	37	170,6	154,7	148,5	145,4	142,3	136,5	127,8	115,0	100,9
U 75...-5000/7-2RT	50	37	181,7	167,0	160,6	157,2	153,6	145,7	133,7	117,7	100,3
U 75...-5000/7-1RT	50	37	190,1	173,5	166,6	163,1	159,5	152,1	141,0	125,5	108,3
U 75...-6000/7T	60	45	199,5	181,1	173,8	170,3	166,7	160,0	149,9	135,1	118,9
U 75...-6000/8-2RT	60	45	210,6	193,5	186,0	182,2	178,1	169,3	156,0	137,9	118,4
U 75...-6000/8-1RT	60	45	219,2	200,0	192,1	188,2	184,1	175,8	163,4	145,9	126,6
U 75...-6000/8T	60	45	227,7	206,5	198,2	194,1	190,1	182,3	170,7	153,8	135,1

TYPE	P2		Q (l/min - m³/h - US gpm)									
			0	750	833,3	1000	1166,7	1333,3	1466,7	1666,7	1833,3	1916,7
			0	45	50	60	70	80	88	100	110	115
			0	197,9	219,8	263,8	307,8	351,7	386,9	439,7	483,6	505,6
3-	HP	kW	H (m)									
			U 90...-750/1-1RT	7,5	5,5	26,4	20,5	19,9	18,7	17,3	15,5	13,2
U 90...-1000/1T	10	7,5	35,6	27,0	25,6	23,2	21,9	20,4	18,8	15,7	12,4	10,5
U 90...-1500/2-2RT	15	11	49,6	42,4	41,3	39,0	36,6	33,2	29,4	22,7	15,7	11,7
U 90...-2000/2T	20	15	69,2	56,6	54,5	50,5	47,3	44,3	41,6	36,3	30,5	27,3
U 90...-2500/3-2RT	25	18,5	80,4	70,8	69,1	65,6	62,2	57,7	53,0	44,3	34,9	30,4
U 90...-3000/3T	30	22	92,4	82,6	80,6	76,7	73,2	69,4	65,5	57,8	49,7	45,2
U 90...-4000/4-2RT	40	30	113,1	100,6	98,2	93,5	89,0	83,5	77,5	66,5	54,6	48,5
U 90...-4000/4T	40	30	125,6	113,0	110,4	105,2	100,6	95,7	90,7	80,8	70,2	64,4
U 90...-5000/5-2RT	50	37	144,1	128,4	125,4	119,3	113,7	106,9	99,7	86,1	71,6	64,1
U 90...-5000/5T	50	37	156,6	140,7	137,4	130,9	125,2	119,1	112,8	100,3	87,1	79,8
U 90...-6000/6-2RT	60	45	175,9	157,0	153,4	146,1	139,3	131,4	122,9	107,0	89,8	80,8
U 90...-6000/6T	60	45	188,4	169,5	165,6	157,8	150,9	143,6	136,2	121,3	105,5	96,7





35 HS/HX

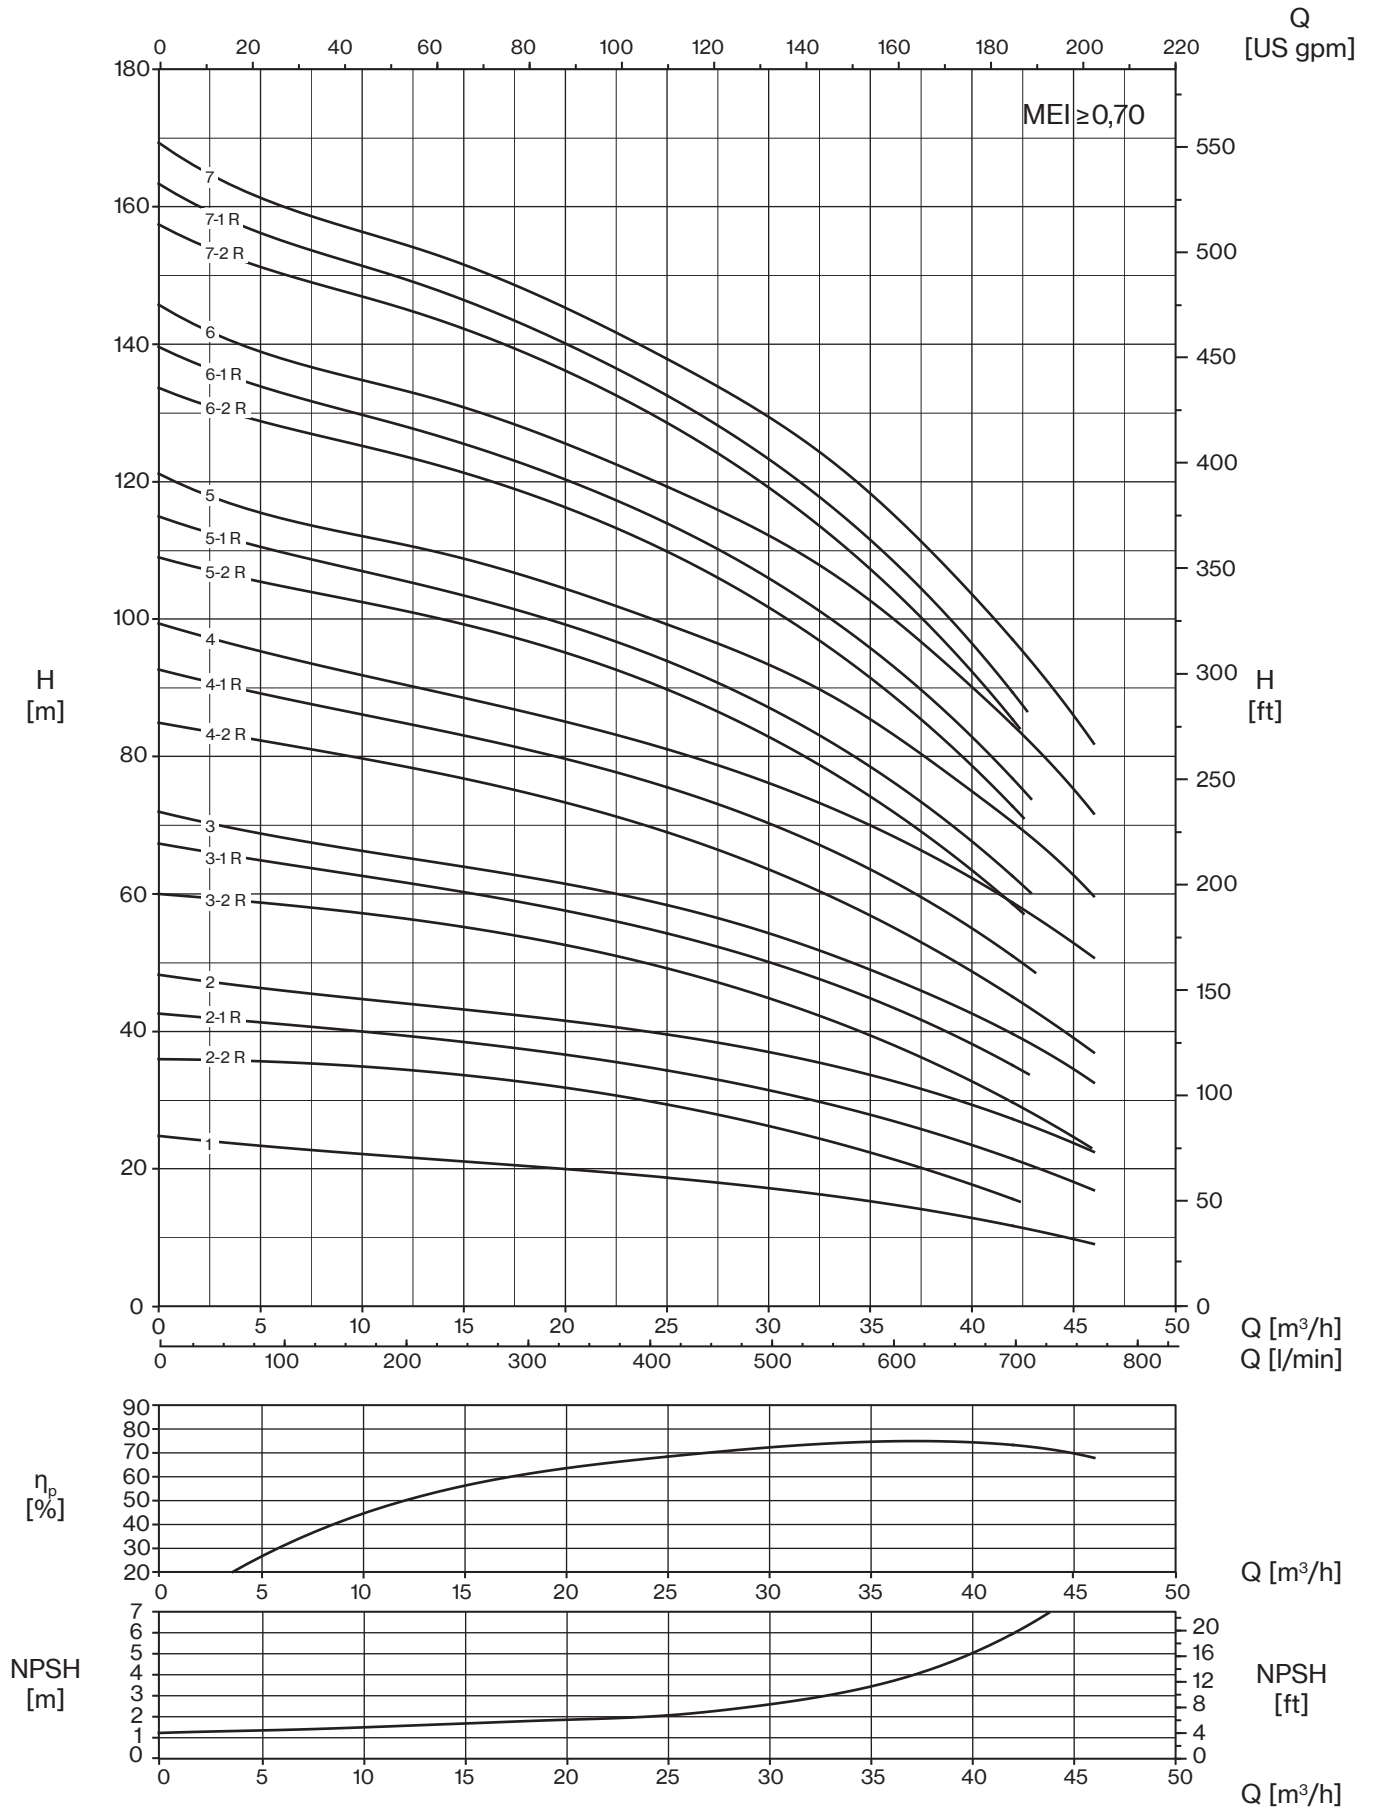

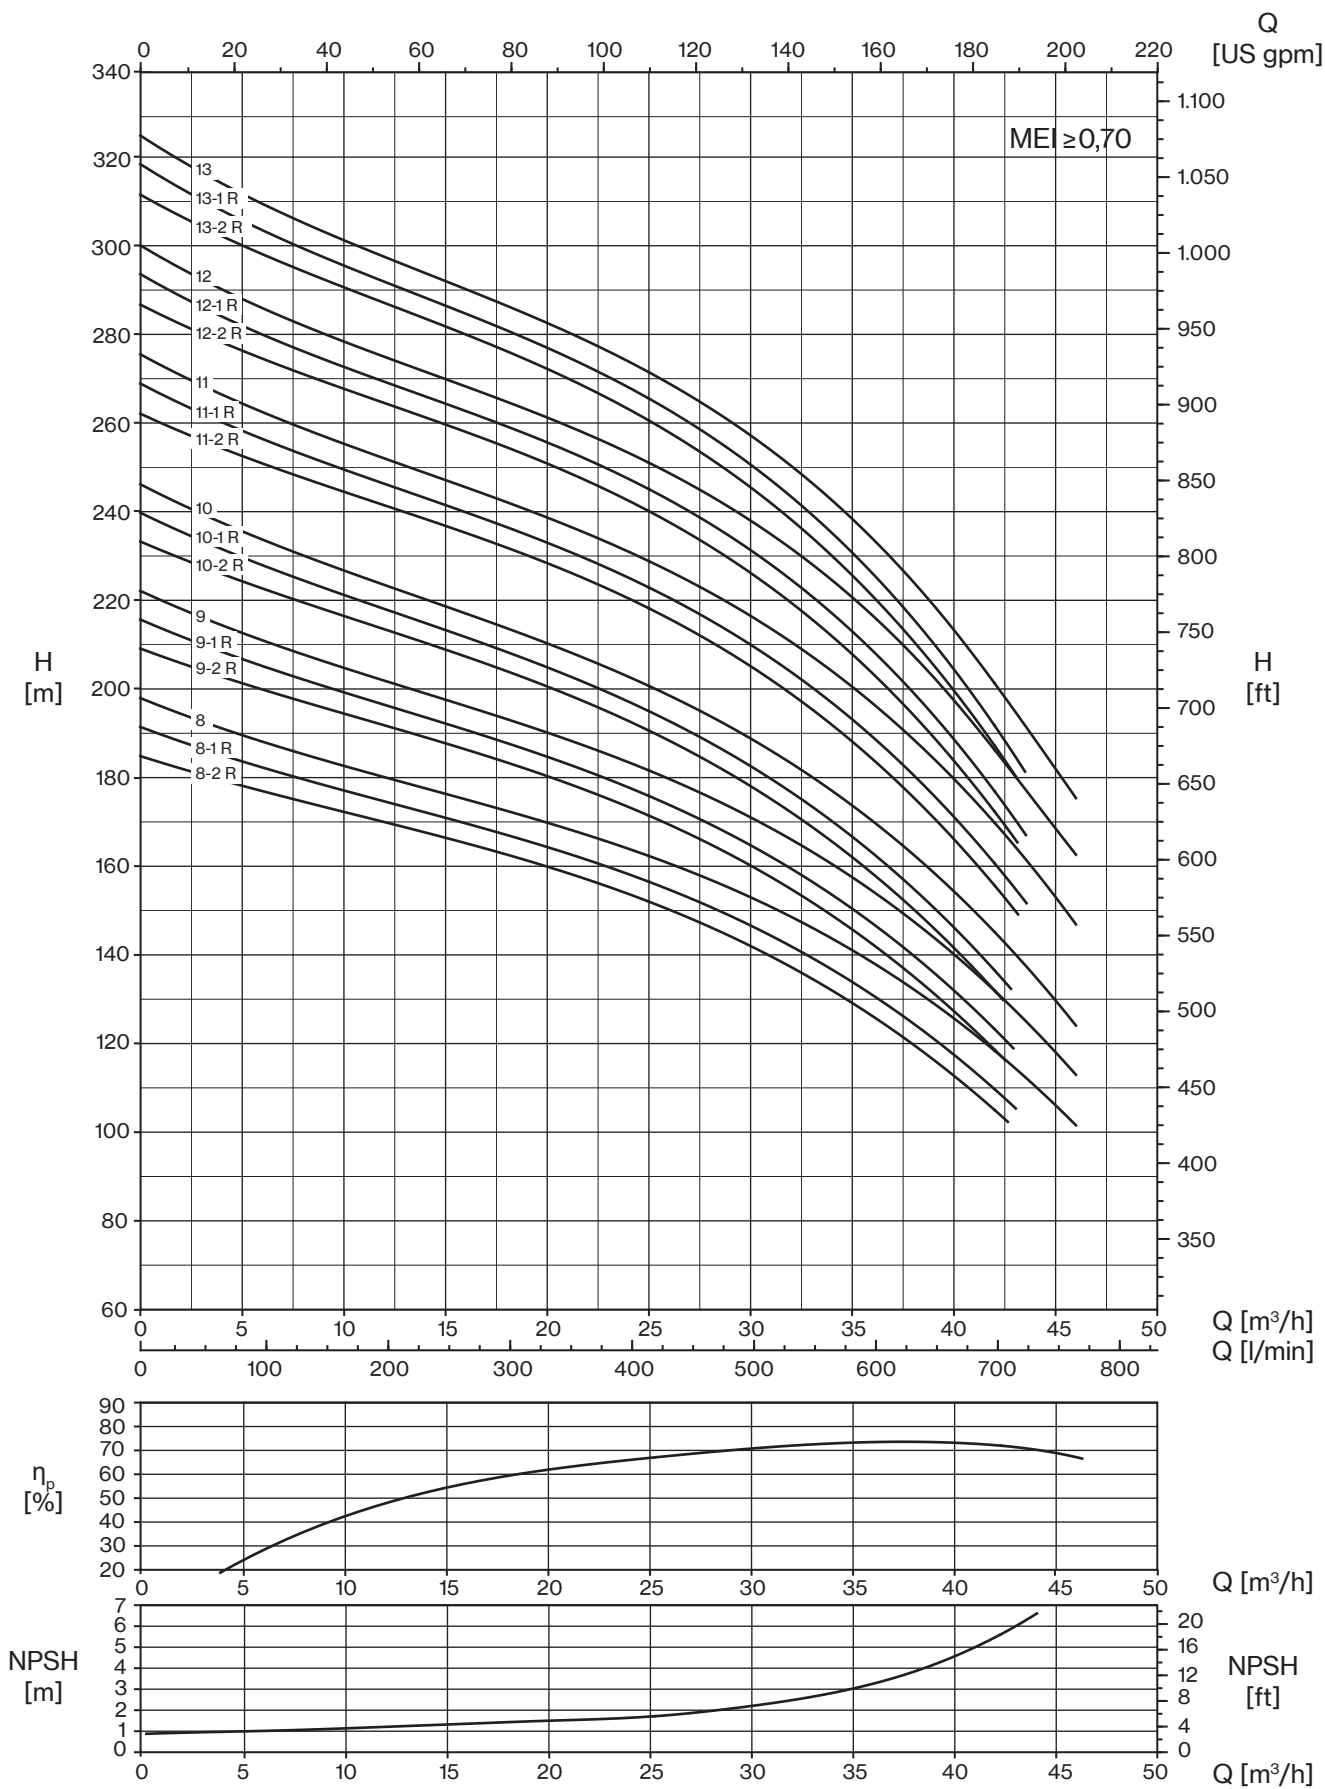

50 HS/HX

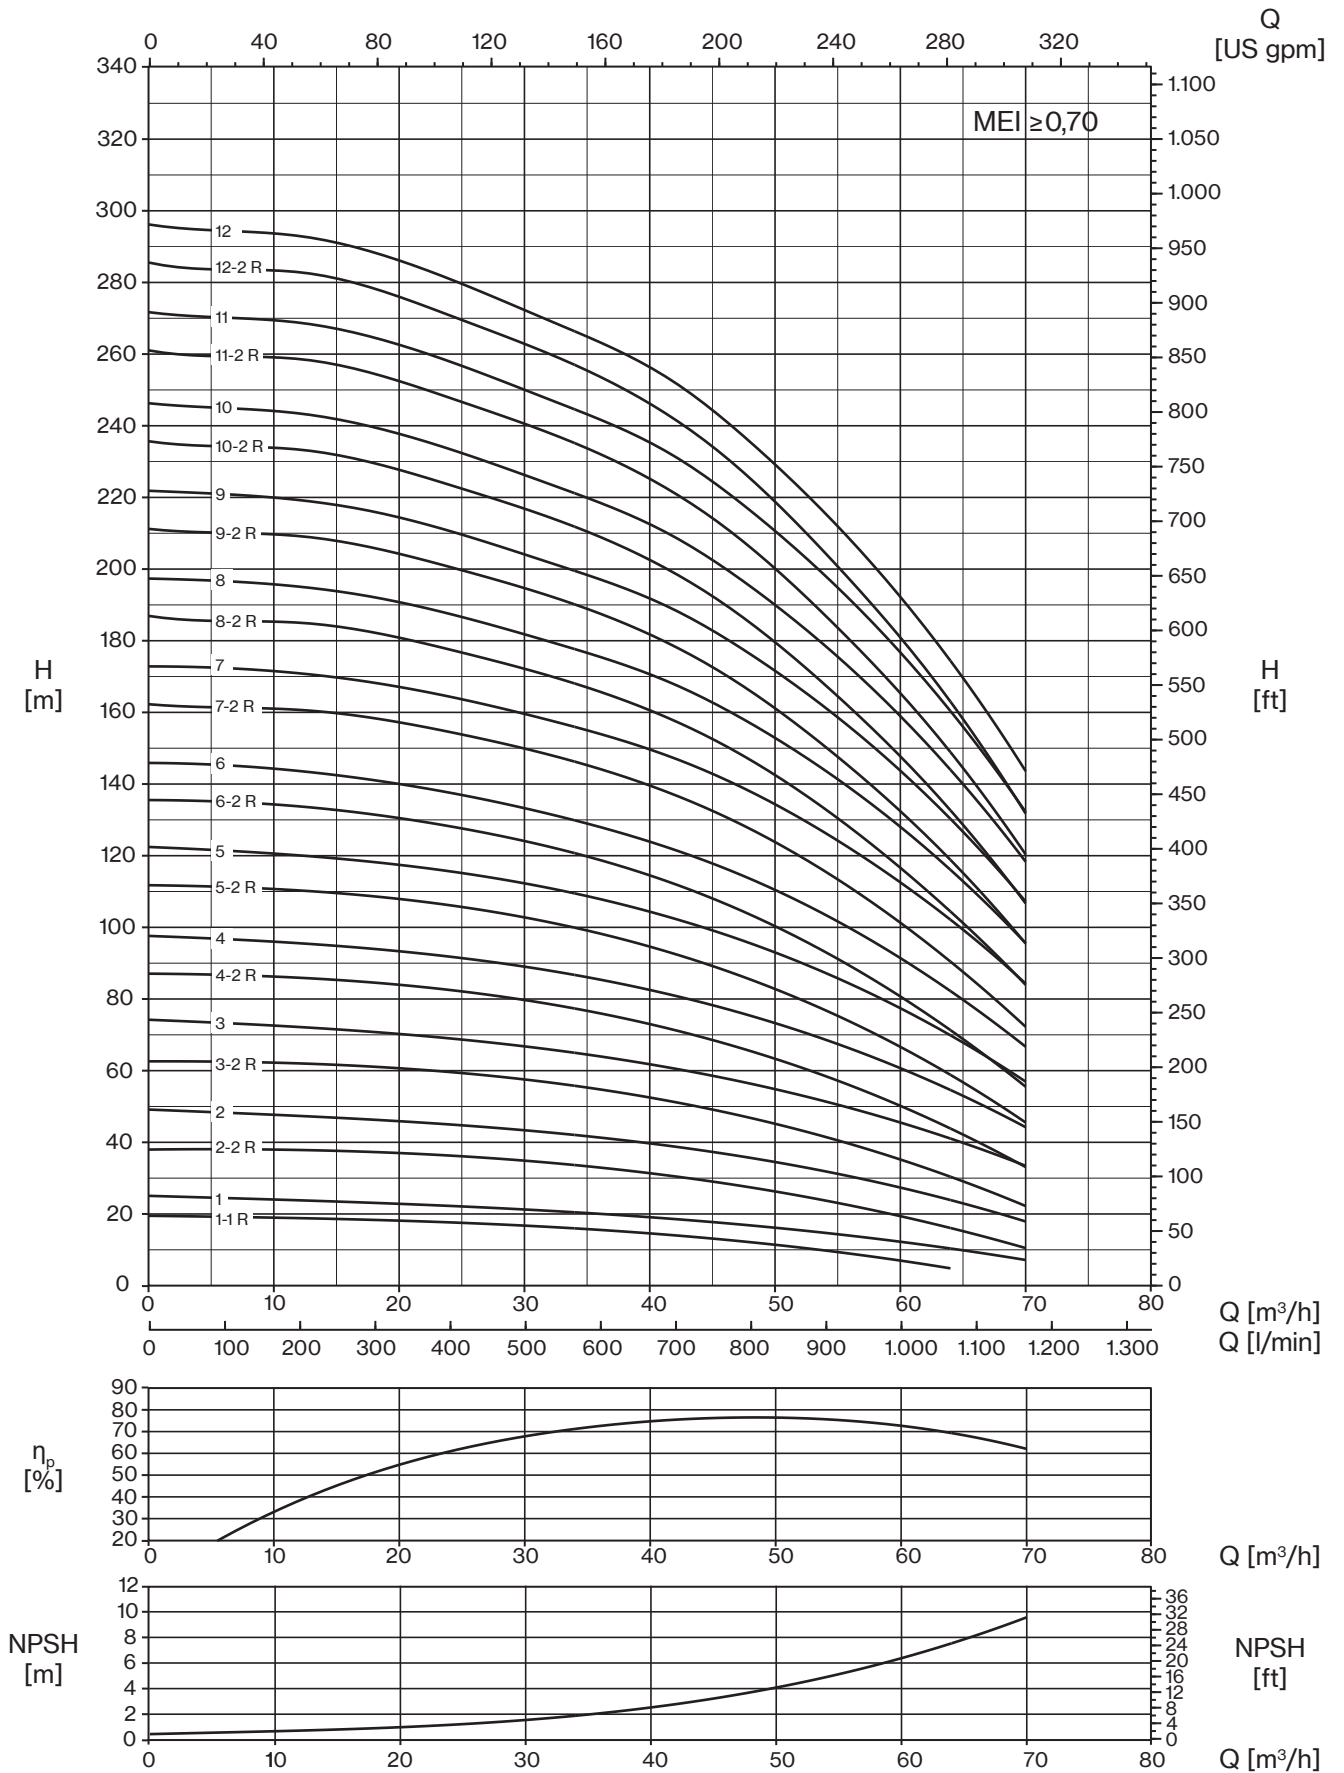


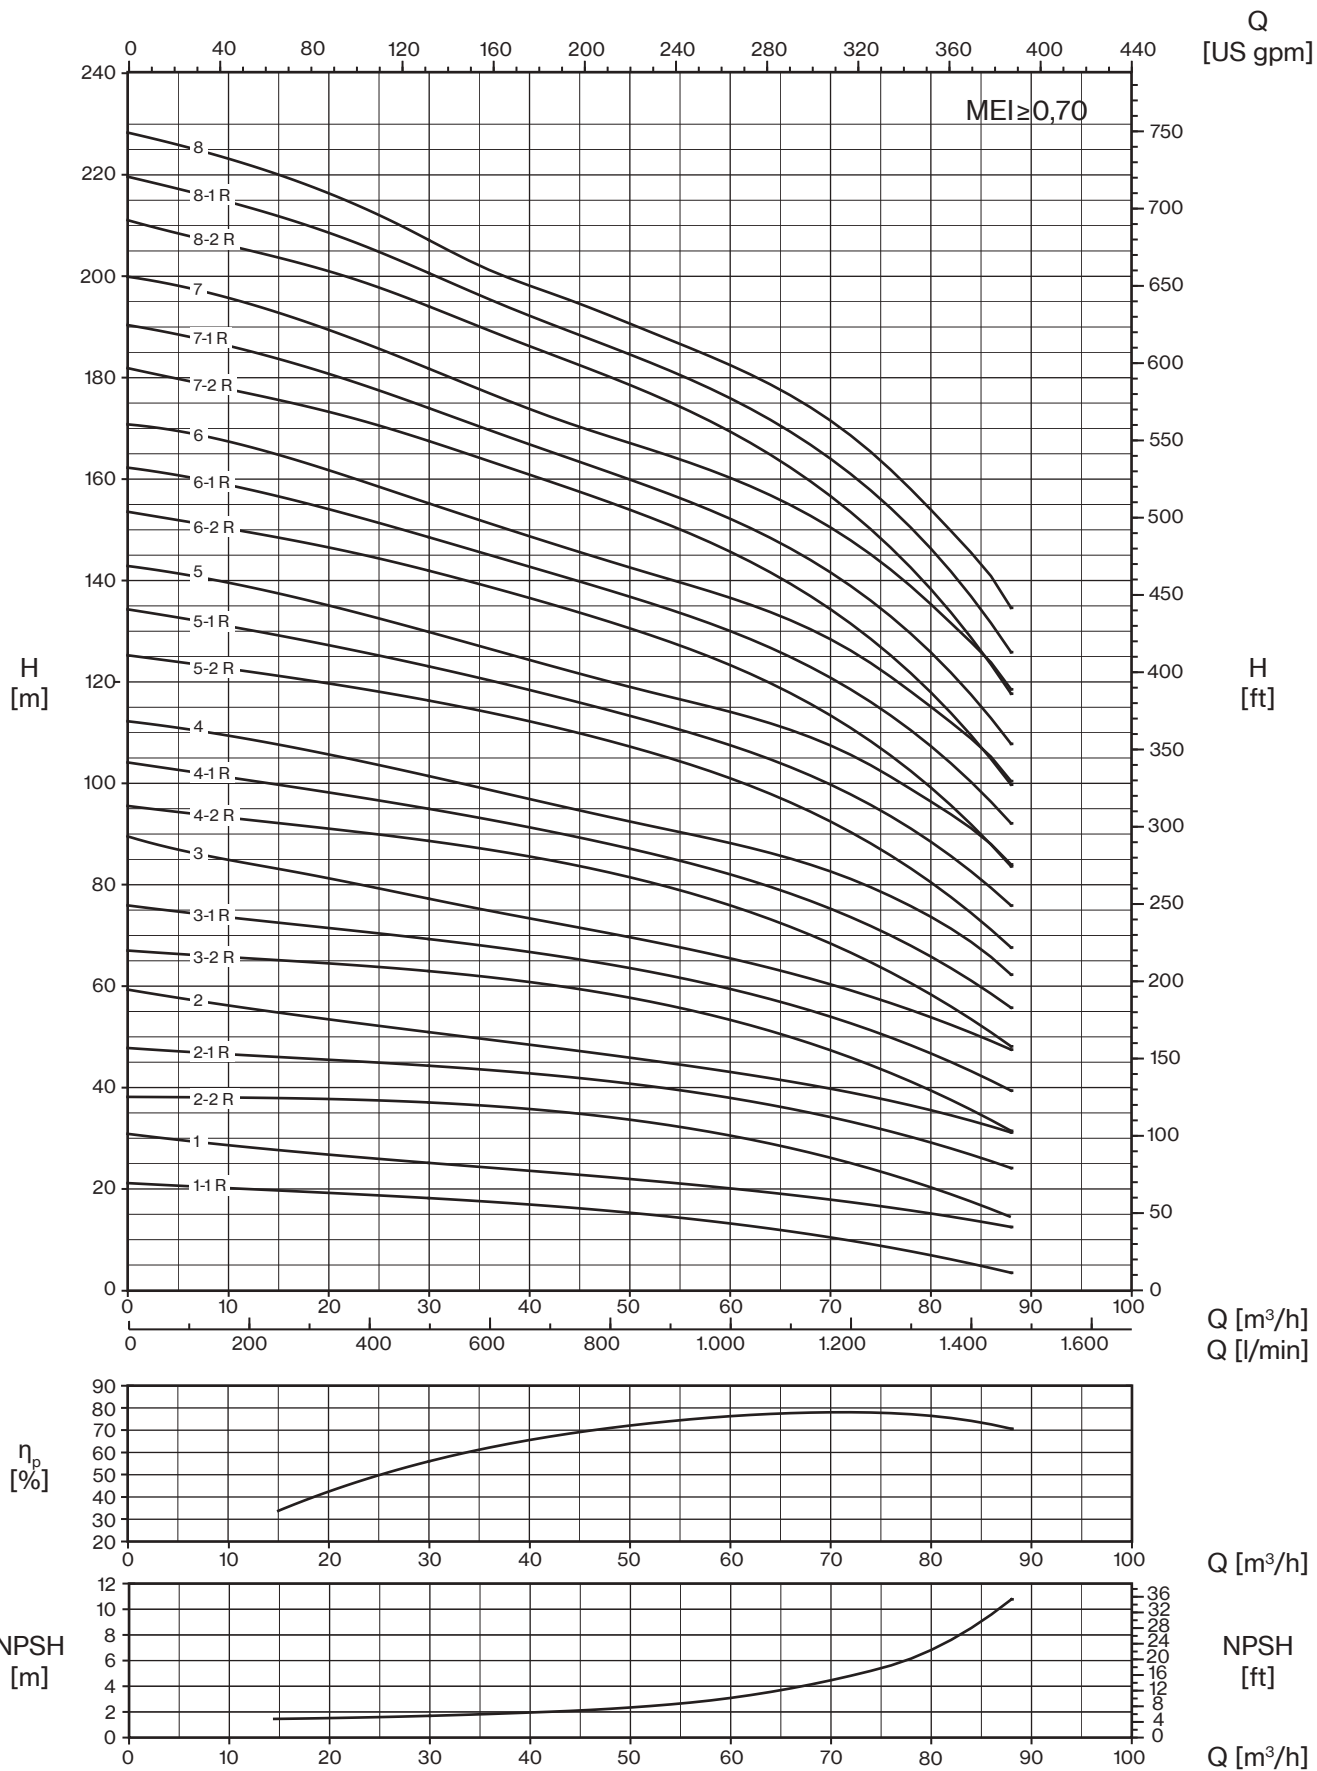

The hydraulic characteristics are guaranteed, according to ISO Standard 9906:2012, grade 3B




90 HS/HX

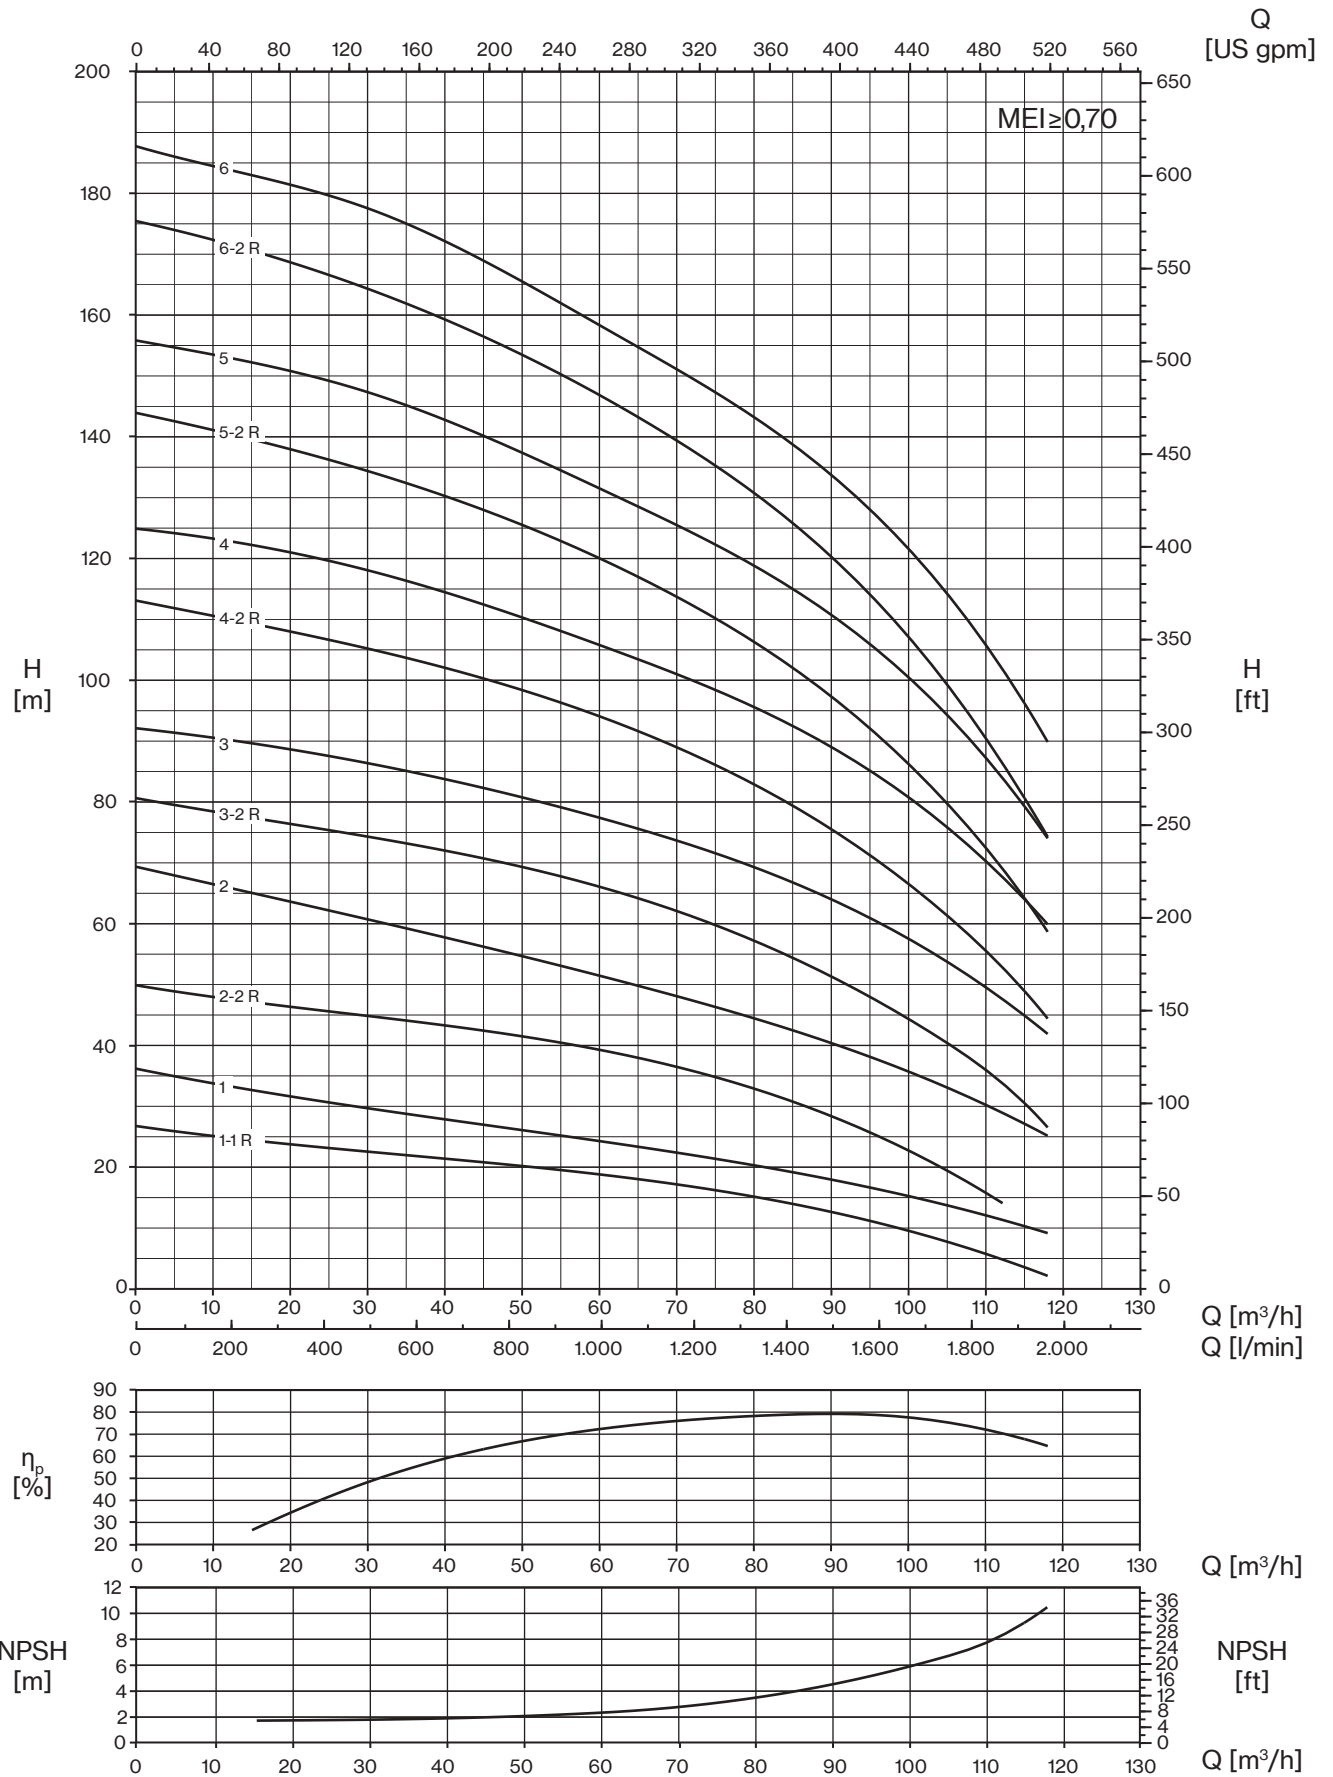

The hydraulic characteristics are guaranteed, according to ISO Standard 9906:2012, grade 3B



35 HS/HX

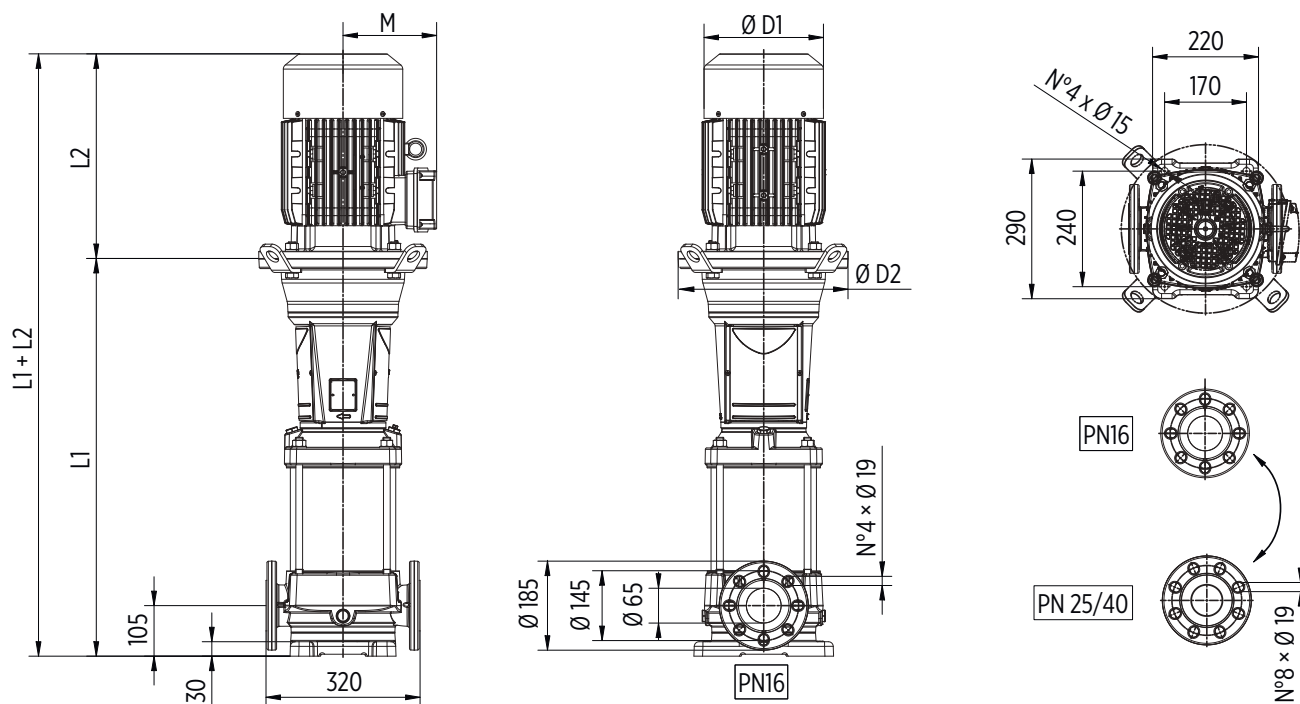


Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 35...-300/1T	2,2	90	431	308	145	177	170	739	48,5	26	74,5
U 35...-550/2-2RT	4	112	513	350	177	220	170	863	52	43	95
U 35...-550/2-1RT	4	112	513	350	177	220	170	863	52	43	95
U 35...-750/2T	5,5	132	724	400	197	256	300	1124	72,5	66	138,5
U 35...-750/3-2RT	5,5	132	806	400	197	256	300	1206	76,5	66	142,5
U 35...-1000/3-1RT	7,5	132	806	400	197	256	300	1206	76,5	73	149,5
U 35...-1000/3T	7,5	132	806	400	197	256	300	1206	76,5	73	149,5
U 35...-1000/4-2RT	7,5	132	888	400	197	256	300	1288	80,5	73	153,5
U 35...-1500/4-1RT	11	160	908	503	255	315	350	1411	84	120	204
U 35...-1500/4T	11	160	908	503	255	315	350	1411	84	120	204
U 35...-1500/5-2RT	11	160	991	503	255	315	350	1494	88	120	208
U 35...-1500/5-1RT	11	160	991	503	255	315	350	1494	88	120	208
U 35...-2000/5T	15	160	991	503	255	315	350	1494	88	132	220
U 35...-2000/6-2RT	15	160	1073	503	255	315	350	1576	92	132	224
U 35...-2000/6-1RT	15	160	1073	503	255	315	350	1576	92	132	224
U 35...-2000/6T	15	160	1073	503	255	315	350	1576	92	132	224
U 35...-2000/7-2RT	15	160	1155	503	255	315	350	1658	96	132	228
U 35...-2000/7-1RT	15	160	1155	503	255	315	350	1658	96	132	228
U 35...-2500/7T	18,5	160	1155	598	252	315	350	1753	96	150	246
U 35...-2500/8-2RT	18,5	160	1237	598	252	315	350	1835	100	150	250
U 35...-2500/8-1RT	18,5	160	1237	598	252	315	350	1835	100	150	250
U 35...-2500/8T	18,5	160	1237	598	252	315	350	1835	100	150	250
U 35...-3000/9-2RT	22	180	1319	620	270	360	350	1939	103,5	205	308,5
U 35...-3000/9-1RT	22	180	1319	620	270	360	350	1939	103,5	205	308,5
U 35...-3000/9T	22	180	1319	620	270	360	350	1939	103,5	205	308,5
U 35...-3000/10-2RT	22	180	1401	620	270	360	350	2021	107,5	205	312,5
U 35...-3000/10-1RT	22	180	1401	620	270	360	350	2021	107,5	205	312,5
U 35...-4000/10T	30	200	1406	661	303	400	400	2067	111	250	361
U 35...-4000/11-2RT	30	200	1488	661	303	400	400	2149	115	250	365
U 35...-4000/11-1RT	30	200	1488	661	303	400	400	2149	115	250	365
U 35...-4000/11T	30	200	1488	661	303	400	400	2149	115	250	365
U 35...-4000/12-2RT	30	200	1570	661	303	400	400	2231	119	250	369
U 35...-4000/12-1RT	30	200	1570	661	303	400	400	2231	119	250	369
U 35...-4000/12T	30	200	1570	661	303	400	400	2231	119	250	369
U 35...-4000/13-2RT	30	200	1652	661	303	400	400	2313	122,5	250	372,5
U 35...-4000/13-1RT	30	200	1652	661	303	400	400	2313	122,5	250	372,5
U 35...-4000/13T	30	200	1652	661	303	400	400	2313	122,5	250	372,5




50 HS/HX

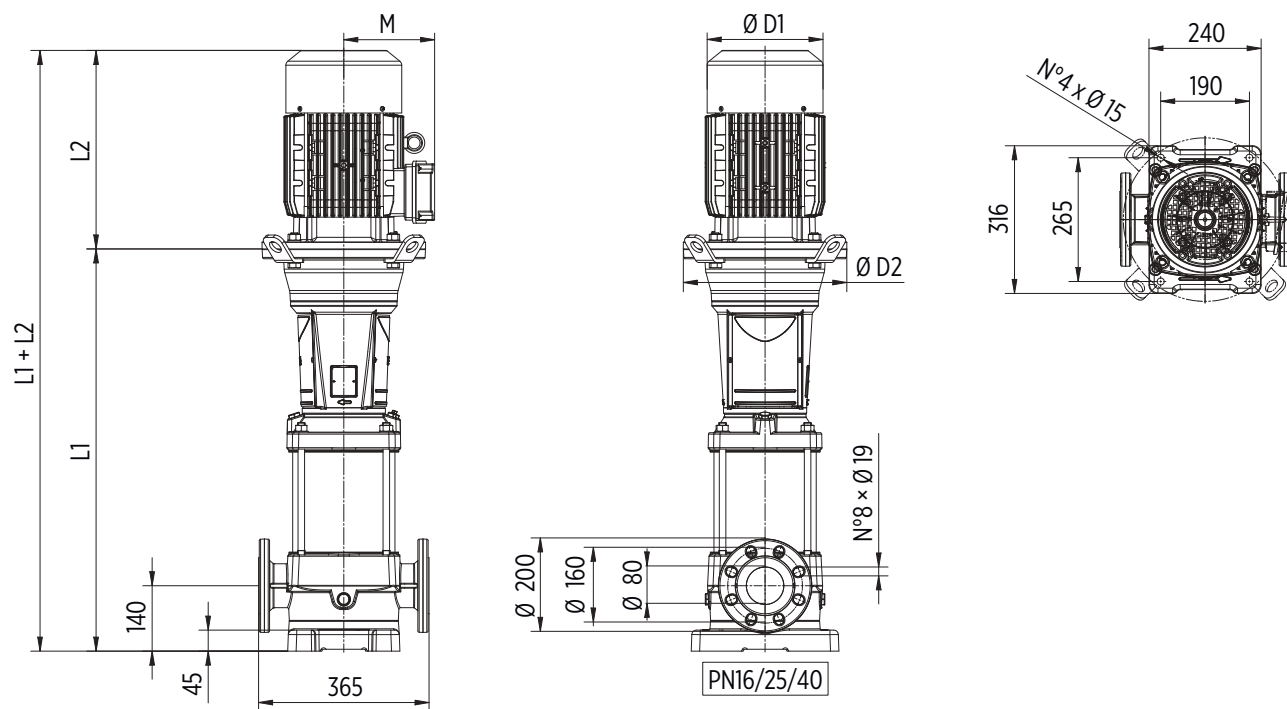

Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)


TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 50...-400/1-1RT	3	100	466	333	157	205	170	799	54	35	89
U 50...-550/1T	4	112	466	350	177	220	170	816	54	43	97
U 50...-750/2-2RT	5,5	132	759	400	197	256	300	1159	78,5	66	144,5
U 50...-1000/2T	7,5	132	759	400	197	256	300	1159	78,5	73	151,5
U 50...-1500/3-2RT	11	160	861	503	255	315	350	1364	85,5	120	205,5
U 50...-1500/3T	11	160	861	503	255	315	350	1364	85,5	120	205,5
U 50...-2000/4-2RT	15	160	943	503	255	315	350	1446	89,5	132	221,5
U 50...-2000/4T	15	160	943	503	255	315	350	1446	89,5	132	221,5
U 50...-2500/5-2RT	18,5	160	1026	598	252	315	350	1624	93,5	150	243,5
U 50...-2500/5T	18,5	160	1026	598	252	315	350	1624	93,5	150	243,5
U 50...-3000/6-2RT	22	180	1108	620	270	360	350	1728	97,5	205	302,5
U 50...-3000/6T	22	180	1108	620	270	360	350	1728	97,5	205	302,5
U 50...-4000/7-2RT	30	200	1195	661	303	400	400	1856	104,5	250	354,5
U 50...-4000/7T	30	200	1195	661	303	400	400	1856	104,5	250	354,5
U 50...-4000/8-2RT	30	200	1277	661	303	400	400	1938	108,5	250	358,5
U 50...-4000/8T	30	200	1277	661	303	400	400	1938	108,5	250	358,5
U 50...-5000/9-2RT	37	200	1359	661	303	400	400	2020	112,5	270	382,5
U 50...-5000/9T	37	200	1359	661	303	400	400	2020	112,5	270	382,5
U 50...-5000/10-2RT	37	200	1441	661	303	400	400	2102	116,5	270	386,5
U 50...-5000/10T	37	200	1441	661	303	400	400	2102	116,5	270	386,5
U 50...-6000/11-2RT	45	225	1523	710	312	450	450	2233	122,5	315	437,5
U 50...-6000/11T	45	225	1523	710	312	450	450	2233	122,5	315	437,5
U 50...-6000/12-2RT	45	225	1605	710	312	450	450	2315	126,5	315	441,5
U 50...-6000/12T	45	225	1605	710	312	450	450	2315	126,5	315	441,5

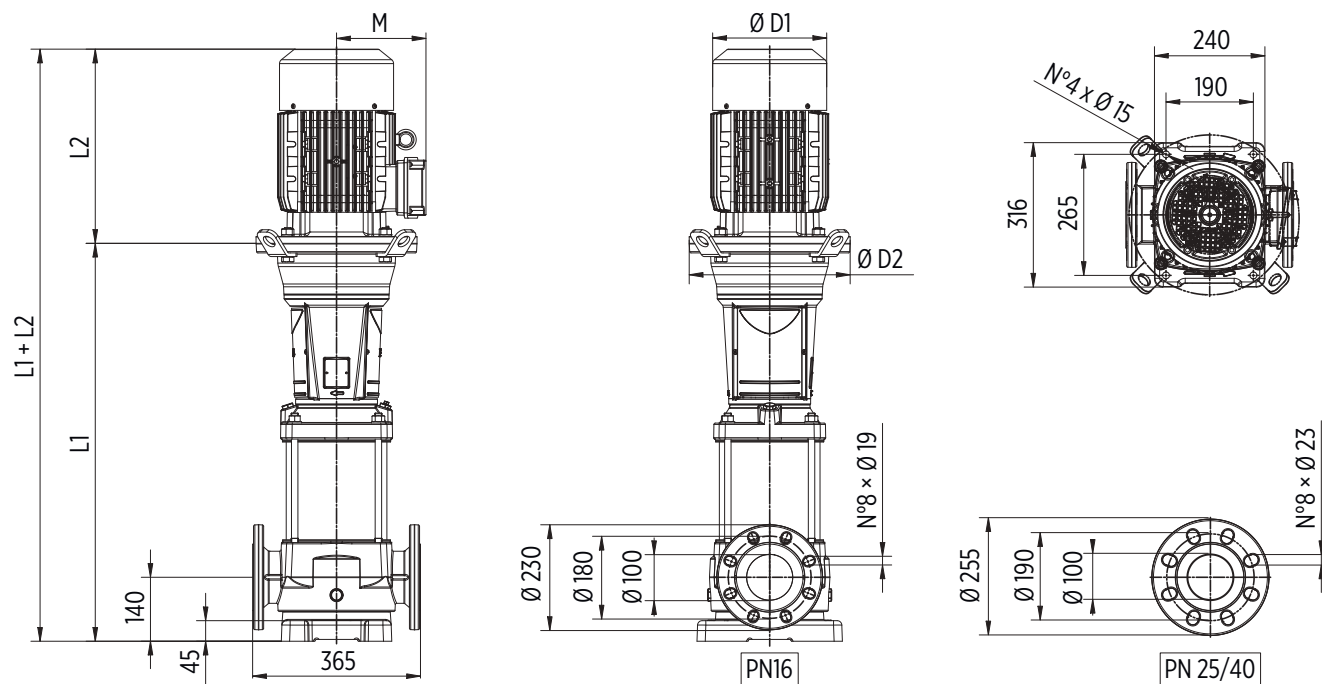

Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 75...-550/1-1RT	4	112	526	350	177	220	170	876	60	43	103
U 75...-750/1T	5,5	132	737	400	197	256	300	1137	80,5	66	146,5
U 75...-1000/2-2RT	7,5	132	829	400	197	256	300	1229	85	73	158
U 75...-1500/2-1RT	11	160	849	503	255	315	350	1352	88,5	120	208,5
U 75...-1500/2T	11	160	849	503	255	315	350	1352	88,5	120	208,5
U 75...-2000/3-2RT	15	160	941	503	255	315	350	1444	93	132	225
U 75...-2000/3-1RT	15	160	941	503	255	315	350	1444	93	132	225
U 75...-2500/3T	18,5	160	941	598	252	315	350	1539	93	150	243
U 75...-2500/4-2RT	18,5	160	1033	598	252	315	350	1631	97,5	150	247,5
U 75...-3000/4-1RT	22	180	1033	620	270	360	350	1653	97	205	302
U 75...-3000/4T	22	180	1033	620	270	360	350	1653	97	205	302
U 75...-4000/5-2RT	30	200	1131	661	303	400	400	1792	105	250	355
U 75...-4000/5-1RT	30	200	1131	661	303	400	400	1792	105	250	355
U 75...-4000/5T	30	200	1131	661	303	400	400	1792	105	250	355
U 75...-4000/6-2RT	30	200	1223	661	303	400	400	1884	109,5	250	359,5
U 75...-5000/6-1RT	37	200	1223	661	303	400	400	1884	109,5	270	379,5
U 75...-5000/6T	37	200	1223	661	303	400	400	1884	109,5	270	379,5
U 75...-5000/7-2RT	37	200	1315	661	303	400	400	1976	113,5	270	383,5
U 75...-5000/7-1RT	37	200	1315	661	303	400	400	1976	113,5	270	383,5
U 75...-6000/7T	45	225	1315	710	312	450	450	2025	116	315	431
U 75...-6000/8-2RT	45	225	1407	710	312	450	450	2117	120,5	315	435,5
U 75...-6000/8-1RT	45	225	1407	710	312	450	450	2117	120,5	315	435,5
U 75...-6000/8T	45	225	1407	710	312	450	450	2117	120,5	315	435,5

90 HS/HX

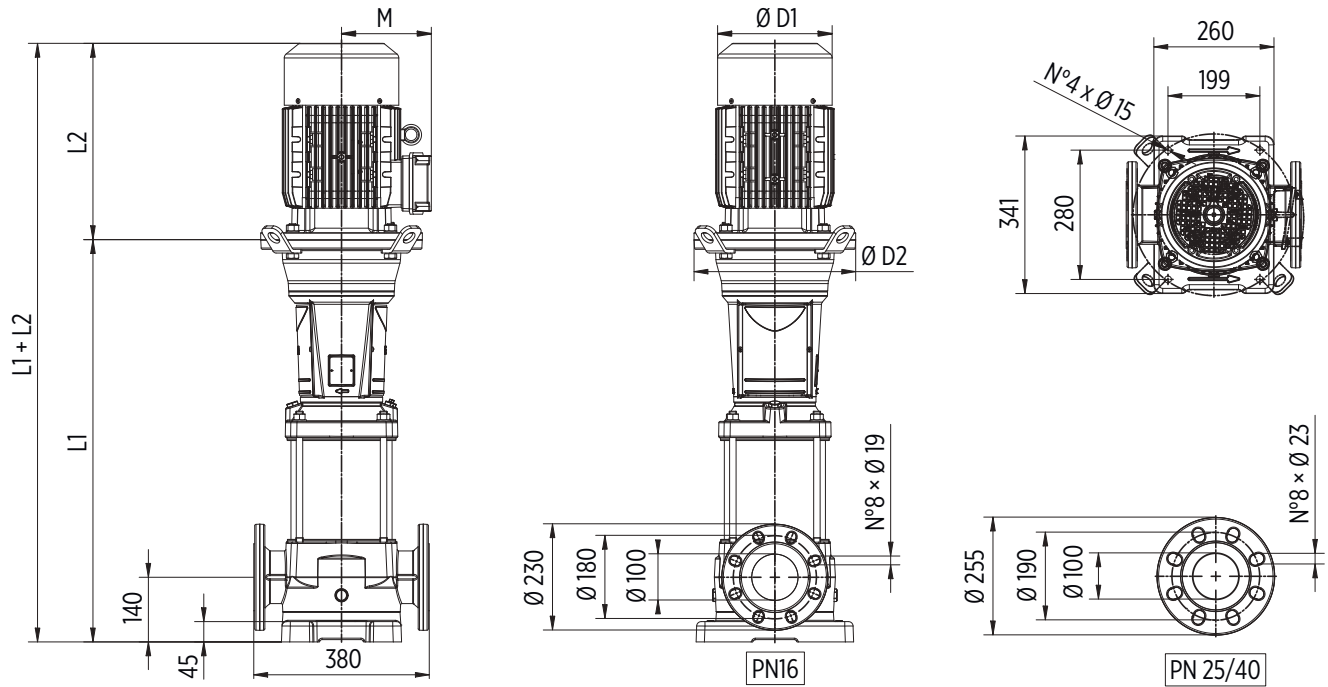



Round flanges on body type PN25/40: the pump is supplied without counterflanges (optional accessories, including bolts and joints)

TYPE	MOTOR		DIMENSIONS (mm)						Kg		
	kW	Dim	L1	L2	M	D1	D2	L1+L2	Pump	Motor	Electric Pump
U 90...-750/1-1RT	5,5	132	737	400	197	256	300	1137	82	66	148
U 90...-1000/1T	7,5	132	737	400	197	256	300	1137	82	73	155
U 90...-1500/2-2RT	11	160	849	503	255	315	350	1352	89	120	209
U 90...-2000/2T	15	160	849	503	255	315	350	1352	89	132	221
U 90...-2500/3-2RT	18,5	160	941	598	252	315	350	1539	93	150	243
U 90...-3000/3T	22	180	941	620	270	360	350	1561	92,5	205	297,5
U 90...-4000/4-2RT	30	200	1038	661	303	400	400	1699	99,5	250	349,5
U 90...-4000/4T	30	200	1038	661	303	400	400	1699	99,5	250	349,5
U 90...-5000/5-2RT	37	200	1131	661	303	400	400	1792	103	270	373
U 90...-5000/5T	37	200	1131	661	303	400	400	1792	103	270	373
U 90...-6000/6-2RT	45	225	1223	710	312	450	450	1933	109	315	424
U 90...-6000/6T	45	225	1223	710	312	450	450	1933	109	315	424



ULTRA HS-HX Serie-Mechanical seal and bearings

CARTRIDGE MECHANICAL SEAL	PUMP MODEL	SHAFT Ø	STANDARD MATERIAL	OPTIONAL			
				V	2	2V	
	U18-100/1T, U18-200/2T, U18-300/3T, U18-400/4T, U18-550/5T, U18-750/6T, U18-750/7T, U18-1000/8T, U18-1000/9T, U18-1500/10T, U18-1500/11T, U18-1500/12T, U18-1500/13T, U18-1500/14T, U18-2000/15T, U18-2000/16T, U18-2000/17T, U22-150/1T, U22-300/2T, U22-400/3T, U22-550/4T, U22-750/5T, U22-1000/6T, U22-1000/7T, U22-1500/8T, U22-1500/9T, U22-1500/10T, U22-2000/11T, U22-2000/12T, U22-2000/13T	16mm	Rotating face Stationary face Elastomer	SiC Graphite EPDM	SiC Graphite FKM	SiC SiC EPDM	SiC SiC FKM
	U35-300/1T, U35-550/2-2RT, U35-550/2-1RT, U35-750/2T, U35-750/3-2RT, U35-1000/3-1RT, U35-1000/3T, U35-1000/4-2RT, U35-1500/4-1RT, U35-1500/4T, U35-1500/5-2RT, U35-1500/5-1RT, U35-2000/5T, U35-2000/6-2RT, U35-2000/6-1RT, U35-2000/6T, U35-2000/7-2RT, U35-2000/7-1RT, U35-2500/7T, U35-2500/8-2RT, U35-2500/8-1RT, U35-2500/8T, U35-3000/9-2RT, U35-3000/9-1RT, U35-3000/9T, U35-3000/10-2RT, U35-3000/10-1RT, U35-4000/10T, U35-4000/11-2RT, U35-4000/11-1RT, U35-4000/11T, U35-4000/12-2RT, U35-4000/12-1RT, U35-4000/12T, U35-4000/13-2RT, U35-4000/13-1RT, U35-4000/13T, U50-400/1-1RT, U50-550/1T, U50-750/2-2RT, U50-1000/2T, U50-1500/3-2RT, U50-1500/3T, U50-2000/4-2RT, U50-2000/4T, U50-2500/5-2RT, U50-2500/5T, U50-3000/6-2RT, U50-3000/6T, U50-4000/7-2RT, U50-4000/7T, U50-4000/8-2RT, U50-4000/8T, U50-5000/9-2RT, U50-5000/9T, U50-5000/10-2RT, U50-5000/10T, U50-6000/11-2RT, U50-6000/11T, U50-6000/12-2RT, U50-6000/12T, U75-550/1-1RT, U75-750/1T, U75-1000/2-2RT, U75-1500/2-1RT, U75-1500/2T, U75-2000/3-2RT, U75-2000/3-1RT, U75-2500/3T, U75-2500/4-2RT, U75-3000/4-1RT, U75-3000/4T, U75-4000/5-2RT, U75-4000/5-1RT, U75-4000/5T, U75-4000/6-2RT, U75-5000/6-1RT, U75-5000/6T, U75-5000/7-2RT, U75-5000/7-1RT, U75-6000/7T, U75-6000/8-2RT, U75-6000/8-1RT, U75-6000/8T, U90-750/1-1RT, U90-1000/1T, U90-1500/2-2RT, U90-2000/2T, U90-2500/3-2RT, U90-3000/3T, U90-4000/4-2RT, U90-4000/4T, U90-5000/5-2RT, U90-5000/5T, U90-6000/6-2RT, U90-6000/6T	22mm / Balanced seal	Rotating face Stationary face Elastomer	SiC Graphite EPDM	SiC Graphite FKM	SiC SiC EPDM	SiC SiC FKM

BEARINGS	PUMP MODEL	PUMP THRUST BEARING		MOTOR BEARING	
	U18-100/1T, U22-150/1T	-	-	6204-ZZ C3	6204-ZZ C3
	U18-200/2T, U18-300/3T, U22-300/2T, U35-300/1T	-	-	6205-ZZ C3	6205-ZZ C3
	U18-400/4T, U18-550/5T, U22-400/3T, U22-550/4T, U35-550/2-2RT, U35-550/2-1RT, U50-400/1-1RT, U50-550/1T, U75-550/1-1RT	-	-	6206-ZZ C3	6206-ZZ C3
	U18-750/6T, U18-750/7T, U18-1000/8T, U18-1000/9T, U22-750/5T, U22-1000/6T, U22-1000/7T, U35-750/2T, U35-750/3-2RT, U35-1000/3-1RT, U35-1000/3T, U35-1000/4-2RT, U50-750/2-2RT, U50-1000/2T, U75-750/1T, U75-1000/2-2RT, U90-750/1-1RT, U90-1000/1T	6212 ZZ	-	6208-ZZ C3	6208-ZZ C3
	U18-1500/10T, U18-1500/11T, U18-1500/12T, U18-1500/13T, U18-1500/14T, U18-2000/15T, U18-2000/16T, U18-2000/17T, U22-1500/8T, U22-1500/9T, U22-1500/10T, U22-2000/11T, U22-2000/12T, U22-2000/13T, U22-2000/14T, U22-2500/15T, U22-2500/16T, U22-2500/17T, U35-1500/4-1RT, U35-1500/4T, U35-1500/5-2RT, U35-1500/5-1RT, U50-1500/3-2RT, U50-1500/3T, U75-1500/2-1RT, U75-1500/2T, U90-1500/2-2RT	6212 ZZ	7212 BEP	6309-ZZ C3	6309-ZZ C3
	U35-2000/5T, U35-2000/6-2RT, U35-2000/6-1RT, U35-2000/6T, U35-2000/7-2RT, U35-2000/7-1RT, U35-2500/7T, U35-2500/8-2RT, U35-2500/8-1RT, U35-2500/8T, U50-2000/4-2RT, U50-2000/4T, U50-2500/5-2RT, U50-2500/5T, U75-2000/3-2RT, U75-2000/3-1RT, U75-2500/3T, U75-2500/4-2RT, U90-2000/2T, U90-2500/3-2RT	6212 ZZ	7212 BEP	6311-ZZ C3	6311-ZZ C3
	U35-3000/9-2RT, U35-3000/9-1RT, U35-3000/9T, U35-3000/10-2RT, U35-3000/10-1RT, U50-3000/6-2RT, U50-3000/6T, U75-3000/4-1RT, U75-3000/4T, U90-3000/3T	6214 ZZ	7214 BEP	6312-ZZ C3	6312-ZZ C3
	U35-4000/10T, U35-4000/11-2RT, U35-4000/11-1RT, U35-4000/11T, U35-4000/12-2RT, U35-4000/12-1RT, U35-4000/12T, U35-4000/13-2RT, U35-4000/13-1RT, U35-4000/13T, U50-4000/7-2RT, U50-4000/7T, U50-4000/8-2RT, U50-4000/8T, U50-5000/9-2RT, U50-5000/9T, U50-5000/10-2RT, U50-5000/10T, U75-4000/5-2RT, U75-4000/5-1RT, U75-4000/5T, U75-4000/6-2RT, U75-5000/6-1RT, U75-5000/6T, U75-5000/7-2RT, U75-5000/7-1RT, U90-4000/4-2RT, U90-4000/4T, U90-5000/5-2RT, U90-5000/5T	6214 ZZ	7214 BEP	6313-ZZ C3	6313-ZZ C3
U50-6000/11-2RT, U50-6000/11T, U50-6000/12-2RT, U50-6000/12T, U75-6000/7T, U75-6000/8-2RT, U75-6000/8-1RT, U75-6000/8T, U90-6000/6-2RT, U90-6000/6T					



ULTRA V/L/H + VSD

Vertical booster pump with variable speed drive

ULTRA V



EPIC / EPIC-A

IPFC

ULTRA L



EPIC / EPIC-A

IPFC

ULTRA H



IPFC

DESCRIPTION

Vertical pump of ULTRA series provided with variable speed drive EPIC, EPIC-A or IPFC. This booster pump assures a desired pressure regardless of changes on flow demand making it suitable for low or missing pressure in residential systems and industrial applications. It is required the installation of a membrane tank downstream the system.

FEATURES

- EPIC, EPIC-A or IPFC variable speed drive
- Three-phase vertical pump of ULTRA series
- Pressure sensor wired to the vsd
- Cable with plug for EPIC vsd only


FUNCTIONING

If the pressure in the network drops the pump will start and gradually speeds up to provide with the set pressure. When the water demand decreases, the pressure will rise causing the pump speed to slow down and eventually to stop the pump if demand ceases. The pump will remain on standby waiting to start at the next water demand.

SELECTION

The next table shows the vertical ULTRA pump models available for the assembly with EPIC, EPIC-A or IPFC. Consult the catalog at the ULTRA series for pump specifics and characteristic curves.

U3SL /A 100/5 T -304 3×400-50

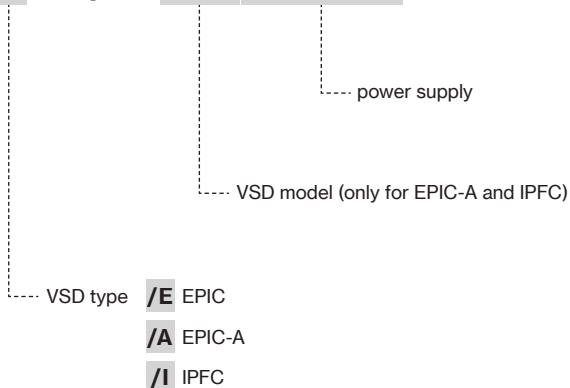

3- PUMP								VSD TYPE			
TYPE		VERSION						Power supply			
		V	SV	L	SL/SLX	LG	SLG/SLGX	1-230V		3-400V	
U 3	100/5T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	120/6T	■	■	■	■	-	-				
	150/7T	■	■	■	■	-	-				
	180/8T	■	■	■	■	-	-				
	200/9T	■	■	■	■	-	-				
	250/10T	■	■	■	■	-	-		-	IPFC 114	EPIC-A 306
	280/11T	■	■	■	■	-	-				
	300/12T	■	■	■	■	-	-				
	350/14T	-	-	-	-	-	■				
	380/16T	-	-	-	-	-	■				
	400/18T	-	-	-	-	-	■				
450/20T	-	-	-	-	-	■					
U 5	120/4T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	150/5T	■	■	■	■	-	-				
	180/6T	■	■	■	■	-	-				
	200/7T	■	■	■	■	-	-				
	250/8T	■	■	■	■	-	-				
	280/9T	■	■	■	■	-	-				
	300/10T	■	■	■	■	-	-				
	350/11T	■	■	■	■	-	-				
	380/12T	■	■	■	■	-	-				
	400/14T	-	-	-	-	-	■				
	450/16T	-	-	-	-	-	■		-	-	IPFC 309
	550/18T	-	-	-	-	-	■				
600/20T	-	-	-	-	-	■	-	-	IPFC 311		
180/4T	■	■	■	■	-	-				EPIC	IPFC 109
250/5T	■	■	■	■	-	-					
300/6T	■	■	■	■	-	-					
350/7T	■	■	■	■	-	-	-	-	-		
400/8T	■	■	■	■	-	-					
450/9T	■	■	■	■	-	-					
550/10T	■	■	■	■	-	-					
750/12T	-	-	-	-	-	■					
800/14T	-	-	-	-	-	■					
900/16T	-	-	-	-	-	■					
950/18T	-	-	-	-	-	■					-
1000/20T	-	-	-	-	-	■					
U 7	180/4T	■	■	■	■	-	-	EPIC	IPFC 109	EPIC-A 304	IPFC 306
	250/5T	■	■	■	■	-	-				
	300/6T	■	■	■	■	-	-		-	-	-
	350/7T	■	■	■	■	-	-				
	400/8T	■	■	■	■	-	-				
	450/9T	■	■	■	■	-	-		-	-	-
	550/10T	■	■	■	■	-	-				
	750/12T	-	-	-	-	-	■				
	800/14T	-	-	-	-	-	■				
	900/16T	-	-	-	-	-	■				
	950/18T	-	-	-	-	-	■				
	1000/20T	-	-	-	-	-	■				
U 9	200/4T	■	■	■	■	-	-	EPIC			
	250/5T	■	■	■	■	-	-				
	300/6T	■	■	■	■	-	-		-	-	-
	400/7T	■	■	■	■	-	-				
	450/8T	■	■	■	■	-	-		-	-	-
	500/9T	■	■	■	■	-	-				
	550/10T	■	■	■	■	-	-				
	750/12T	-	-	-	-	-	■				
	800/14T	-	-	-	-	-	■				
	900/16T	-	-	-	-	-	■				
	950/18T	-	-	-	-	-	■				
	1000/20T	-	-	-	-	-	■				




ULTRA+VSD

		3- PUMP							VSD TYPE		
TYPE		VERSION							Power supply		
		V	SV	L	SL/ SLX	LG	HS	HX	1-230V	3-400V	
U 18	100/1T	-	-	-	-	-	-	■	IPFC 109	EPIC-A 304	IPFC 306
	200/2T	-	-	-	-	-	-	■			
	300/3T	-	-	-	-	-	-	■	IPFC 114	EPIC-A 306	
	250/3T	■	■	■	■	-	-	-			
	400/4T	-	-	-	-	-	-	■	-	-	EPIC-A 309
	450/4T	■	■	■	■	-	-	-			
	450/5T	■	■	■	■	-	-	-			IPFC 309
	550/5T	-	-	-	-	-	-	■			
	550/6T	■	■	■	■	-	-	-			IPFC 311
	750/6T	-	-	-	-	-	-	■			
	750/7T	-	-	-	-	-	-	■			IPFC 314
	750/8T	■	■	■	■	-	-	-			
	1000/8T	-	-	-	-	-	-	■			IPFC 318
	1000/9T	-	-	-	-	-	-	■			
	900/9T	■	■	■	■	-	-	-			IPFC 325
	920/10T	-	-	-	-	■	-	-			
	1000/11T	-	-	-	-	■	-	-			IPFC 330
	1500/10T	-	-	-	-	-	-	■			
	1500/11T	-	-	-	-	-	-	■			IPFC 325
	1500/12T	-	-	-	-	-	-	■			
1500/13T	-	-	-	-	-	-	■	IPFC 330			
1500/14T	-	-	-	-	-	-	■				
2000/15T	-	-	-	-	-	-	■	IPFC 330			
2000/16T	-	-	-	-	-	-	■				
2000/17T	-	-	-	-	-	-	■				
U 22	200/1T	-	-	-	-	-	-	■	IPFC 109	-	IPFC 306
	300/2T	-	-	-	-	-	-	■	IPFC 114		
	400/3T	-	-	-	-	-	-	■	-		IPFC 309
	550/4T	-	-	-	-	-	-	■			
	750/5T	-	-	-	-	-	-	■	IPFC 311		
	1000/6T	-	-	-	-	-	-	■			
	1000/7T	-	-	-	-	-	-	■	IPFC 314		
	1500/8T	-	-	-	-	-	-	■			
	1500/9T	-	-	-	-	-	-	■	IPFC 318		
	1500/10T	-	-	-	-	-	-	■			
	2000/11T	-	-	-	-	-	-	■	IPFC 325		
	2000/12T	-	-	-	-	-	-	■			
	2000/13T	-	-	-	-	-	-	■	IPFC 330		
	2000/14T	-	-	-	-	-	-	■			



		3- PUMP							VSD TYPE		
TYPE		VERSION							Power supply		
		V	SV	L	SL/SLX	LG	HS	HX	1-230V	3-400V	
U 35	300/1T	-	-	-	-	-	■	■	-	IPFC 114	IPFC 306
	550/2-2RT	-	-	-	-	-	■	■		IPFC 309	
	550/2-1RT	-	-	-	-	-	■	■		IPFC 311	
	750/2T	-	-	-	-	-	■	■		IPFC 314	
	750/3-2RT	-	-	-	-	-	■	■		IPFC 318	
	1000/3-1RT	-	-	-	-	-	■	■		IPFC 325	
	1000/3T	-	-	-	-	-	■	■			
	1000/4-2RT	-	-	-	-	-	■	■		IPFC 330	
	1500/4-1RT	-	-	-	-	-	■	■			
	1500/4T	-	-	-	-	-	■	■			
	1500/5-2RT	-	-	-	-	-	■	■			
	1500/5-1RT	-	-	-	-	-	■	■			
	2000/5T	-	-	-	-	-	■	■			
	2000/6-2RT	-	-	-	-	-	■	■			
	2000/6-1RT	-	-	-	-	-	■	■			
	2000/6T	-	-	-	-	-	■	■			
2000/7-2RT	-	-	-	-	-	■	■				
2000/7-1RT	-	-	-	-	-	■	■				
U 50	400/1-1RT	-	-	-	-	-	■	■	-	IPFC 114	IPFC 306
	550/1T	-	-	-	-	-	■	■		IPFC 309	
	750/2-2RT	-	-	-	-	-	■	■		IPFC 311	
	1000/2T	-	-	-	-	-	■	■		IPFC 318	
	1500/3-2RT	-	-	-	-	-	■	■		IPFC 325	
	1500/3T	-	-	-	-	-	■	■		IPFC 330	
	2000/4-2RT	-	-	-	-	-	■	■			
	2000/4T	-	-	-	-	-	■	■			
	2500/5-2RT	-	-	-	-	-	■	■			
	2500/5T	-	-	-	-	-	■	■			
	3000/6-2RT	-	-	-	-	-	■	■			
	3000/6T	-	-	-	-	-	■	■			
	4000/7-2RT	-	-	-	-	-	■	■			
U 75	550/1-1RT	-	-	-	-	-	■	■	-	IPFC 309	
	750/1T	-	-	-	-	-	■	■		IPFC 311	
	1000/2-2RT	-	-	-	-	-	■	■		IPFC 318	
	1500/2-1RT	-	-	-	-	-	■	■		IPFC 325	
	1500/2T	-	-	-	-	-	■	■		IPFC 330	
	2000/3-2RT	-	-	-	-	-	■	■			
	2000/3-1RT	-	-	-	-	-	■	■			
	2500/3T	-	-	-	-	-	■	■			
	2500/4-2RT	-	-	-	-	-	■	■			
	3000/4-1RT	-	-	-	-	-	■	■			
	3000/4T	-	-	-	-	-	■	■			
4000/5-2RT	-	-	-	-	-	■	■				
U 90	750/1-1RT	-	-	-	-	-	■	■	-	IPFC 311	
	1000/1T	-	-	-	-	-	■	■		IPFC 318	
	1500/2-2RT	-	-	-	-	-	■	■		IPFC 325	
	2000/2T	-	-	-	-	-	■	■		IPFC 330	



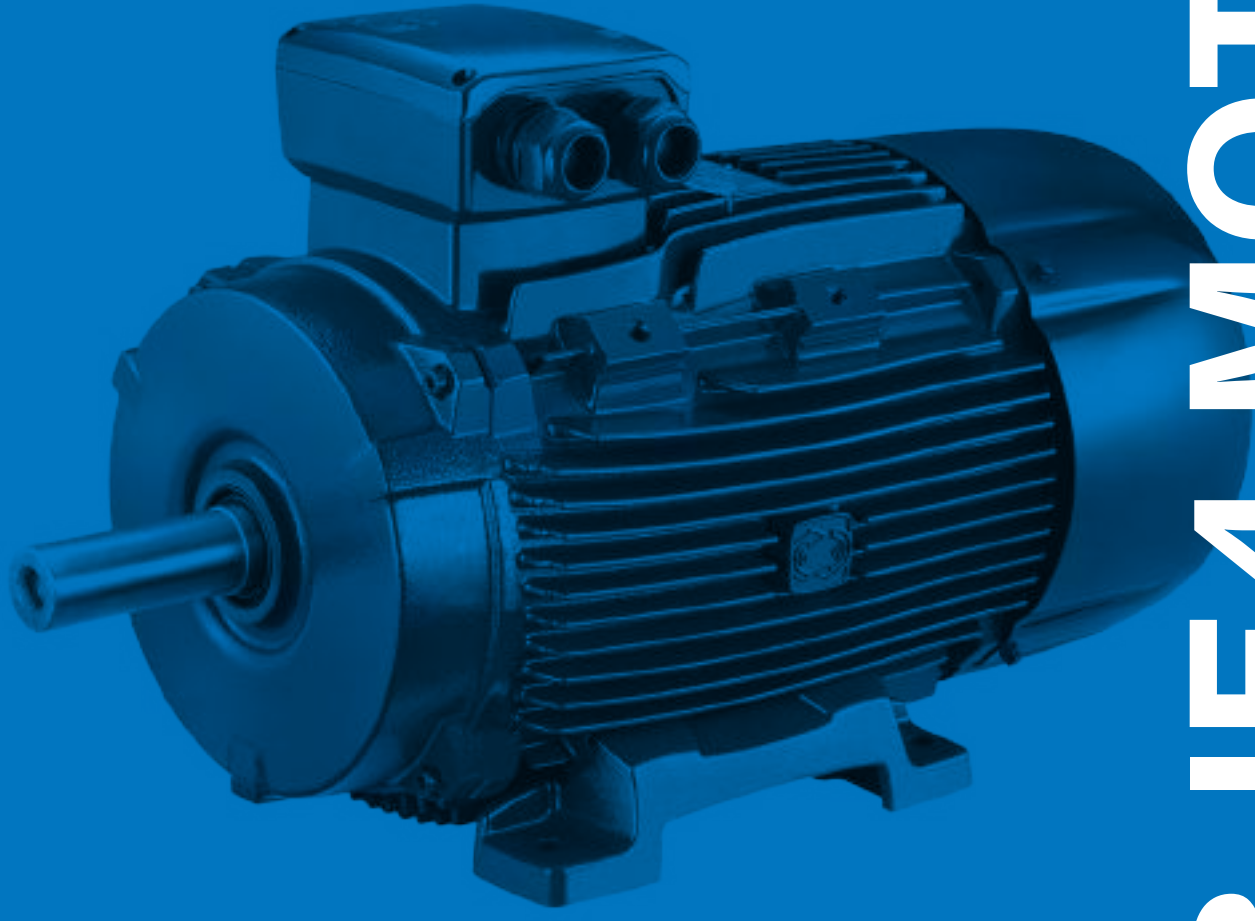

IE3-IE4 MOTORS

80-132 (0,75 kW-7,5 kW)






Construction features	
Frame	aluminum alloy
Multiple voltage/ Multi-frequency	50/60 Hz
Duty service	S1 continuous
Winding	tropicalized suitable for inverter power supply
ATEX (dust and gas)	version available: II 3G Ex nA IIB T4 Gc II 3D Ex tc IIIB T125°C Dc

Motor	
Motor	closed and externally ventilated
Insulation class	F (on request H)
Protection degree	IPX5 (on request IP56, IP66, IP67)
Efficiency class	IE3-IE4, IEC60034-30-1

VOLTAGES AND FREQUENCIES TOLERANCE

Data at 400V - 50Hz

SIZE	Hz	V	
			
80-112	50 ±5%	230	400
		220	380
		240	415



160-355 (11 kW-315 kW)






Construction features	
Frame	cast iron
Multiple voltage/ Multi-frequency	50/60 Hz
Duty service	S1 continuous
Winding	tropicalized and reinforced insulation for inverter power supply ($P \geq 110\text{kW}$ we recommend to order the motor with insulated bearings option). Windings with PTC (n° 3) thermistor as standard.
ATEX (dust and gas)	version available: II 3G Ex nA IIB T4 Gc II 3D Ex tc IIIB T125°C Dc

Motor	
Motor	closed and externally ventilated
Insulation class	F (on request H)
Protection degree	IPX5 (on request IP56, IP66, IP67)
Efficiency class	IE3-IE4, IEC60034-30-1

VOLTAGES AND FREQUENCIES TOLERANCE

Data at 400V - 50Hz

SIZE	Hz	V	
			
132-355	50 ±5%	400	690
		380	660
		415	720



TYPE	kW	HP	rpm	In (A)	Is (A)	Is In	Cn (Nm)	Cs (Nm)	Cs Cn	Cmax (Nm)	Cmax Cn
80A-2	0,75	1	2892	1,74	11,84	6,8	2,48	8,60	3,5	9,18	3,7
80B-2	1,1	1,5	2885	2,26	16,74	7,4	3,64	10,90	3,0	12,74	3,5
90S-2	1,5	2	2902	3,26	25,07	7,7	4,93	19,12	3,9	18,74	3,8
90L-2	2,2	3	2918	5,02	38,59	7,7	7,35	30,97	4,2	30,44	4,1
100L-2	3	4	2903	6,09	48,24	7,9	9,87	35,19	3,6	40,74	4,1
112M-2	4	5,5	2943	7,56	74,38	9,8	12,97	45,92	3,5	61,86	4,8
132SA-2	5,5	7,5	2940	10,14	70,59	7,0	17,87	37,70	2,1	35,79	2,0
132SB-2	7,5	10	2925	13,35	95,00	7,1	24,49	53,50	2,2	78,50	3,2
160MA-2	11	15	2937	19,72	123,05	6,2	35,77	73,32	2,1	100,15	2,8
160MB-2	15	20	2938	26,29	150,23	5,7	48,76	95,08	2,0	121,89	2,5
160L-2	18,5	25	2942	32,15	192,92	6,0	60,05	124,31	2,1	179,00	2,1
180M-2	22	30	2950	37,53	304,03	8,1	71,22	163,81	2,3	220,80	3,1
200LA-2	30	40	2940	51,51	386,34	7,5	97,45	224,13	2,3	223,37	2,3
200LB-2	37	50	2960	63,26	474,46	7,5	119,38	274,56	2,3	275,49	2,3
225M-2	45	60	2960	76,69	582,87	7,6	145,19	333,93	2,3	332,80	2,3
250M-2	55	75	2970	94,39	707,92	7,5	176,85	406,76	2,3	406,76	2,3
280S-2	75	100	2970	125,82	868,14	6,9	241,16	530,56	2,2	554,67	2,3
280M-2	90	125	2970	150,67	1069,73	7,1	289,39	636,67	2,2	665,61	2,3
315S-2	110	150	2970	183,76	1304,72	7,1	353,70	707,41	2,0	778,15	2,2
315MA-2	132	180	2970	220,06	1562,41	7,1	424,44	848,89	2,0	933,78	2,2
315LA-2	160	215	2970	263,53	1871,07	7,1	514,48	1028,96	2,0	1131,85	2,2
315LB-2	200	270	2970	328,73	2333,99	7,1	643,10	1286,20	2,0	1414,81	2,2
355M-2	250	335	2980	410,91	2917,49	7,1	801,17	1602,35	2,0	1762,58	2,2
355L-2	315	423	2980	517,75	3676,03	7,1	1009,48	2018,96	2,0	2220,86	2,2

TYPE	η%				Fatt. pot. cos φ			ΔT (°C)	LwA (dB)	J Kgm2	Kg
	100%	IE	75%	50%	100%	75%	50%				
80A-2	80,9	IE3	79,6	76,4	0,770	0,700	0,566	35	65	0,00158	17
80B-2	84,5	IE3	84,7	82,8	0,830	0,770	0,652	41	65	0,00185	18
90S-2	85,3	IE3	83,4	81,3	0,786	0,726	0,582	43	71	0,00383	23
90L-2	86,2	IE3	87,0	84,9	0,730	0,675	0,498	48	71	0,00726	26
100L-2	87,1	IE3	87,3	84,9	0,812	0,766	0,618	49	75	0,01439	35
112M-2	89,6	IE3	89,8	88,9	0,856	0,805	0,665	44	77	0,01663	43
132SA-2	91,0	IE3	89,7	87,4	0,860	0,840	0,761	48	78	0,03300	44,8
132SB-2	91,6	IE3	92,4	92,9	0,885	0,850	0,760	60	78	0,03960	73
160MA-2	91,4	IE3	91,2	89,7	0,881	0,864	0,812	49	81	0,04976	120
160MB-2	92,0	IE3	92,6	91,8	0,895	0,877	0,841	61	81	0,06587	132
160L-2	93,0	IE3	93,7	93,0	0,893	0,875	0,827	58	81	0,07260	150
180M-2	94,0	IE3	93,9	93,0	0,900	0,880	0,870	41	83	0,09900	205
200LA-2	93,4	IE3	94,4	90,7	0,900	0,881	0,820	65	84	0,16368	250
200LB-2	93,8	IE3	93,6	90,2	0,900	0,887	0,840	65	84	0,18348	270
225M-2	94,1	IE3	93,9	90,7	0,900	0,878	0,816	65	86	0,30756	315
250M-2	94,5	IE3	92,6	88,5	0,890	0,872	0,825	65	89	0,41184	420
280S-2	95,6	IE4	93,7	89,5	0,900	0,896	0,875	55	91	0,76428	550,8
280M-2	95,8	IE4	95,7	93,7	0,900	0,894	0,857	65	91	0,89100	625
315S-2	96,0	IE4	95,9	93,9	0,900	0,894	0,857	65	92	1,55760	968
315MA-2	96,2	IE4	96,2	94,2	0,900	0,894	0,857	65	92	2,40240	1100
315LA-2	96,3	IE4	96,2	94,2	0,910	0,904	0,867	65	92	2,74560	1160,5
315LB-2	96,5	IE4	96,5	94,5	0,910	0,904	0,867	65	92	3,14160	1221
355M-2	96,5	IE4	96,5	94,5	0,910	0,904	0,867	65	100	3,96000	2090
355L-2	96,5	IE4	96,5	94,5	0,910	0,904	0,867	65	100	4,62000	2530



4 POLES IE3-IE4


Data at 400V - 50Hz

TYPE	kW	HP	rpm	In (A)	Is (A)	Is In	Cn (Nm)	Cs (Nm)	Cs Cn	Cmax (Nm)	Cmax Cn
80B-4	0,75	1	1426	1,87	11,24	6,0	5,01	15,52	3,1	15,41	3,1
90S-4	1,1	1,5	1436	2,61	16,60	6,4	7,36	24,26	3,3	24,70	3,4
90L-4	1,5	2	1427	3,59	24,34	6,8	10,03	41,06	4,1	38,49	3,8
100LA-4	2,2	3	1438	4,77	33,83	7,1	14,74	52,18	3,5	54,71	3,7
100LB-4	3	4	1447	6,48	49,52	7,6	19,76	69,03	3,5	77,85	3,9
112M-4	4	5,5	1460	8,79	62,51	7,1	26,17	83,57	3,2	108,56	4,1
132S-4	5,5	7,5	1454	10,64	68,01	6,4	36,12	75,86	2,1	101,15	2,8
132M-4	7,5	10	1460	14,39	94,37	6,6	49,06	91,80	1,9	132,46	2,7
160M-4	11	15	1468	20,76	121,31	5,8	71,56	121,50	1,7	193,21	2,7
160L-4	15	20	1460	28,19	140,97	5,0	98,12	166,60	1,7	255,10	2,6
180M-4	18,5	25	1477	33,53	206,45	6,2	120,94	202,50	1,7	384,23	3,2
180L-4	22	30	1470	39,62	261,96	6,6	142,93	235,19	1,6	401,22	2,8
200L-4	30	40	1480	53,48	385,07	7,2	193,58	425,88	2,2	445,24	2,3
225S-4	37	50	1480	65,37	490,30	7,5	238,75	525,25	2,2	549,13	2,3
225M-4	45	60	1480	77,39	588,17	7,6	290,37	638,82	2,2	667,85	2,3
250M-4	55	75	1480	93,89	713,58	7,6	354,90	780,78	2,2	816,27	2,3
280S-4	75	100	1480	126,70	874,24	6,9	483,95	1064,70	2,2	1113,09	2,3
280M-4	90	120	1485	153,61	1075,26	7,0	578,79	1273,33	2,2	1331,21	2,3
315S-4	110	150	1480	187,35	1292,74	6,9	709,80	1561,55	2,2	1632,53	2,3
315M-4	132	180	1480	224,59	1549,68	6,9	851,76	1873,86	2,2	1959,04	2,3
315LA-4	160	220	1480	271,67	1874,51	6,9	1032,43	2271,35	2,2	2374,59	2,3
315LB-4	200	270	1480	339,23	2340,72	6,9	1290,54	2839,19	2,2	2968,24	2,3
355M-4	250	335	1490	414,62	2860,88	6,9	1602,35	3525,17	2,2	3685,40	2,3
355L-4	315	423	1490	522,42	3604,71	6,9	2018,96	4441,71	2,2	4643,61	2,3

TYPE	η %				Fatt. pot. $\cos \varphi$			ΔT (°C)	LwA (dB)	J Kgm2	Kg
	100%	IE	75%	50%	100%	75%	50%				
80B-4	83,1	IE3	82,6	81,6	0,690	0,619	0,531	46	56	0,00277	12
90S-4	84,8	IE3	84,9	79,3	0,723	0,609	0,510	36	61	0,00304	25
90L-4	85,3	IE3	85,1	83,0	0,708	0,592	0,483	41	61	0,00356	30
100LA-4	86,7	IE3	87,8	85,8	0,771	0,663	0,543	41	64	0,00713	36
100LB-4	89,0	IE3	89,4	86,8	0,745	0,648	0,519	46	64	0,00893	40
112M-4	89,1	IE3	89,2	87,2	0,736	0,674	0,505	46	77	0,01663	43
132S-4	89,9	IE3	92,1	92,4	0,830	0,770	0,675	61	71	0,02853	70
132M-4	90,5	IE3	90,8	89,9	0,831	0,790	0,699	46	71	0,03946	56,5
160M-4	91,8	IE3	91,7	90,4	0,833	0,790	0,675	52	73	0,08133	125
160L-4	92,3	IE3	93,1	92,3	0,832	0,780	0,680	61	75	0,12239	150
180M-4	92,6	IE3	92,1	90,2	0,870	0,817	0,724	40	76	0,18531	170,6
180L-4	93,2	IE3	91,7	91,0	0,860	0,832	0,761	59	76	0,21065	189,3
200L-4	93,6	IE3	93,8	92,8	0,865	0,818	0,767	80	79	0,34930	254,8
225S-4	93,9	IE3	92,7	92,0	0,870	0,839	0,776	75	81	0,54128	268,3
225M-4	94,3	IE3	93,3	92,8	0,890	0,872	0,807	80	81	0,62527	353
250M-4	95,0	IE3	94,2	93,5	0,890	0,862	0,800	75	83	0,87991	450
280S-4	96,0	IE4	94,5	92,0	0,890	0,863	0,843	70	86	1,71600	605
280M-4	96,1	IE4	94,4	92,9	0,880	0,872	0,838	65	86	1,96680	700
315S-4	96,3	IE4	94,7	93,2	0,880	0,872	0,838	65	87	4,13160	925
315M-4	96,4	IE4	94,8	93,3	0,880	0,872	0,838	55	87	4,81800	1180
315LA-4	96,6	IE4	95,0	93,5	0,880	0,872	0,838	75	87	5,42784	1160,5
315LB-4	96,7	IE4	95,0	93,4	0,880	0,872	0,838	70	87	6,34920	1240,8
355M-4	96,7	IE4	95,1	93,5	0,900	0,892	0,857	75	94	8,61960	1870
355L-4	96,7	IE4	95,0	93,4	0,900	0,892	0,857	70	94	10,87680	2090




B3

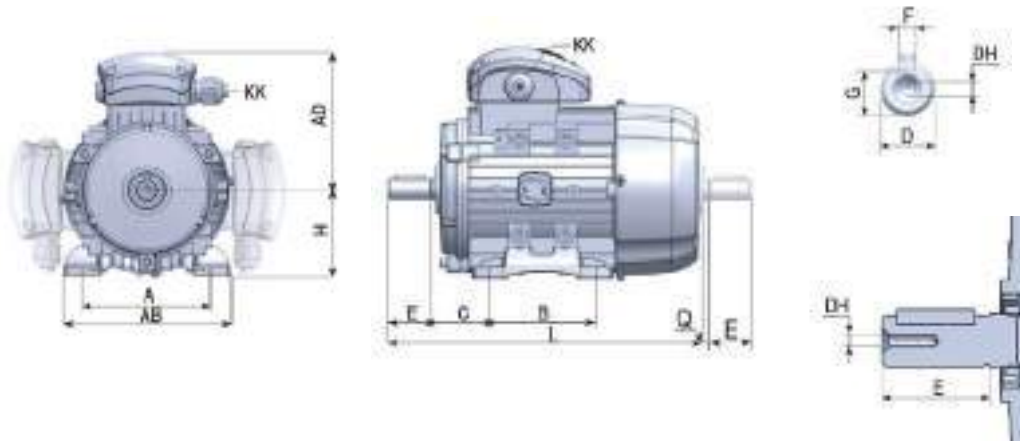

DIMENSIONS (mm)																
TYPE	POLES	AD	H	KK	L	D	DH	E	Q	F	G	B3				
												A	AB	B	C	K
80	2-8	130	80	M20	283	19	M6×16	40	3	6	15,5	125	157	100	50	10
90S	2-8	145	90	M20	330	24	M8×19	50	5	8	20	140	173	100	56	10
90L	2-8	145	90	M20	358	24	M8×19	50	5	8	20	140	173	125	56	10
100	2-8	157	100	M20	393	28	M10×22	60	5	8	24	160	196	140	63	12
112M	2-8	177	112	M25	410	28	M10×22	60	5	8	24	190	227	140	70	12
132S	2-8	197	132	M32	480	38	M12×28	80	5	10	33	216	262	140	89	12
132M	2-8	197	132	M32	516	38	M12×28	80	5	10	33	216	262	178	89	12
160M	2-8	255	160	2×M40	613	42	M16×36	110	5	12	37	254	320	210	108	15
160L	2-8	252	160	2×M40	708	42	M16×36	110	5	12	37	254	320	254	108	15
180M	2-8	270	180	2×M40	730	48	M16×36	110	8	14	42,5	279	355	241	121	15
180L	2-8	270	180	2×M40	780	48	M16×36	110	8	14	42,5	279	355	279	121	15
200L	2-8	303	200	2×M50	771	55	M20×42	110	12	16	49	318	395	305	133	19
225S	2-8	312	225	2×M50	815	60	M20×42	140	12	18	53	356	435	286	149	19
225M	2	312	225	2×M50	820	55	M20×42	110	12	16	49	356	435	286/311	149	19
225M	4-8	312	225	2×M50	850	60	M20×42	140	12	18	53	356	435	286/311	149	19
250M	2	355	250	2×M63	910	60	M20×42	140	12	18	53	406	490	349	168	24
250M	4-8	355	250	2×M63	910	65	M20×42	140	12	18	58	406	490	349	168	24
280S	2	398	280	2×M63	985	65	M20×42	140	12	18	58	457	550	368	190	24
280S	4-8	398	280	2×M63	985	75	M20×42	140	12	20	67,5	457	550	368	190	24
280M	2	398	280	2×M63	1035	65	M20×42	140	12	18	58	457	550	368/419	190	24
280M	4-8	398	280	2×M63	1035	75	M20×42	140	12	20	67,5	457	550	368/419	190	24
315S	2	540	315	2×M63	1160	65	M20×42	140	15	18	58	508	630	406	216	28
315S	4-8	540	315	2×M63	1270	80	M20×42	170	15	22	71	508	630	406	216	28
315M	2	540	315	2×M63	1290	65	M20×42	140	15	18	58	508	630	457	216	28
315M	4-8	540	315	2×M63	1325	80	M20×42	170	15	22	71	508	630	457	216	28
315L	2	540	315	2×M63	1320	65	M20×42	140	15	18	58	508	630	508	216	28
315L	4-8	540	315	2×M63	1350	80	M20×42	170	15	22	71	508	630	508	216	28
355M	2	655	355	2×M63	1500	75	M20×42	140	15	20	67,5	610	730	560/630	254	28
355M	4-8	655	355	2×M63	1530	95	M20×42	170	15	25	86	610	730	560/630	254	28
355L	2	655	355	2×M63	1500	75	M20×42	140	15	20	67,5	610	730	560/630	254	28
355L	4-8	655	355	2×M63	1530	95	M20×42	170	15	25	86	610	730	560/630	254	28




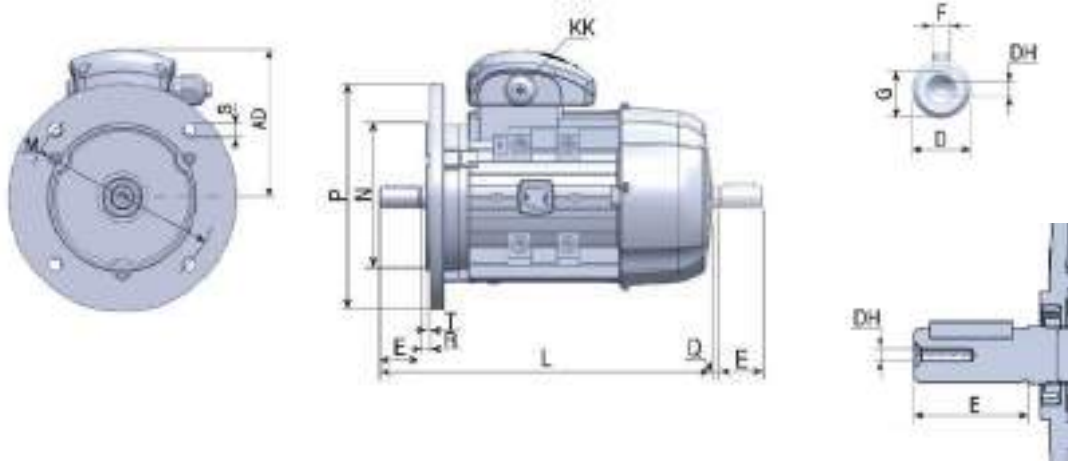

DIMENSIONS (mm)

TYPE	POLES	AD	H	KK	L	D	DH	E	Q	F	G	B5				
												M	N	P	S	T
80	2-8	130	80	M20	283	19	M6×16	40	3	6	15,5	165	130	200	12×4	3,5
90S	2-8	145	90	M20	330	24	M8×19	50	5	8	20	165	130	200	12×4	3,5
90L	2-8	145	90	M20	358	24	M8×19	50	5	8	20	165	130	200	12×4	3,5
100	2-8	157	100	M20	393	28	M10×22	60	5	8	24	215	180	250	15×4	4
112M	2-8	177	112	M25	410	28	M10×22	60	5	8	24	215	180	250	15×4	4
132S	2-8	197	132	M32	480	38	M12×28	80	5	10	33	265	230	300	15×4	4
132M	2-8	197	132	M32	516	38	M12×28	80	5	10	33	265	230	300	15×4	4
160M	2-8	255	160	2×M40	613	42	M16×36	110	5	12	37	300	250	350	19×4	5
160L	2-8	252	160	2×M40	708	42	M16×36	110	5	12	37	300	250	350	19×4	5
180M	2-8	270	180	2×M40	730	48	M16×36	110	8	14	42,5	300	250	350	19×4	5
180L	2-8	270	180	2×M40	780	48	M16×36	110	8	14	42,5	300	250	350	19×4	5
200L	2-8	303	200	2×M50	771	55	M20×42	110	12	16	49	350	300	400	19×4	5
225S	2-8	312	225	2×M50	815	60	M20×42	140	12	18	53	400	350	450	19×8	5
225M	2	312	225	2×M50	820	55	M20×42	110	12	16	49	400	350	450	19×8	5
225M	4-8	312	225	2×M50	850	60	M20×42	140	12	18	53	400	350	450	19×8	5
250M	2	355	250	2×M63	910	60	M20×42	140	12	18	53	500	450	550	19×8	5
250M	4-8	355	250	2×M63	910	65	M20×42	140	12	18	58	500	450	550	19×8	5
280S	2	398	280	2×M63	985	65	M20×42	140	12	18	58	500	450	550	19×8	5
280S	4-8	398	280	2×M63	985	75	M20×42	140	12	20	67,5	500	450	550	19×8	5
280M	2	398	280	2×M63	1035	65	M20×42	140	12	18	58	500	450	550	19×8	5
280M	4-8	398	280	2×M63	1035	75	M20×42	140	12	20	67,5	500	450	550	19×8	5
315S	2	540	315	2×M63	1160	65	M20×42	140	15	18	58	600	550	660	24×8	6
315S	4-8	540	315	2×M63	1270	80	M20×42	170	15	22	71	600	550	660	24×8	6
315M	2	540	315	2×M63	1290	65	M20×42	140	15	18	58	600	550	660	24×8	6
315M	4-8	540	315	2×M63	1325	80	M20×42	170	15	22	71	600	550	660	24×8	6
315L	2	540	315	2×M63	1320	65	M20×42	140	15	18	58	600	550	660	24×8	6
315L	4-8	540	315	2×M63	1350	80	M20×42	170	15	22	71	600	550	660	24×8	6
355M	2	655	355	2×M63	1500	75	M20×42	140	15	20	67,5	740	680	800	24×8	6
355M	4-8	655	355	2×M63	1530	95	M20×42	170	15	25	86	740	680	800	24×8	6
355L	2	655	355	2×M63	1500	75	M20×42	140	15	20	67,5	740	680	800	24×8	6
355L	4-8	655	355	2×M63	1530	95	M20×42	170	15	25	86	740	680	800	24×8	6

B5R/B14

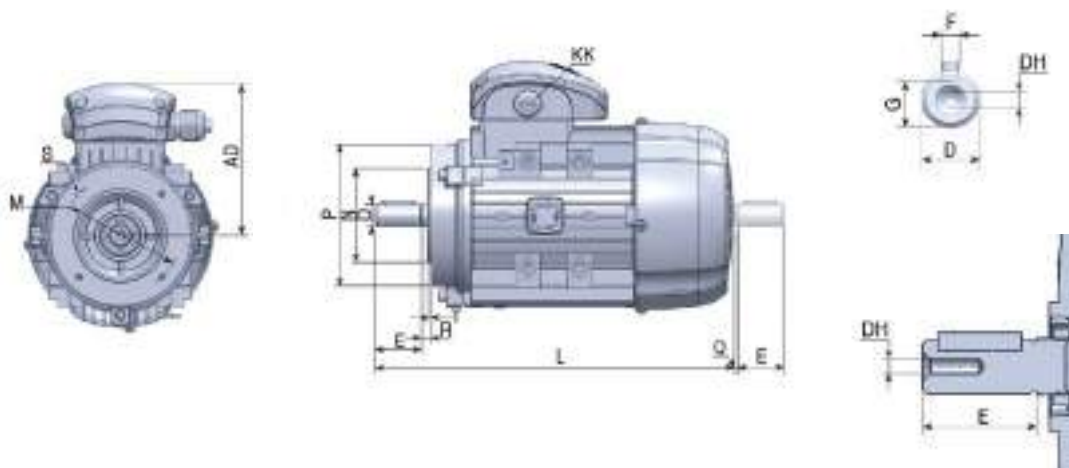


B14

DIMENSIONS (mm)																
TYPE	POLES	AD	H	KK	L	D	DH	E	Q	F	G	B14				
												M	N	P	S	T
80	2-8	130	80	M20	283	19	M6×16	40	3	6	15,5	100	80	120	M6	3
90S	2-8	145	90	M20	330	24	M8×19	50	5	8	20	115	95	140	M8	3
90L	2-8	145	90	M20	358	24	M8×19	50	5	8	20	115	95	140	M8	3
100	2-8	157	100	M20	393	28	M10×22	60	5	8	24	130	110	160	M8	3,5
112M	2-8	177	112	M25	410	28	M10×22	60	5	8	24	130	110	160	M8	3,5
132S	2-8	197	132	M32	480	38	M12×28	80	5	10	33	165	130	200	M10	3,5
132M	2-8	197	132	M32	516	38	M12×28	80	5	10	33	165	130	200	M10	3,5
160M	2-8	255	160	2×M40	613	42	M16×36	110	5	12	37	215	180	250	M12	4
160L	2-8	252	160	2×M40	708	42	M16×36	110	5	12	37	215	180	250	M12	4

B5R/B14

DIMENSIONS (mm)																
TYPE	POLES	AD	H	KK	L	D	DH	E	Q	F	G	B5R / B14B				
												M	N	P	S	T
80	2-8	130	80	M20	283	19	M6×16	40	3	6	15,5	130	110	160	M8	3,5
90S	2-8	145	90	M20	330	24	M8×19	50	5	8	20	130	110	160	M8	3,5
90L	2-8	145	90	M20	358	24	M8×19	50	5	8	20	130	110	160	M8	3,5
100	2-8	157	100	M20	393	28	M10×22	60	5	8	24	165	130	200	M10	3,5
112M	2-8	177	112	M25	410	28	M10×22	60	5	8	24	165	130	200	M10	3,5
132S	2-8	197	132	M32	480	38	M12×28	80	5	10	33	215	180	250	M10	4
132M	2-8	197	132	M32	516	38	M12×28	80	5	10	33	215	180	250	M10	4
160M	2-8	255	160	2×M40	613	42	M16×36	110	5	12	37	265	230	300	14×4	5
160L	2-8	252	160	2×M40	708	42	M16×36	110	5	12	37	265	230	300	14×4	5



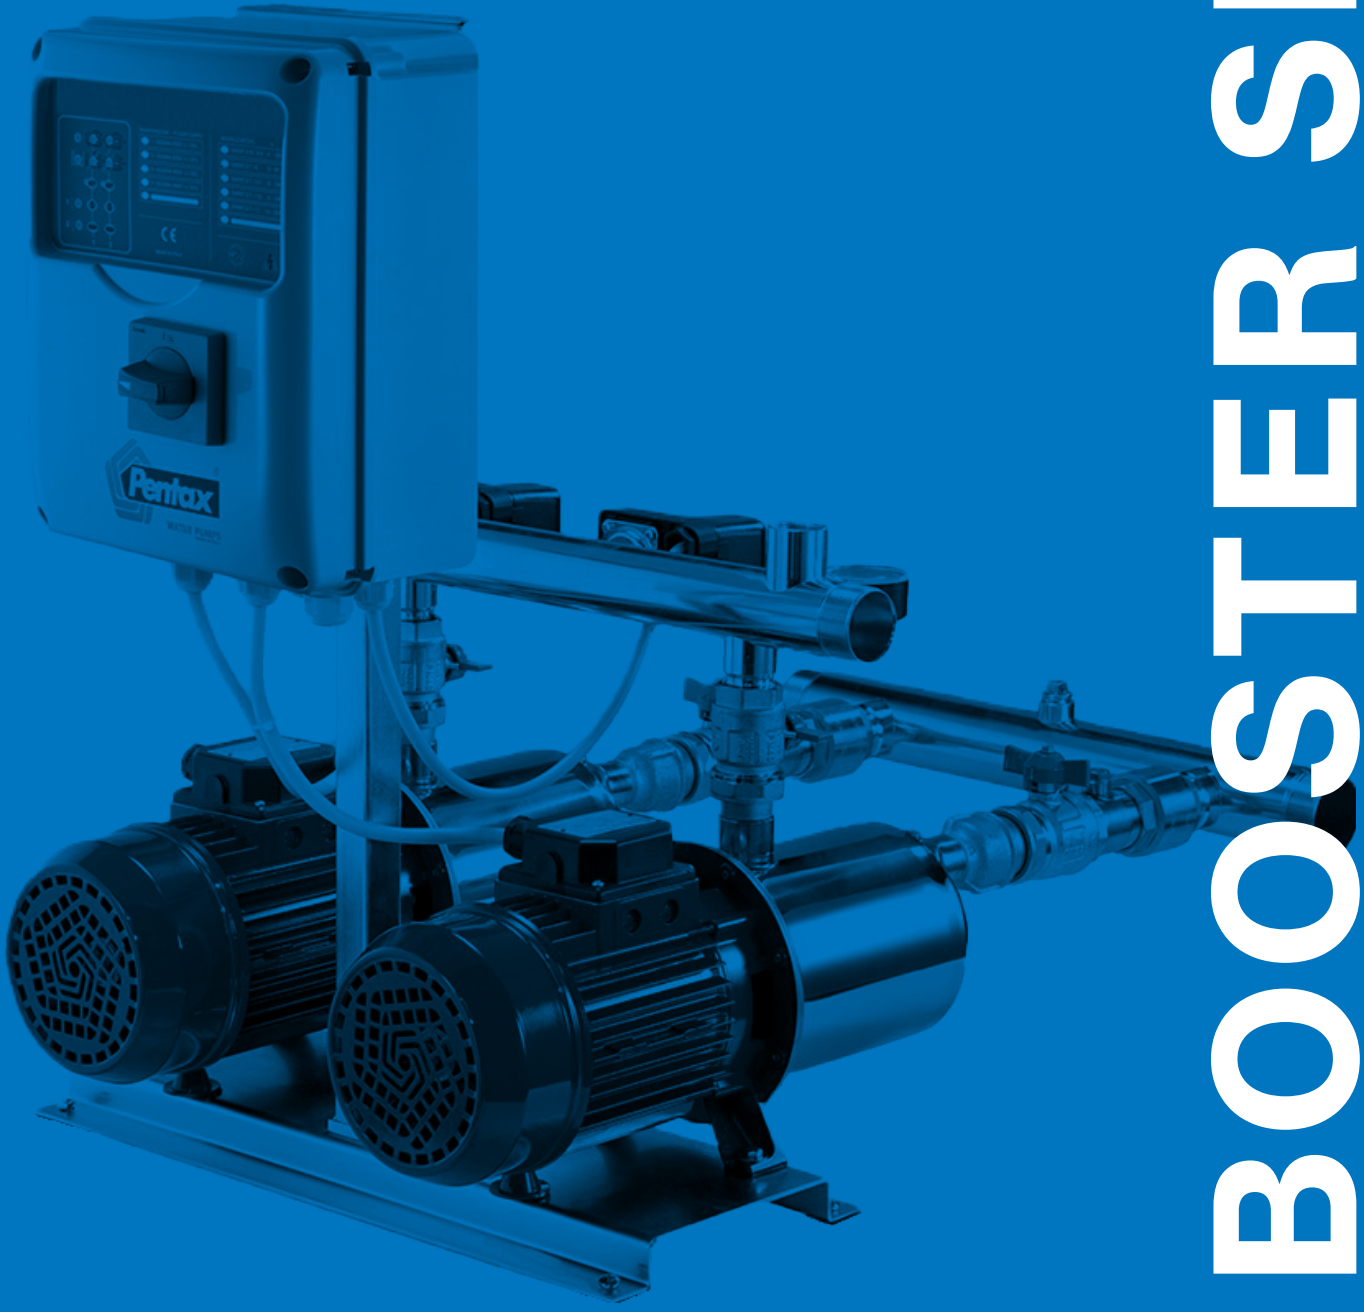

BOOSTER SETS

AQUADOMUS

Booster set

Aquadomus is an integrated 'Plug&Play' system to manage water pressurization for domestic and residential applications. The electronic control (E-IPFC) manages the operation of the system in order to maintain the pressure constant even if the conditions of use change. It can be driven and monitored by a dedicated app "Pentax IPFC". It consists of a multistage pump, a permanent magnet synchronous motor, an electronic inverter control, an expansion tank, a no return valve, a pressure sensor, a cable with plug.

Construction features

Pump body	stainless steel AISI 304
Motor bracket	aluminum
Impellers, diffusers	Noryl®
Mechanical seal	ceramic-graphite-EPDM
Motor shaft	stainless steel AISI 303
Liquid temperature	-5 ÷ +35 °C
Rated pressure	max 7 bar
4 poles synchronous motor with permanent magnet	4200 rpm
Input voltage	1~ 230V - 50Hz 1~ 220V - 60Hz 1~ 115V - 50/60Hz
Insulation class	F
Protection degree	IPX4
Max rated current	3,7 A
Max absorbed power P1	820W
Cable	H07 RNF 1,5 m



Constant pressure even if the conditions of use change






Dedicated Pentax IPFC App for programming and monitoring (compatible with iOS and Android)



Bluetooth smart pump



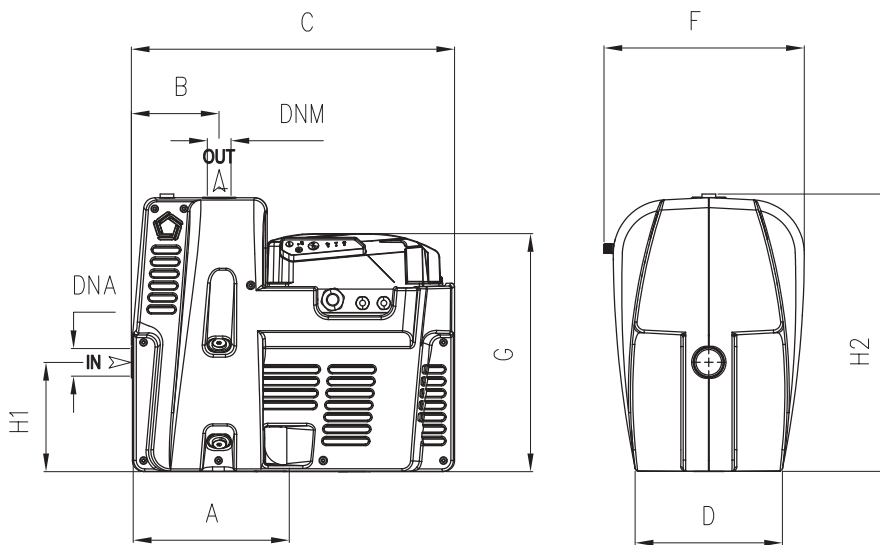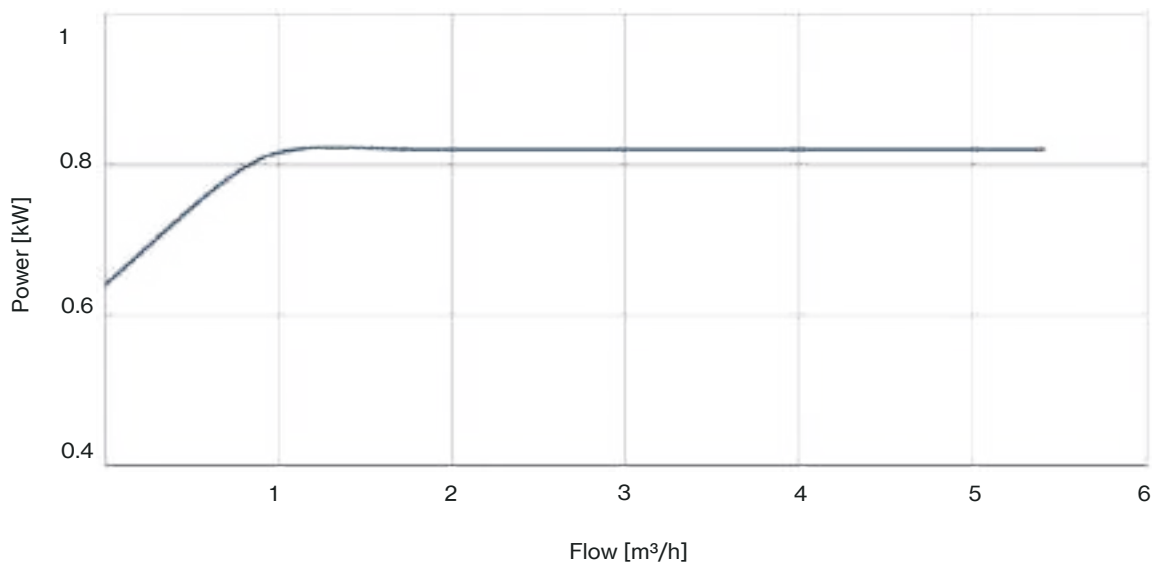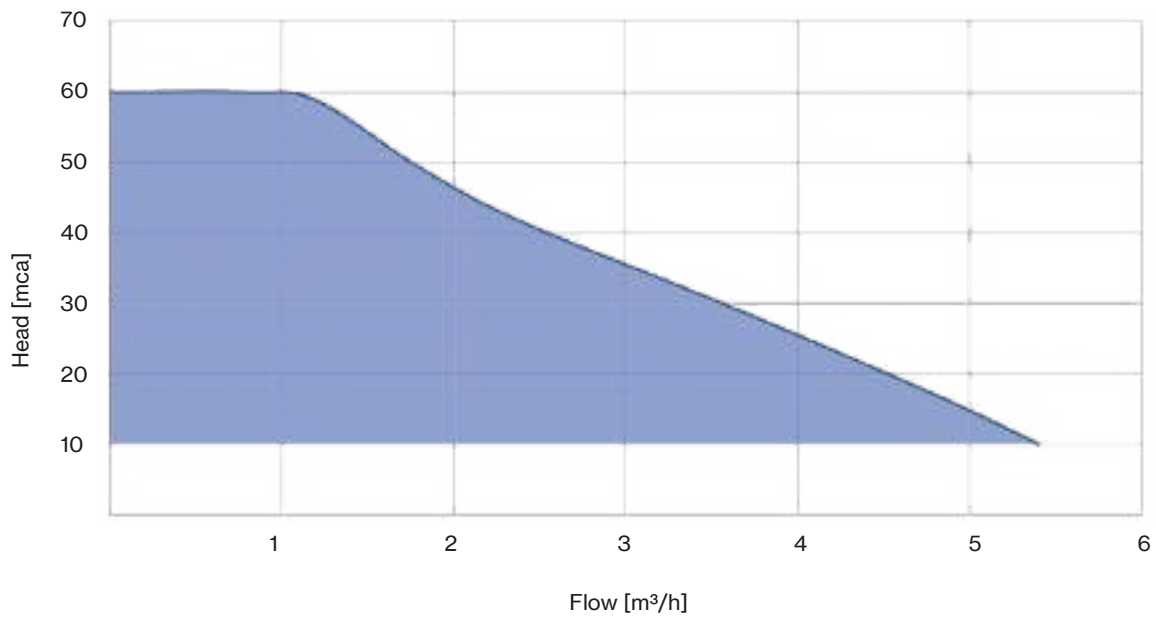

TYPE	DIMENSIONS (mm)										Kg
	A	B	C	D	F	G	H1	H2	DNA	DNM	
Aquadomus	166,8	103	377	173	235	280	128	325	1" G	1" G	11



SUPERDOMUS

Booster set



Fixed speed booster sets with one pump and membrane tank

DESCRIPTION

Compact, built-in, fully automatic pressurization units consisting of a single pump, membrane tank, pressure switch, pressure gauge, connectors and cable with plug. They are ready for installation and suitable for pressure boosting in water systems for domestic use and industrial applications.

FUNCTIONING


The pump switches on automatically when the pressure drops below the minimum set value. When water demand ends, the pump will fill up the tank and then it turns off when the pressure reaches the maximum set value.

TYPE		P2		P1 (kW)		Pipe		Tank capacity					
1~	3~	HP	KW	1~	3~	Suction ("G)	Delivery ("G)	8 L	20-24 L		50 L	100 L	
								cylindrical	spherical	cylindrical	inox	cylindrical	cylindrical
CP 45	-	0,5	0,37	0,5	-	1	1	■	■	-	-	-	-
CP 75	-	1	0,74	1,11	-	1	1	■	■	-	-	-	-
PM 45	-	0,5	0,37	0,5	-	1	1	■	■	-	-	-	-
PM 80	-	1	0,74	1,1	-	1	1	■	■	-	-	-	-
CAM 50N	-	0,6	0,44	0,7	-	1	1	■	-	■	-	-	-
CAM 75N	-	0,8	0,59	0,82	-	1	1	■	-	■	-	-	-
CAM 100N	-	1	0,74	1,04	-	1	1	-	■	■	-	-	-
CAM 120	-	1,2	0,88	1,14	-	1	1	-	■	■	-	-	-
CAM 140	-	1,5	1,1	1,3	-	1	1	-	■	■	-	-	-
CAM 150	CAMT 150	2	1,5	1,9	1,8	1½	1¼	-	-	-	-	-	■
CAM 200	CAMT 200	2,5	1,85	2,3	2,2	1½	1¼	-	-	-	-	-	■
CAM 300	CAMT 300	3	2,2	2,7	2,6	1½	1¼	-	-	-	-	-	■
INOX 100N	-	1	0,74	1,04	-	1	1	-	-	■	■	-	-
INOX 120	-	1,2	0,88	1,14	-	1	1	-	-	■	■	-	-
INOX 140	-	1,5	1,1	1,3	-	1	1	-	-	■	■	-	-
CAB 150	CABT 150	2	1,5	1,8	1,7	1½	1	-	-	■	-	-	-
CAB 200	CABT 200	2,5	1,85	2,2	2,1	1½	1	-	-	-	-	-	■
CAB 300	CABT 300	3	2,2	2,8	2,6	1½	1	-	-	-	-	-	■
AP 75	-	0,8	0,59	0,8	-	1¼	1	-	-	■	-	-	-
AP 100	-	1	0,74	1,02	-	1¼	1	-	-	■	-	-	-
AP 150	APT 150	1,5	1,1	1,65	1,65	1¼	1	-	-	■	-	-	-
AP 200	APT 200	2	1,5	2,22	2,22	1¼	1	-	-	-	-	-	-
MPX 100	-	1	0,74	1,07	-	1	1	-	-	■	■	-	-
MPX 120	-	1,2	0,88	1,27	-	1	1	-	-	■	■	-	-
U 3A-90/4	U 3A-90/4T	0,9	0,66	0,9	0,88	1	1	-	-	■	■	-	■
U 3A-100/5	U 3A-100/5T	1	0,75	1,06	1,01	1	1	-	-	■	■	-	■
U 5A-120/4	U 5A-120/4T	1,2	0,9	1,13	1,13	1	1	-	-	■	■	-	■
U 5A-150/5	U 5A-150/5T	1,5	1,1	1,47	1,39	1	1	-	-	■	■	-	■
U 3SA-90/4	U 3SA-90/4T	0,9	0,66	0,83	0,8	1	1	-	-	■	■	-	■
U 3SA-100/5	U 3SA-100/5T	1	0,75	0,99	0,92	1	1	-	-	■	■	-	■
U 5SA-120/4	U 5SA-120/4T	1,2	0,9	1,09	1,08	1	1	-	-	■	■	-	■
U 5SA-150/5	U 5SA-150/5T	1,5	1,1	1,39	1,31	1	1	-	-	■	■	-	■



SUPERDOMUS+VSD

Booster set

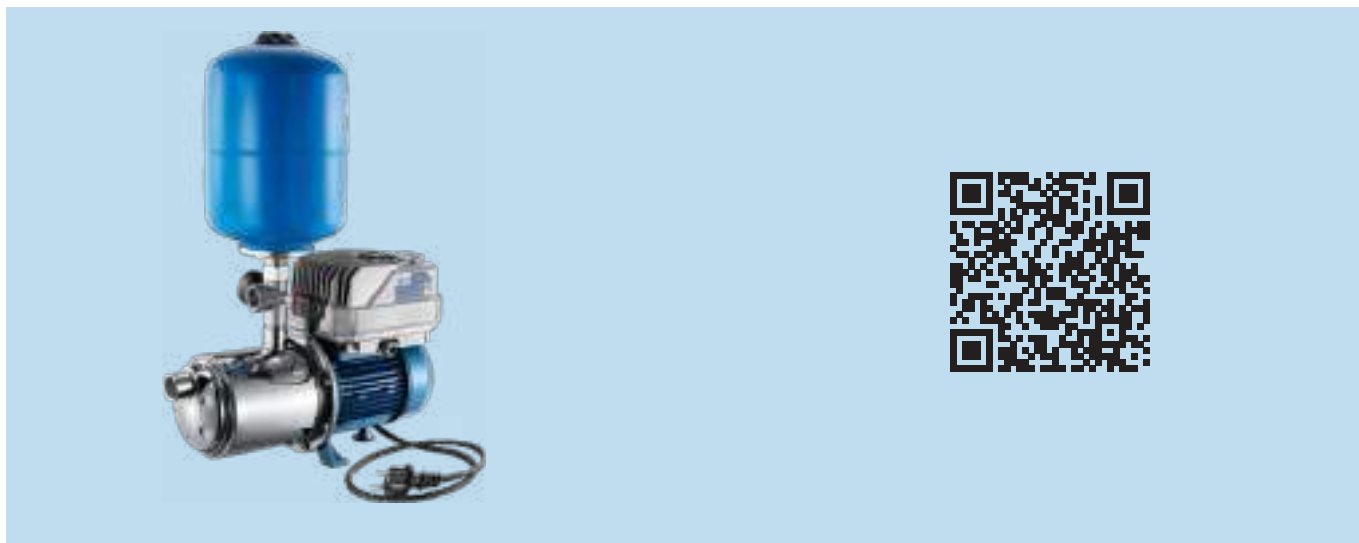

Variable speed booster sets with one pump and membrane tank

DESCRIPTION

SUPERDOMUS+VSD are single-phase automatic booster sets consisting of a horizontal pump operated and controlled by EPIC variable speed drive. They provide constant pressure regardless of changes on flow demand, making them suitable for low or missing pressure in domestic systems and small industrial applications.

FEATURES

- Variable speed drive EPIC (1~ 230V-in, 3~ 230V-out)
- Three-phase horizontal pump
- Stainless steel 5-way connector with built-in non return valve
- Pressure sensor
- Pressure gauge
- 8 liters membrane tank
- Cable with plug

FUNCTIONING

If the pressure in the network drops the pump will start and gradually speeds up to provide with the set pressure. When the water demand decreases, the pressure will rise causing the pump speed to slow down and eventually to stop the pump if demand ceases. The pump will remain on standby waiting to start at the next water demand.

SELECTION

The table below shows the pump series available as SUPERDOMUS+VSD. Consult the catalog at the relative pump series for specifics and characteristic curves.

VSD	HORIZONTAL 3- PUMP TYPE	max nominal power P2	
		HP	kW
EPIC	CAM	2	1,5
	CAB	2	1,5
	INOX	1,5	1,1
	MPX	1,2	0,88
	CM	2	1,5
	CB	2	1,5
	CH	1,5	1,1
	MB	2	1,5
	U 3, U 3S	1,5	1,1
	U 5, U 5S	2	1,5
	U 7, U 7S	2,5	1,85
	U 9, U 9S	2	1,5
	U 18, U 18S	2	1,5





Fixed speed and variable speed booster sets with two self-priming pumps

DESCRIPTION

Pressurisation units with 2 self-priming horizontal axis pumps fitted on a single skid and connected in parallel by suction and delivery manifolds. These systems are specifically designed for domestic use as well as small civil or industrial applications. They can be equipped with EPIC inverters, which ensures that they can meet the constant pressure demands for modern systems. The key characteristics of these systems are their reliability, user-friendly operation, and low maintenance needs. To ensure proper operation of the booster set, pressure tanks of adequate capacity are required depending on constant or variable speed, pumps type, and applications.

FEATURES



- Two self-priming horizontal axis pumps
- Cast iron pump body for CAM and CAB pumps series
- Stainless steel pump body for INOX, ULTRA A, ULTRA SA series
- Suction manifold in galvanized steel with non-return and isolation valves
- Delivery manifold in galvanized steel with pressure gauge and isolation valves
- Base frame in galvanized steel
- Electronic control panel EQ2SM(T) and two pressure switches for fixed speed version
- Inverter EPIC on each pump and two pressure sensors for the variable speed version
- Pressure tanks available on request, as accessory

FUNCTIONING

In the fixed speed version as soon as pressure drops below the minimum set value on the pressure switch the first pump starts automatically. If water demand further increases, the second pump will run until the pressure rises above the maximum set value. When demand ends, the last pump turns off. All the pumps follow cycling changeover for equal work distribution. In case of one pump failure, the other pumps would continue to operate.

In the variable speed version when the system pressure drops below the desired level, the sensors detect it giving an input to the inverter to start the first pump at controlled speed. If the flow rate is not sufficient, the pressure continues to drop causing the second pump to start. As soon as the flow demand decreases, the pressure rises again and the second pump stop. The first pump continues to modulate its speed in order to regulate and maintain the set pressure until it turns off when the flow demand ends. Based on working hours, the inverters will alternate the starting order of pumps to ensure better wear distribution. Continuity of operation is ensured in the event of one pump or one inverter failure.

SELF-PRIMING BOOSTER SETS

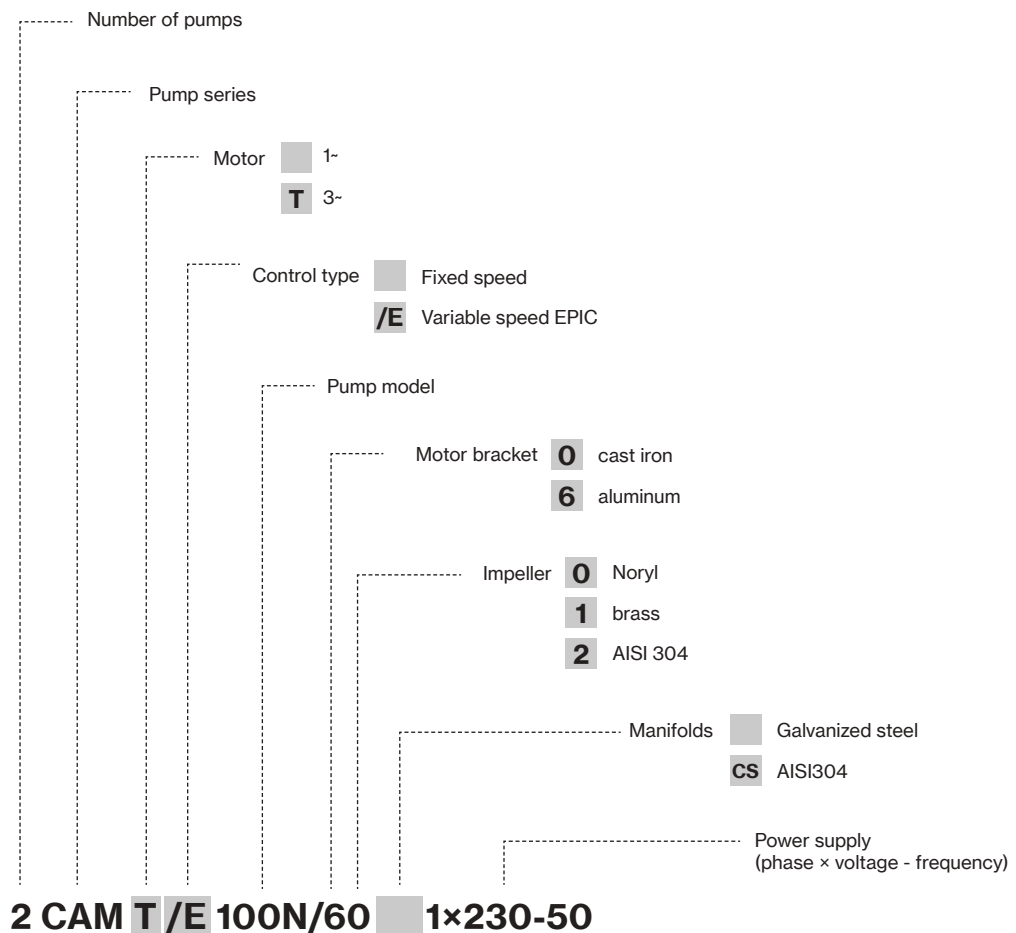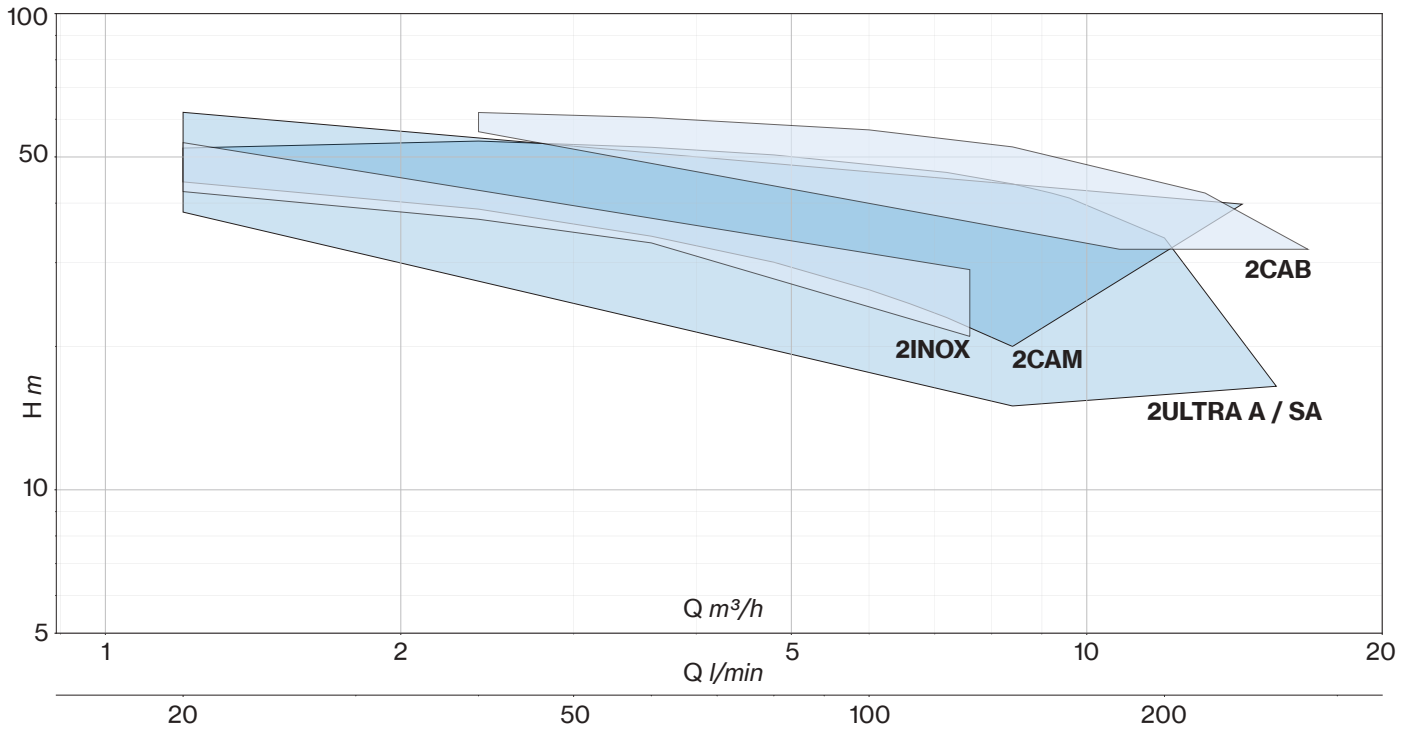

SELF-PRIMING BOOSTER SETS

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)												
		FIXED SPEED		VARIABLE SPEED			0	1,2	2,4	3,6	4,8	7,2	8,4	9,2	9,6	12,0	14	15,6	
		1~ 230V	3~ 400V	1~ 230V-in 3~ 230V-out			0	20	40	60	80	120	140	153,4	160	200	233	260	
l/min	bar				HP (x2)	kW (x2)	H (m)												
80	3	2U 3A-90/4	2U 3A-90/4T	2U 3A/E-90/4T	0,9	0,66	40,8	38,3	35,1	31,8	29,9	19,8	15,0						
		2U 3SA-90/4	2U 3SA-90/4T	2U 3SA/E-90/4T			43,0	41,0	38,3	35,0	31,3	22,3	17,2	13,5					
100		2U 3A-100/5	2U 3A-100/5T	2U 3A/E-100/5T	1	0,75	52,2	48,9	45,1	40,8	36,0	25,4	19,8	15,0					
		2U 3SA-100/5	2U 3SA-100/5T	2U 3SA/E-100/5T			54,0	52,1	48,8	44,9	40,2	29,0	22,0	16,8					
160		2U 5A-120/4	2U 5A-120/4T	2U 5A/E-120/4T	1,2	0,9	45,3	44,2	42,8	41,3	39,6	35,6	33,4	31,7	30,8	24,0	15,0		
		2U 5SA-120/4	2U 5SA-120/4T	2U 5SA/E-120/4T			44,5	43,3	42,1	41,0	40,0	36,4	34,3	32,8	32,0	26,2	18,5	13,5	
200	2U 5A-150/5	2U 5A-150/5T	2U 5A/E-150/5T	1,5	1,1	56,8	55,9	54,6	53,0	51,0	46,1	43,2	41,2	40,1	33,0	24,0	15,0		
	2U 5SA-150/5	2U 5SA-150/5T	2U 5SA/E-150/5T			56,0	52,2	54,0	52,4	50,5	46,4	43,9	42,0	41,0	33,8	23,8	16,5		

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)												
		FIXED SPEED		VARIABLE SPEED			0	1,2	2,4	3,6	4,8	6	6,6	7,2	8,4	9,6	12	14,4	
		1~ 230V	3~ 400V	1~ 230V-in 3~ 230V-out			0	20	40	60	80	100	110	120	140	160	200	240	
l/min	bar				HP (x2)	kW (x2)	H (m)												
80	3	2CAM 100N	2CAMT 100N	2CAMT/E 100N	1	0,74	50,9	44,3	38,9	34,1	30,1	26,3	24,6	23,0	20,0				
100	3	2CAM 120	2CAMT 120	2CAMT/E 120	1,2	0,88	55,1	48,5	42,6	37,8	33,5	29,7	27,9	26,2	23,0				
120	3	2CAM 140	2CAMT 140	2CAMT/E 140	1,5	1,1	62,5	55,7	49,4	44,2	39,5	35,5	33,5	31,6	28,1				
140	3,5	2CAM 150	2CAMT 150	2CAMT/E 150	2	1,5	54,8	51,8	48,9	46,2	43,6	41,1	40,0	38,8	36,6	34,5	30,6	26,8	
160	4	2CAM 200	2CAMT 200	-	2,5	1,85	62,7	59,7	56,8	54,0	51,5	49,1	47,9	46,8	44,6	42,4	38,4	34,8	
180	4,5	2CAM 300	2CAMT 300	-	3	2,2	70,0	66,9	63,9	61,0	58,3	55,8	54,6	53,5	51,3	49,2	45,1	41,6	

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)							
		FIXED SPEED		VARIABLE SPEED			0	1,2	2,4	3,6	4,8	6	7,2	7,6
		1~ 230V	3~ 400V	1~ 230V-in 3~ 230V-out			0	20	40	60	80	100	120	126,6
l/min	bar				HP (x2)	kW (x2)	H (m)							
80	3	2INOX 100N	2INOXT 100N	2INOXT/E 100N	1	0,74	48,0	42,3	37,0	33,0	29,6	26,2	22,7	21,0
100		2INOX 120	2INOXT 120	2INOXT/E 120	1,2	0,88	53,4	47,4	41,9	37,5	33,7	29,9	26,0	24,3
120		2INOX 140	2INOXT 140	2INOXT/E 140	1,5	1,1	60,2	53,6	47,8	42,4	38,0	34,4	30,5	29,0

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)							
		FIXED SPEED		VARIABLE SPEED			0	2,4	3,6	6,0	8,4	10,8	13,2	15,6
		1~ 230V	3~ 400V	1~ 230V-in 3~ 230V-out			0	40	60	100	140	180	220	260,0
l/min	bar				HP (x2)	kW (x2)	H (m)							
140	4	2CAB 150	2CABT 150	2CABT/E 150	1,5	1,1	61,5	57,2	54,7	48,5	40,9	30,8		
180		2CAB 200	2CABT 200	2CABT/E 200	2	1,5	62,8	60,0	58,5	54,7	50,1	44,5	38,7	
220		2CAB 300	2CABT 300	-	3	2,2	68,4	65,6	64,0	60,7	56,5	51,7	46,4	40,2





Fixed speed and variable speed booster sets with two threaded centrifugal pumps

DESCRIPTION

Pressurisation units with 2 horizontal centrifugal pumps fitted on a single skid and connected in parallel by suction and delivery manifolds. These systems are extremely silent and designed for water supply, pressurization, heating and air conditioning and liquid transfer. They can be equipped with EPIC and EPIC-A inverters, which ensures that they can meet the constant pressure demands for modern systems. The key characteristics of these systems are their reliability, user-friendly operation, and low maintenance needs. To ensure proper operation of the booster set, pressure tanks of adequate capacity are required depending on constant or variable speed, pumps type, and applications.

FEATURES



- Two horizontal axis pumps with single or double impeller
- Cast iron pump body
- Suction manifold in galvanized steel with non-return and isolation valves
- Delivery manifold in galvanized steel with pressure gauge and isolation valves
- Base frame in galvanized steel
- Electronic control panel EQ2SM(T) and two pressure switches for fixed speed version
- Inverter EPIC or EPIC-A on each pump and two pressure sensors for the variable speed version
- Pressure tanks available on request, as accessory

FUNCTIONING

In the fixed speed version as soon as pressure drops below the minimum set value on the pressure switch the first pump starts automatically. If water demand further increases, the second pump will run until the pressure rises above the maximum set value. When demand ends, the last pump turns off. All the pumps follow cycling changeover for equal work distribution. In case of one pump failure, the other pumps would continue to operate.

In the variable speed version when the system pressure drops below the desired level, the sensors detect it giving an input to the inverter to start the first pump at controlled speed. If the flow rate is not sufficient, the pressure continues to drop causing the second pump to start. As soon as the flow demand decreases, the pressure rises again and the second pump stop. The first pump continues to modulate its speed in order to regulate and maintain the set pressure until it turns off when the flow demand ends. Based on working hours, the inverters will alternate the starting order of pumps to ensure better wear distribution. Continuity of operation is ensured in the event of one pump or one inverter failure.

THREADED CENTRIFUGAL BOOSTER SETS

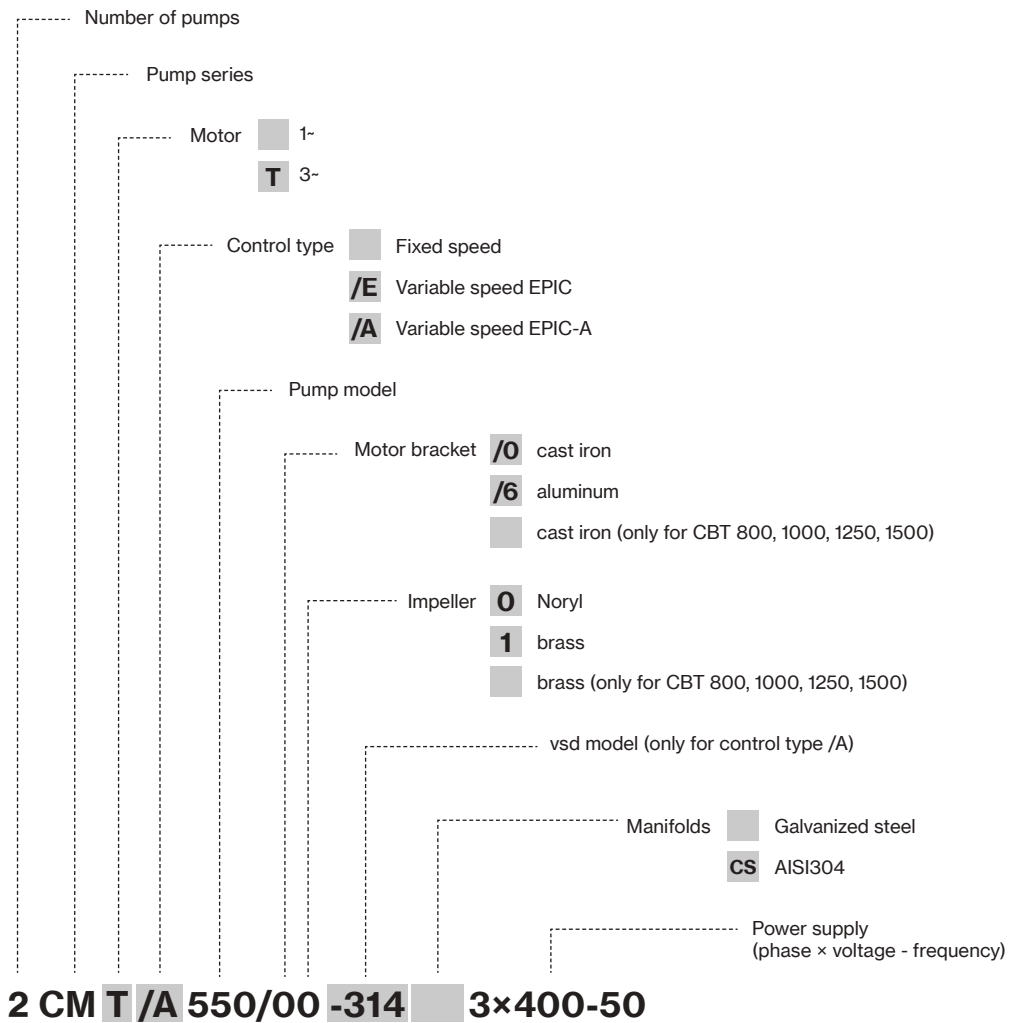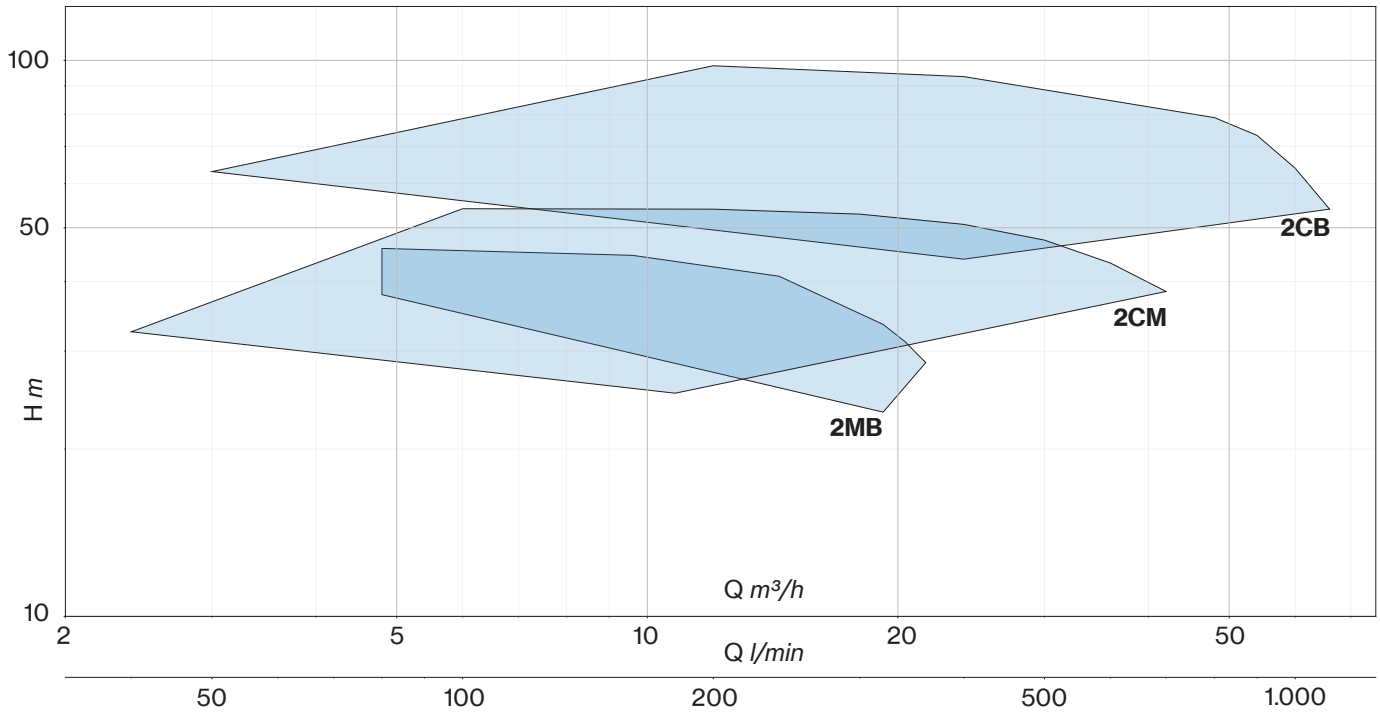

THREADED CENTRIFUGAL BOOSTER SETS

TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED		VARIABLE SPEED				0	2,4	4,8	7,2	9,6	10,8	13,2	14,4	15,6					
		1- 230V	3- 400V	EPIC	EPIC-A			0	40	80	120	160	180	220	240	260					
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)													
100	3	-	-	2CMT/E100	2CMT/A100-304	1	0,74	33,0	32,5	31,5	29,6	26,8	25,2								
150	3,5	2CM164	2CMT164	2CMT/E164	2CMT/A164-304	2	1,5	39,4	39,1	38,6	37,2	35,2	33,8	27,2							
200	4	2CM214	2CMT214	-	2CMT/A214-306	2,5	1,85	46,3	45,9	45,5	44,1	42,1	41,1	38,2	35,5						
	4,5	2CM314	2CMT314	-	2CMT/A314-306	3	2,2	53,2	52,7	52,1	50,8	48,8	47,6	45,0	42,9	39,2					

TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)														
		FIXED SPEED		VARIABLE SPEED				0	6	12	18	24	30	36	42							
		1- 230V	3- 400V	EPIC	EPIC-A			0	100	200	300	400	500	600	700							
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)														
400	4	-	2CMT400	-	2CMT/A400-309	4	3	45,1	45,2	44,9	43,4	40,9	37,4	32,5								
500	4,5	-	2CMT550	-	2CMT/A550-314	5,5	4	54,1	54,1	54,0	52,9	50,7	47,5	43,2	38,4							


TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED		VARIABLE SPEED				0	4,8	9,6	14,4	19,2	21,6	24,0							
		1- 230V	3- 400V	EPIC	EPIC-A			0	80	160	240	320	360	400							
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)													
160	3,5	2MB150	2MBT150	2MBT/E150	2MBT/A150-304	2	1,5	39,2	40,2	39,5	35,7	28,7	23,9	18,0							
240		2MB200	2MBT200	-	2MBT/A200-304	2,5	1,85	44,9	45,6	44,8	41,7	35,2	30,8	25,8							
300		2MB300	2MBT300	-	2MBT/A300-306	3	2,2	49,5	49,4	48,3	45,8	39,8	35,8	31,1							

TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)														
		FIXED SPEED		VARIABLE SPEED				0	1,2	2,4	3,6	4,8	7,2	9,6	12,0	14,4	16,8	18				
		1- 230V	3- 400V	EPIC	EPIC-A			0	20	40	60	80	120	160	200	240	280	300				
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)														
60	3,5	2CB100	2CBT100	2CBT/E100	2CBT/A100-304	1	0,74	42,0	40,8	39,4	37,4	34,7	29,2	21,0								
180	4	2CB160	2CBT160	2CBT/E160	2CBT/A160-306	2	1,5	48,3	47,7	47,1	46,5	45,7	43,5	40,1	36,2	31,1						
220	4	2CB210	2CBT210	-	2CBT/A210-306	2,5	1,85	54,9	54,4	53,8	53,0	52,3	50,5	47,1	43,1	38,3	32,4					
220	4,5	2CB310	2CBT310	-	2CBT/A310-306	3	2,2	61,4	60,9	60,3	59,8	59,2	57,1	53,6	49,3	44,2	38,3	35,2				

TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)														
		FIXED SPEED		VARIABLE SPEED				0	3	6	9	12	15	18	21	24	27	30	33			
		1- 230V	3- 400V	EPIC	EPIC-A			0	50	100	150	200	250	300	350	400	450	500	550			
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)														
250	5,5	-	2CBT400	-	2CBT/A400-309	4	3	63,6	63,1	62,0	60,3	58,2	55,5	52,3	48,4	43,9						
300	6,5	-	2CBT600	-	2CBT/A600-314	5,5	4	76,9	76,4	75,4	73,8	71,7	69,0	65,9	62,1	58,0	53,4					
350	7,5	-	2CBT751	-	2CBT/A751-314	7,5	5,5	90,7	90,0	88,9	87,3	85,3	82,9	80,1	76,8	73,1	68,8	63,7				
350	8	-	2CBT900	-	2CBT/A900-318	10	7,5	97,5	96,6	95,4	93,7	91,7	89,2	86,5	83,3	79,8	75,2	71,2	66,4			

TARGET (2 pumps)		MODEL				P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED		VARIABLE SPEED				0	12	24	36	48	54	60	66						
		1- 230V	3- 400V	EPIC	EPIC-A			0	200	400	600	800	900	1000	1100						
l/min	bar			1- 230V-in 3- 230V-out	3- 400V-in 3- 400V-out	HP (x2)	kW (x2)	H (m)													
600	5	-	2CBT800	-	2CBT/A800-314	7,5	5,5	70,0	68,5	63,9	57,1	45,3	38,2								
800	5,5	-	2CBT1000	-	2CBT/A1000-318	10	7,5	80,7	80,4	75,0	68,5	59,7	52,6	43,7							
900	6	-	2CBT1250	-	2CBT/A1250-318	12,5	9,2	89,5	88,8	84,1	77,7	69,7	63,0	54,2	45,1						
900	7	-	2CBT1500	-	2CBT/A1500-325	15	11	98,3	97,8	93,5	85,7	78,9	73,3	64,0	54,0						



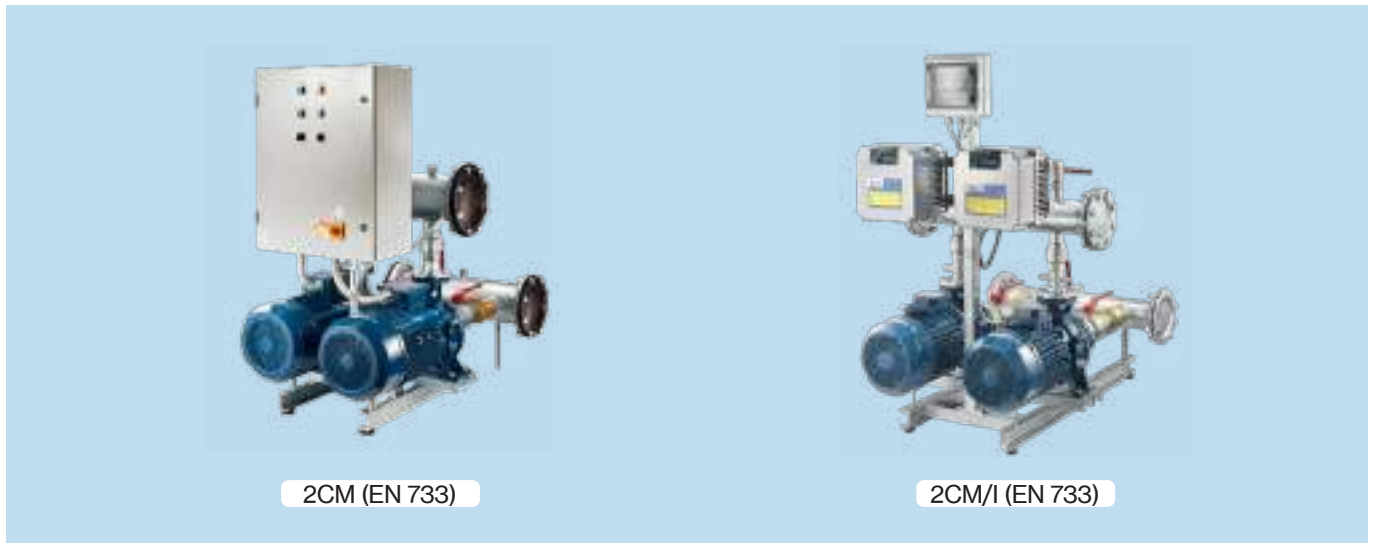

Fixed speed and variable speed booster sets with two monobloc centrifugal flanged pumps

DESCRIPTION

Booster units with 2 monobloc horizontal centrifugal pumps of CM (EN 733) series, set on a single skid and connected in parallel by suction and delivery manifolds. These systems are widely used in water supplies, pressurization and fire-fighting systems, cooling, heating, irrigation, industrial and agricultural applications. To ensure a constant pressure to the system these booster sets can be equipped with EPIC-A or IPFC inverters.

To ensure proper operation of the booster set, pressure tanks of adequate capacity are required depending on constant or variable speed, pumps type, and applications.

FEATURES



- Two monobloc horizontal centrifugal flanged pumps of CM (EN 733) series
- Cast iron pump body
- Suction manifold in galvanized steel with non-return and isolation valves
- Delivery manifold in galvanized steel with pressure gauge and isolation valves
- Base frame in galvanized steel
- EQ2SM(T) electronic or Q2ST electromechanical control panel with pressure switches for fixed speed version
- Inverter EPIC-A or IPFC, connected on each pump with pressure sensors, for variable speed version
- Pressure tanks, available on request, as accessory

FUNCTIONING

In the fixed speed version as soon as pressure drops below the minimum set value on the pressure switch the first pump starts automatically. If water demand further increases, the second pump will run until the pressure rises above the maximum set value. When demand ends, the last pump turns off. All the pumps follow cycling changeover for equal work distribution. In case of one pump failure, the other pumps would continue to operate.

In the variable speed version when the system pressure drops below the desired level, the sensors detect it giving an input to the inverter to start the first pump at controlled speed. If the flow rate is not sufficient, the pressure continues to drop causing the second pump to start. As soon as the flow demand decreases, the pressure rises again and the second pump stop. The first pump continues to modulate its speed in order to regulate and maintain the set pressure until it turns off when the flow demand ends. Based on working hours, the inverters will alternate the starting order of pumps to ensure better wear distribution. Continuity of operation is ensured in the event of one pump or one inverter failure.

CENTRIFUGAL FLANGED BOOSTER SETS

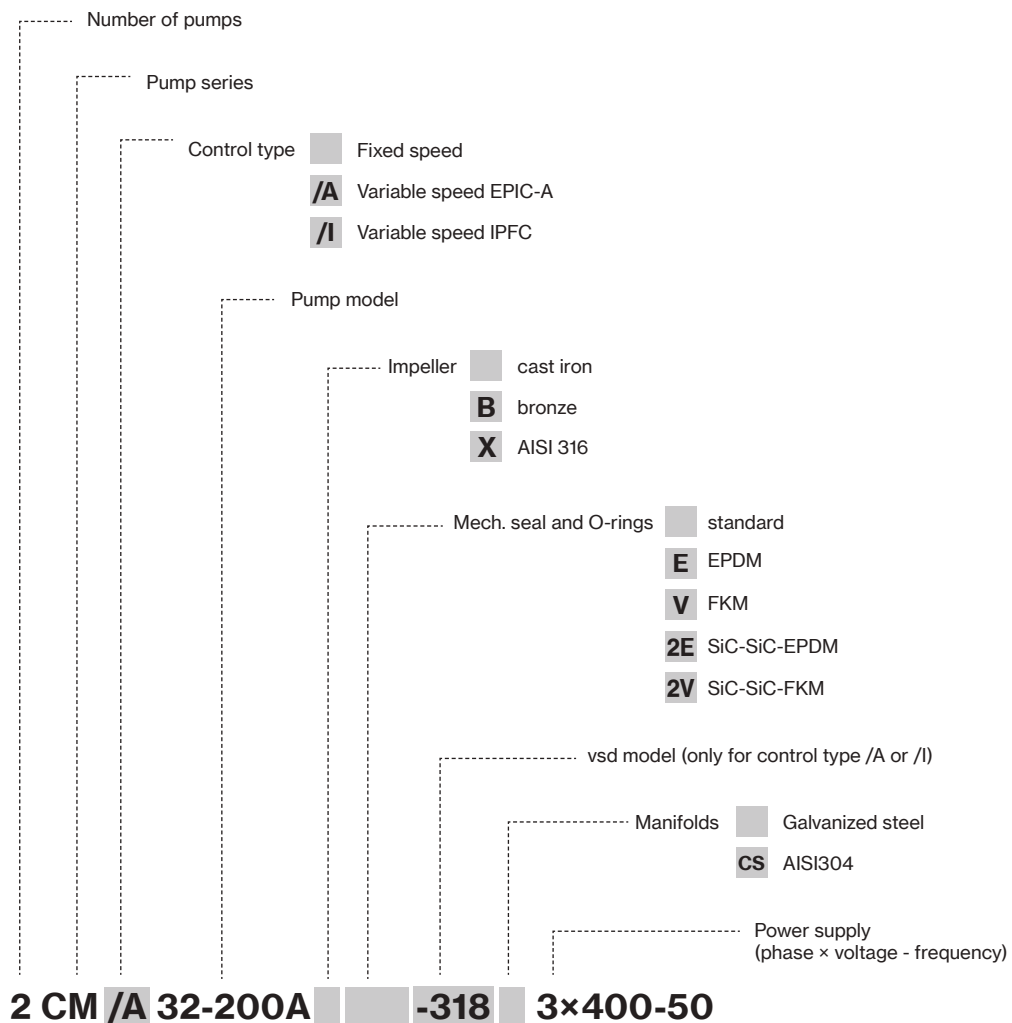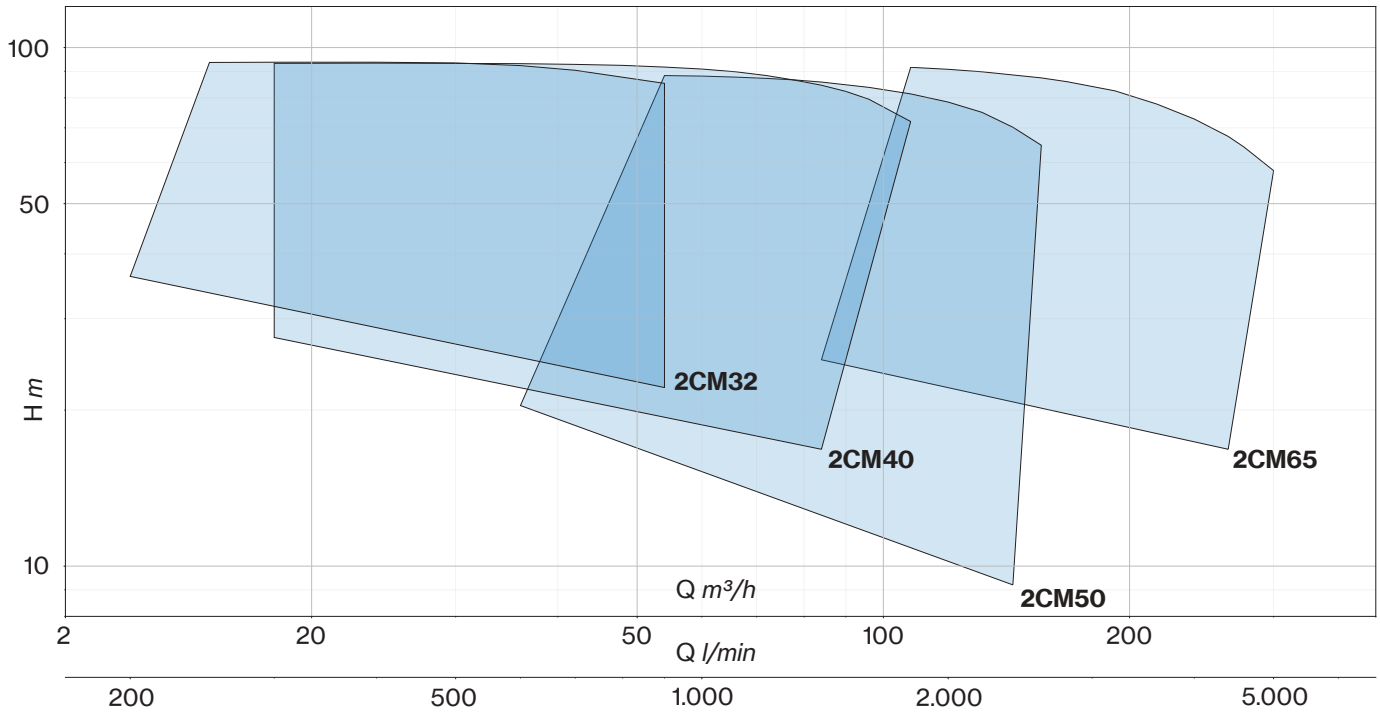

CENTRIFUGAL FLANGED BOOSTER SETS

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)												
		FIXED SPEED	VARIABLE SPEED				0	12	15	18	24	30	36	42	48	54	60	66	
		3-400V	EPIC-A	IPFC			0	200	250	300	400	500	600	700	800	900	1000	1100	
m³/h	bar		3-400V-in 3-400V-out		HP (x2)	kW (x2)	H (m)												
36	3	2CM32-160A	2CM/A32-160A-309	2CM/I 32-160A-309	4	3	36,1	36,2	36,0	35,6	34,6	33,2	31,4	28,9	25,7	22,1			
	3,5	2CM32-200C	2CM/A32-200C-314	2CM/I 32-200C-311	5,5	4	40,2	40,3	40,1	39,8	38,9	37,7	36,1	34,2	31,6	28,7			
42	4	2CM32-200B	2CM/A32-200B-314	2CM/I 32-200B-314	7,5	5,5	48,3	48,0	47,9	47,6	46,7	45,5	44,2	42,6	40,5	37,9	35,4		
	5	2CM32-200A	2CM/A32-200A-318	2CM/I 32-200A-318	10	7,5	57,9	58,3	58,4	58,4	58,0	57,1	55,6	53,8	51,4	49,2	46,6	44,3	
	6,5	2CM32-250C	2CM/A32-250C-318	2CM/I 32-250C-318	12,5	9,2	74,6		72,8	72,5	71,9	70,5	68,8	66,6	64,1	61,3			
	7,5	2CM32-250B	2CM/A32-250B-325	2CM/I 32-250B-325	15	11	84,8		84,0	83,9	83,6	82,7	81,1	78,6	75,4	73,2			
	8,5	2CM32-250A	2CM/A32-250A-330	2CM/I 32-250A-330	20	15	93,5		93,6	93,7	93,7	93,4	92,3	90,4	87,7	85,3			

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED	VARIABLE SPEED				0	18	36	42	48	54	60	66	72	78	84	90	96	108
		3-400V	EPIC-A	IPFC			0	300	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1800
m³/h	bar		3-400V-in 3-400V-out		HP (x2)	kW (x2)	H (m)													
54	2	2CM40-125A	2CM/A40-125A-309	2CM/I 40-125A-309	4	3	26,8	27,6	27,2	26,5	25,7	24,6	23,4	22,0	20,3	18,5	16,8			
	3	2CM40-160A	2CM/A40-160A-314	2CM/I 40-160A-311	5,5	4	38,8	34,9	33,9	33,2	32,4	31,3	30,0	28,5	26,9	25,2	23,4			
	4	2CM40-200B	2CM/A40-200B-314	2CM/I 40-200B-314	7,5	5,5	44,6	45,5	44,5	43,5	42,3	41,0	39,3	37,2	34,9	32,3	29,4			
	5	2CM40-200A	2CM/A40-200A-318	2CM/I 40-200A-318	10	7,5	56,2	56,5	55,9	55,1	54,1	52,8	51,2	49,3	47,0	44,4	41,6			
66	5	2CM40-200AP	2CM/A40-200AP-318	2CM/I 40-200AP-318	12,5	9,2	61,7	61,4	60,0	59,1	57,9	56,4	54,7	53,1	51,1	48,5	45,5	42,2		
	6,5	2CM40-250B	2CM/A40-250B-325	2CM/I 40-250B-325	15	11	73,7	73,9	71,9	71,1	70,2	69,2	68,1	66,7	64,7	62,1				
72	7,5	2CM40-250A	2CM/A40-250A-330	2CM/I 40-250A-330	20	15	82,6	84,6	84,3	83,4	82,4	81,3	80,0	78,5	76,9	75,4	72,8	69,0		
84	8,5	2CM40-250BM	2CM/A40-250BM-338	2CM/I 40-250BM-338	25	18,5	92,6	93,2	93,1	92,8	92,4	91,7	90,9	89,8	88,3	86,5	84,6	82,3	79,5	72,0

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED	VARIABLE SPEED				0	36	42	48	54	60	72	84	96	108	120	132	144	156
		3-400V	EPIC-A	IPFC			0	600	700	800	900	1000	1200	1400	1600	1800	2000	2200	2400	2600
m³/h	bar		3-400V-in 3-400V-out		HP (x2)	kW (x2)	H (m)													
96	1,5	2CM50-125B	2CM/A50-125B-309	2CM/I 50-125B-309	4	3	20,0	20,4	20,3	20,1	19,9	19,6	18,7	17,6	16,4	15,0	13,2	11,3	9,2	
	2	2CM50-125A	2CM/A50-125A-314	2CM/I 50-125A-311	5,5	4	23,7	24,2	24,1	23,9	23,7	23,3	22,6	21,7	20,7	19,6	18,2	16,4	14,2	
108	2,5	2CM50-160B	2CM/A50-160B-314	2CM/I 50-160B-314	7,5	5,5	32,1		33,5	33,4	33,1	32,7	31,6	30,2	28,3	26,2	23,9	21,5	18,9	
120	3	2CM50-160A	2CM/A50-160A-318	2CM/I 50-160A-318	10	7,5	38,1		39,8	39,8	39,8	39,6	38,8	37,7	36,1	34,1	32,1	29,9	27,6	25,4
	3,5	2CM50-200C	2CM/A50-200C-325	2CM/I 50-200C-325	12,5	9,2	48,2			49,7	49,2	48,5	46,9	44,9	42,6	40,0	36,0	32,3	28,9	
	4	2CM50-200B	2CM/A50-200B-325	2CM/I 50-200B-325	15	11	53,1			54,6	54,1	53,5	52,2	50,4	48,1	45,5	42,7	38,8	35,0	
	5	2CM50-200A	2CM/A50-200A-330	2CM/I 50-200A-330	20	15	59,9			61,8	61,5	61,0	59,7	58,0	56,0	53,6	50,8	47,8	44,4	39,8
	6,5	2CM50-250B	2CM/A50-250B-338	2CM/I 50-250B-338	25	18,5	78,8				78,4	78,0	77,0	75,1	72,9	70,3	66,9	62,9	58,5	
	7,5	2CM50-250A	2CM/A50-250A-344	2CM/I 50-250A-348	30	22	88,5				88,3	88,1	87,2	85,8	83,8	81,4	78,5	75,0	70,2	64,8

TARGET (2 pumps)		MODEL			P2 NOMINAL		Q (m³/h - l/min)													
		FIXED SPEED	VARIABLE SPEED				0	84	90	108	132	156	168	192	216	240	264	276	288	300
		3-400V	EPIC-A	IPFC			0	1400	1500	1800	2200	2600	2800	3200	3600	4000	4400	4600	4800	5000
m³/h	bar		3-400V-in 3-400V-out		HP (x2)	kW (x2)	H (m)													
192	2	2CM65-125A	2CM/A65-125A-318	2CM/I 65-125A-318	10	7,5	24,6	25,0	24,9	24,7	24,2	23,5	23,0	22,0	20,6	18,8	16,8			
	2,5	2CM65-160C	2CM/A65-160C-318	2CM/I 65-160C-318	12,5	9,2	28,9	30,6	30,5	30,0	29,1	27,9	27,2	25,3	22,9	20,2	17,5	16,0	13,9	
	3	2CM65-160B	2CM/A65-160B-325	2CM/I 65-160B-325	15	11	33,2	35,1	35,0	34,6	33,8	32,8	32,1	30,4	28,2	25,5	22,5	21,4	20,4	
	3,5	2CM65-160A	2CM/A65-160A-338	2CM/I 65-160A-338	20	15	40,1	42,5	42,5	42,3	41,8	41,0	40,4	38,9	37,1	35,3	32,8	31,7	30,9	
240	3	2CM65-200C	2CM/A65-200C-338	2CM/I 65-200C-338	20	15	44,4			46,1	44,7	43,2	42,4	40,3	37,5	33,7	28,9	26,8		
	4	2CM65-200B	2CM/A65-200B-338	2CM/I 65-200B-338	25	18,5	51,7			53,9	52,7	51,3	50,4	48,6	45,9	43,0	39,4	37,1	34,6	
	5	2CM65-200A	2CM/A65-200A-344	2CM/I 65-200A-348	30	22	60,3			61,8	61,0	59,8	59,1	57,1	54,6	51,6	48,3	46,5	44,4	
	6	2CM65-250B	-	2CM/I 65-250B-365	40	30	80,6			80,6	78,4	75,7	74,1	70,4	66,1	61,0	54,7	51,0	47,3	
	7	2CM65-250A	-	2CM/I 65-250A-375	50	37	91,6			91,6	89,8	87,4	85,9	82,5	77,8	72,8	67,4	64,3	60,8	57,9





Fixed speed booster sets with two or three pumps

DESCRIPTION

Fully automatic booster sets for water supply consisting of two (2U) or three (3U) fixed speed multistage pumps, control panel, pressure switches, all fixed on a single frame for easy installation. These booster sets are suitable for water network supply in housing complexes, offices, hotels, shopping centers, industrial plants and for irrigation. It is recommended the installation of a pressure tank.

FEATURES


- Horizontal or vertical multistage pumps of ULTRA series
- Suction galvanized steel manifold with non-return and isolation valves
- Delivery galvanized steel manifold with pressure gauge, isolation valves and pressure switches
- Base frame in galvanized steel
- Electronic or electromechanical panels for pump's control and protection
- Two pressure switches
- Pressure tanks available on request, as accessory

FUNCTIONING

As soon as pressure drops below the minimum set value on a pressure switch, the first pump starts automatically. If water demand further increases, the second pump (and third if present) will run until the pressure rises above the maximum set value. When demand ends, the last pump fills up the membrane tank and then turns off. All the pumps follow cycling changeover for equal work distribution. In case of one pump failure, the other pumps would continue to operate.

CONTROL PANELS

- EQ2SM-EQ3SM electronic control panel (1- up to 2,2kW)
- EQ2SMT-EQ3SMT electronic control panel (3- up to 15kW)
- Q2ST-Q3ST star-delta electromechanical control panel (3- from 18,5kW to 37kW)

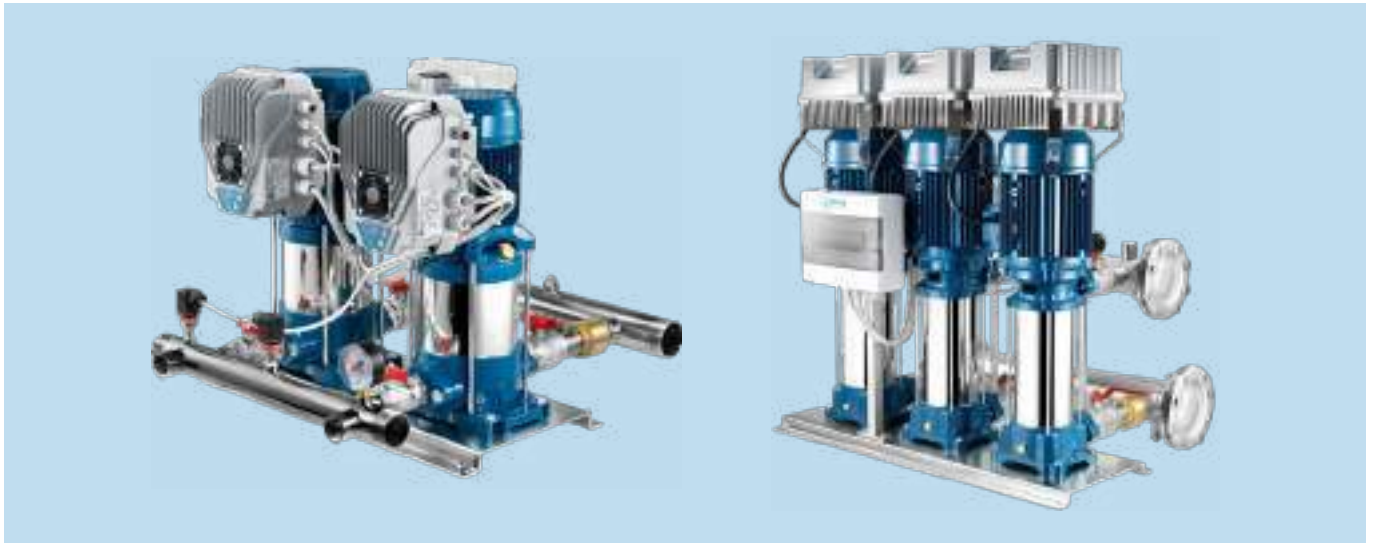

Variable speed booster sets with two or three pumps

DESCRIPTION

The booster sets + VSD are fully automatic systems consisting of two (2U+VSD) or three (3U+VSD) speed-controlled multistage pumps. The booster sets + VSD deliver the highest comfort level on domestic, agricultural and industrial applications ensuring constant pressure, low energy consumption and protection against overload and dry running. It is required the installation of a pressure tank.

FEATURES

- Horizontal or vertical multistage pumps of ULTRA series
- Inlet and outlet galvanized steel manifolds (inox as option)
- Base frame in galvanized steel
- Non-return valves on suction side, one per pump
- Isolating valves, two per pump
- Pressure gauge
- Variable speed drive, one per pump
- Outlet-pressure sensors, one per pump
- Breaker box
- On request membrane tanks (not connected)

FUNCTIONING


When the system pressure drops below the desired level, the sensors detect it giving an input to the VSD to start the first pump at controlled speed. If the flow rate is not sufficient, the pressure continues to drop causing the second and the third pump to start. As soon as the flow demand decreases, the pressure rises again and the second and third pumps stop. The first pump continues to modulate its speed in order to regulate and maintain the set pressure until it turns off when the flow demand ends. Based on working hours, VSDs will alternate the starting order of pumps to ensure better wear distribution. Continuity of operation is ensured in the event of one pump or one VSD failure.

VARIABLE SPEED DRIVES


- EPIC with single-phase input up to 7,5 A
- IPFC with single-phase input up to 9,9 A
- EPIC-A with three-phase input up to 42 A
- IPFC with three-phase input up to 27 A

MULTISTAGE BOOSTER SETS


2U

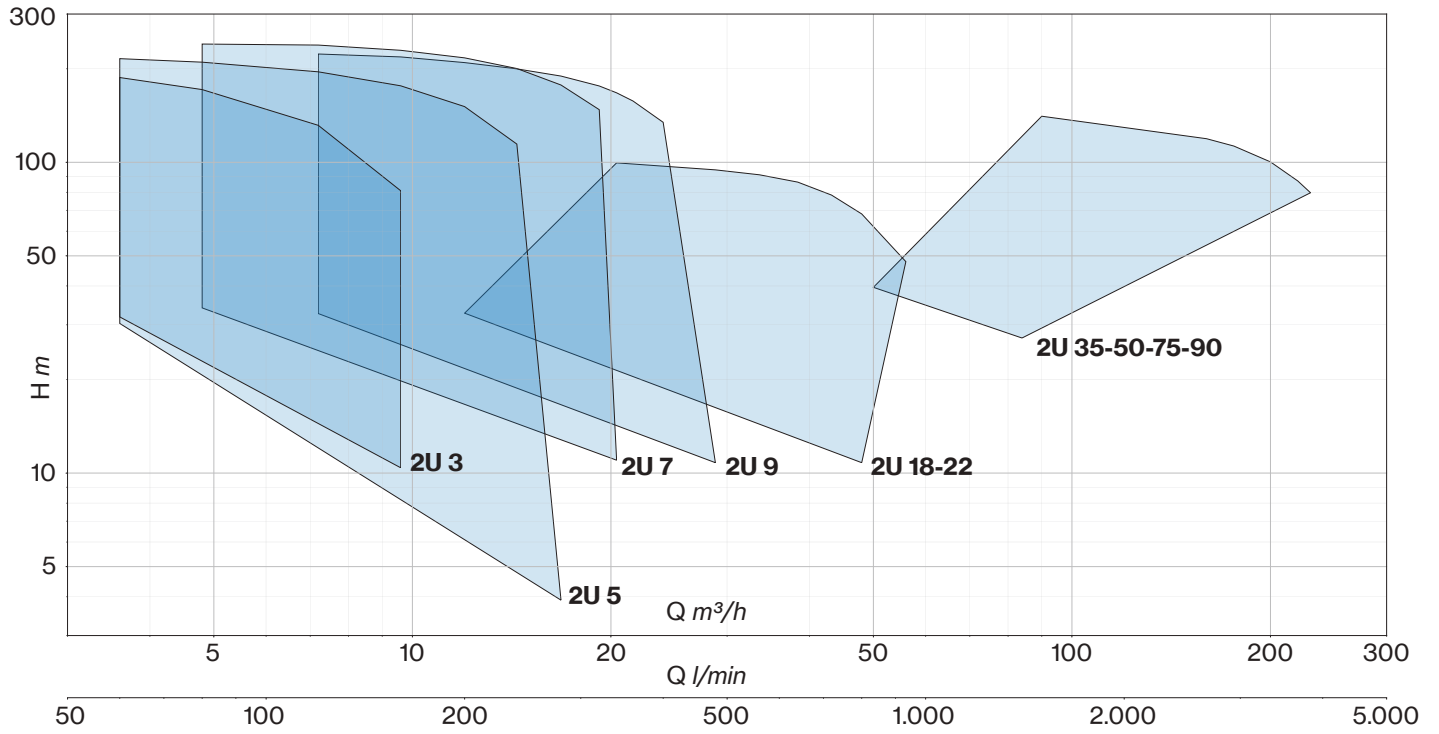

3U

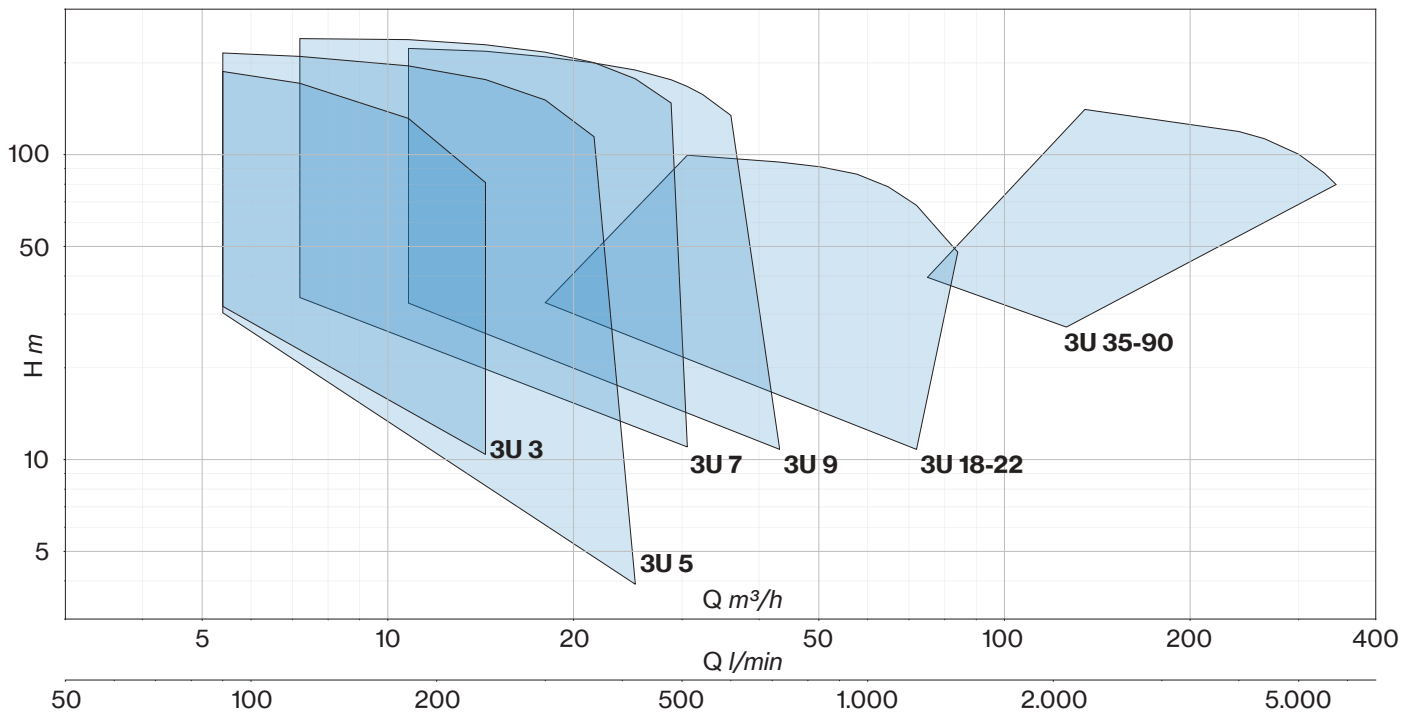

MULTISTAGE BOOSTER SETS

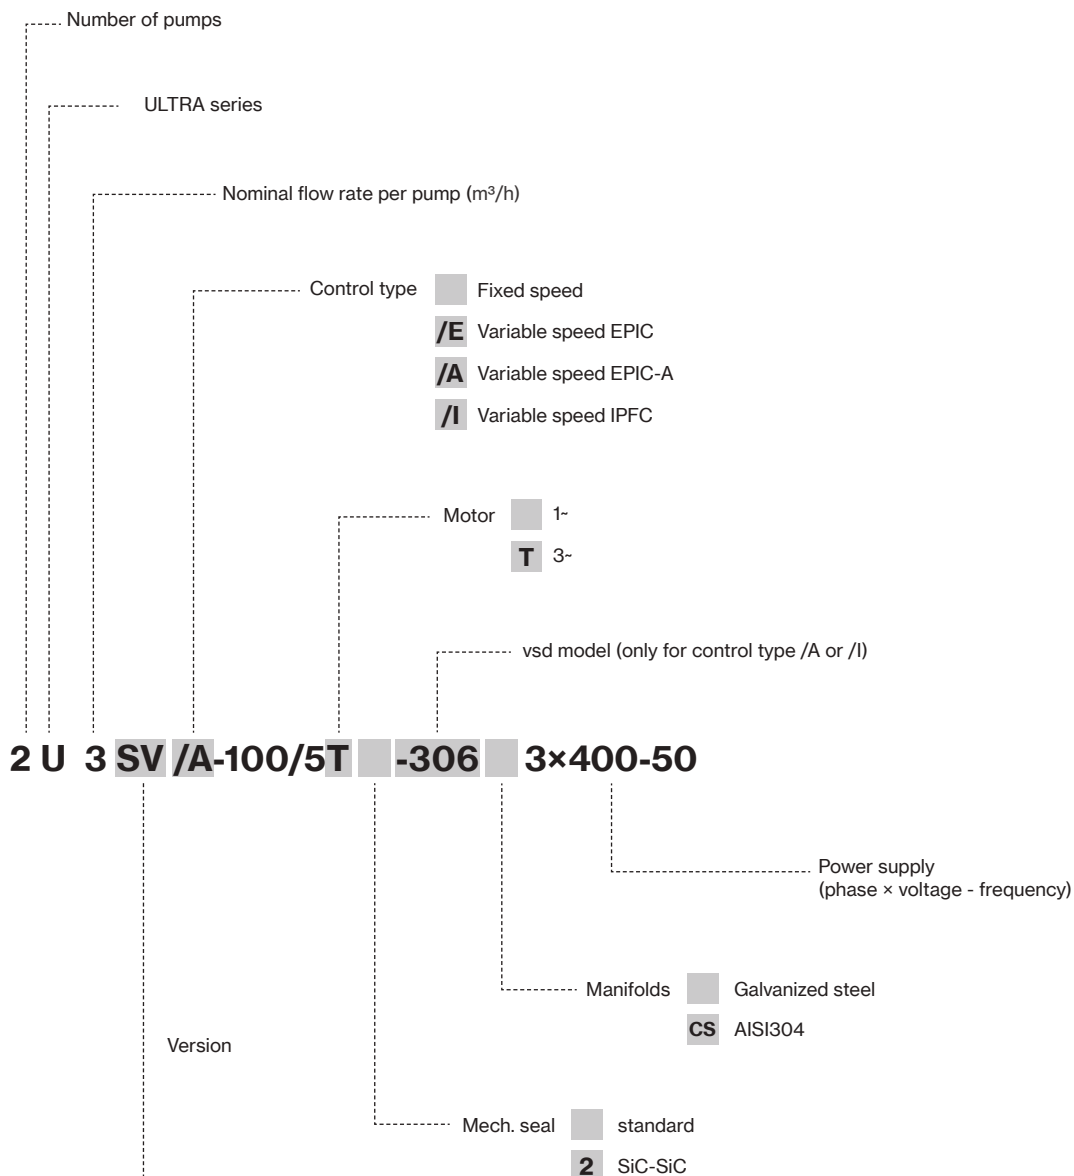

	PUMP TYPE	MAX LIQUID TEMPERATURE	IMPELLERS MATERIAL	PUMP SHELL AND BODY MATERIAL	PUMP AND MOTOR SHAFT	
S	Horizontal multistage	35° C	Noryl®	AISI 304	monoblock	
		110° C	AISI 304	AISI 304		
V	Vertical multistage, overlapped ports	35° C	Noryl®	AISI 304 / cast iron		
		90° C	AISI 304	AISI 304 / cast iron		
SV	Vertical multistage, inline ports	35° C	Noryl®	AISI 304 / cast iron		with coupling
		35° C	Noryl®	AISI 304 / cast iron		monoblock
		110° C	AISI 304	AISI 304 / cast iron		with coupling
		110° C	AISI 304	AISI 304		
		110° C	AISI 304	AISI 304 / cast iron	with coupling	
		110° C	AISI 304	AISI 304		
		120° C	AISI 304	AISI 304 / cast iron		
		120° C	AISI 316	AISI 316		



2U PERFORMANCE

TARGET (2 pumps)	VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)																	FIXED SPEED		VARIABLE SPEED				
	m³/h	bar	HORIZ.		VERT. OVERLAP	VERT. INLINE	HP (x2)	kW (x2)	0	3,6	4,8	7,2	9,6	12	14,4	16,8	19,2	20,4	21,6	24	28,8	33,6	1-	3-	1-	3-				
									0	60	80	120	160	200	240	280	320	340	360	400	480	560	H (m)		/E	/I	/A	/I		
									H (m)																					
6	2	2U 3	-	-	90/4	0,9	0,66	40,8	31,8	27,9	19,8	10,4																		
		2U 3S	-	-				44,3	36,4	33,2	24,5	13,9																		
	3	2U 3	2U 3V	2U 3L	100/5	1	0,75	52,2	40,8	36,0	25,4	14,0																		
		2U 3S	2U 3SV	2U 3SL				55,3	46,5	42,1	31,6	17,7																		
	4	2U 3	2U 3V	2U 3L	120/6	1,2	0,9	62,8	49,6	43,9	32,1	18,3																		
		2U 3S	2U 3SV	2U 3SL				66,6	56,0	50,7	38,1	22,4																		
	5	2U 3	2U 3V	2U 3L	150/7	1,5	1,1	77,1	68,4	62,3	46,5	25,7																		
		2U 3S	2U 3SV	2U 3SL				75,6	64,8	58,9	44,4	26,1																		
	6	-	2U 3V	2U 3L	180/8	2	1,5	88,1	77,6	70,2	51,3	26,0																		
		-	2U 3SV	2U 3SL				86,7	73,9	67,3	51,0	29,9																		
	7	-	2U 3V	2U 3L	200/9	2	1,5	98,8	87,3	79,4	60,0	32,2																		
		-	2U 3SV	2U 3SL				97,0	82,5	74,7	56,4	32,9																		
	8	-	2U 3V	2U 3L	250/10	2	1,5	109,3	96,3	87,5	65,3	34,5																		
		-	2U 3SV	2U 3SL				107,2	90,5	82,0	61,5	35,6																		
	9	-	2U 3V	2U 3L	280/11	2,5	1,85	120,4	106,1	96,4	71,6	38,3																		
		-	2U 3SV	2U 3SL				117,2	98,8	89,8	66,8	37,3																		
10	-	2U 3V	2U 3L	300/12	2,5	1,85	130,3	114,6	103,8	76,6	40,8																			
	-	2U 3SV	2U 3SL				126,4	106,1	95,9	71,7	40,0																			
12	-	-	2U 3SLG	350/14	3	2,2	154,8	133,7	122,5	97,4	58,2																			
14	-	-	2U 3SLG	380/16	4	3	177,5	154,5	141,3	109,4	67,0																			
15	-	-	2U 3SLG	400/18	4	3	195,1	172,8	158,0	122,1	75,3																			
16	-	-	2U 3SLG	450/20	4	3	218,3	187,4	171,4	131,5	81,0																			
10	2	2U 5	-	-	80/3	0,8	0,6	33,4	30,3	29,0	26,0	22,5	17,6	12,0	3,9															
		2U 5S	-	-				34,0	31,1	29,9	27,0	23,6	19,1	13,1	6,0															
	3	2U 5	2U 5V	2U 5L	120/4	1,2	0,9	45,3	41,3	39,6	35,6	30,8	24,9	17,6	6,4															
		2U 5S	2U 5SV	2U 5SL				45,5	42,2	40,7	37,2	32,9	27,4	19,8	10,4															
	4	2U 5	2U 5V	2U 5L	150/5	1,5	1,1	57,6	55,6	54,2	50,5	45,0	37,0	27,4																
		2U 5S	2U 5SV	2U 5SL				55,9	52,8	51,4	48,1	43,4	37,3	28,3	16,4															
	5	2U 5	2U 5V	2U 5L	180/6	2	1,5	69,1	66,5	64,8	60,1	53,2	43,8	32,0																
		2U 5S	2U 5SV	2U 5SL				67,0	63,3	61,6	57,6	51,9	44,2	33,6	20,4															
	5,5	2U 5	2U 5V	2U 5L	200/7	2	1,5	80,6	77,1	75,1	69,6	61,3	50,4	35,8																
		2U 5S	2U 5SV	2U 5SL				77,8	73,5	71,3	66,3	59,6	50,7	38,0	22,4															
	6,5	-	2U 5V	2U 5L	250/8	2,5	1,85	92,0	88,2	85,8	79,2	70,1	57,2	41,1																
		-	2U 5SV	2U 5SL				89,2	83,9	81,6	76,2	68,4	58,3	43,2	24,6															
	7	-	2U 5V	2U 5L	280/9	2,5	1,85	103,3	98,9	96,2	88,8	78,4	64,1	45,3																
		-	2U 5SV	2U 5SL				99,7	93,7	90,9	84,1	75,2	61,1	47,4	25,9															
	8	-	2U 5V	2U 5L	300/10	3	2,2	115,1	110,6	107,6	99,5	87,6	72,1	50,7																
		-	2U 5SV	2U 5SL				112,2	105,4	102,4	95,3	85,6	72,6	54,8	31,0															
9	-	2U 5V	2U 5L	350/11	3,5	2,57	127,6	122,5	119,4	110,8	98,0	80,8	57,4																	
	-	2U 5SV	2U 5SL				125,1	117,6	114,3	106,1	95,5	80,9	60,9	34,8																
10	-	2U 5V	2U 5L	380/12	4	3	140,3	135,4	132,1	123,2	109,5	90,1	66,5																	
	-	2U 5SV	2U 5SL				135,7	128,9	125,6	117,7	106,3	91,3	70,2	41,5																
12	-	-	2U 5SLG	400/14	4	3	159,2	150,7	146,7	136,6	122,9	105,5	79,0																	
14	-	-	2U 5SLG	450/16	5,5	4	182,0	173,2	169,1	158,0	142,9	122,9	93,6																	
16	-	-	2U 5SLG	550/18	5,5	4	204,4	194,4	189,5	176,5	159,6	136,3	103,2																	
18	-	-	2U 5SLG	600/20	5,5	4	226,7	215,5	210,0	195,5	176,3	151,1	114,5																	



2U PERFORMANCE

TARGET (2 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)															FIXED SPEED		VARIABLE SPEED						
		HORIZ.	VERT. OVERLAP	VERT. INLINE		HP (x2)	kW (x2)	0	3,6	4,8	7,2	9,6	12	14,4	16,8	19,2	20,4	21,6	24	26,4	33,6	1-	3-	1-	3-						
								0	60	80	120	160	200	240	280	320	340	360	400	440	560			/E	/I	/A	/I				
		m³/h	bar	H (m)																											
14	2	2U 7	-	-	120/3	1,2	0,9	36,7		34,0	32,0	29,6	26,5	23,0	18,6	13,8	11,0							■	■	-	■	-			
		2U 7S	-	-				35,6		33,9	32,8	31,2	28,1	24,7	20,6	15,7	13,0	10,0									■	■	-	■	-
	3	2U 7	2U 7V	2U 7L	180/4	2	1,5	49,6		48,4	46,7	43,8	39,9	34,9	28,9										■	■	■	■	■		
		2U 7S	2U 7SV	2U 7SL				46,0	45,2	43,1	40,3	36,9	32,3	25,5													■	■	■	■	■
	4	2U 7	2U 7V	2U 7L	250/5	2,5	1,85	63,2		62,1	60,3	56,9	52,1	46,2	39,0										■	■	■	■	■		
		2U 7S	2U 7SV	2U 7SL				58,5	57,6	56,6	54,1	50,8	46,1	40,3	31,8												■	■	■	■	■
	5	2U 7	2U 7V	2U 7L	300/6	3	2,2	76,0		75,1	73,1	69,2	63,6	56,8	48,2										■	■	-	■	■		
		2U 7S	2U 7SV	2U 7SL				70,6	69,9	68,7	65,8	61,8	56,6	49,7	39,3												■	■	-	■	■
	6	2U 7	2U 7V	2U 7L	350/7	3,5	2,57	89,0		88,0	85,8	81,2	74,5	66,3	56,2										-	■	-	■	■		
		2U 7S	2U 7SV	2U 7SL				82,8	82,0	80,6	77,2	72,3	66,0	57,4	46,4												-	■	-	■	■
	7	-	2U 7V	2U 7L	400/8	4	3	102,3		101,0	98,2	92,4	84,4	74,6	62,4										-	■	-	-	■	■	
		-	2U 7SV	2U 7SL				94,8	94,3	92,5	88,6	83,2	76,4	66,2	52,6												-	■	-	-	■
	8	-	2U 7V	2U 7L	450/9	4,5	3,37	115,2		114,4	111,4	105,6	97,1	86,3	73,1										-	■	-	-	■	■	
		-	2U 7SV	2U 7SL				107,4	106,9	105,2	101,1	95,3	87,7	76,3	61,0												-	■	-	-	■
	9	-	2U 7V	2U 7L	550/10	5,5	4	128,1		128,0	124,9	118,7	109,4	97,6	83,0											-	■	-	-	■	■
-		2U 7SV	2U 7SL	119,8				119,6	118,4	113,9	107,7	99,4	87,0	70,4												-	■	-	-	■	■
11	-	-	2U 7SLG	750/12	7,5	5,5	143,7		143,7	142,6	137,0	129,6	119,8	105,6	87,0									-	■	-	-	■	■		
13	-	-	2U 7SLG	800/14	7,5	5,5	167,6		167,3	165,9	159,6	151,0	139,5	122,6	100,3										-	■	-	-	■	■	
15	-	-	2U 7SLG	900/16	7,5	5,5	191,5		191,2	189,3	181,7	171,5	157,7	137,6	111,1										-	■	-	-	■	■	
17	-	-	2U 7SLG	950/18	10	7,5	215,5		215,7	213,9	205,8	194,7	179,8	159,0	132,3										-	■	-	-	■	■	
19	-	-	2U 7SLG	1000/20	10	7,5	240,3		240,2	238,4	229,3	216,8	200,3	177,3	147,7										-	■	-	-	■	■	
18	2	2U 9	-	-	150/3	1,5	1,1	35,0		32,8	31,7	30,2	28,5	26,5	24,1	22,7	21,2	17,9	14,3						■	■	■	-	■	-	
		2U 9S	-	-				35,1		32,8	31,8	30,6	29,0	27,2	24,9	23,6	22,2	18,9	15,2									■	■	■	-
	3	2U 9	2U 9V	2U 9L	200/4	2	1,5	45,8		42,1	40,7	39,2	37,3	34,6	31,3	29,4	27,4	23,0	17,9							■	■	■	■	■	■
		2U 9S	2U 9SV	2U 9SL				45,8	42,7	41,5	39,7	37,8	35,6	32,7	30,9	29,0	24,6	19,8										■	■	■	■
	3,5	2U 9	2U 9V	2U 9L	250/5	2,5	1,85	56,9		52,2	50,4	48,5	46,1	42,9	38,8	36,4	33,8	28,2	22,3							■	■	-	■	■	■
		2U 9S	2U 9SV	2U 9SL				57,1	53,1	51,6	49,5	47,2	44,3	40,6	38,4	35,8	30,2	24,4										■	■	-	■
	4	-	2U 9V	2U 9L	300/6	3	2,2	69,8		64,5	62,5	60,3	57,5	53,6	48,8	46,0	42,9	36,4	29,6							■	■	-	■	■	■
		-	2U 9SV	2U 9SL				69,4	64,7	63,0	60,3	57,3	54,0	49,8	46,9	43,6	36,2	28,1										■	■	-	■
	5,5	-	2U 9V	2U 9L	400/7	4	3	83,3		77,8	75,7	72,7	68,9	64,2	58,5	55,2	51,6	43,6	34,7							-	■	-	-	■	■
		-	2U 9SV	2U 9SL				82,0	77,2	74,9	72,0	68,7	64,9	59,9	56,6	52,9	44,2	33,9										-	■	-	-
	6,5	-	2U 9V	2U 9L	450/8	4,5	3,37	96,7		90,7	88,2	84,8	80,6	75,5	69,2	65,4	61,3	52,2	42,1							-	■	-	-	■	■
		-	2U 9SV	2U 9SL				93,5	88,5	86,3	82,6	79,0	74,9	69,5	65,8	61,5	52,0	41,7										-	■	-	-
	7	-	2U 9V	2U 9L	500/9	4,5	3,37	107,1		99,5	96,4	92,8	88,3	82,4	75,2	71,0	66,4	56,4	45,2							-	■	-	-	■	■
		-	2U 9SV	2U 9SL				105,4	99,1	96,5	92,5	88,3	83,5	77,3	73,0	68,1	57,5	46,9										-	■	-	-
	8	-	2U 9V	2U 9L	550/10	5,5	4	119,5		111,6	108,2	104,3	99,3	92,7	84,6	79,9	74,8	63,5	51,2							-	■	-	-	■	■
-		2U 9SV	2U 9SL	117,6				111,2	108,7	104,5	99,9	94,7	87,8	83,2	77,9	66,2	53,4										-	■	-	-	■
10	-	-	2U 9SLG	750/12	7,5	5,5	141,3		133,2	130,4	125,4	119,7	113,4	105,1	99,7	93,7	79,6							-	■	-	-	■	■		
12	-	-	2U 9SLG	800/14	7,5	5,5	165,5		155,7	152,6	146,5	139,9	132,7	123,4	117,3	110,3	94,0								-	■	-	-	■	■	
13	-	-	2U 9SLG	900/16	10	7,5	188,7		177,6	173,6	167,1	159,7	151,4	140,4	133,3	125,1	106,2								-	■	-	-	■	■	
15	-	-	2U 9SLG	950/18	10	7,5	213,8		201,6	197,3	189,6	181,2	172,0	159,9	151,8	142,5	121,0								-	■	-	-	■	■	
17	-	-	2U 9SLG	1000/20	10	7,5	236,7		223,1	218,3	209,3	199,8	189,5	176,1	167,3	157,5	134,5								-	■	-	-	■	■	



2U PERFORMANCE

TARGET (2 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)																	FIXED SPEED		VARIABLE SPEED	
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	12	14,4	16,8	19,2	20,4	21,6	24	28,8	33,6	38,4	43,2	48	56	1-	3-	1-	3-			
						m³/h	bar	HP (×2)	kW (×2)	H (m)																	/E	/I
36	2	2U 18 2U 18S	2U 18V 2U 18SV	2U 18L 2U 18SL	250/3	2,5	1,85	34,7 33,8	32,9 31,6	32,6 31,0	32,2 30,2	31,6 29,4	31,3 28,9	31,0 28,4	30,1 27,4	28,0 25,4	24,7 23,2	20,6 20,4	15,9 16,3	10,7 11,5		-	■	-	■	■	■	
	2,5	-	-	2U 18H	300/3	3	2,2	41,2			37,1 36,3	35,9 35,5	34,4 34,4	32,3 28,9	24,8 19,4	13,5						-	■	-	■	■	■	
	3	2U 18 2U 18S	2U 18V 2U 18SV	2U 18L 2U 18SL	400/4	4	3	47,1 46,3	45,4 44,2	45,2 43,4	44,9 42,5	44,3 41,4	44,0 40,9	43,6 40,3	42,6 39,1	40,0 36,7	36,0 34,1	30,6 30,8	24,6 25,6	17,8 19,0		-	■	-	■	■	■	
	3,5	-	-	2U 18H	400/4	4	3	55,1			49,9 48,8	48,3	47,7	46,3	43,5	39,1	33,5	26,4	18,5			-	■	-	■	■	■	
	4	-	2U 18V 2U 18SV	2U 18L 2U 18SL	450/5	4,5	3,37	59,2 58,1	57,6 55,7	57,4 54,6	57,0 53,4	56,4 52,1	56,0 51,4	55,6 50,7	54,5 49,3	51,6 46,3	46,7 42,9	40,1 38,7	33,3 32,2	25,3 24,0		-	■	-	■	■	■	
	4,5	-	-	2U 18H	550/5	5,5	4	72,3			64,3 63,1	62,4	61,7	60,1	56,6	51,8	45,1	36,8	27,6			-	■	-	■	■	■	
	5	-	2U 18V 2U 18SV	2U 18L 2U 18SL	550/6	5,5	4	71,4 70,1	69,7 67,4	69,6 66,3	69,0 64,9	68,2 63,4	67,7 62,6	67,1 61,7	65,7 60,0	62,2 56,4	56,3 52,4	48,0 47,6	39,4 39,6	29,4 29,9		-	■	-	■	■	■	
	6	-	-	2U 18H	750/6	7,5	5,5	88,0			79,6 78,2	77,4	76,7	74,9	71,0	66,0	58,3	48,8	37,5			-	■	-	■	■	■	
	6,5	-	-	2U 18H	750/7	7,5	5,5	102,5			92,4 90,7	89,8	88,9	86,8	82,3	76,2	67,3	56,1	43,0			-	■	-	■	■	■	
	7	-	2U 18V 2U 18SV	2U 18L 2U 18SL	750/8	7,5	5,5	96,1 94,2	94,2 90,6	94,1 89,1	93,5 87,3	92,4 85,3	91,7 84,2	90,9 83,1	89,1 80,9	84,5 76,2	77,0 71,1	66,1 65,0	54,2 54,6	41,1 41,4		-	■	-	■	■	■	
	7,5	-	2U 18V 2U 18SV	2U 18L 2U 18SL	900/9	10	7,5	108,5 106,4	106,9 102,8	107,0 101,3	106,4 99,3	105,3 97,2	104,5 96,1	103,7 94,9	101,7 92,4	96,8 87,3	88,6 81,6	75,9 75,0	62,6 63,5	47,8 48,5		-	■	-	■	■	■	
	8	-	-	2U 18H	1000/8	10	7,5	117,0			105,2 103,2	102,3	101,2	98,8	93,5	86,5	76,2	63,5	48,5			-	■	-	■	■	■	
9	-	-	2U 18H	1000/9	10	7,5	131,2			117,8 115,5	114,4	113,1	110,4	104,5	96,5	84,9	70,5	53,6			-	■	-	■	■	■		
9,5	-	-	2U 18LG	920/10	10	7,5	120,4	116,8	118,3	118,0	116,6	115,9	115,0	112,6	104,4	96,3	85,8	67,8			-	■	-	■	■	■		
10	-	-	2U 18LG	1000/11	10	7,5	132,4	128,9	130,0	129,6	128,0	127,1	125,9	123,0	115,0	103,9	93,0	72,6			-	■	-	■	■	■		
44	3	-	-	2U 22H	400/3	4	3	45,0					40,8	40,5	39,9	38,3	36,6	34,2	30,5	25,8	16,6	-	■	-	■	■	■	
	4	-	-	2U 22H	550/4	5,5	4	62,2					55,5	55,1	54,2	52,4	50,2	47,3	42,7	36,8	25,2	-	■	-	■	■	■	
	5	-	-	2U 22H	750/5	7,5	5,5	78,6					70,6	70,1	69,0	67,0	64,2	60,8	55,3	47,9	33,5	-	■	-	■	■	■	
	6,5	-	-	2U 22H	1000/6	10	7,5	94,2					86,0	85,3	84,1	81,7	79,2	76,8	63,6	52,8	42,0	-	■	-	■	■	■	
	7,5	-	-	2U 22H	1000/7	10	7,5	109,5					99,6	98,8	97,4	94,6	91,2	86,3	78,4	68,2	47,9	-	■	-	■	■	■	

TARGET (2 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)																	FIXED SPEED		VARIABLE SPEED	
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	50	60	68	84	90	100	120	128	140	160	176	200	230	1-	3-	1-	3-			
						m³/h	bar	HP (×2)	kW (×2)	H (m)																	/E	/I
70	3	-	-	2U 35H	750/2	7,5	5,5	48,5	39,6	36,9	34,4	27,2										-	■	-	■	■	■	
	4,5	-	-	2U 35H	1000/3	10	7,5	72,2	58,2	54,2	50,3	39,5										-	■	-	■	■	■	
	5	-	-	2U 35H	1000/4-2R	10	7,5	85,1	68,6	63,9	58,4	44,7										-	■	-	■	■	■	
	6	-	-	2U 35H	1500/4-1R	15	11	92,8	75,3	70,2	65,2	50,8										-	■	-	■	■	■	
	7	-	-	2U 35H	1500/4	15	11	99,4	81,0	76,3	71,8	58,5										-	■	-	■	■	■	
	8,5	-	-	2U 35H	2000/5	20	15	121,1	99,3	93,1	87,4	70,0										-	■	-	■	■	■	
	10	-	-	2U 35H	2000/6	20	15	145,6	119,3	111,9	105,0	84,2										-	■	-	■	■	■	
	11	-	-	2U 35H	2000/7-1R	20	15	163,3	132,3	123,2	114,0	89,1										-	■	-	■	■	■	
100	3	-	-	2U 50H	1000/2	10	7,5	49,0			42,0	38,8	37,2	34,3	27,5	24,1						-	■	-	■	■	■	
	5	-	-	2U 50H	1500/3	15	11	74,2			65,0	60,9	58,8	54,8	45,5	41,0						-	■	-	■	■	■	
	7	-	-	2U 50H	2000/4	20	15	97,5			86,4	81,3	78,5	73,2	60,8	54,7						-	■	-	■	■	■	
	9	-	-	2U 50H	2500/5	25	18,5	122,3			109,1	102,9	99,5	92,9	77,5	70,0						-	■	-	■	■	■	
	11	-	-	2U 50H	3000/6	30	22	146,0			129,8	122,2	118,0	110,0	91,6	82,5						-	■	-	■	■	■	
150	3,5	-	-	2U 75H	1500/2	15	11	59,3		51,2	49,9	47,5	46,8	45,5	43,2	42,0	39,9	35,3	30,8		-	■	-	■	■	■		
	6	-	-	2U 75H	2500/3	25	18,5	89,6		77,6	75,6	72,0	70,9	69,0	65,7	63,9	60,7	53,9	47,2		-	■	-	■	■	■		
	8	-	-	2U 75H	3000/4	30	22	111,8		100,8	99,2	95,8	94,5	92,4	88,4	86,3	82,3	73,3	62,9		-	■	-	■	■	■		
	10	-	-	2U 75H	4000/5	40	30	142,4		129,2	127,1	123,0	121,5	119,0	114,1	111,5	106,9	96,3	84,6		-	■	-	■	■	■		
	11	-	-	2U 75H	4000/6-2R	40	30	153,5		141,6	139,5	135,1	133,3	130,3	123,4	119,6	112,9	99,0	84,1		-	■	-	■	■	■		
180	2,5	-	-	2U 90H	1500/2-2R	15	11	49,6					42,4	41,3	39,0	38,1	36,6	33,2	29,4	22,7	11,7	-	■	-	■	■	■	
	4	-	-	2U 90H	2000/2	20	15	69,2					56,6	54,5	50,5	49,2	47,3	44,3	41,6	36,3	27,3	-	■	-	■	■	■	
	6,5	-	-	2U 90H	3000/3	30	22	92,4					82,6	80,6	76,7	75,3	73,2	69,4	65,5	57,8	45,2	-	■	-	■	■	■	
	9	-	-	2U 90H	4000/4	40	30	125,6					113,0	110,4	105,2	103,3	100,6	95,7	90,7	80,8	64,4	-	■	-	■	■	■	
	11	-	-	2U 90H	5000/5	50	37	156,6					140,7	137,4	130,9	128,6	125,2	119,1	112,8	100,3	79,8	-	■	-	■	■	■	



3U PERFORMANCE

TARGET (3 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)																FIXED SPEED		VARIABLE SPEED			
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	5,4	7,2	10,8	14,4	18	21,6	25,2	28,8	30,6	32,4	36	43,2	50,4	1-	3-	1-	3-	/E	/I	/A	/I
9	3	-	3U 3V	3U 3L	100/5	1	0,75	52,2	40,8	36,0	25,4	14,0										■	■	-	■	■	■		
		-	3U 3SV	3U 3SL				55,3	46,5	42,1	31,6	17,7														■	■	-	■
	4	-	3U 3V	3U 3L	120/6	1,2	0,9	62,8	49,6	43,9	32,1	18,3											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				66,6	56,0	50,7	38,1	22,4														■	■	-	■
	5	-	3U 3V	3U 3L	150/7	1,5	1,1	77,1	68,4	62,3	46,5	25,7											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				75,6	64,8	58,9	44,4	26,1														■	■	-	■
	6	-	3U 3V	3U 3L	180/8	2	1,5	88,1	77,6	70,2	51,3	26,0											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				86,7	73,9	67,3	51,0	29,9														■	■	-	■
	7	-	3U 3V	3U 3L	200/9	2	1,5	98,8	87,3	79,4	60,0	32,2											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				97,0	82,5	74,7	56,4	32,9														■	■	-	■
	8	-	3U 3V	3U 3L	250/10	2	1,5	109,3	96,3	87,5	65,3	34,5											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				107,2	90,5	82,0	61,5	35,6														■	■	-	■
	9	-	3U 3V	3U 3L	280/11	2,5	1,85	120,4	106,1	96,4	71,6	38,3											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				117,2	98,8	89,8	66,8	37,3														■	■	-	■
	10	-	3U 3V	3U 3L	300/12	2,5	1,85	130,3	114,6	103,8	76,6	40,8											■	■	-	■	■	■	
		-	3U 3SV	3U 3SL				126,4	106,1	95,9	71,7	40,0														■	■	-	■
12	-	-	3U 3SLG	350/14	3	2,2	154,8	133,7	122,5	97,4	58,2											-	■	-	■	■	■		
14	-	-	3U 3SLG	380/16	4	3	177,5	154,5	141,3	109,4	67,0											-	■	-	■	■	■		
15	-	-	3U 3SLG	400/18	4	3	195,1	172,8	158,0	122,1	75,3											-	■	-	■	■	■		
16	-	-	3U 3SLG	450/20	4	3	218,3	187,4	171,4	131,5	81,0											-	■	-	■	■	■		
15	3	-	3U 5V	3U 5L	120/4	1,2	0,9	45,3	41,3	39,6	35,6	30,8	24,9	17,6	6,4							■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				45,5	42,2	40,7	37,2	32,9	27,4	19,8	10,4										■	■	-	■	■
	3	-	3U 5V	3U 5L	150/5	1,5	1,1	57,6	55,6	54,2	50,5	45,0	37,0	27,4								■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				55,9	52,8	51,4	48,1	43,4	37,3	28,3	16,4										■	■	-	■	■
	5	-	3U 5V	3U 5L	180/6	2	1,5	69,1	66,5	64,8	60,1	53,2	43,8	32,0								■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				67,0	63,3	61,6	57,6	51,9	44,2	33,6	20,4										■	■	-	■	■
	5,5	-	3U 5V	3U 5L	200/7	2	1,5	80,6	77,1	75,1	69,6	61,3	50,4	35,8								■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				77,8	73,5	71,3	66,3	59,6	50,7	38,0	22,4										■	■	-	■	■
	6,5	-	3U 5V	3U 5L	250/8	2,5	1,85	92,0	88,2	85,8	79,2	70,1	57,2	41,1								■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				89,2	83,9	81,6	76,2	68,4	58,3	43,2	24,6										■	■	-	■	■
	7	-	3U 5V	3U 5L	280/9	2,5	1,85	103,3	98,9	96,2	88,8	78,4	64,1	45,3								■	■	-	■	■	■		
		-	3U 5SV	3U 5SL				99,7	93,7	90,9	84,1	75,2	61,1	47,4	25,9										■	■	-	■	■
	8	-	3U 5V	3U 5L	300/10	3	2,2	115,1	110,6	107,6	99,5	87,6	72,1	50,7							■	■	-	■	■	■			
		-	3U 5SV	3U 5SL				112,2	105,4	102,4	95,3	85,6	72,6	54,8	31,0									■	■	-	■	■	■
	9	-	3U 5V	3U 5L	350/11	3,5	2,57	127,6	122,5	119,4	110,8	98,0	80,8	57,4							-	■	-	■	■	■			
		-	3U 5SV	3U 5SL				125,1	117,6	114,3	106,1	95,5	80,9	60,9	34,8									-	■	-	■	■	■
	10	-	3U 5V	3U 5L	380/12	4	3	140,3	135,4	132,1	123,2	109,5	90,1	66,5							-	■	-	■	■	■			
		-	3U 5SV	3U 5SL				135,7	128,9	125,6	117,7	106,3	91,3	70,2	41,5									-	■	-	■	■	■
12	-	-	3U 5SLG	400/14	4	3	159,2	150,7	146,7	136,6	122,9	105,5	79,0							-	■	-	■	■	■				
14	-	-	3U 5SLG	450/16	5,5	4	182,0	173,2	169,1	158,0	142,9	122,9	93,6							-	■	-	■	■	■				
16	-	-	3U 5SLG	550/18	5,5	4	204,4	194,4	189,5	176,5	159,6	136,3	103,2							-	■	-	■	■	■				
18	-	-	3U 5SLG	600/20	5,5	4	226,7	215,5	210,0	195,5	176,3	151,1	114,5							-	■	-	■	■	■				



3U PERFORMANCE

TARGET (3 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)															FIXED SPEED		VARIABLE SPEED			
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	5,4	7,2	10,8	14,4	18	21,6	25,2	28,8	30,6	32,4	36	39,6	50,4	1-	3-	1-	3-			
m³/h	bar				HP (x3)	kW (x3)	H (m)																	/E	/I	/A	/I	
21	3	-	3U 7V	3U 7L	180/4	2	1,5	49,6		48,4	46,7	43,8	39,9	34,9	28,9							■	■	-	■	■	■	
		-	3U 7SV	3U 7SL				46,7		46,0	45,2	43,1	40,3	36,9	32,3	25,5									■	■	-	■
	4	-	3U 7V	3U 7L	250/5	2,5	1,85	63,2		62,1	60,3	56,9	52,1	46,2	39,0								■	■	-	■	■	■
		-	3U 7SV	3U 7SL				58,5		57,6	56,6	54,1	50,8	46,1	40,3	31,8									■	■	-	■
	5	-	3U 7V	3U 7L	300/6	3	2,2	76,0		75,1	73,1	69,2	63,6	56,8	48,2								■	■	-	■	■	■
		-	3U 7SV	3U 7SL				70,6		69,9	68,7	65,8	61,8	56,6	49,7	39,3									■	■	-	■
	6	-	3U 7V	3U 7L	350/7	3,5	2,57	89,0		88,0	85,8	81,2	74,5	66,3	56,2								-	■	-	■	■	■
		-	3U 7SV	3U 7SL				82,8		82,0	80,6	77,2	72,3	66,0	57,4	46,4									-	■	-	■
	7	-	3U 7V	3U 7L	400/8	4	3	102,3		101,0	98,2	92,4	84,4	74,6	62,4								-	■	-	-	■	■
		-	3U 7SV	3U 7SL				94,8		94,3	92,5	88,6	83,2	76,4	66,2	52,6									-	■	-	-
	8	-	3U 7V	3U 7L	450/9	4,5	3,37	115,2		114,4	111,4	105,6	97,1	86,3	73,1								-	■	-	-	■	■
		-	3U 7SV	3U 7SL				107,4		106,9	105,2	101,1	95,3	87,7	76,3	61,0									-	■	-	-
	9	-	3U 7V	3U 7L	550/10	5,5	4	128,1		128,0	124,9	118,7	109,4	97,6	83,0								-	■	-	-	■	■
		-	3U 7SV	3U 7SL				119,8		119,6	118,4	113,9	107,7	99,4	87,0	70,4									-	■	-	-
11	-	-	3U 7SLG	750/12	7,5	5,5	143,7		143,7	142,6	137,0	129,6	119,8	105,6	87,0							-	■	-	-	■	■	
13	-	-	3U 7SLG	800/14	7,5	5,5	167,6		167,3	165,9	159,6	151,0	139,5	122,6	100,3							-	■	-	-	■	■	
15	-	-	3U 7SLG	900/16	7,5	5,5	191,5		191,2	189,3	181,7	171,5	157,7	137,6	111,1							-	■	-	-	■	■	
17	-	-	3U 7SLG	950/18	10	7,5	215,5		215,7	213,9	205,8	194,7	179,8	159,0	132,3							-	■	-	-	■	■	
19	-	-	3U 7SLG	1000/20	10	7,5	240,3		240,2	238,4	229,3	216,8	200,3	177,3	147,7							-	■	-	-	■	■	
27	3	-	3U 9V	3U 9L	200/4	2	1,5	45,8		42,1	40,7	39,2	37,3	34,6	31,3	29,4	27,4	23,0	17,9			■	■	-	■	■	■	
		-	3U 9SV	3U 9SL				45,8		42,7	41,5	39,7	37,8	35,6	32,7	30,9	29,0	24,6	19,8						■	■	-	■
	3,5	-	3U 9V	3U 9L	250/5	2,5	1,85	56,9		52,2	50,4	48,5	46,1	42,9	38,8	36,4	33,8	28,2	22,3			■	■	-	■	■	■	
		-	3U 9SV	3U 9SL				57,1		53,1	51,6	49,5	47,2	44,3	40,6	38,4	35,8	30,2	24,4						■	■	-	■
	4	-	3U 9V	3U 9L	300/6	3	2,2	69,8		64,5	62,5	60,3	57,5	53,6	48,8	46,0	42,9	36,4	29,6			■	■	-	■	■	■	
		-	3U 9SV	3U 9SL				69,4		64,7	63,0	60,3	57,3	54,0	49,8	46,9	43,6	36,2	28,1						■	■	-	■
	5,5	-	3U 9V	3U 9L	400/7	4	3	83,3		77,8	75,7	72,7	68,9	64,2	58,5	55,2	51,6	43,6	34,7			-	■	-	-	■	■	
		-	3U 9SV	3U 9SL				82,0		77,2	74,9	72,0	68,7	64,9	59,9	56,6	52,9	44,2	33,9						-	■	-	-
	6,5	-	3U 9V	3U 9L	450/8	4,5	3,37	96,7		90,7	88,2	84,8	80,6	75,5	69,2	65,4	61,3	52,2	42,1			-	■	-	-	■	■	
		-	3U 9SV	3U 9SL				93,5		88,5	86,3	82,6	79,0	74,9	69,5	65,8	61,5	52,0	41,7						-	■	-	-
	7	-	3U 9V	3U 9L	500/9	4,5	3,37	107,1		99,5	96,4	92,8	88,3	82,4	75,2	71,0	66,4	56,4	45,2			-	■	-	-	■	■	
		-	3U 9SV	3U 9SL				105,4		99,1	96,5	92,5	88,3	83,5	77,3	73,0	68,1	57,5	46,9						-	■	-	-
	8	-	3U 9V	3U 9L	550/10	5,5	4	119,5		111,6	108,2	104,3	99,3	92,7	84,6	79,9	74,8	63,5	51,2			-	■	-	-	■	■	
		-	3U 9SV	3U 9SL				117,6		111,2	108,7	104,5	99,9	94,7	87,8	83,2	77,9	66,2	53,4						-	■	-	-
10	-	-	3U 9SLG	750/12	7,5	5,5	141,3		133,2	130,4	125,4	119,7	113,4	105,1	99,7	93,7	79,6				-	■	-	-	■	■		
12	-	-	3U 9SLG	800/14	7,5	5,5	165,5		155,7	152,6	146,5	139,9	132,7	123,4	117,3	110,3	94,0				-	■	-	-	■	■		
13	-	-	3U 9SLG	900/16	10	7,5	188,7		177,6	173,6	167,1	159,7	151,4	140,4	133,3	125,1	106,2				-	■	-	-	■	■		
15	-	-	3U 9SLG	950/18	10	7,5	213,8		201,6	197,3	189,6	181,2	172,0	159,9	151,8	142,5	121,0				-	■	-	-	■	■		
17	-	-	3U 9SLG	1000/20	10	7,5	236,7		223,1	218,3	209,3	199,8	189,5	176,1	167,3	157,5	134,5				-	■	-	-	■	■		



3U PERFORMANCE

TARGET (3 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)														FIXED SPEED		VARIABLE SPEED				
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	18	21,6	25,2	28,8	30,6	32,4	36	43,2	50,4	57,6	64,8	72	84							
						HP (x3)	kW (x3)	H (m)														1-	3-	1-	3-			
m³/h	bar																						/E	/I	/A	/I		
54	2	-	-	3U 18V 3U 18S	3U 18L 3U 18SL	250/3	2,5	1,85	34,7	32,9	32,6	32,2	31,6	31,3	31,0	30,1	28,0	24,7	20,6	15,9	10,7	-	■	-	■	■	■	
		-	-	-	-	-	-	-	33,8	31,6	31,0	30,2	29,4	28,9	28,4	27,4	25,4	23,2	20,4	16,3	11,5	-	■	-	■	■	■	
	2,5	-	-	-	3U 18H	300/3	3	2,2	41,2			37,1	36,3	35,9	35,5	34,4	32,3	28,9	24,8	19,4	13,5	-	■	-	■	■	■	
		-	-	3U 18V 3U 18S	3U 18L 3U 18SL	400/4	4	3	47,1	45,4	45,2	44,9	44,3	44,0	43,6	42,6	40,0	36,0	30,6	24,6	17,8	-	■	-	-	■	■	
	3,5	-	-	-	3U 18H	400/4	4	3	55,1			49,9	48,8	48,3	47,7	46,3	43,5	39,1	33,5	26,4	18,5	-	■	-	■	■	■	
		-	-	3U 18V 3U 18S	3U 18L 3U 18SL	450/5	4,5	3,37	59,2	57,6	57,4	57,0	56,4	56,0	55,6	54,5	51,6	46,7	40,1	33,3	25,3	-	■	-	-	■	■	
	4,5	-	-	-	3U 18H	550/5	5,5	4	72,3			64,3	63,1	62,4	61,7	60,1	56,6	51,8	45,1	36,8	27,6	-	■	-	-	■	■	
		-	-	3U 18V 3U 18S	3U 18L 3U 18SL	550/6	5,5	4	71,4	69,7	69,6	69,0	68,2	67,7	67,1	65,7	62,2	56,3	48,0	39,4	29,4	-	■	-	-	■	■	
	6,5	-	-	-	3U 18H	750/6	7,5	5,5	88,0			79,6	78,2	77,4	76,7	74,9	71,0	66,0	58,3	48,8	37,5	-	■	-	-	■	■	
		-	-	3U 18V 3U 18S	3U 18L 3U 18SL	750/7	7,5	5,5	102,5			92,4	90,7	89,8	88,9	86,8	82,3	76,2	67,3	56,1	43,0	-	■	-	-	■	■	
	7,5	-	-	-	3U 18H	750/8	7,5	5,5	96,1	94,2	94,1	93,5	92,4	91,7	90,9	89,1	84,5	77,0	66,1	54,2	41,1	-	■	-	-	■	■	
		-	-	3U 18V 3U 18S	3U 18L 3U 18SL	900/9	10	7,5	94,2	90,6	89,1	87,3	85,3	84,2	83,1	80,9	76,2	71,1	65,0	54,6	41,4	-	■	-	-	■	■	
8,5	-	-	-	3U 18H	1000/8	10	7,5	108,5	106,9	107,0	106,4	105,3	104,5	103,7	101,7	96,8	88,6	75,9	62,6	47,8	-	■	-	-	■	■		
	-	-	3U 18V 3U 18S	3U 18L 3U 18SL	1000/9	10	7,5	106,4	102,8	101,3	99,3	97,2	96,1	94,9	92,4	87,3	81,6	75,0	63,5	48,5	-	■	-	-	■	■		
66	3	-	-	-	3U 22H	400/3	4	3	45,0					40,8	40,5	39,9	38,3	36,6	34,2	30,5	25,8	16,6	-	■	-	■	■	■
		-	-	-	-	-	-	-	62,2					55,5	55,1	54,2	52,4	50,2	47,3	42,7	36,8	25,2	-	■	-	-	■	■
	4,5	-	-	-	3U 22H	550/4	5,5	4	78,6					70,6	70,1	69,0	67,0	64,2	60,8	55,3	47,9	33,5	-	■	-	-	■	■
		-	-	-	-	-	-	-	94,2					86,0	85,3	84,1	81,7	79,2	76,8	73,6	68,6	62,8	42,0	-	■	-	-	■
	7,5	-	-	-	3U 22H	1000/6	10	7,5	109,5					99,6	98,8	97,4	94,6	91,2	86,3	78,4	68,2	47,9	-	■	-	-	■	■

TARGET (3 pumps)		VERSION			TYPE	P2 NOMINAL		Q (m³/h - l/min)														FIXED SPEED		VARIABLE SPEED									
		HORIZ.	VERT. OVERLAP	VERT. INLINE				0	75	90	102	126	135	150	180	192	210	240	264	300	345												
						HP (x3)	kW (x3)	H (m)														1-	3-	1-	3-								
m³/h	bar																						/E	/I	/A	/I							
105	3	-	-	3U 35H	750/2	7,5	5,5	48,5	39,6	36,9	34,4	27,2															-	■	-	-	■	■	
		-	-	3U 35H	1000/3	10	7,5	72,2	58,2	54,2	50,3	39,5																-	■	-	-	■	■
	5	-	-	3U 35H	1000/4-2R	10	7,5	85,1	68,6	63,9	58,4	44,7																-	■	-	-	■	■
		-	-	3U 35H	1500/5-1R	15	11	92,8	75,3	70,2	65,2	50,8																-	■	-	-	■	■
	7	-	-	3U 35H	1500/4	15	11	99,4	81,0	76,3	71,8	58,5																-	■	-	-	■	■
		-	-	3U 35H	2000/5	20	15	121,1	99,3	93,1	87,4	70,0																-	■	-	-	■	■
	11	-	-	3U 35H	2000/6	20	15	145,6	119,3	111,9	105,0	84,2																-	■	-	-	■	■
-		-	3U 35H	2000/7-1R	20	15	163,3	132,3	123,2	114,0	89,1																-	■	-	-	■	■	
150	3	-	-	3U 50H	1000/2	10	7,5	49,0			42,0	38,8	37,2	34,3	27,5	24,1											-	■	-	-	■	■	
		-	-	3U 50H	1500/3	15	11	74,2			65,0	60,9	58,8	54,8	45,5	41,0											-	■	-	-	■	■	
	7	-	-	3U 50H	2000/4	20	15	97,5			86,4	81,3	78,5	73,2	60,8	54,7											-	■	-	-	■	■	
		-	-	3U 50H	2500/5	25	18,5	122,3			109,1	102,9	99,5	92,9	77,5	70,0												-	■	-	-	■	-
	11	-	-	3U 50H	3000/6	30	22	146,0			129,8	122,2	118,0	110,0	91,6	82,5											-	■	-	-	■	-	
225	3,5	-	-	3U 75H	1500/2	15	11	59,3			51,2	49,9	47,5	46,8	45,5	43,2	42,0	39,9	35,3	30,8							-	■	-	-	■	■	
		-	-	3U 75H	2500/3	25	18,5	89,6			77,6	75,6	72,0	70,9	69,0	65,7	63,9	60,7	53,9	47,2							-	■	-	-	■	-	
	8	-	-	3U 75H	3000/4	30	22	111,8			100,8	99,2	95,8	94,5	92,4	88,4	86,3	82,3	73,3	62,9							-	■	-	-	■	-	
		-	-	3U 75H	4000/5	40	30	142,4			129,2	127,1	123,0	121,5	119,0	114,1	111,5	106,9	96,3	84,6							-	■	-	-	■	-	
	11	-	-	3U 75H	4000/6-2R	40	30	153,5			141,6	139,5	135,1	133,3	130,3	123,4	119,6	112,9	99,0	84,1							-	■	-	-	■	-	
270	2,5	-	-	3U 90H	1500/2-2R	15	11	49,6						42,4	41,3	39,0	38,1	36,6	33,2	29,4	22,7	11,7				-	■	-	-	■	■		
		-	-	3U 90H	2000/2	20	15	69,2						56,6	54,5	50,5	49,2	47,3	44,3	41,6	36,3	27,3				-	■	-	-	■	■		
	6,5	-	-	3U 90H	3000/3	30	22	92,4						82,6	80,6	76,7	75,3	73,2	69,4	65,5	57,8	45,2				-	■	-	-	■	-		
		-	-	3U 90H	4000/4	40	30	125,6						113,0	110,4	105,2	103,3	100,6	95,7	90,7	80,8	64,4				-	■	-	-	■	-		
11	-	-	3U 90H	5000/5	50	37	156,6						140,7	137,4	130,9	128,6	125,2	119,1	112,8	100,3	79,8				-	■	-	-	■	-			






DRAINAGE AND SEWAGE

DRAINAGE AND SEWAGE PUMPS

Plastic



DP

DPV

DPM



High Head



DH



DC



Single-channel



DB

DM

DM4



Grinder



DTR

DTR 101



Vortex



DG

DX

DV

DV4



Different models available in relation to performance requirements: centrifugal, Vortex, single or double channels pumps suitable for clean water, sewage and slurry. Impeller with grinding system available.


Applications:

- Emptying of cisterns
- Fountains
- Swimming pools
- Draining of liquids from collection tanks and sumps




DRAINAGE AND SEWAGE PUMPS

Drainage

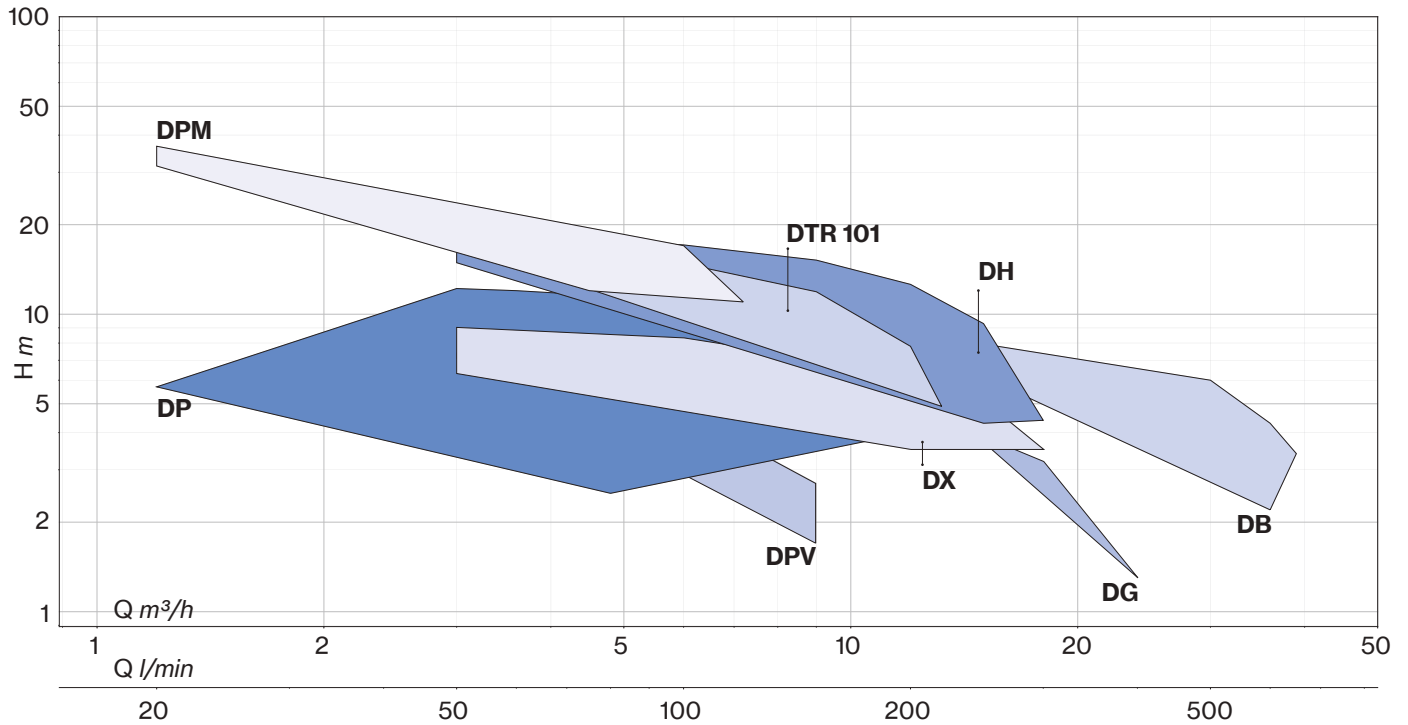


Sewage

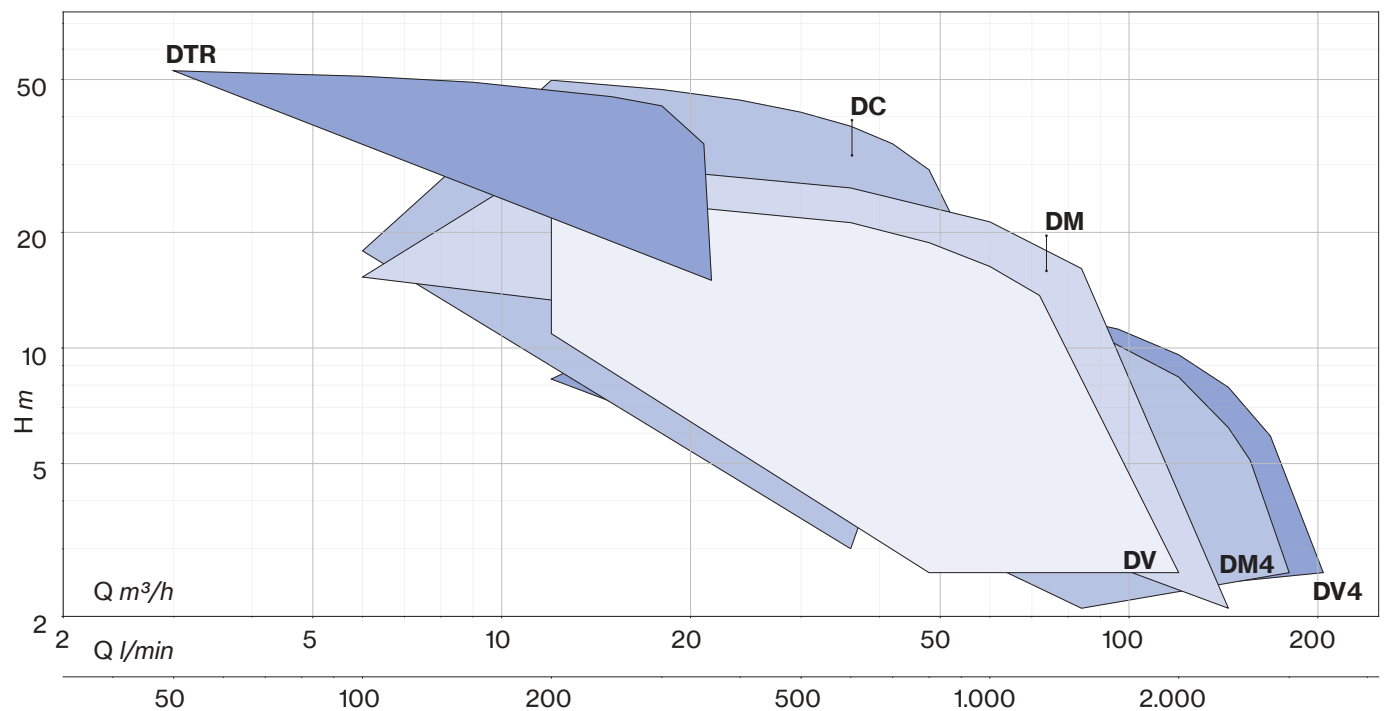

DP/DPV

Drainage
Plastic

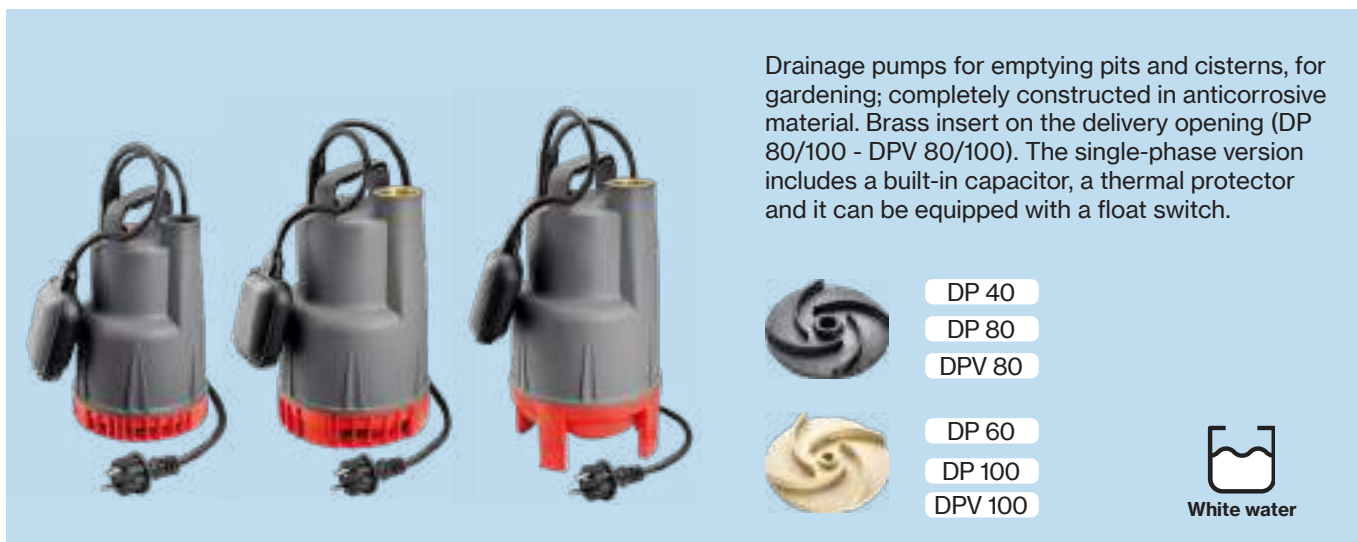

Drainage pumps for emptying pits and cisterns, for gardening; completely constructed in anticorrosive material. Brass insert on the delivery opening (DP 80/100 - DPV 80/100). The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.



DP 40

DP 80

DPV 80



DP 60

DP 100

DPV 100



White water

Construction features

Pump body polypropylene



Impeller Noryl®

Mechanical seal double lip seal on ceramic bush

Motor shaft stainless steel AISI 416 with ceramic bush

Free passage
 \varnothing max 4 mm (DP 40/60)
 \varnothing max 7 mm (DP 80/100)
 \varnothing max 15 mm (DPV 80/100)

Max submergence 5 m

Liquid temperature 0 - 40 °C

Cable
 H05 RN8F, 10 m (DP 40/60)
 H07 RN8F, 10 m (DP 80/100,
 DPV 80/100)

G float switch

Motor

3- 400V - 50Hz
(DPV 80/100)


2 Poles induction motor

1- 230V - 50Hz
(with thermal protection)

Insulation class F

Protection degree IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DP 40-60	80×120×175	135	80×120×205	162
DP 80-100	80×120×145	57	80×120×190	76
DPV 80-100	80×120×145	57	80×120×190	76

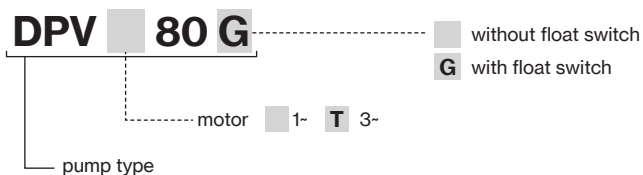


DP



DPV



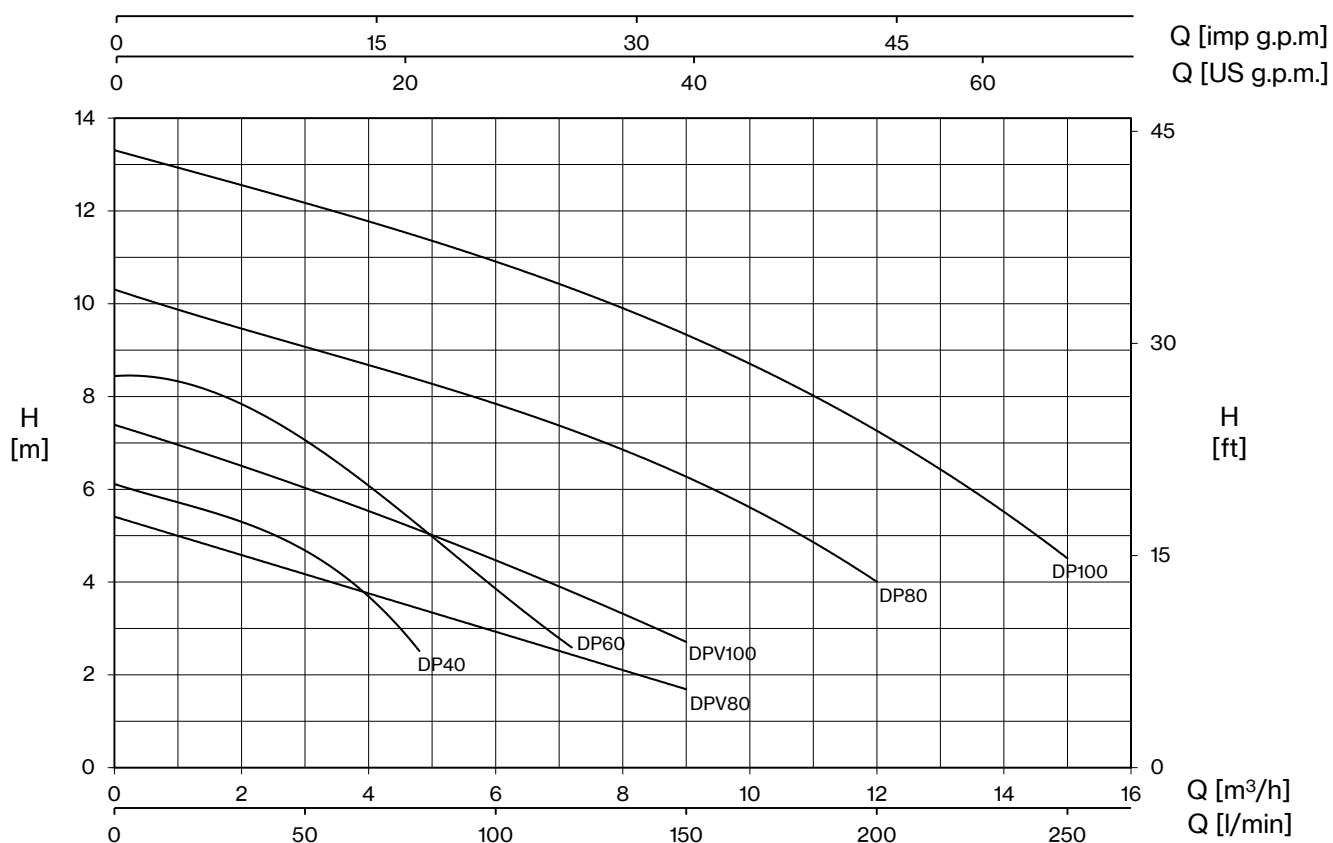




TYPE		W	AMPERE		Q (m³/h - l/min)										
1~	3~		1~	3~	0	1,2	2,4	3	3,6	4,8	6	7,2	9	12	15
					0	20	40	50	60	80	100	120	150	200	250
			1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)										
DP 40 (G)	-	200	1,0	-	6,1	5,7	5,0	4,7	4,2	2,5					
DP 60 (G)	-	400	2,1	-	8,5	8,1	7,6	7,2	6,7	5,0	3,9	2,6			
DP 80 (G)	DPT 80	800	3,7	1,8	10,3			9,1	8,8	8,3	7,8	7,3	6,3	4,0	
DP 100 (G)	DPT 100	1050	5,1	2,3	13,3			12,2	12,0	11,5	10,9	10,3	9,3	7,3	4,5


TYPE		W	AMPERE		Q (m³/h - l/min)			
1~	3~		1~	3~	0	3	6	9
					0	50	100	150
			1~ 230V 50 Hz	3~ 400V 50 Hz	H (m)			
DPV 80 (G)	DPVT 80	500	2,6	1,2	5,4	4,2	2,9	1,7
DPV 100 (G)	DPVT 100	750	3,8	1,7	7,4	5,8	4,7	2,7



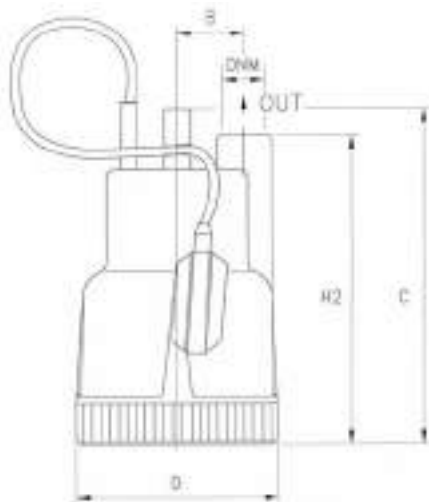

DP/DPV

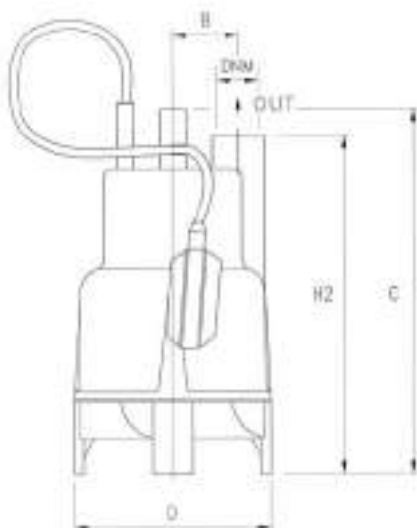

TYPE		DIMENSIONS (mm)								
1~	3~	B	C	D	H2	DNM	I	L	M	
DP 40 (G)	-	50	250	150	230	1" G	170	200	320	5
DP 60 (G)	-	50	250	150	230		170	200	320	6,5
DP 80 (G)	DPT 80	55,5	296	176	276	1" ¼ G	185	230	310	8,5
DP 100 (G)	DPT 100	55,5	296	176	276		185	230	310	10




TYPE		DIMENSIONS (mm)								
1~	3~	B	C	D	H2	DNM	I	L	M	
DPV 80 (G)	DPVT 80	55,5	331	176	310	1" ¼ G	185	230	345	8,5
DPV 100 (G)	DPVT 100	55,5	331	176	310		185	230	345	10







Multistage drainage pumps for clean water made of technopolymer material used for pumping liquid from wells, tanks and reservoirs, pressurization of domestic systems, irrigation of gardens and vegetable gardens. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch. Suitable to be installed with the Hidrotank flow controller.

Construction features	
Pump body	technopolymer
 Impeller, diffusers	Noryl®
Shell, motor cover, base support	Noryl®
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side
Motor shaft	stainless steel AISI 303
Max submergence	5 m
Liquid temperature	0 - 35 °C
Cable	H07 RN8F, 10 m
G	float switch

Motor	
	3~ 400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX8

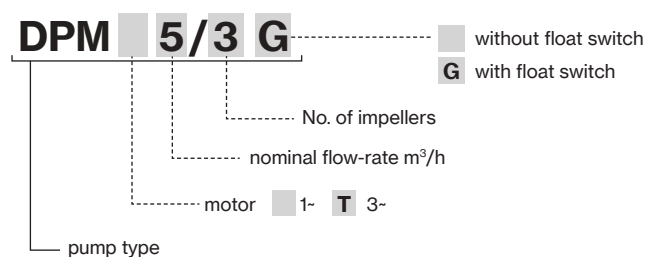


DPM

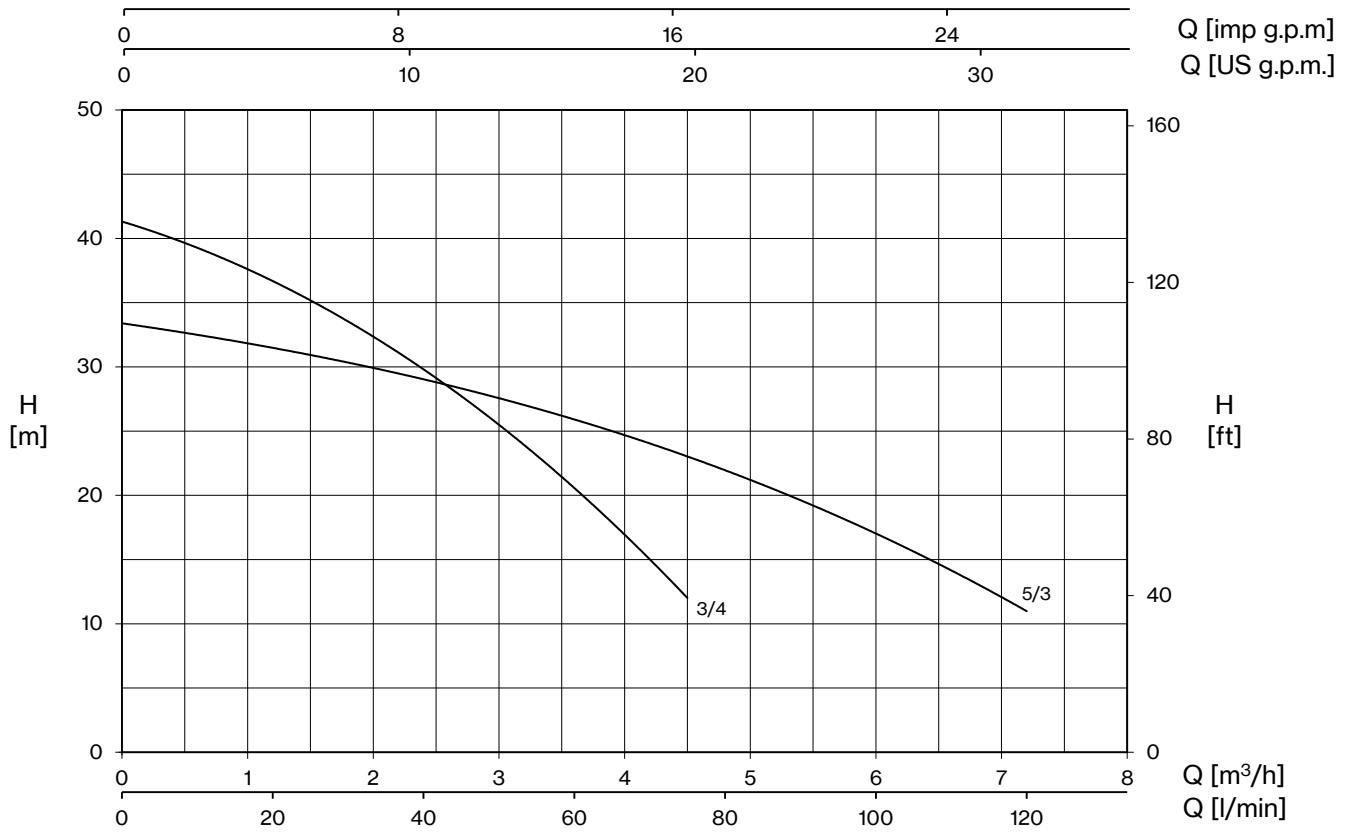

TYPE		W	AMPERE		Q (m³/h - l/min)									
1~	3~		1~	3~	0	0,6	1,2	1,8	2,4	3,6	4,5	6	7,2	
			1~ 230V 50 Hz	3~ 400V 50 Hz	0	10	20	30	40	60	75	100	120	
		H (m)												
DPM 5/3 (G)	DPMT 5/3	900	3,9	1,7	33,4	32,5	31,5	30,3	29,0	26,0	23,0	17,0	11,0	
DPM 3/4 (G)	DPMT 3/4	800	3,4	1,6	41,3	39,3	36,7	33,5	29,8	20,6	12,0			

mt: minimum working level

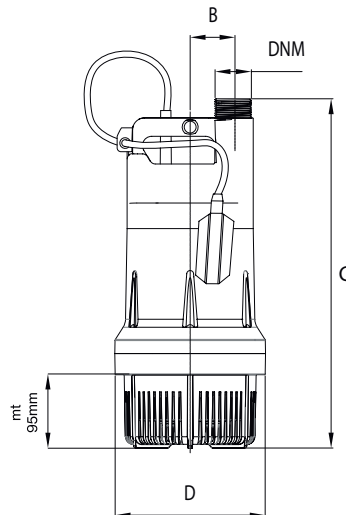

TYPE		DIMENSIONS (mm)							
1~	3~	B	C	D	DNM	I	L	M	
DPM 5/3 (G)	DPMT 5/3	56	454	196	1" 1/2	264	203	482	10
DPM 3/4 (G)	DPMT 3/4	56	454	196	1" 1/2	264	203	482	10,5






Drainage pumps with open impeller for pumping liquids with suspended solids. Characterized by high head. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.




Construction features

Painting	cataphoresis
Pump body	cast iron
Shell, motor cover, base support	stainless steel
 Impeller	brass
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side
Motor shaft	stainless steel AISI 430
Free passage	Ø max 10 mm
Max submergence	5 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
G	float switch


Motor

	3~ 400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX8


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DH	80×120×125	57	80×120×165	76

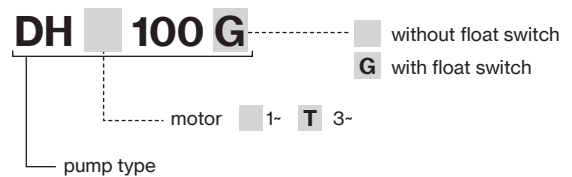

DH

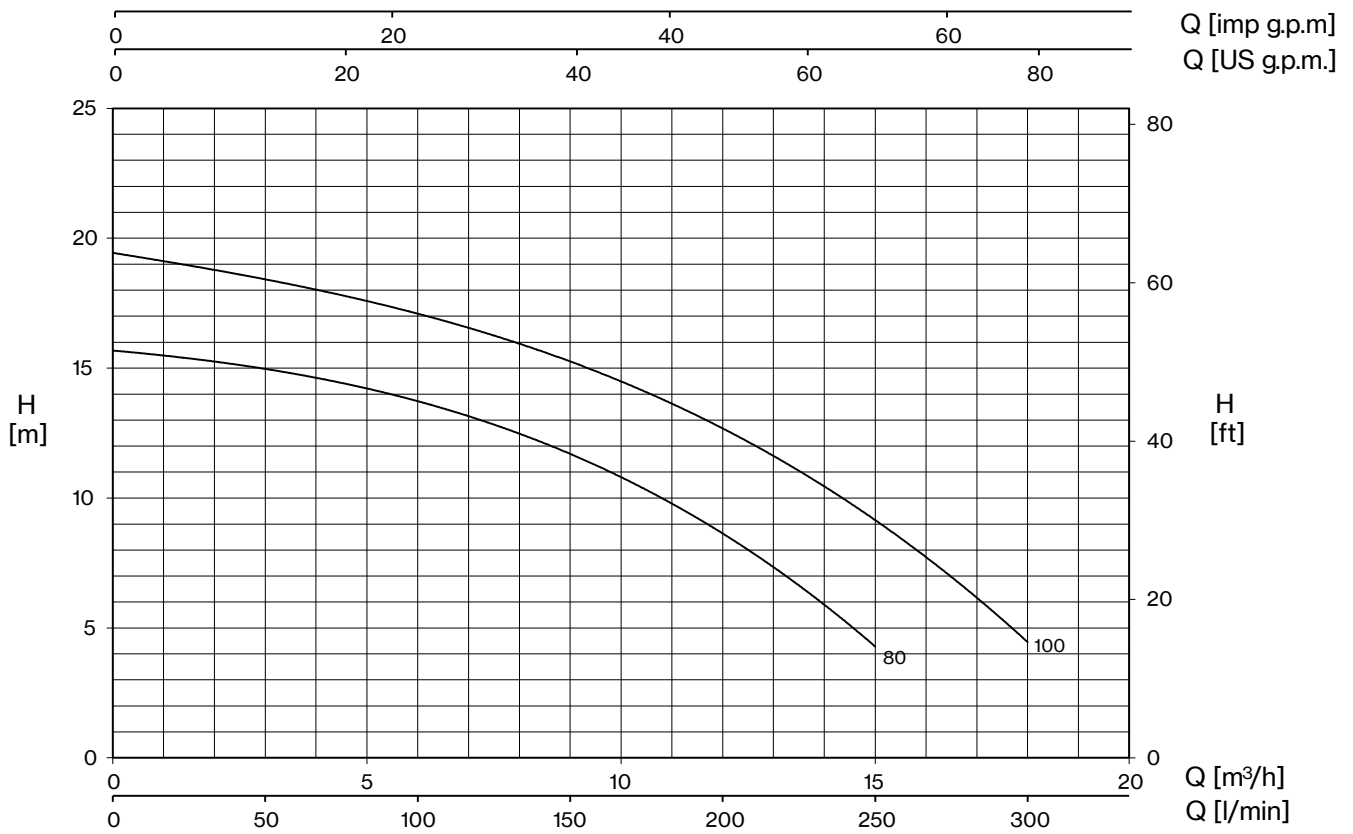

TYPE		W	AMPERE		Q (m³/h - l/min)							
1~	3~		1~	3~	0	3	6	9	12	15	18	
					0	50	100	150	200	250	300	
			1- 230V 50 Hz	3- 400V 50 Hz	H (m)							
DH 80 (G)	DHT 80	980	4,3	2,1	15,7	14,9	13,8	11,7	8,6	4,3		
DH 100 (G)	DHT 100	1370	6,2	2,8	19,4	18,5	17,1	15,2	12,6	9,3	4,4	

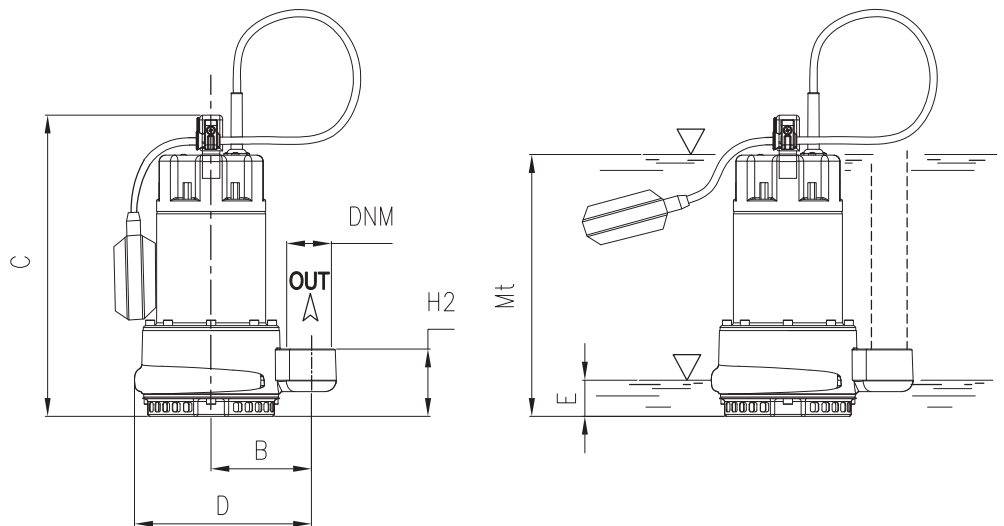

E: maximum emptying level
Mt: minimum liquid level for continuous duty

TYPE		DIMENSIONS (mm)										Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DH 80 (G)	DHT 80	105	330	218,5	45	70	190	1" 1/2 G	180	255	380	14,5
DH 100 (G)	DHT 100	105	330	218,5	45	70	190	1" 1/2 G	180	255	380	16



DC 160-310

DCT 410-1000

DCT 410-1000/P



Centrifugal drainage high head pumps ideal for civil and industrial applications, specifically designed for very heavy use. Available in the mobile or permanent versions with coupling feet.



Grey water

Construction features

Painting cataphoresis
Pump body cast iron



Impeller cast iron

Mechanical seal double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side

Motor shaft stainless steel AISI 304

Free passage Ø max 10 mm

Max submergence 20 m

Liquid temperature 0 - 40 °C

Cable H07 RN8F, 10 m

Bolts A2 stainless steel

Foot support galvanized iron

Gaskets NBR rubber

Motor

3~ 230V - 50Hz
3~ 400V - 50Hz
3~ 230/400V - 50Hz
3~ 400/690V - 50Hz

2 Poles induction motor

1~ 230V - 50Hz
required run capacitor
(35µF for 1,5HP model,
50µF for 2HP model)

Insulation class F

Protection degree IPX8

DC T 560 -CF counter-flange not included
CF included



..... motor 1~ **T** 3~
..... pump type



TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DC 160÷310	85×110×145	18	85×110×190	27
DCT 410-560	85×110×170	12	85×110×170	12
DCT 750-1000	100×120×190	12	100×120×190	12



DC

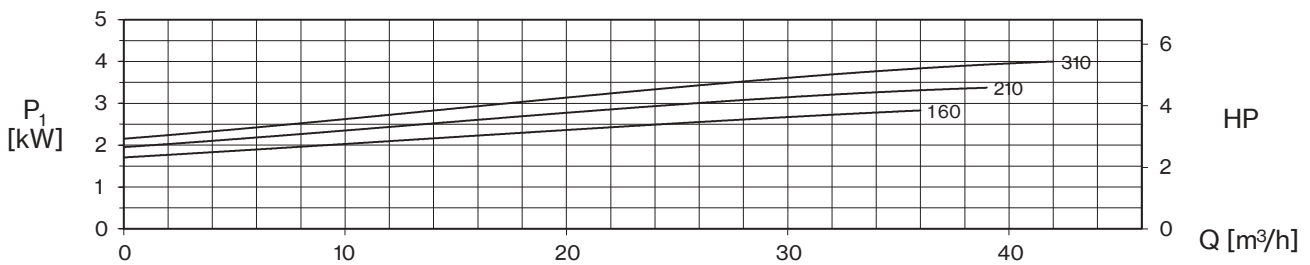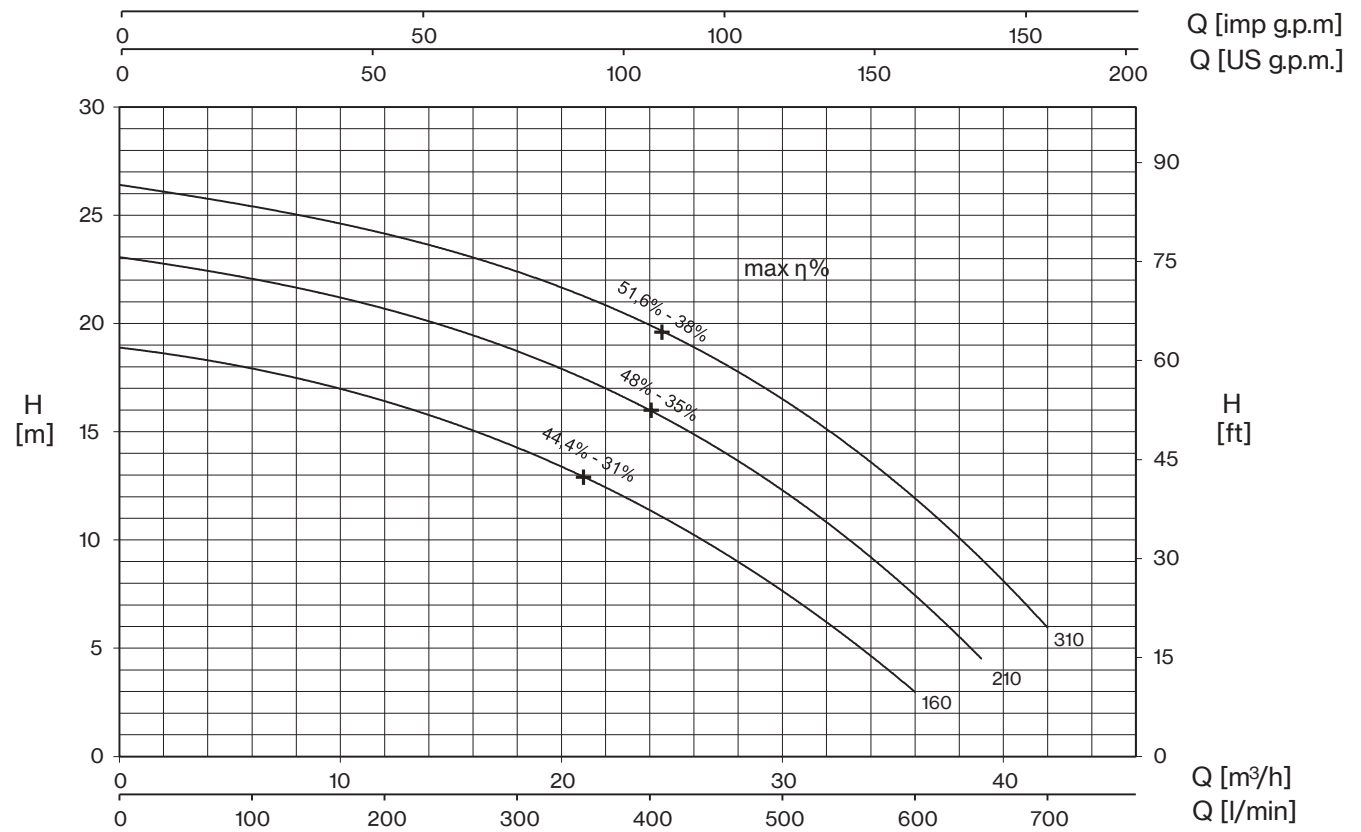

TYPE		AMPERE				
1~	3~	230 V 50 Hz	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DC 160	DCT 160	13,8	8,3	4,8	-	-
DC 210	DCT 210	16,5	10,2	5,9	-	-
-	DCT 310	-	12	6,9	-	-


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE		P2		P1 (kW)		Q (m³/h - l/min)								
1~	3~	HP	kW	1~	3~	0	6	12	18	24	30	36	39	42
						0	100	200	300	400	500	600	650	700
						H (m)								
DC 160	DCT 160	1,5	1,1	3,0	2,8	18,9	17,9	16,4	14,3	11,4	7,6	3,0		
DC 210	DCT 210	2	1,5	3,7	3,4	23,0	22,2	20,7	18,6	15,9	12,5	7,4	4,5	
-	DCT 310	3	2,2	-	4,0	26,4	25,4	24,2	22,4	19,9	16,4	12,1	9,1	5,9



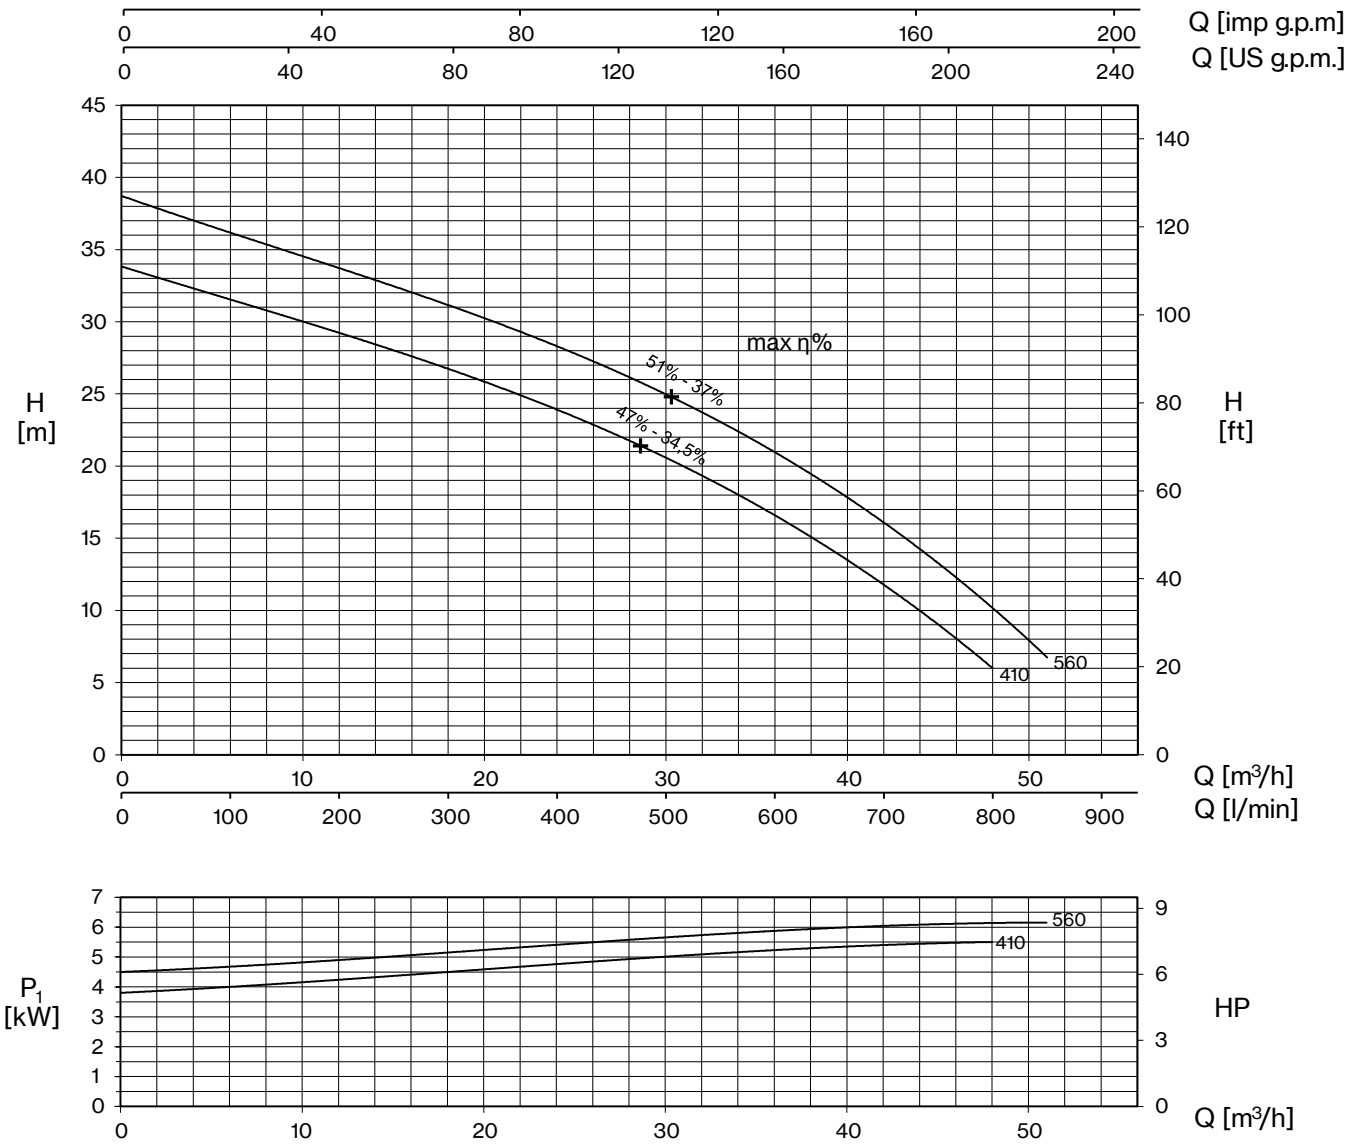

TYPE	AMPERE			
	3- 230V 50 Hz (*)	3- 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DCT 410	15,4	8,9	-	-
DCT 560	17,6	10,2	-	-

+ max η %



max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)									
				0	6	12	18	24	30	36	42	48	51
	HP	kW	3-	0	100	200	300	400	500	600	700	800	850
DCT 410	4	3	5,5	33,8	31,6	29,2	26,8	23,9	20,5	16,5	12,0	5,9	
DCT 560	5,5	4	6,3	38,7	36,1	33,9	31,2	28,3	24,7	20,9	16,3	10,4	6,5



DC

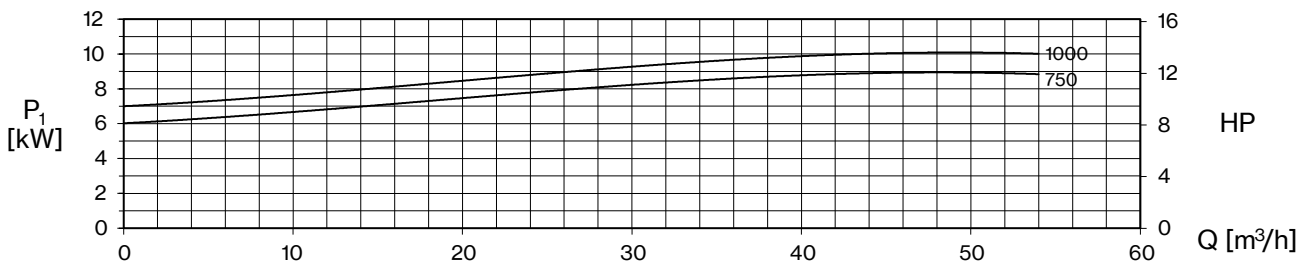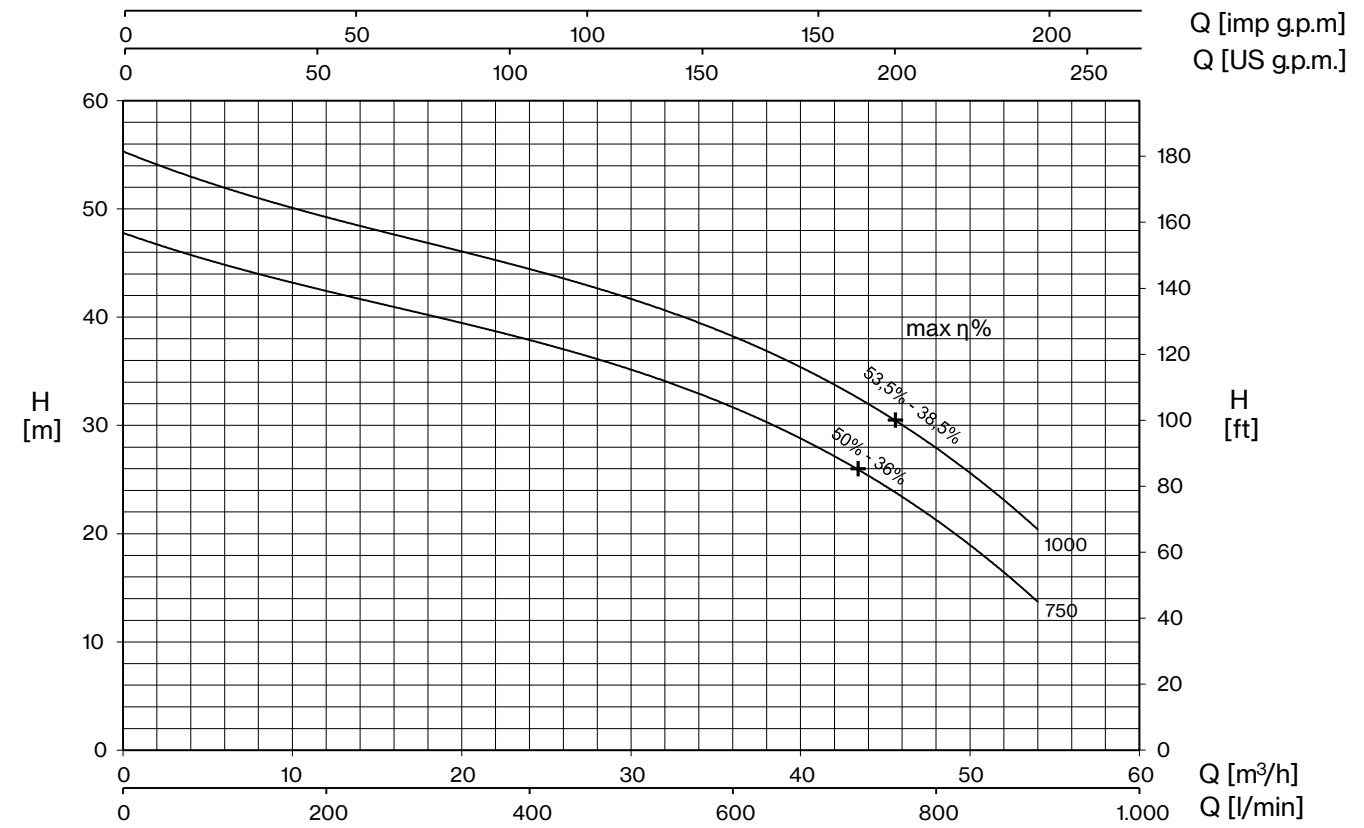

TYPE	AMPERE			
	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DCT 750	-	15,3	26,5	15,3
DCT 1000	-	17,5	30,3	17,5


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)									
				0	12	18	24	30	36	42	48	54	
	HP	kW	3~	0	200	300	400	500	600	700	800	900	
DCT 750	7,5	5,5	9,0	47,6	42,9	40,4	37,7	34,7	31,2	27,4	22,3	13,1	
DCT 1000	10	7,5	10,3	55,1	49,8	47,1	44,2	41,1	37,8	34,0	29,1	19,7	




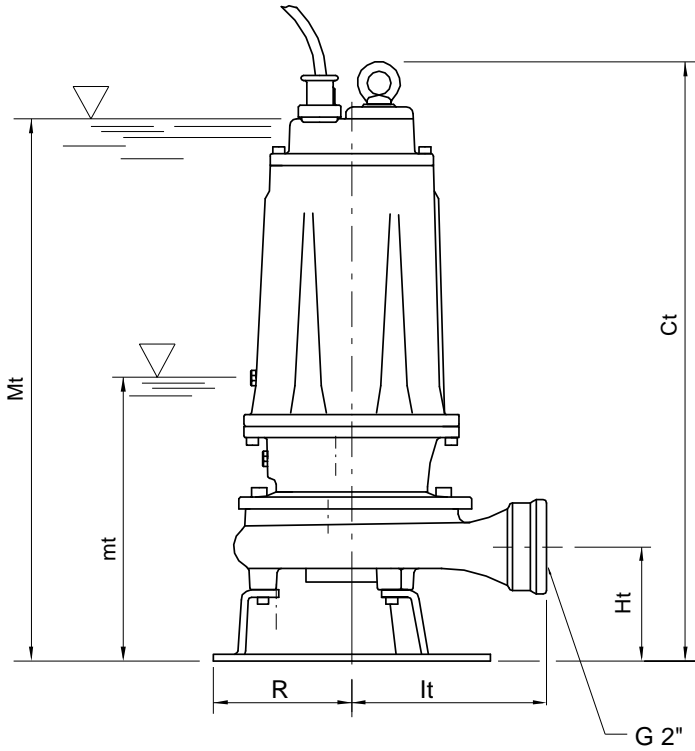


mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE		DIMENSIONS (mm)							Kg
1~	3~	Ct	Ht	R	lt	mt	Mt	DNM	
DC 160	DCT 160	513	102	117	174	205	475	2"G	37
DC 210	DCT 210	513	102	117	174	205	475	2"G	37,5
-	DCT 310	513	102	117	174	205	475	2"G	37


TYPE	PROTECTION		1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL		
	1- 230V	3- 400V	1- 230V	3- 400V	400/690 V	1- 230V	3- 400V	400/690 V
DC 160	PMC 15/35-15	PT 20-30-40/4.3-6.8	EQSM + 35µF	EQSMT 10		EQ2SM + 2×35µF	EQ2SMT 10	
DC 210	PMC 20/50-18	PT 20-30-40/4.3-6.8	EQSM + 50µF	EQSMT 10		EQ2SM + 2×50µF	EQ2SMT 10	
DCT 310		PT 40-50/5.7-9.1		EQSMT 10			EQ2SMT 10	
DCT 410		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DCT 560		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DCT 750		PT 100/12.5-16.5		EQSMT 10	QST 7		EQ2SMT 10	Q2ST 7
DCT 1000		PT 125-150/16-21		EQSMT 10	QST 10		EQ2SMT 10	Q2ST 10

DC

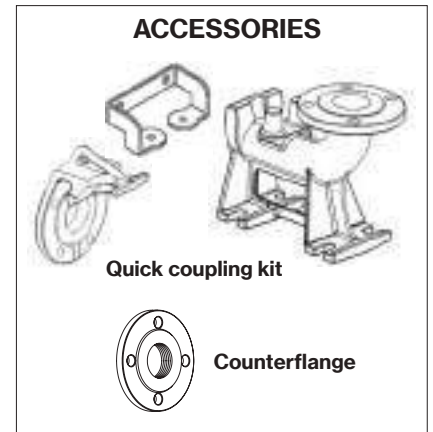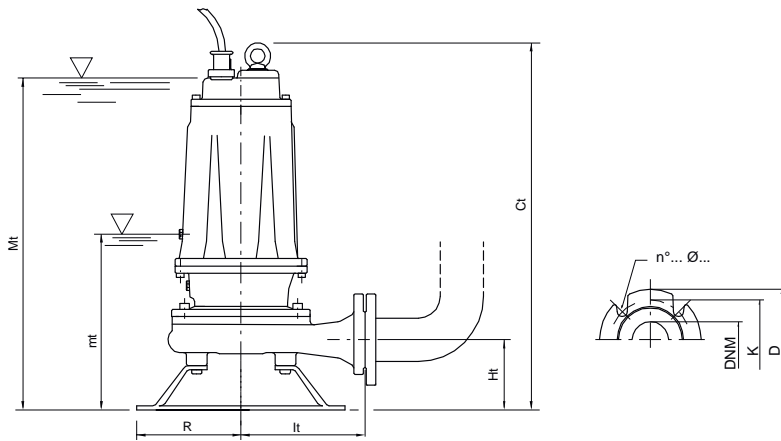

mt: minimum working level
Mt: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)							Kg
	Ct	Ht	R	It	mt	Mt	DNM	
DCT 410	595	112	160	187	263	550	50	60,5
DCT 560	595	112	160	187	263	550	50	63,5
DCT 750	680	160	180	250	280	630	65	91
DCT 1000	680	160	180	250	280	630	65	93,5

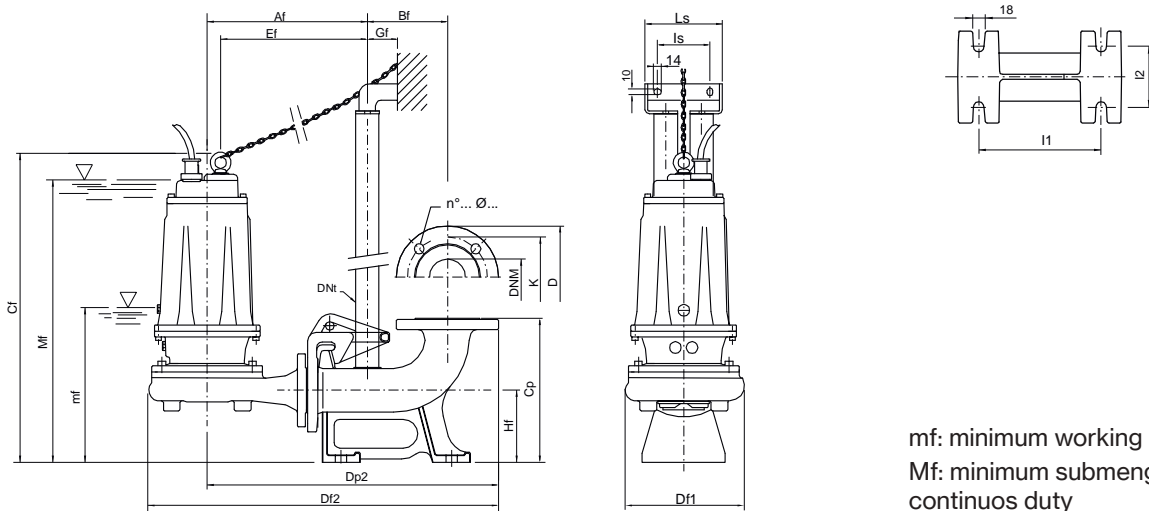

mf: minimum working level
Mf: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)																	
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNT	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM
DCT 410/P	300	145	614	260	237	654	535	1" 1/4	269	55	130	200	100	95	140	290	566	50
DCT 560/P	300	145	614	260	237	654	535	1" 1/4	269	55	130	200	100	95	140	290	566	50
DCT 750/P	331	145	656	260	279	701	569	1" 1/4	296	55	130	200	100	95	140	290	600	65
DCT 1000/P	331	145	656	260	279	701	569	1" 1/4	296	55	130	200	100	95	140	290	600	65

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
50	125	165	4... 18...
65	145	185	4... 18...





Drainage pumps with "Double-Channel" impeller for pumping waste waters and liquids with suspended solids; ideal for civil and household applications. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.



Construction features

Painting cataphoresis

Pump body cast iron

Shell, motor cover, base support stainless steel



Impeller stainless steel

Mechanical seal double seal with oil chamber: silicon carbide on pump side, ceramic-graphite on motor side

Motor shaft stainless steel AISI 430

Free passage Ø max 50 mm

Max submergence 5 m

Liquid temperature 0 - 40 °C

Cable H07 RN8F, 10 m

G float switch

Motor


3~ 400V - 50Hz

2 Poles induction motor 1~ 230V - 50Hz
(with thermal protection)


Insulation class F

Protection degree IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DB	80×120×160	51	80×120×160	51

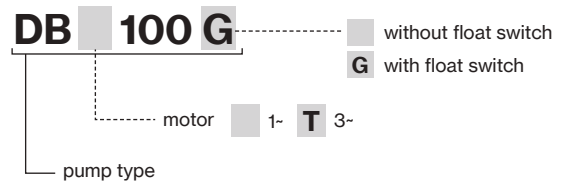



DB

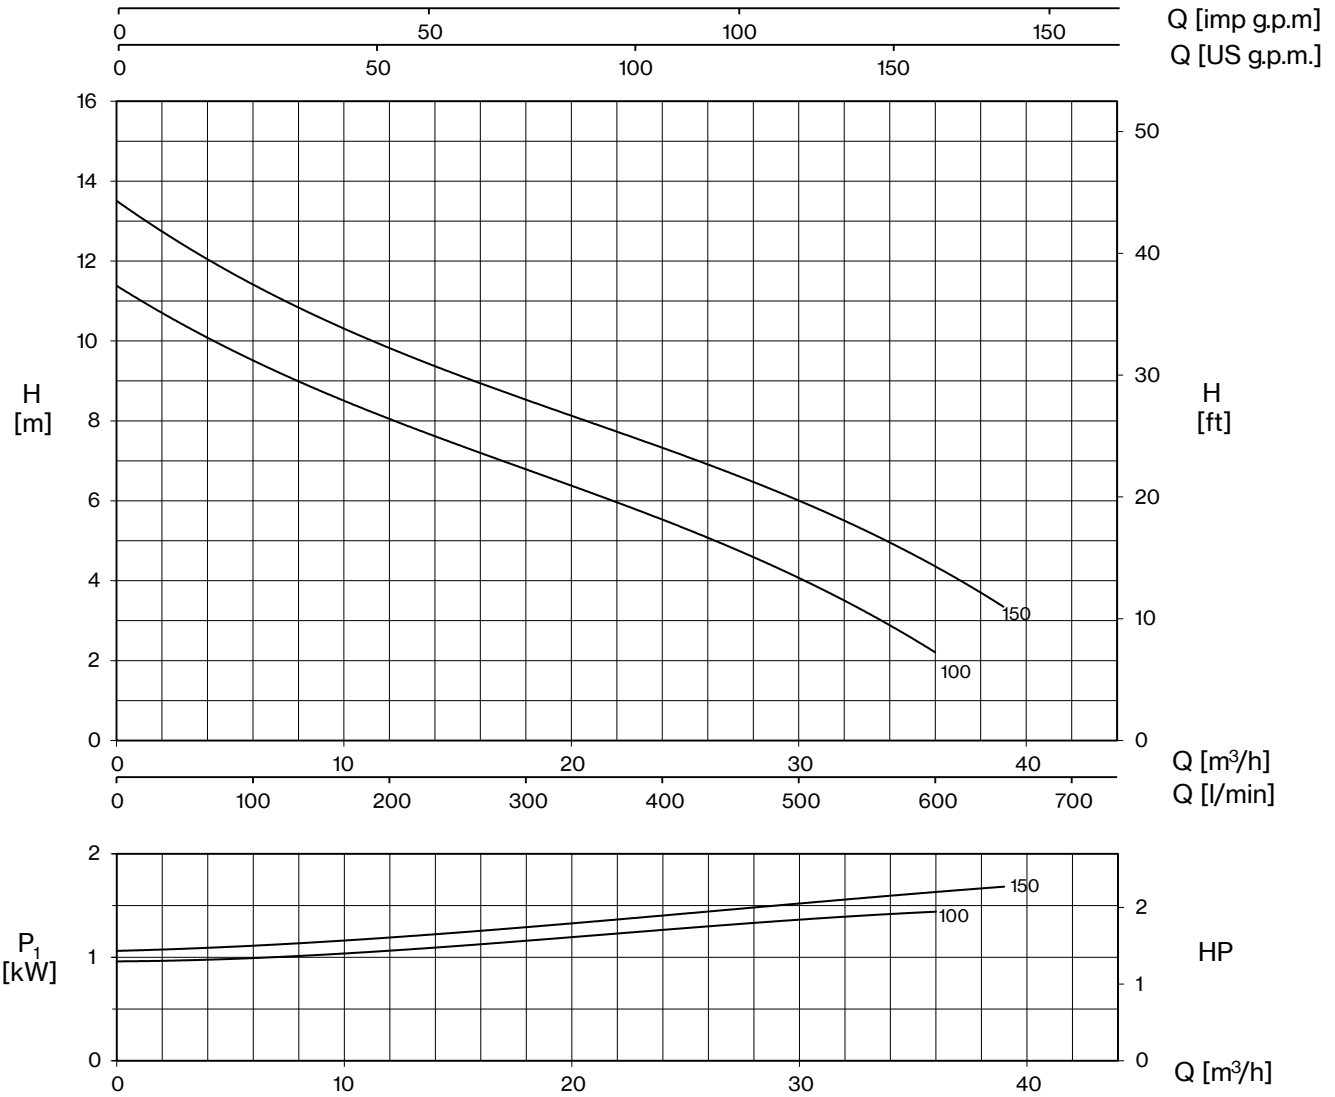

TYPE		W	AMPERE		Q (m³/h - l/min)							
1~	3~		1~ 1- 230V 50 Hz	3~ 3- 400V 50 Hz	0	6	12	18	24	30	36	39
					0	100	200	300	400	500	600	650
		H (m)										
DB 100 (G)	DBT 100	1350	5,9	2,8	11,4	9,5	8,0	6,8	5,6	4,0	2,2	
DB 150 (G)	DBT 150	1700	8,0	3,0	13,6	11,5	9,8	8,5	7,3	6,0	4,3	3,4

E: maximum emptying level
Mt: minimum liquid level for continuous duty

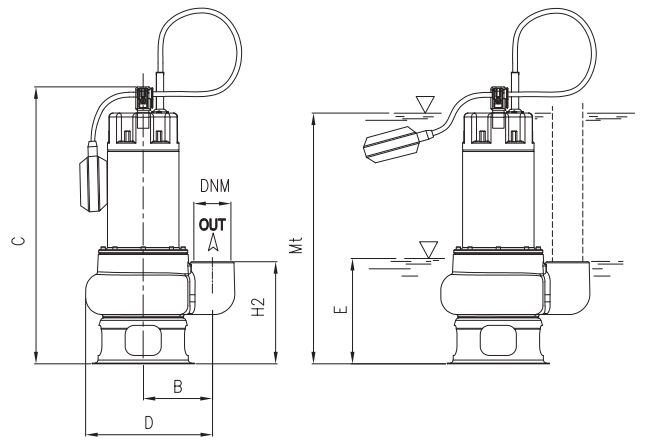


TYPE		DIMENSIONS (mm)										Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DB 100 (G)	DBT 100	142,5	461	247,5	185	170	390	2" G	200	260	470	17
DB 150 (G)	DBT 150	142,5	461	247,5	185	170	390	2" G	200	260	470	18,5





Single channel centrifugal drainage pumps. Specifically designed for heavy duty applications they guarantee high capacity at medium head; ideal for civil and industrial applications. Available in mobile or permanent version with coupling feet.



Construction features

Painting	cataphoresis
Pump body	cast iron
	Impeller cast iron
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side
Motor shaft	stainless steel AISI 304
Free passage	Ø max 50 mm
Max submergence	20 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
Bolts	A2 stainless steel
Foot support	galvanized iron
Gaskets	NBR rubber


Motor

2 Poles induction motor	3~ 230V - 50Hz 3~ 400V - 50Hz 3~ 230/400V - 50Hz 3~ 400/690V - 50Hz
	1~ 230V - 50Hz required run capacitor (35µF for 1,5HP model, 50µF for 2HP model)
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DM 160÷310	85×110×145	18	85×110×190	27
DMT 410-560	85×110×170	12	85×110×170	12
DMT 1000	100×120×190	12	100×120×190	12

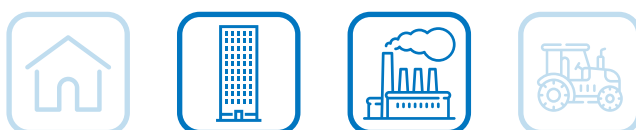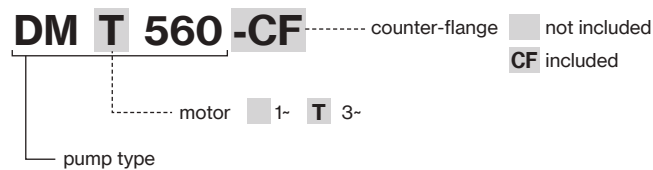

DM

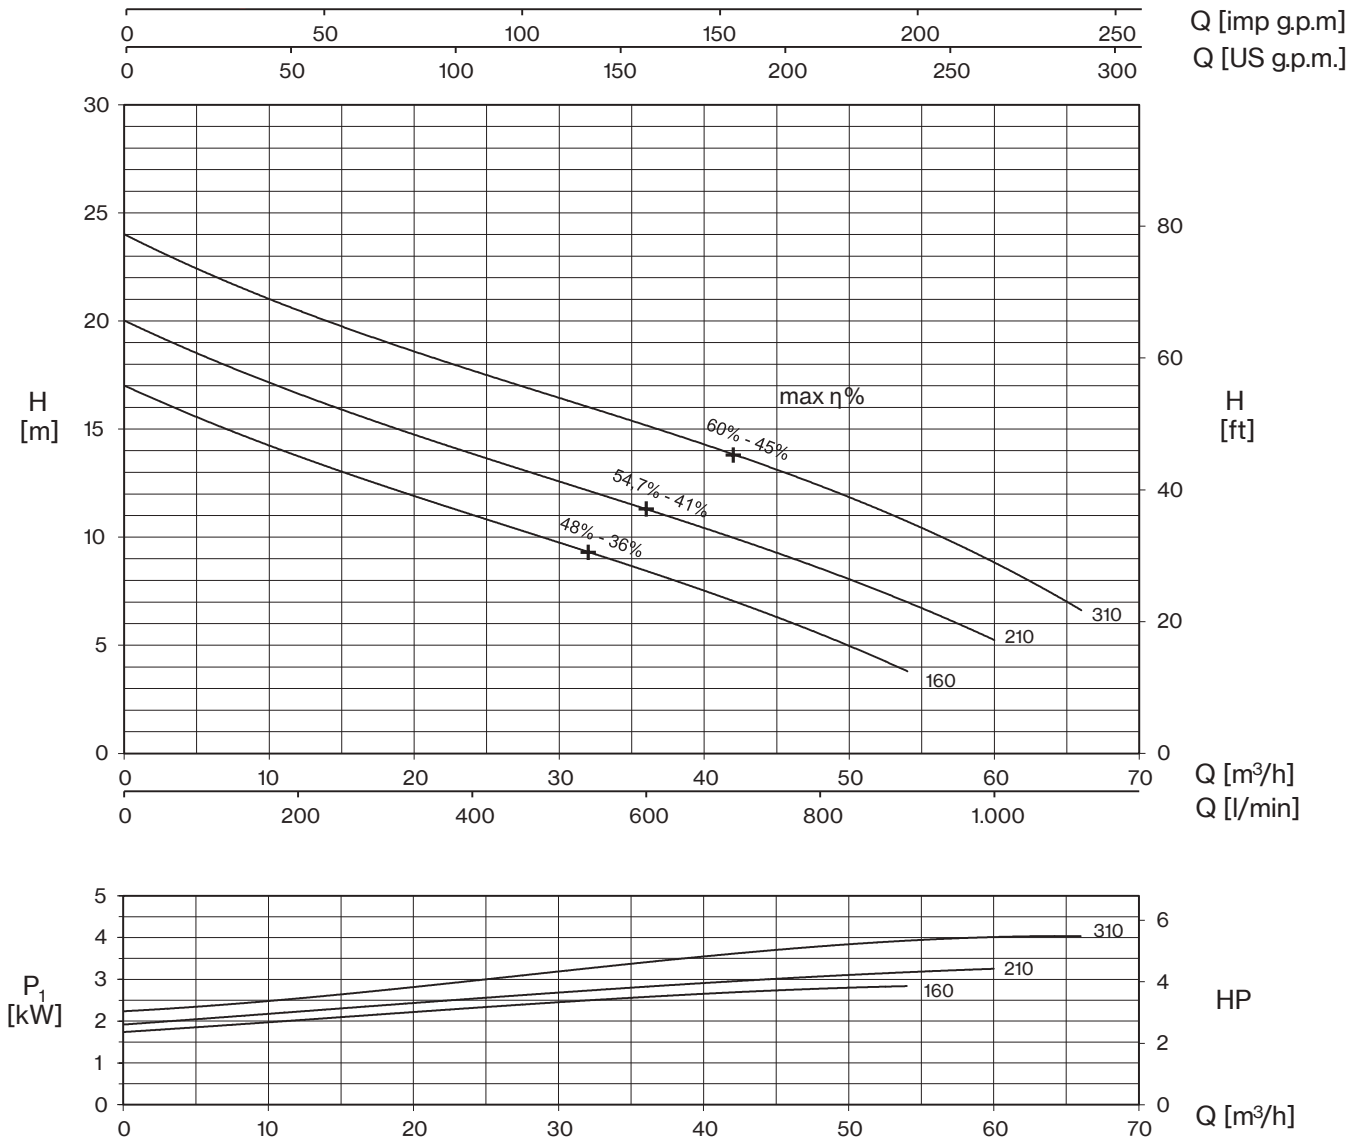

TYPE		AMPERE				
1~	3~	230 V 50 Hz	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ/Δ (*)	400/690 V 50 Hz λ/Δ
DM 160	DMT 160	12,5	7,6	4,4	-	-
DM 210	DMT 210	15	9,5	5,5	-	-
-	DMT 310	-	12	6,9	-	-

+ max η %



max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE		P2		P1 (kW)		Q (m³/h - l/min)											
1~	3~	HP	kW	1~	3~	0	6	12	18	24	30	36	42	48	54	60	66
						0	100	200	300	400	500	600	700	800	900	1000	1100
						H (m)											
DM 160	DMT 160	1,5	1,1	2,8	2,6	17,0	15,3	13,8	12,3	11,0	9,8	8,4	7,1	5,5	3,8		
DM 210	DMT 210	2	1,5	3,3	3,1	19,9	18,4	16,7	15,2	13,8	12,4	11,3	10,1	8,6	7,0	5,2	
-	DMT 310	3	2,2	-	4,1	23,9	22,2	20,6	19,1	17,8	16,3	15,0	13,8	12,3	10,9	9,1	6,4



Q [imp g.p.m]
Q [US g.p.m.]

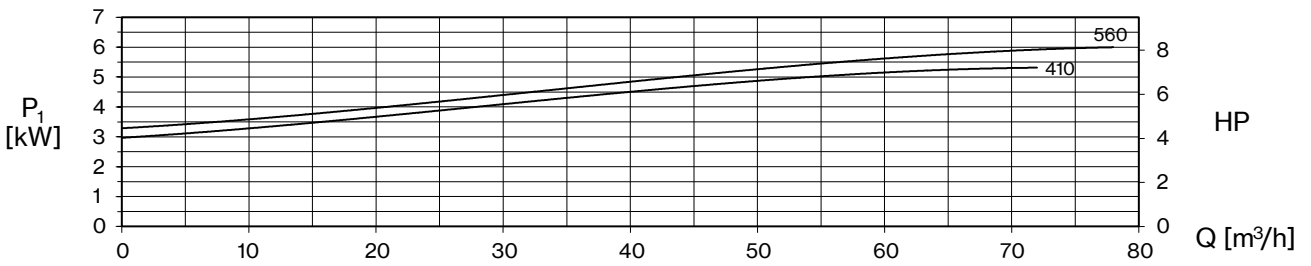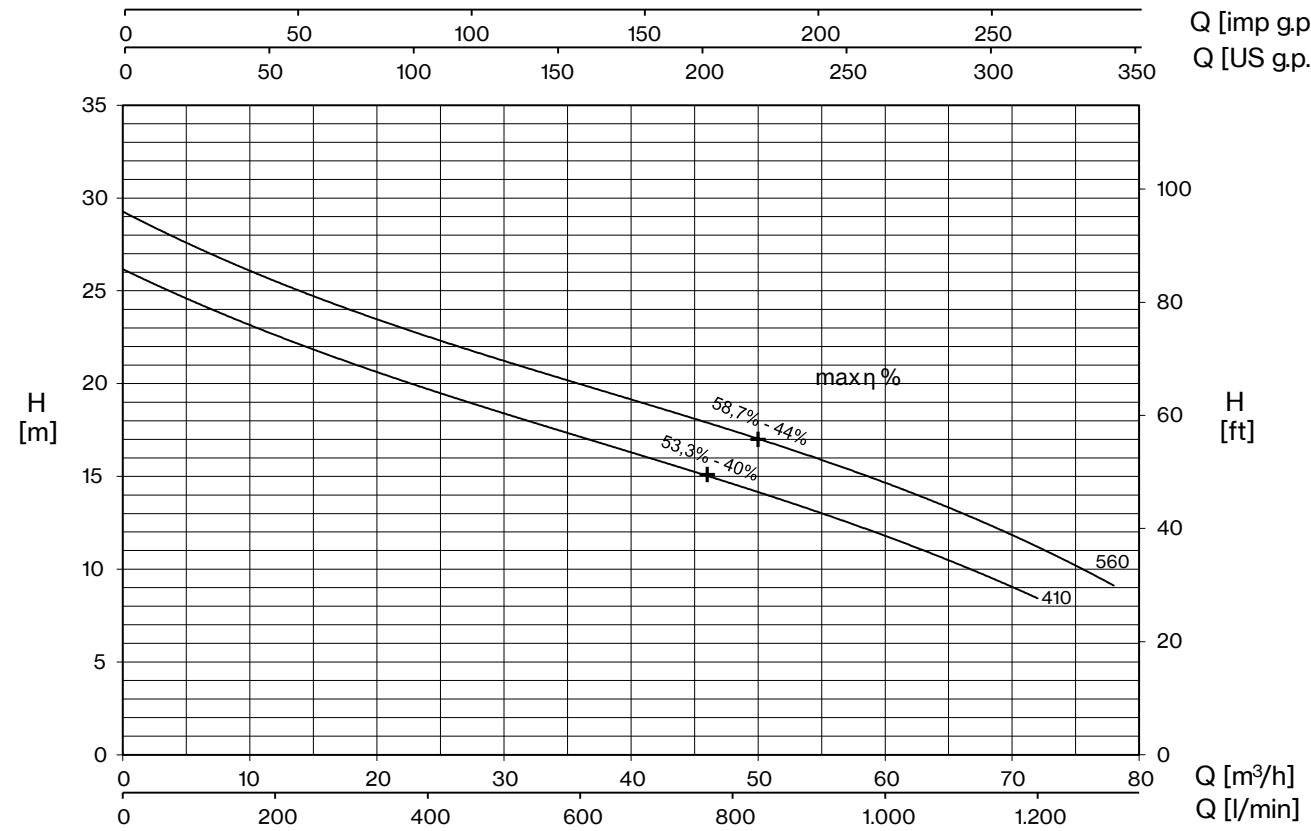

TYPE	AMPERE			
	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DMT 410	15,4	8,9	-	-
DMT 560	17,6	10,2	-	-

+ max η %



max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)									
				0	6	18	30	42	54	60	66	72	78
	HP	kW	3~	0	100	300	500	700	900	1000	1100	1200	1300
DMT 410	4	3	5,3	26	24,6	21,1	18,2	15,9	13,3	11,8	10,3	8,3	
DMT 560	5,5	4	6,0	29,1	27,5	24,1	21,1	18,6	16,1	14,7	13,1	11,4	8,9



DM

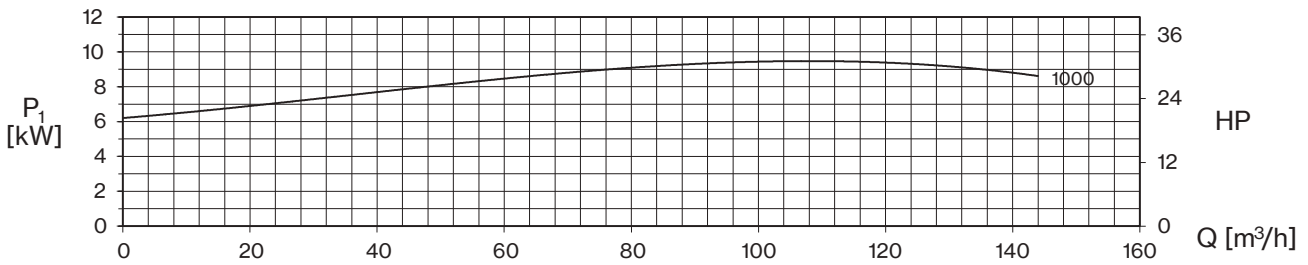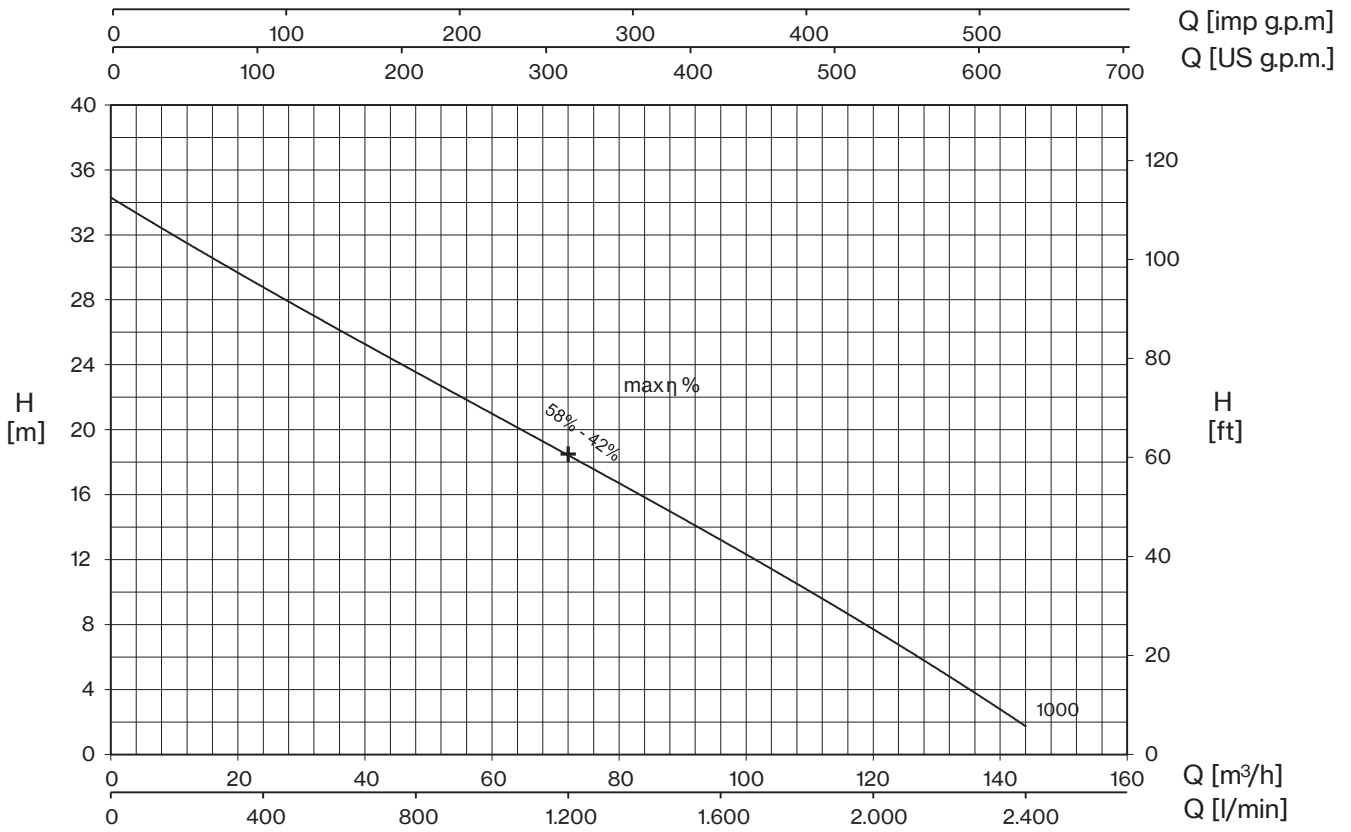

TYPE	AMPERE			
	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DMT 1000	-	16,3	28,2	16,3



+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution



TYPE	P2		P1 (kW)	Q (m³/h - l/min)													
				0	12	24	36	48	60	72	84	96	108	120	132	144	
	HP	kW	3~	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	
DMT 1000	10	7,5	9,6	34,9	30,9	28,3	26,1	23,7	21,3	18,7	16,1	13,2	10,2	7,4	4,6	2,1	



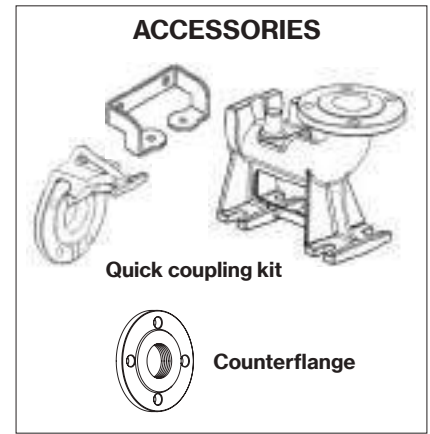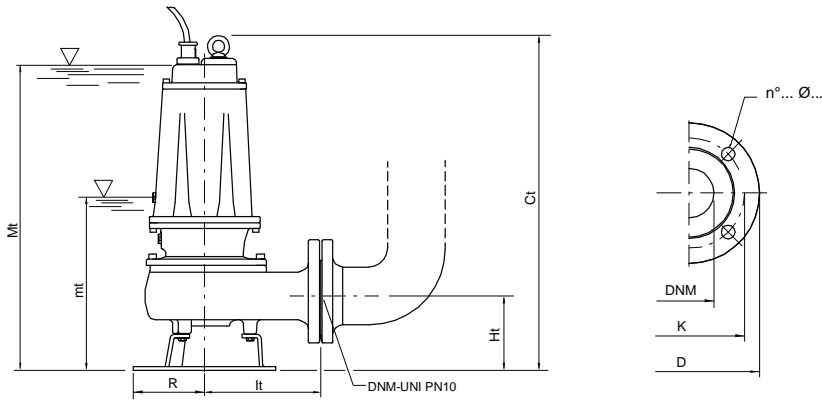

mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE		DIMENSIONS (mm)							Kg	
1~	3~	Ct	Ht	R	It	mt	Mt	DNM	1~	3~
DM 160	DMT 160	551	123	117	191	243	513	65	41,5	40
DM 210	DMT 210	551	123	117	191	243	513	65	42,5	41,5
-	DMT 310	551	123	117	191	243	513	65	-	42,5
-	DMT 410	645	148	160	210	285	600	80	-	68
-	DMT 560	645	148	160	210	285	600	80	-	71,5
-	DMT 1000	725	178	180	232	358	670	80	-	94

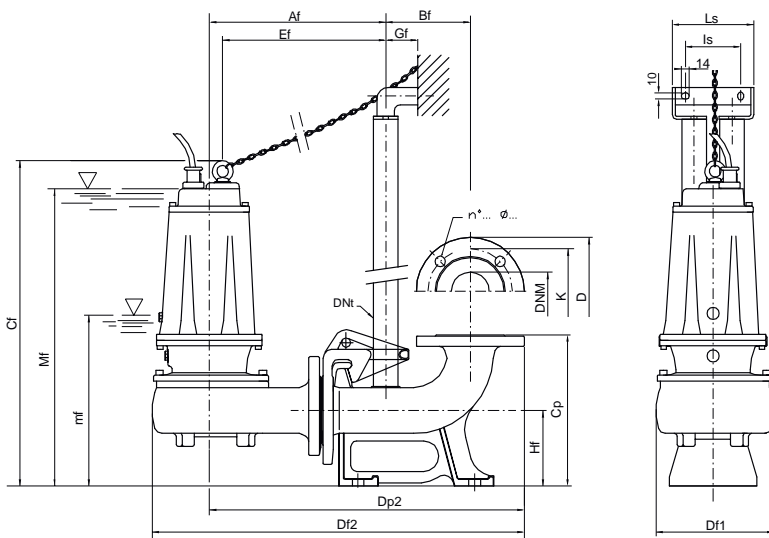


mf: minimum working level
 Mf: minimum submersion level for continuous duty

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
65	145	185	4... 18...
80	160	200	8... 18...

TYPE	DIMENSIONS (mm)																		
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNt	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM	
DM 160/P - DMT 160/P	303	145	560	260	200	639	542	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DM 210/P - DMT 210/P	303	145	560	260	200	639	542	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DMT 310/P	303	145	560	260	200	639	542	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DMT 410/P	350	165	690	340	220	722	615	2"	319	85	190	250	140	130	180	327	642	80	
DMT 560/P	350	165	690	340	220	722	615	2"	319	85	190	250	140	130	180	327	642	80	
DMT 1000/P	370	165	745	340	235	750	638	2"	338	85	190	250	140	130	180	380	690	80	


TYPE	PROTECTION		1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL		
	1- 230V	3- 400V	1- 230V	3- 400V	400/690 V	1- 230V	3- 400V	400/690 V
DM 160	PMC 15/35-15	PT 20-30-40/4.3-6.8	EQSM + 35µF	EQSMT 10		EQ2SM + 2x35µF	EQ2SMT 10	
DM 210	PMC 20/50-18	PT 20-30-40/4.3-6.8	EQSM + 50µF	EQSMT 10		EQ2SM + 2x50µF	EQ2SMT 10	
DMT 310		PT 40-50/5.7-9.1		EQSMT 10			EQ2SMT 10	
DMT 400		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DMT 560		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DMT 1000		PT 125-150/16-21		EQSMT 10	QST 10		EQ2SMT 10	Q2ST 10



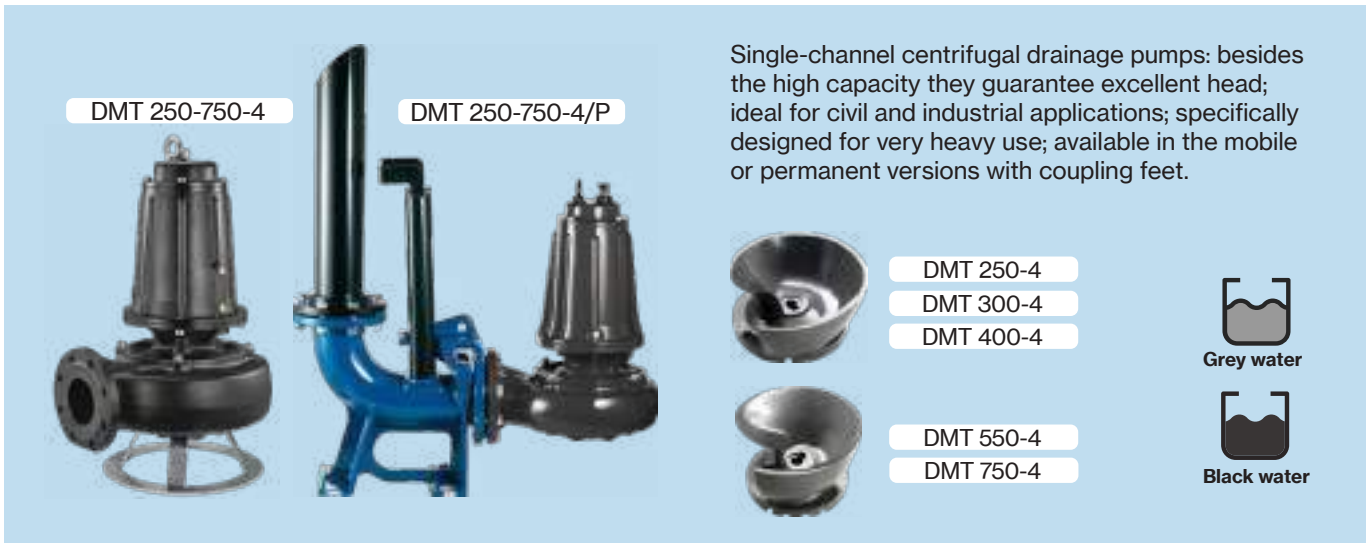

Single-channel centrifugal drainage pumps: besides the high capacity they guarantee excellent head; ideal for civil and industrial applications; specifically designed for very heavy use; available in the mobile or permanent versions with coupling feet.



Construction features

Painting	cataphoresis
Pump body	cast iron
 Impeller	cast iron
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side
Motor shaft	stainless steel AISI 304
Free passage	Ø max 60 mm (DMT 250/4÷400/4) Ø max 90 mm (DMT 550/4-750/4)
Max submergence	20 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
Bolts	A2 stainless steel
Foot support	galvanized iron
Gaskets	NBR rubber



Motor

4 Poles induction motor	3~ 230V - 50Hz 3~ 400V - 50Hz 3~ 230/400V - 50Hz 3~ 400/690V - 50Hz
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DMT 250-4÷750-4	85×110×190	12	100×120×190	12

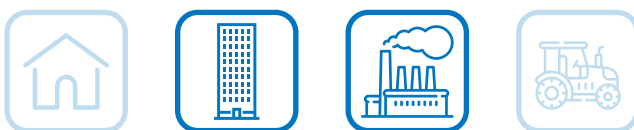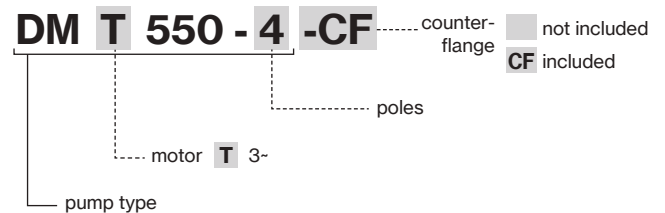

Q [imp g.p.m]
Q [US g.p.m.]

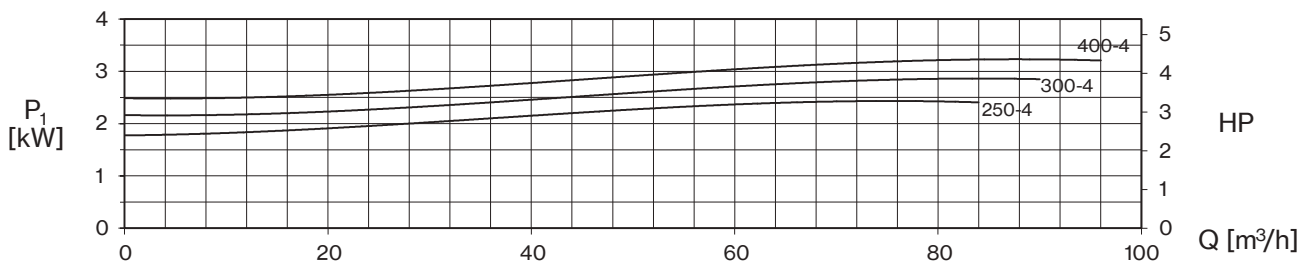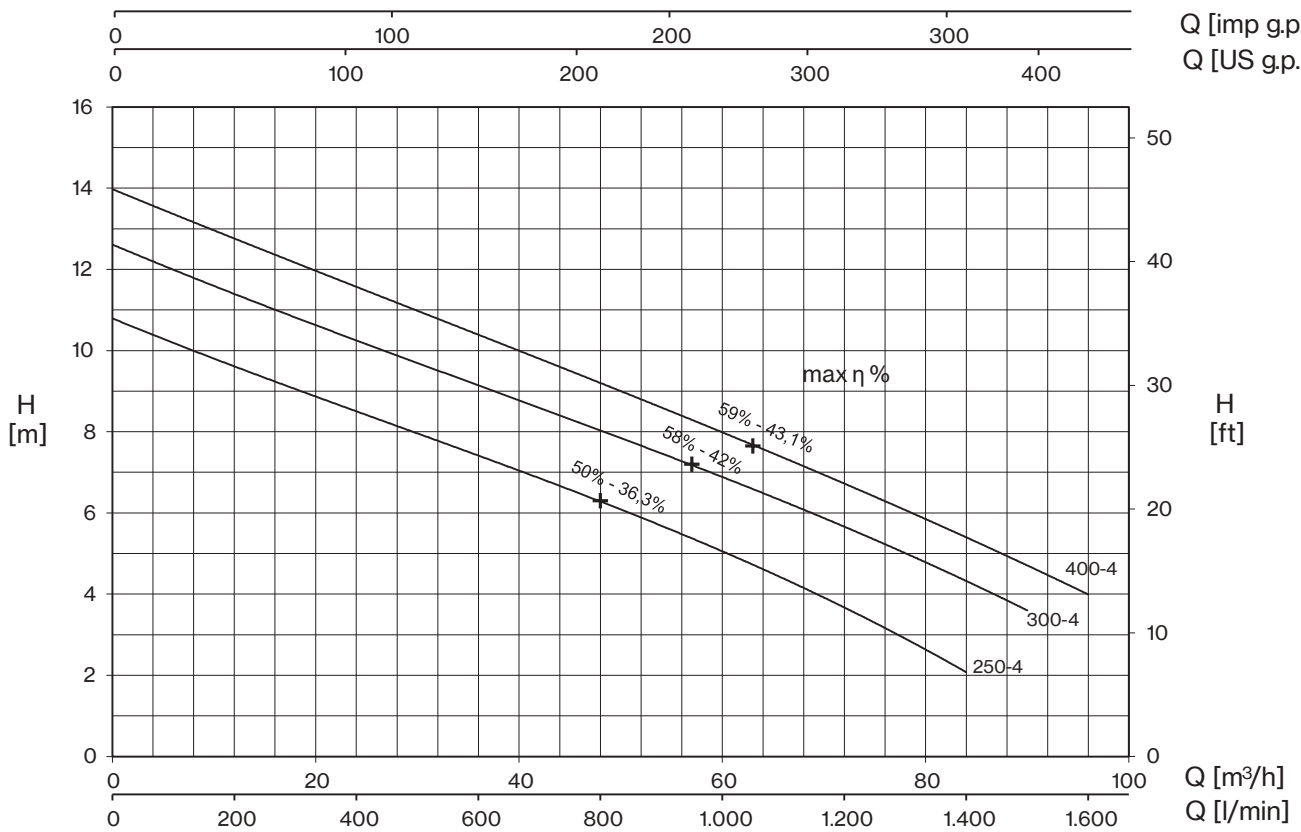

TYPE	AMPERE			
	3- 230V 50 Hz (*)	3- 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DMT 250-4	7,8	4,5	-	-
DMT 300-4	9	5,2	-	-
DMT 400-4	11,2	6,5	-	-

+ max η %



max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)										
				0	12	24	36	48	60	72	84	90	96	
	HP	kW	3-	0	200	400	600	800	1000	1200	1400	1500	1600	
	H (m)													
DMT 250-4	2,5	1,8	2,4	10,8	9,6	8,5	7,4	6,3	5,1	3,6	2,1			
DMT 300-4	3	2,2	2,9	12,6	11,4	10,3	9,1	8,0	6,9	5,7	4,3	3,6		
DMT 400-4	4	3	3,2	14,0	12,7	11,6	10,4	9,2	8,0	6,7	5,4	4,7	4,0	



DM4

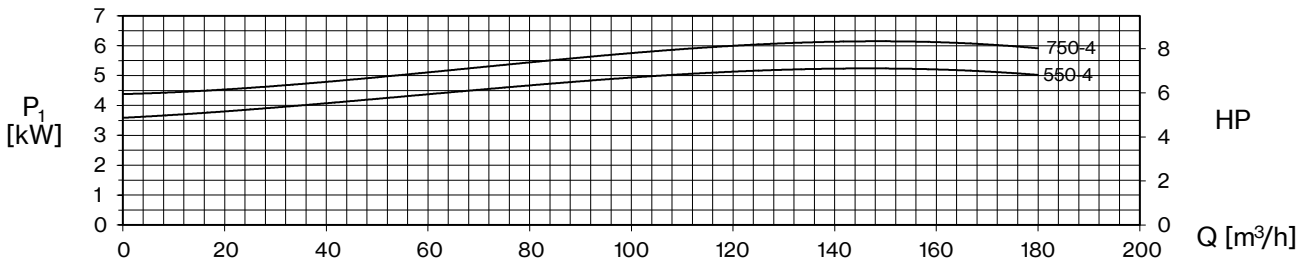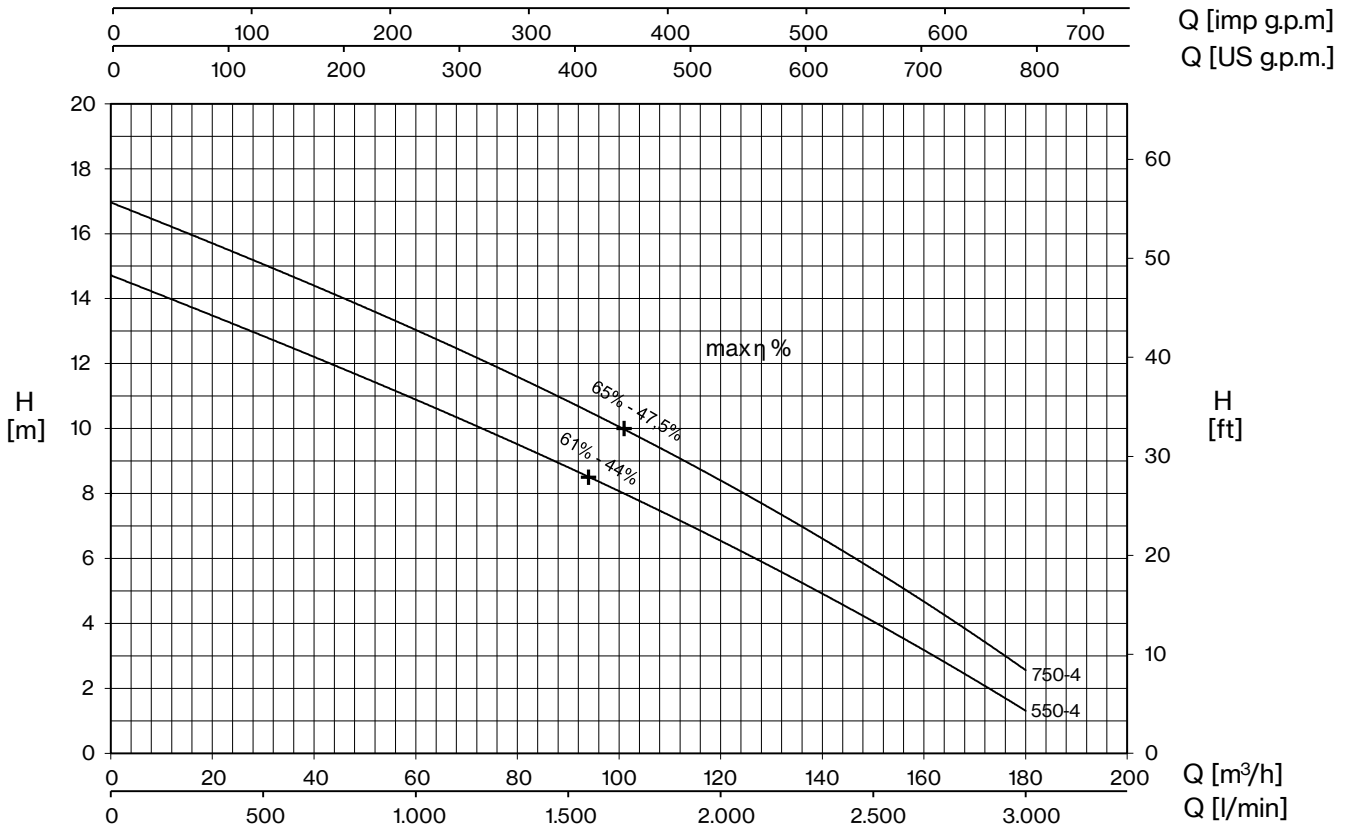

TYPE	AMPERE			
	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400V 50 Hz λ / Δ (*)	400/690V 50 Hz λ / Δ
DMT 550-4	-	9,4	16,3	9,4
DMT 750-4	-	11,8	20,4	11,8



+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution


TYPE	P2		P1 (kW)	Q (m³/h - l/min)																
				0	12	24	36	48	60	72	84	96	108	120	132	144	156	168	180	
	HP	kW	3~	0	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3000	
DMT 550-4	5,5	4	5,2	14,7	14,0	13,2	12,5	11,7	10,9	10,1	9,2	8,3	7,5	6,5	5,6	4,6	3,6	2,4	1,3	
DMT 750-4	7,5	5,5	6,1	17,0	16,2	15,4	14,7	13,8	13,0	12,2	11,4	10,4	9,4	8,4	7,3	6,2	5,1	3,8	2,6	



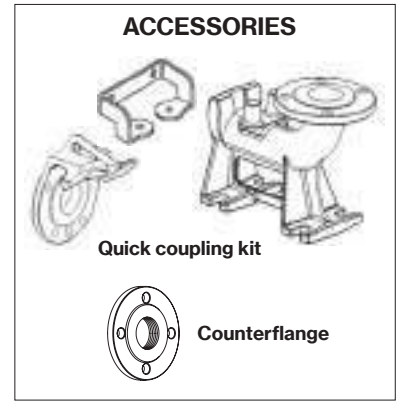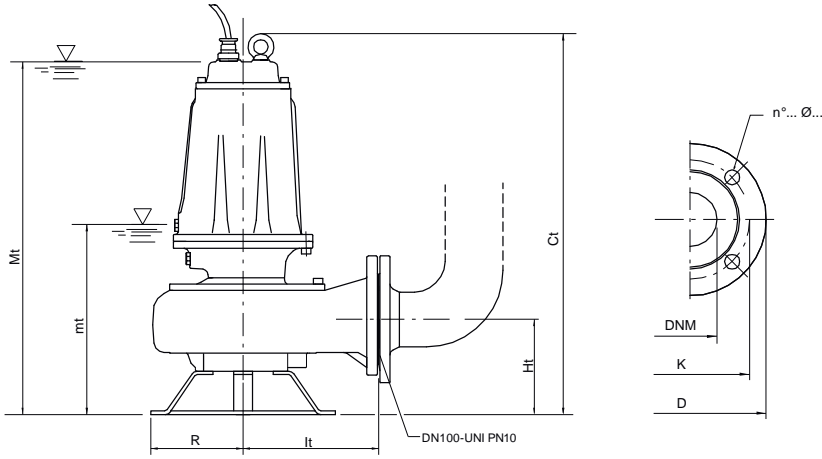

mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)							Kg
	Ct	Ht	R	It	mt	Mt	DNM	
DMT 250-4	660	165	160	235	300	614	100	71,5
DMT 300-4	660	165	160	235	300	614	100	74
DMT 400-4	660	165	160	235	300	614	100	77,5
DMT 550-4	715	195	180	276	385	695	100	104
DMT 750-4	715	195	180	276	385	695	100	107,5

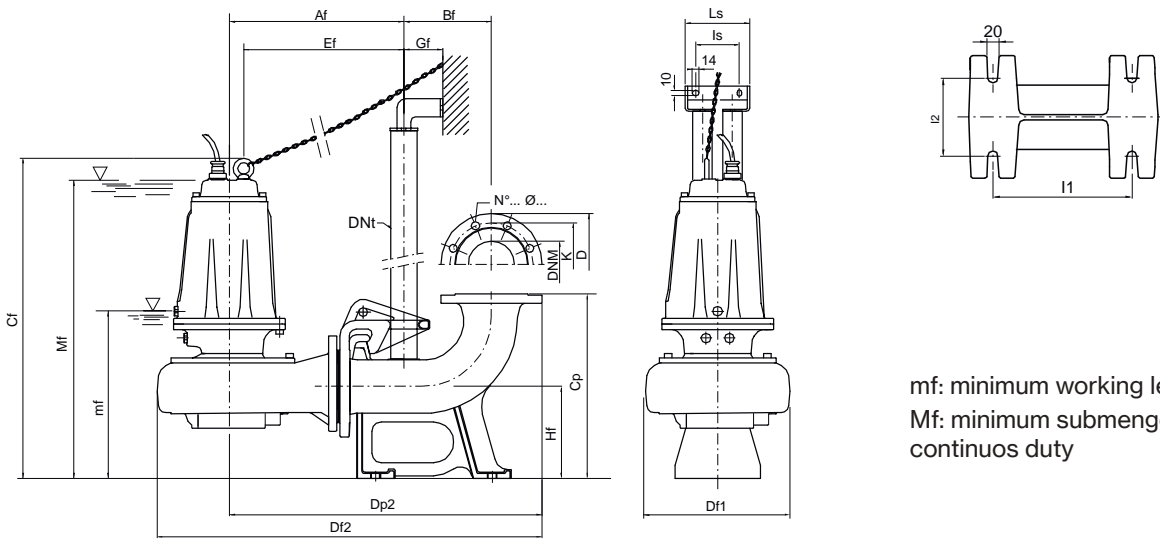

mf: minimum working level
 Mf: minimum submersion level for continuous duty


TYPE	DIMENSIONS (mm)																	
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	Dnt	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM
DMT 250-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100
DMT 300-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100
DMT 400-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100
DMT 550-4/P	419	190	755	400	371	900	719	2"	384	85	200	250	140	130	180	390	700	100
DMT 750-4/P	419	190	755	400	371	900	719	2"	384	85	200	250	140	130	180	390	700	100

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
100	180	220	8... 18...

TYPE	PROTECTION	1 PUMP CONTROL PANEL		2 PUMPS CONTROL PANEL	
	3- 400V	3- 400V	400/690 V	3- 400V	400/690 V
DMT 250-4	PT 40-50/5.7-9.1	EQSMT 10		EQ2SMT 10	
DMT 300-4	PT 40-50/5.7-9.1	EQSMT 10		EQ2SMT 10	
DMT 400-4	PT 40-50/5.7-9.1	EQSMT 10		EQ2SMT 10	
DMT 550-4	PT 55-75/8.6-13.5	EQSMT 10		EQ2SMT 10	
DMT 750-4	PT 100/12.5-16.5	EQSMT 10	QST 5	EQ2SMT 10	Q2ST 5




DTR 101

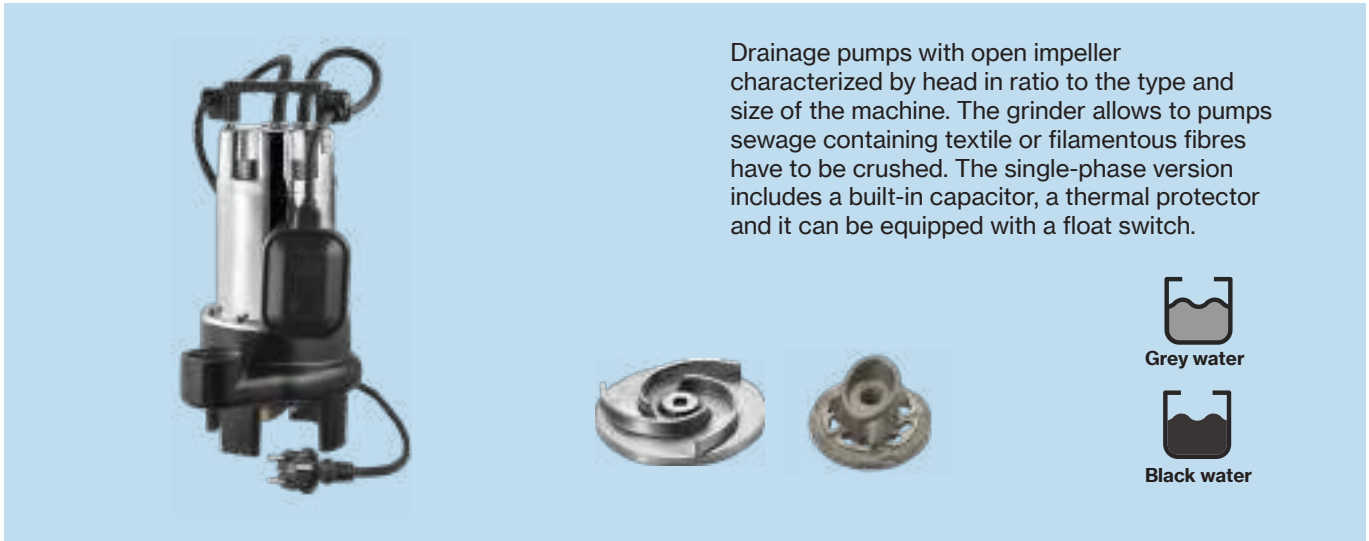


Drainage pumps with open impeller characterized by head in ratio to the type and size of the machine. The grinder allows to pumps sewage containing textile or filamentous fibres have to be crushed. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.



Construction features	
Painting	cataphoresis
Pump body	cast iron
Shell, motor cover	stainless steel
Impeller	brass
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side
Motor shaft	stainless steel AISI 430
 Grinder	treated stainless steel
Max submergence	5 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
G	float switch


Motor	
	3~ 400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX8

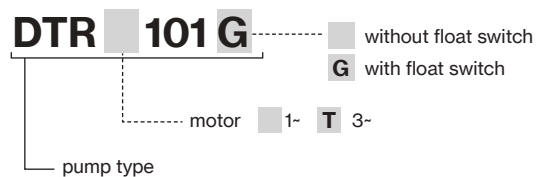

DTR 101


Q [imp.g.p.m.]

Q [US.g.p.m.]

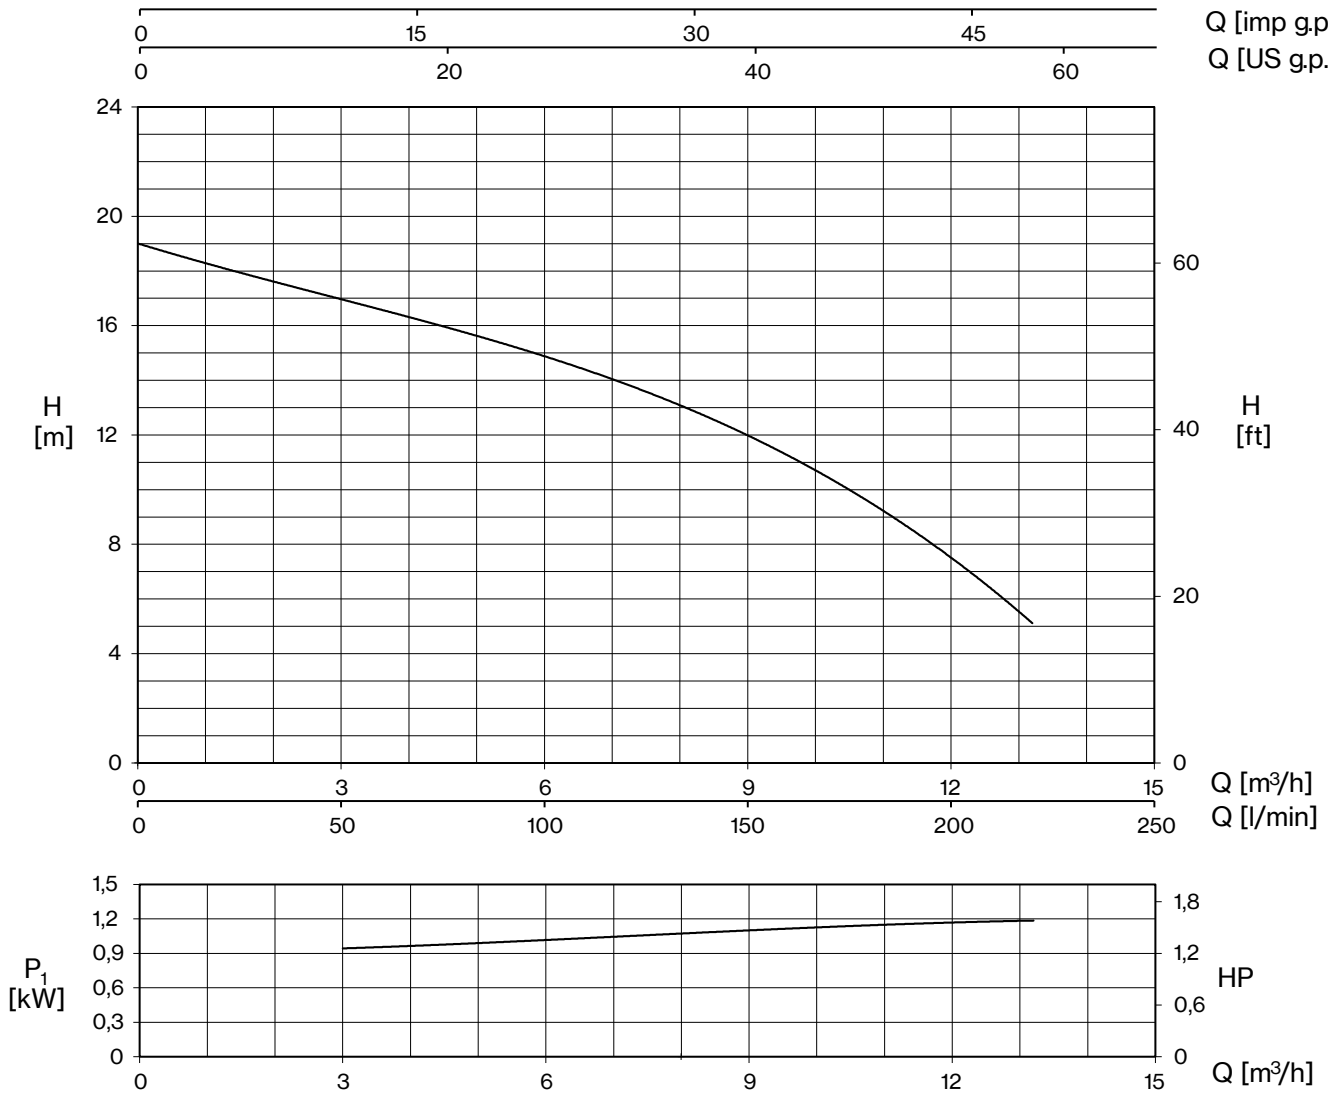

TYPE		W	AMPERE		Q (m³/h - l/min)					
1~	3~		1~ 230V 50 Hz	3~ 400V 50 Hz	0	3	6	9	12	13,2
					0	50	100	150	200	220
					H (m)					
DTR 101 (G)	DTRT 101	1200	5,3	2,2	19,0	17,1	14,8	11,9	7,8	4,9

E: maximum emptying level
Mt: minimum liquid level for continuous duty

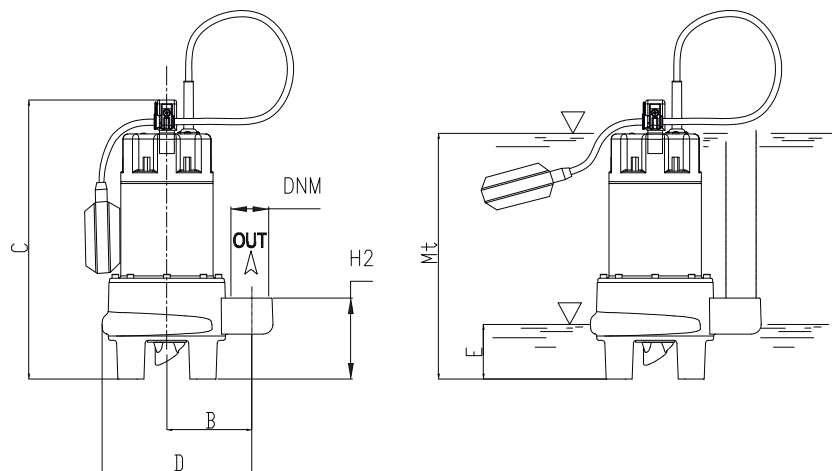

TYPE		DIMENSIONS (mm)										
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	Kg
DTR 101 (G)	DTRT 101	105	359	218,5	70	104,5	313	1" 1/2 G	260	185	450	16,5



DTR/DTRT


Sewage
Grinder



Drainage and waste water pumps equipped with open impeller and grinder system able to shred sewage with suspended solids and prevent the pump from clogging. Best for emptying of septic tanks and residential sumps as well as for rain water systems and for draining of flooded areas where seamless operation is required. The quick coupling feet DN50 and DN65 is available for flanged pumps.





Construction features

Painting	cataphoresis
Pump body	cast iron
Impeller	cast iron
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side
Motor shaft	stainless steel AISI 304
Max submergence	20 m
Liquid temperature	0 - 40 °C
	Grinder treated stainless steel
Bolts	A2 stainless steel
Foot support	galvanized iron
Gaskets	NBR rubber



Motor

2 Poles induction motor	3- 230V - 50Hz 3- 400V - 50Hz 3- 230/400V - 50Hz 3- 400/690V - 50Hz
1- 230V - 50Hz	required run capacitor (35µF for 1,5HP models, 50µF for 2HP model) + start capacitor (80µF with disjuntor)
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DTRT 150-300	85×110×145	18	85×110×190	27
DTRT 400-550	85×110×170	12	85×110×170	12
DTRT 750-1000	100×120×190	12	100×120×190	12

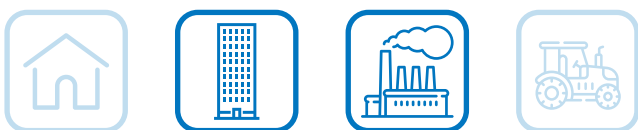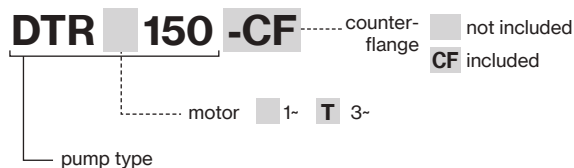

DTR/DTRT

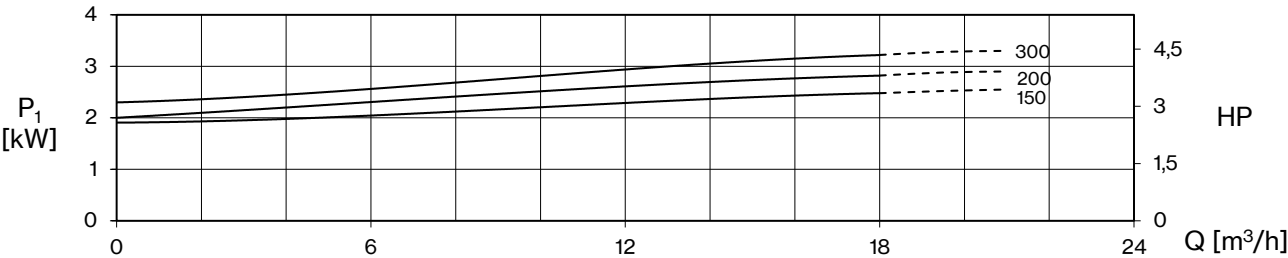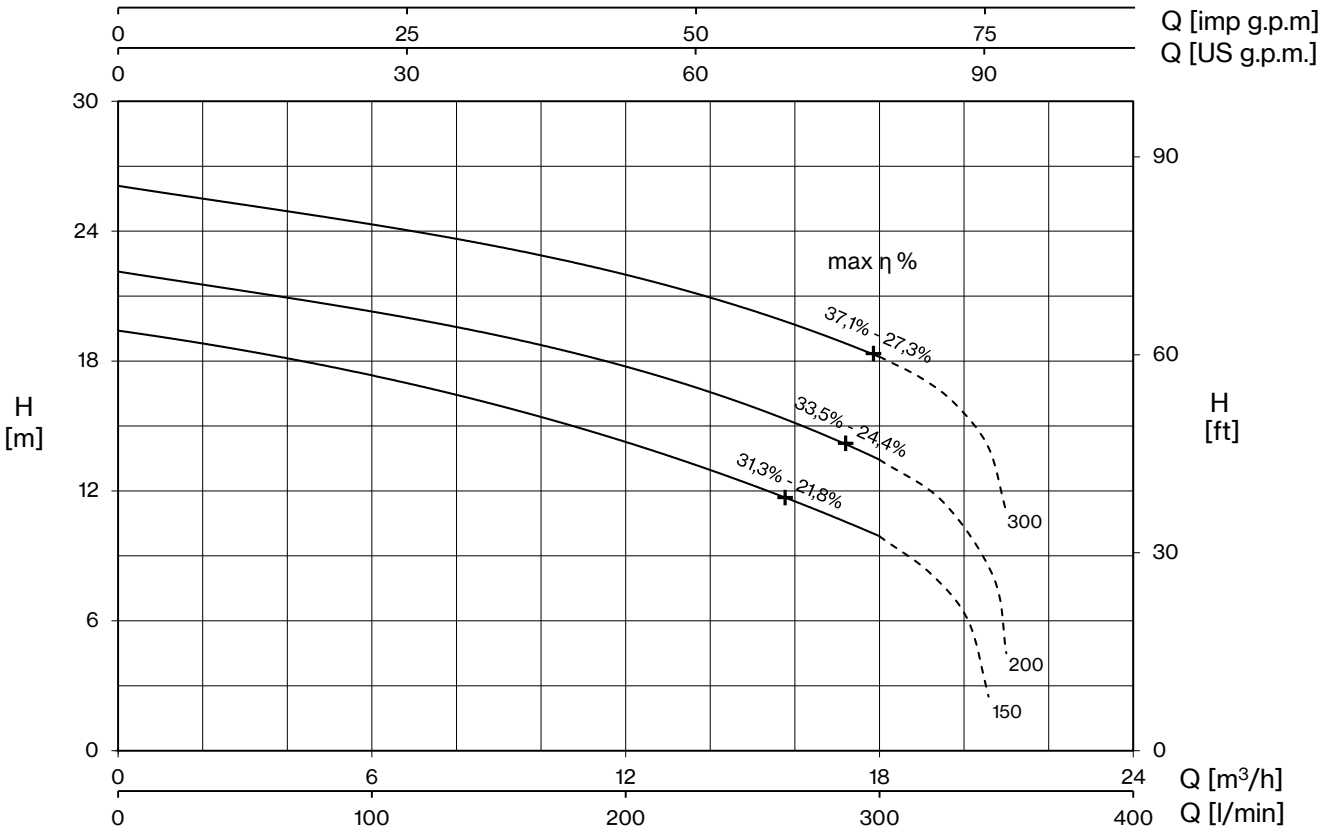

TYPE		AMPERE				
1~	3~	230 V 50 Hz	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DTR 150	DTRT 150	11,5	7,6	4,4	-	-
DTR 200	DTRT 200	13,6	8,8	5,1	-	-
-	DTRT 300	-	10,0	5,8	-	-

+ max η %


max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE		P ₂		P ₁ (kW)		Q (m³/h - l/min)							
1~	3~	HP	kW	1~	3~	0	3	6	9	12	13,2	15	18
						0	50	100	150	200	220	250	300
						H (m)							
DTR 150	DTRT 150	1,5	1,1	2,6	2,5	19,4	18,5	17,3	16,0	14,2	13,5	12,3	9,9
DTR 200	DTRT 200	2	1,5	3	2,8	22,1	21,3	20,3	19,1	17,7	17,1	16	13,4
-	DTRT 300	3	2,2	-	3,2	26,1	25,2	24,3	23,3	22	21,4	20,3	18,2



DTR/DTRT

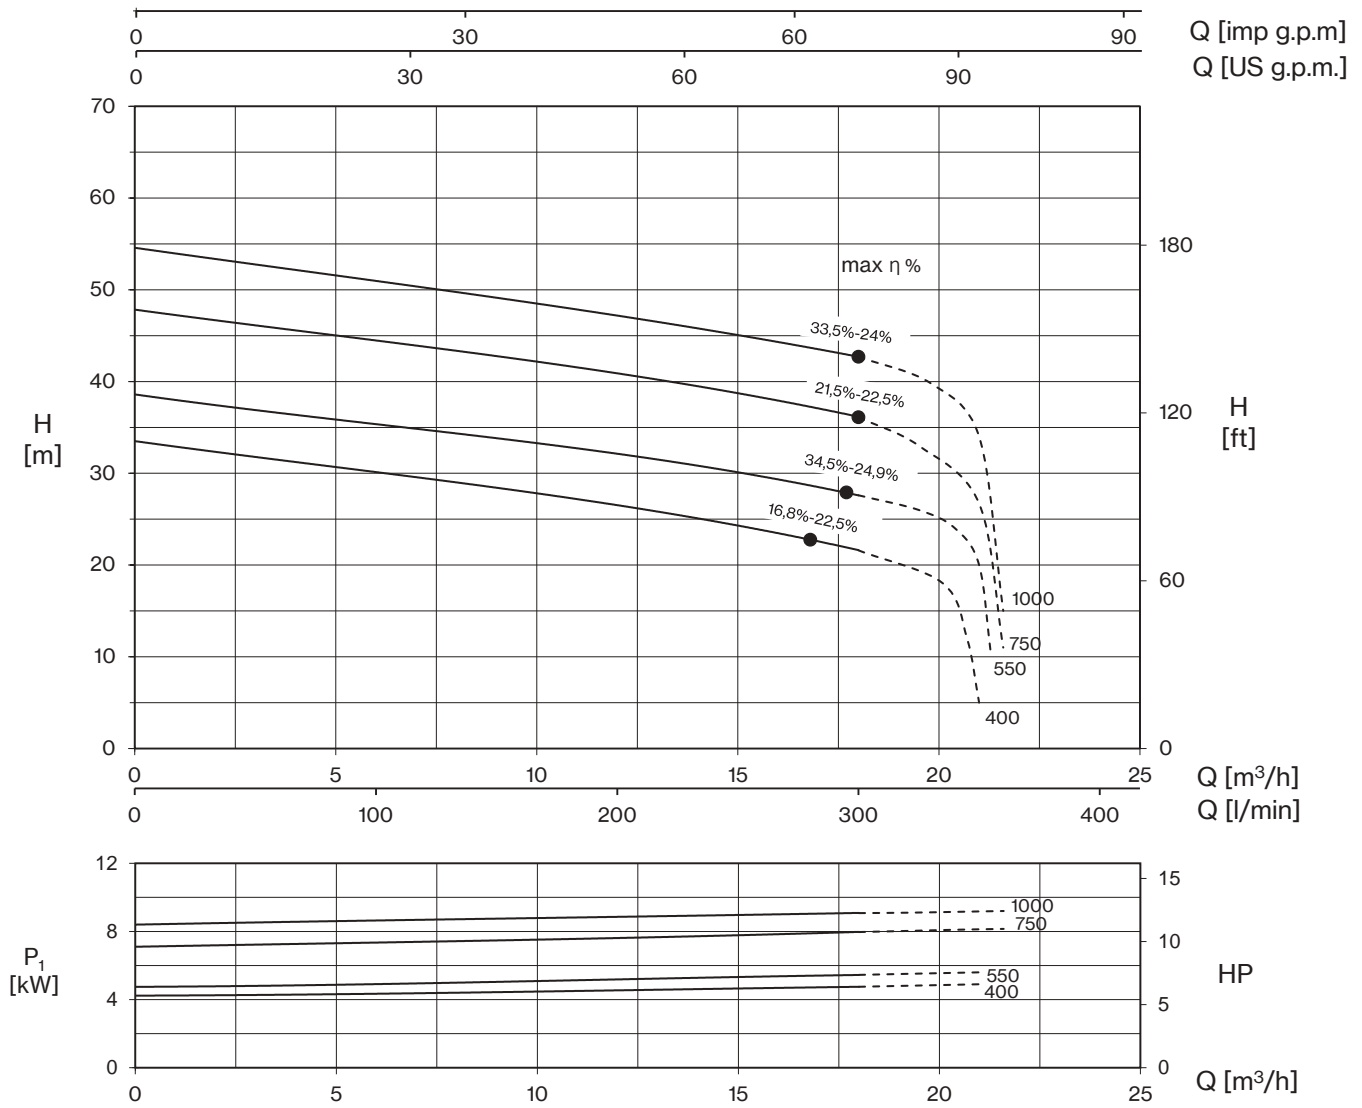

TYPE	AMPERE			
	3- 230V 50 Hz (*)	3- 400V 50 Hz	230/400V 50 Hz λ / Δ (*)	400/690V 50 Hz λ / Δ
DTRT 400	13,0	7,5	-	-
DTRT 550	15,9	9,2	-	-
DTRT 750	-	13,9	24	13,9
DTRT 1000	-	15,5	26,8	15,5


+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)							
				0	3	6	9	12	15	18	
	HP	kW	3-	0	50	100	150	200	250	300	
	H (m)										
DTRT 400	4	3	4,5	33,5	31,8	30,1	28,5	26,4	24,4	21,6	
DTRT 550	5,5	4	5,3	38,6	36,9	35,3	33,9	32,1	30,1	27,6	
DTRT 750	7,5	5,5	8,0	47,8	46,2	44,5	42,7	40,8	38,9	36,1	
DTRT 1000	10	7,5	9,1	54,6	52,7	51,0	49,2	47,1	45,1	42,7	



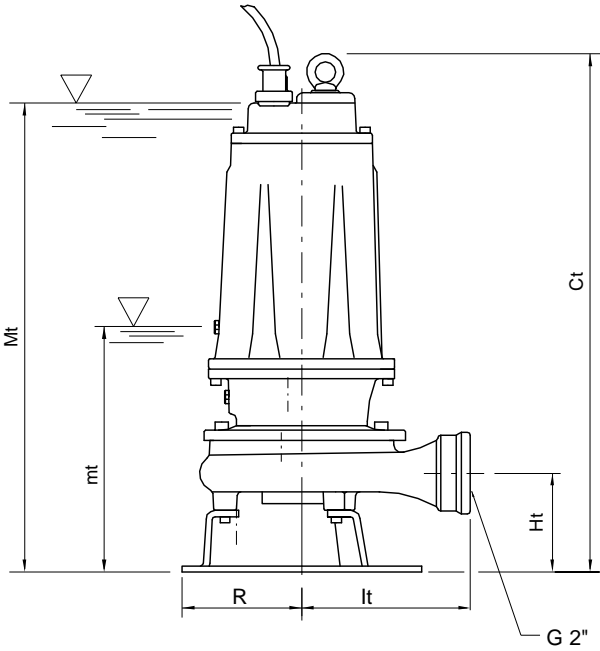




mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE		DIMENSIONS (mm)							Kg
1~	3~	Ct	Ht	R	lt	mt	Mt	DNM	
DTR 150	DTRT 150	513	102	117	174	205	475	2" G	38
DTR 200	DTRT 200	513	102	117	174	205	475	2" G	38,5
-	DTRT 300	513	102	117	174	205	475	2" G	38

TYPE	PROTECTION		1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL		
	1- 230V	3- 400V	1- 230V	3- 400V	400/690 V	1- 230V	3- 400V	400/690 V
DTR 150	PMLD 15/35-13	PT 20-30-40/4.3-6.8	EQSM + 35µF + 80µF*	EQSMT 10		EQ2SM + 2×35µF + 2×80µF*	EQ2SMT 10	
DTR 200	PMLD 20/50-15	PT 20-30-40/4.3-6.8	EQSM + 50µF + 80µF*	EQSMT 10		EQ2SM + 2×50µF + 2×80µF*	EQ2SMT 10	
DTRT 300		PT 20-30-40/4.3-6.8		EQSMT 10			EQ2SMT 10	
DTRT 400		PT 40-50/5.7-9.1		EQSMT 10			EQ2SMT 10	
DTRT 550		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DTRT 750		PT 100/12.5-16.5		EQSMT 10	QST 7		EQ2SMT 10	Q2ST 7
DTRT 1000		PT 125-150/16-21		EQSMT 10	QST 10		EQ2SMT 10	Q2ST 10



*start capacitor with disjuntor

DTR/DTRT

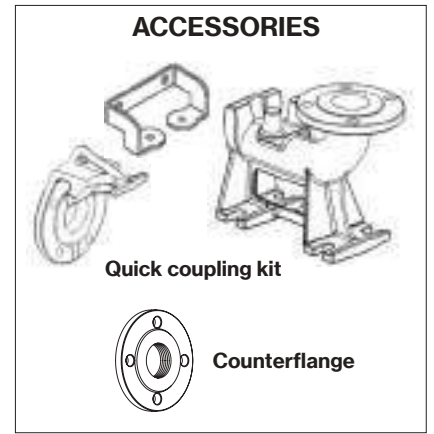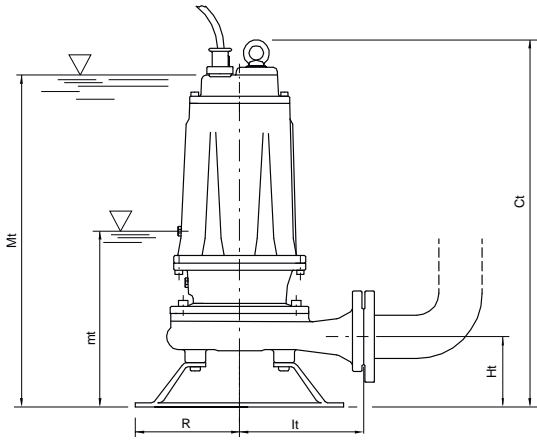

mt: minimum working level
Mt: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)								Kg
	Ct	Ht	R	It	mt	Mt	DNM		
DTRT 400	595	112	160	190	265	550	50	62,5	
DTRT 550	595	112	160	190	265	550	50	65,5	
DTRT 750	680	160	180	250	280	630	65	91,5	
DTRT 1000	680	160	180	250	280	630	65	94,5	

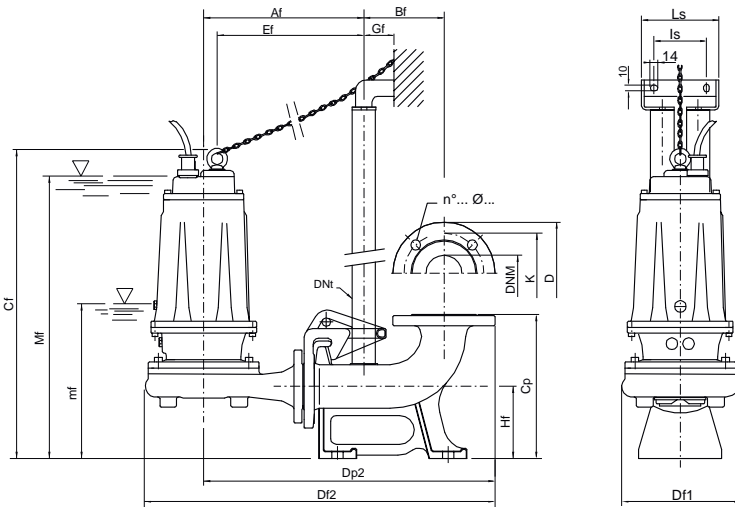



mf: minimum working level
Mf: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)																		
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	Dnt	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM	
DTRT 400/P	300	145	614	260	237	654	538	1" 1/4	269	55	130	200	100	95	140	290	566	50	
DTRT 550/P	300	145	614	260	237	654	538	1" 1/4	269	55	130	200	100	95	140	290	566	50	
DTRT 750/P	331	145	656	260	279	710	569	1" 1/4	297	55	130	200	100	95	140	290	600	65	
DTRT 1000/P	331	145	656	260	279	710	569	1" 1/4	297	55	130	250	100	95	140	290	600	65	

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
50	125	165	4... 18...
65	145	185	4... 18...




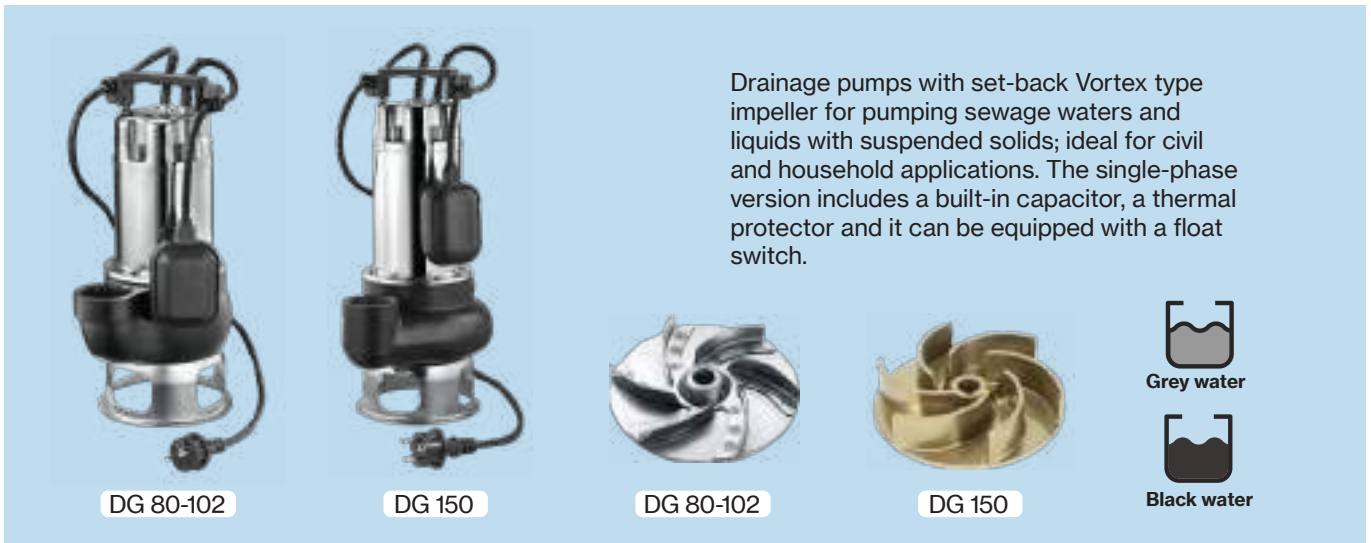


Construction features	
Painting	cataphoresis
Pump body	cast iron
Shell, motor cover, base support	stainless steel
 Impeller	Vortex stainless steel (80÷102); brass (150)
Mechanical seal	double seal with oil barrier: pump side with silicon carbide mechanical seal; motor side with sealing ring (80÷102) or ceramic-graphite mechanical seal (150)
Motor shaft	stainless steel AISI 430
Free passage	Ø max 35 mm (80-100) Ø max 50 mm (82÷150)
Max submergence	5 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
G	float switch

Motor	
	3~ 400V - 50Hz
2 Poles induction motor	1~ 230V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DG 80÷102	80×120×145	48	80×120×190	76
DG 150	80×120×160	51	80×120×160	51

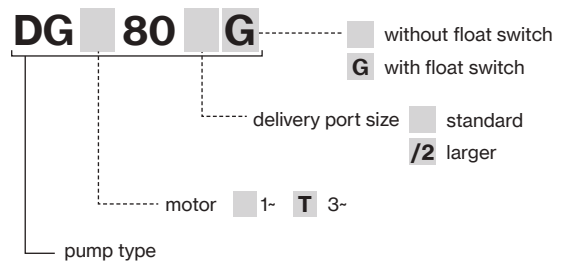


DG

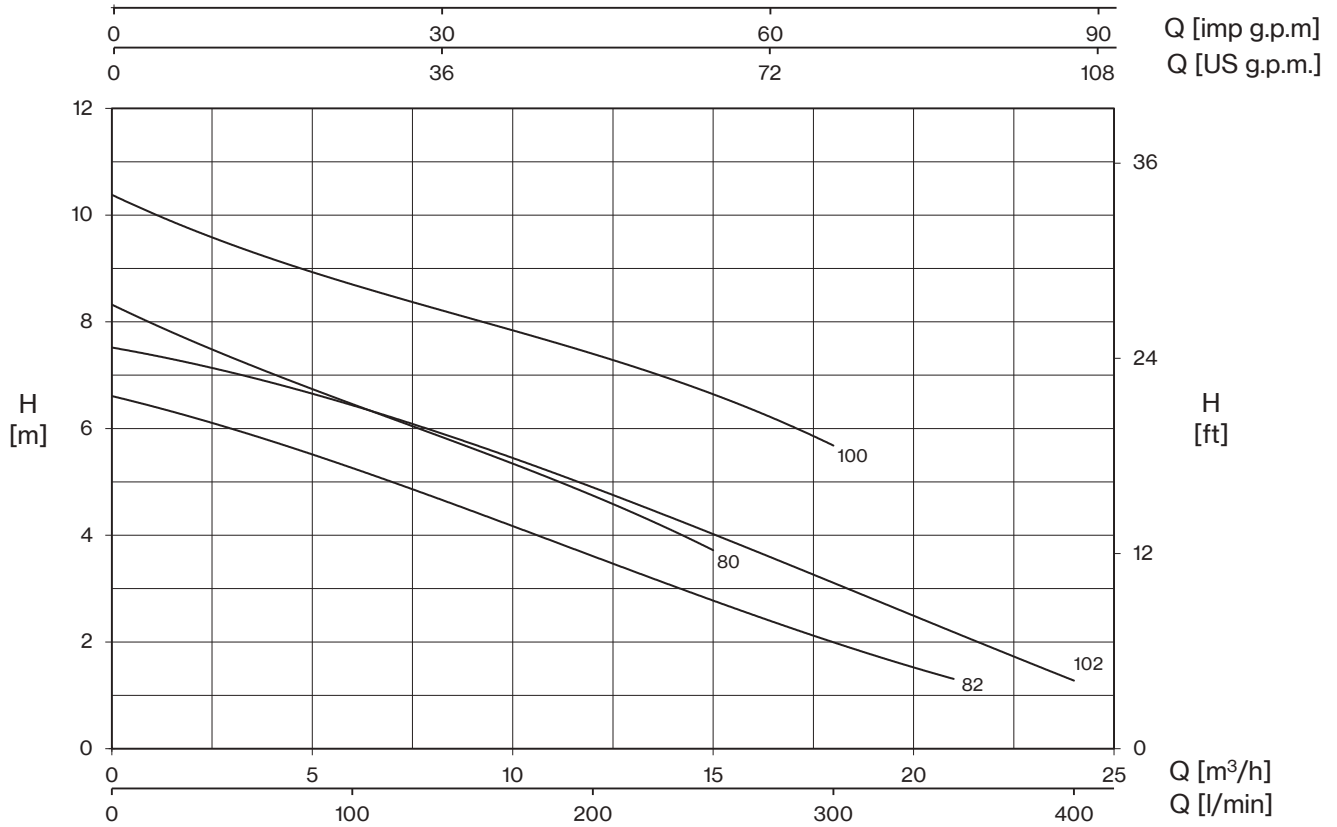


TYPE		W	AMPERE		Q (m³/h - l/min)										
1~	3~		1~	3~	0	3	6	9	12	15	18	21	24		
					0	50	100	150	200	250	300	350	400		
		1- 230V 50 Hz		3- 400V 50 Hz		H (m)									
DG 80 (G)	DGT 80	1050	4,7	2,2	8,3	7,4	6,4	5,6	4,8	3,7					
DG 80/2 (G)	DGT 80/2	1050	4,7	2,2	8,3	7,4	6,4	5,6	4,8	3,7					
DG 100 (G)	DGT 100	1350	6,2	2,8	10,4	9,4	8,7	8,1	7,4	6,6	5,7				
DG 100/2 (G)	DGT 100/2	1350	6,2	2,8	10,4	9,4	8,7	8,1	7,4	6,6	5,7				
DG 82 (G)	DGT 82	1000	4,5	2,1	6,6	6,0	5,3	4,4	3,6	2,8	2,0	1,3			
DG 102 (G)	DGT 102	1200	5,3	2,4	7,5	7,1	6,4	5,7	4,9	4,0	3,2	2,1	1,3		

E: maximum emptying level
Mt: minimum liquid level for continuous duty

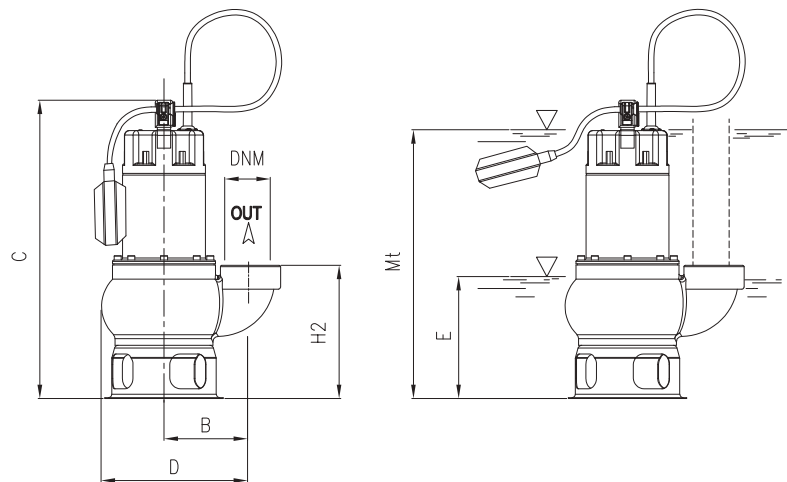


TYPE		DIMENSIONS (mm)										Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DG 80 (G)	DGT 80	110	410	230	140	174	290	1"½ G	250	183	448	13,5
DG 80/2 (G)	DGT 80/2	110	410	230	140	174	290	2" G	250	183	448	14
DG 100 (G)	DGT 100	110	410	230	140	174	290	1"½ G	250	183	448	15,5
DG 100/2 (G)	DGT 100/2	110	410	230	140	174	290	2" G	250	183	448	15,5
DG 82 (G)	DGT 82	120	426	250	150	190	300	2" G	264	203	482	15
DG 102 (G)	DGT 102	120	426	250	150	190	300	2" G	264	203	482	16



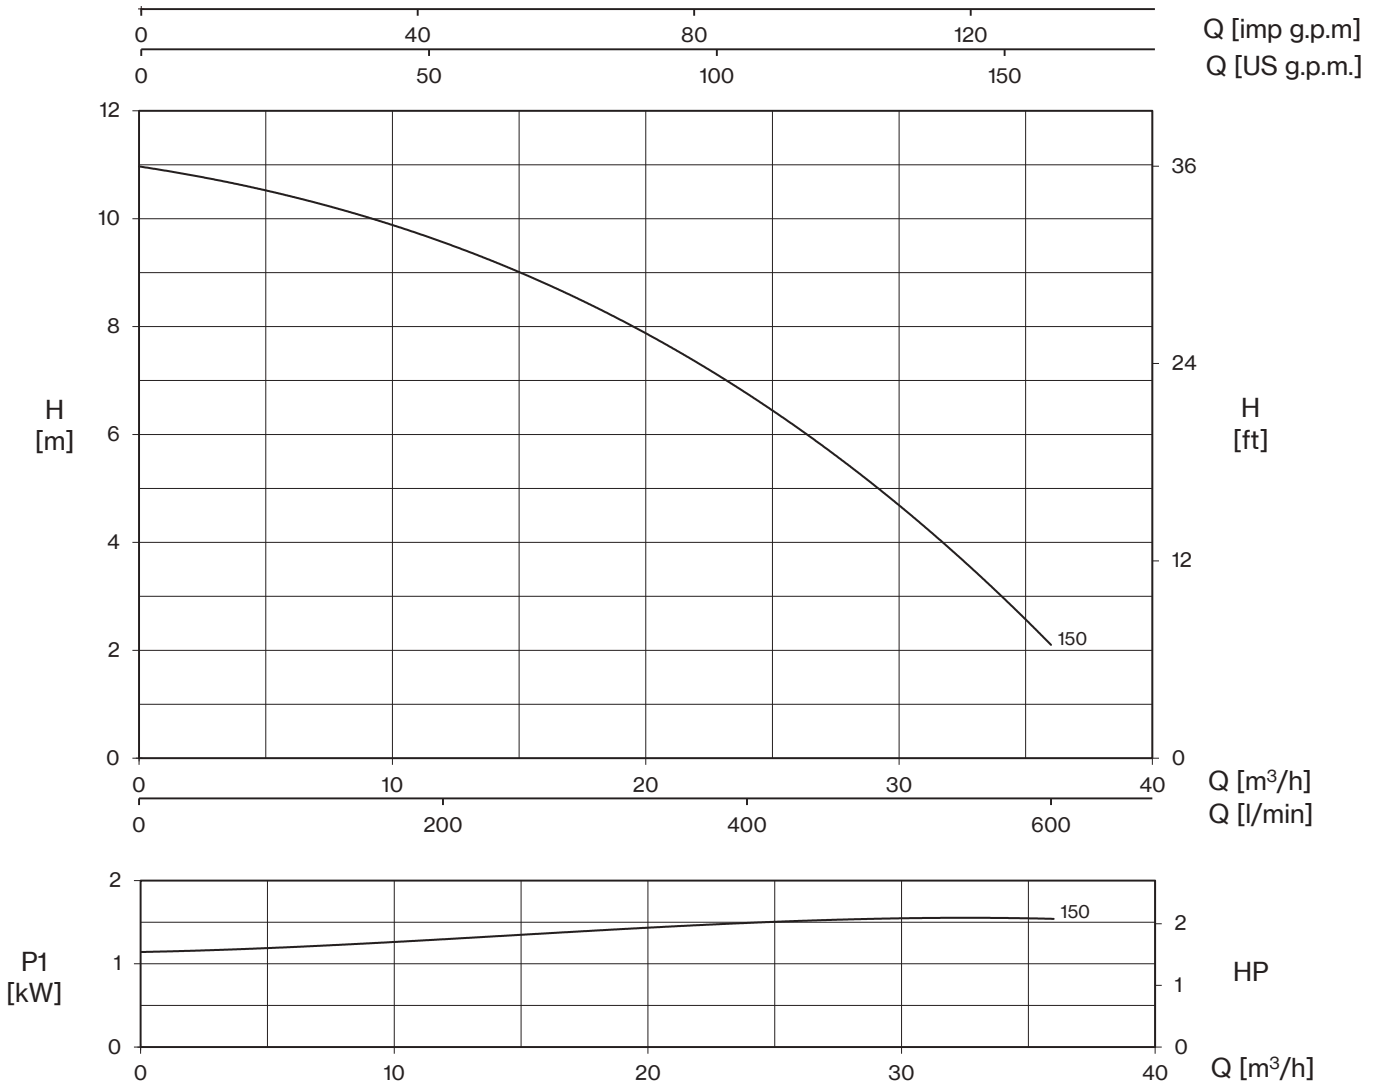

TYPE		W	AMPERE		Q (m³/h - l/min)						
1~	3~		1~ 230V 50 Hz	3~ 400V 50 Hz	0	6	12	18	24	30	36
					0	100	200	300	400	500	600
					H (m)						
DG 150 (G)	DGT 150	1550	7,1	2,9	11,0	10,4	9,6	8,3	6,8	4,6	2,1

E: maximum emptying level
Mt: minimum liquid level for continuous duty

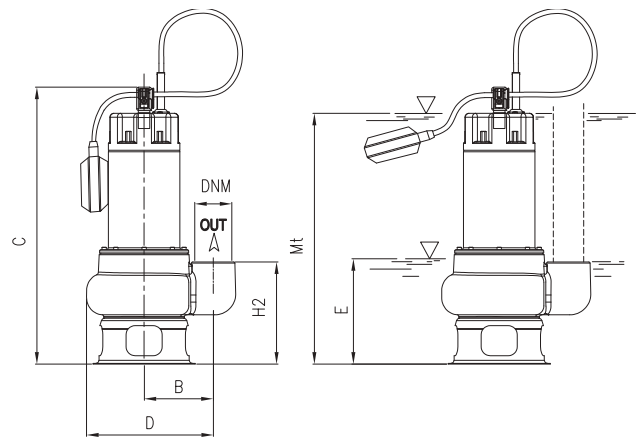

TYPE		DIMENSIONS (mm)										Kg
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	
DG 150 (G)	DGT 150	142,5	461	247,5	185	170	390	2" G	200	260	470	19





Drainage pumps with set-back Vortex type impeller for pumping charged waters and liquids with suspended solids; ideal for civil and household applications. The single-phase version includes a built-in capacitor, a thermal protector and it can be equipped with a float switch.



Construction features

Pump body stainless steel with openings 1" ½ and 2"

Shell, motor cover, base support stainless steel



Impeller stainless steel Vortex type

Mechanical seal double seal with oil barrier: silicon carbide on pump side, sealing ring on motor side

Motor shaft stainless steel AISI 430

Free passage Ø max 28 mm

Max submergence 5 m

Liquid temperature 0 - 40 °C

Cable H07 RN8F, 10 m

G float switch

Motor


3~ 400V - 50Hz


2 Poles induction motor 1~ 230V - 50Hz
(with thermal protection)

Insulation class F

Protection degree IPX8


TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DX	80×120×145	48	80×120×190	76

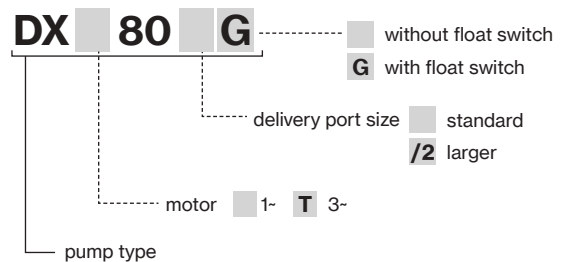

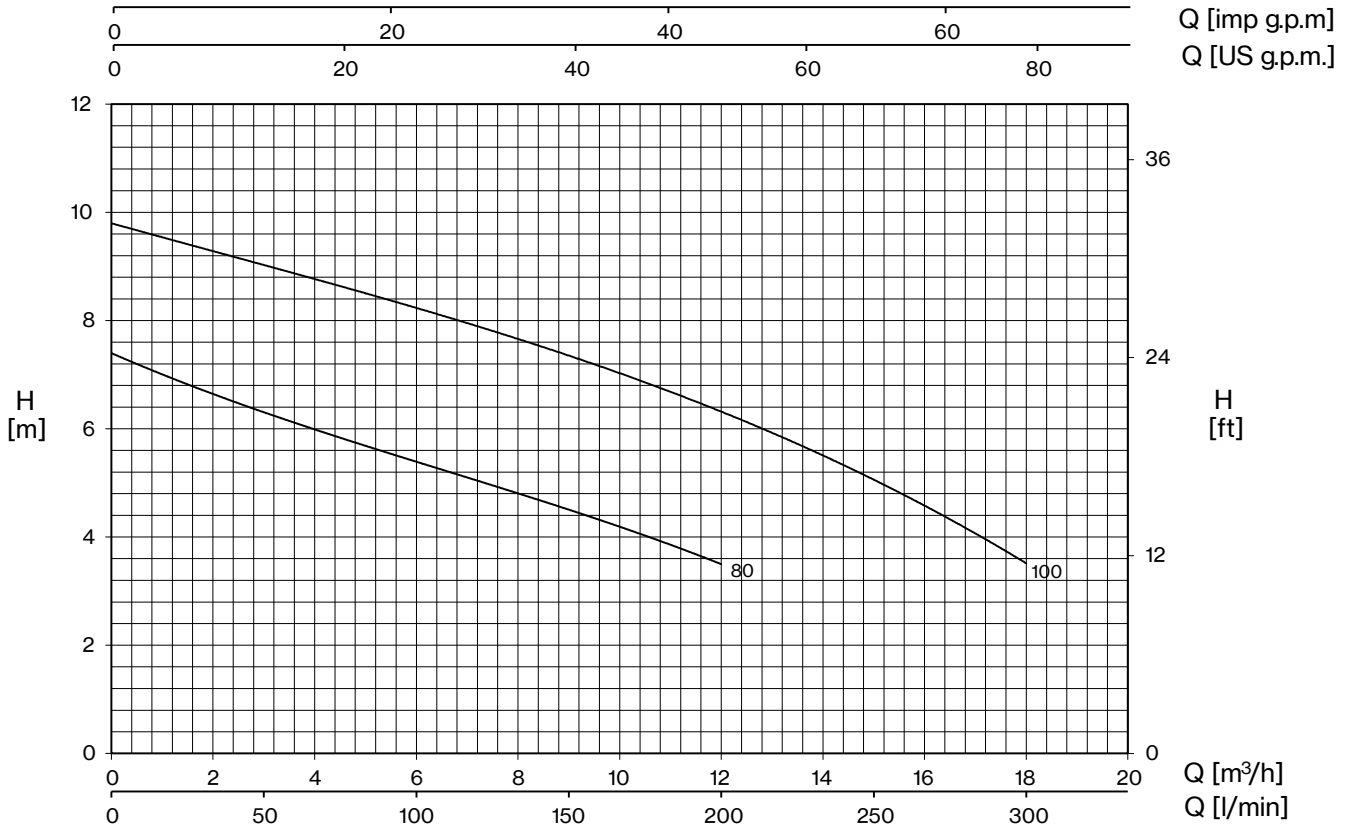


TYPE		W	AMPERE		Q (m³/h - l/min)						
1~	3~		1~ 1- 230V 50 Hz	3~ 3- 400V 50 Hz	0	3	6	9	12	15	18
					0	50	100	150	200	250	300
H (m)											
DX 80 (G)	DXT 80	1050	4,7	2,2	7,4	6,3	5,4	4,5	3,5		
DX 80/2 (G)	DXT 80/2	1050	4,7	2,2	7,4	6,3	5,4	4,5	3,5		
DX 100 (G)	DXT 100	1350	6,2	2,8	9,8	9,0	8,3	7,3	6,3	5,1	3,5
DX 100/2 (G)	DXT 100/2	1350	6,2	2,8	9,8	9,0	8,3	7,3	6,3	5,1	3,5

E: maximum emptying level
Mt: minimum liquid level for continuous duty

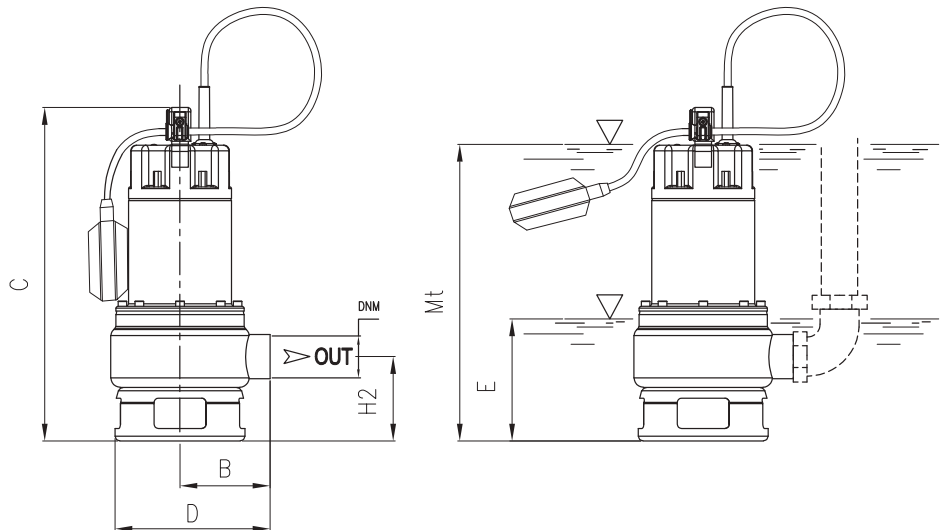

TYPE		DIMENSIONS (mm)										
1~	3~	B	C	D	E	H2	Mt	DNM	I	L	M	Kg
DX 80 (G)	DXT 80	104	400	183	125	112	280	1" ½ G	250	183	448	10,5
DX 80/2 (G)	DXT 80/2	114	400	183	125	112	280	2" G	250	183	448	10,5
DX 100 (G)	DXT 100	104	400	183	125	112	280	1" ½ G	250	183	448	12
DX 100/2 (G)	DXT 100/2	114	400	183	125	112	280	2" G	250	183	448	12



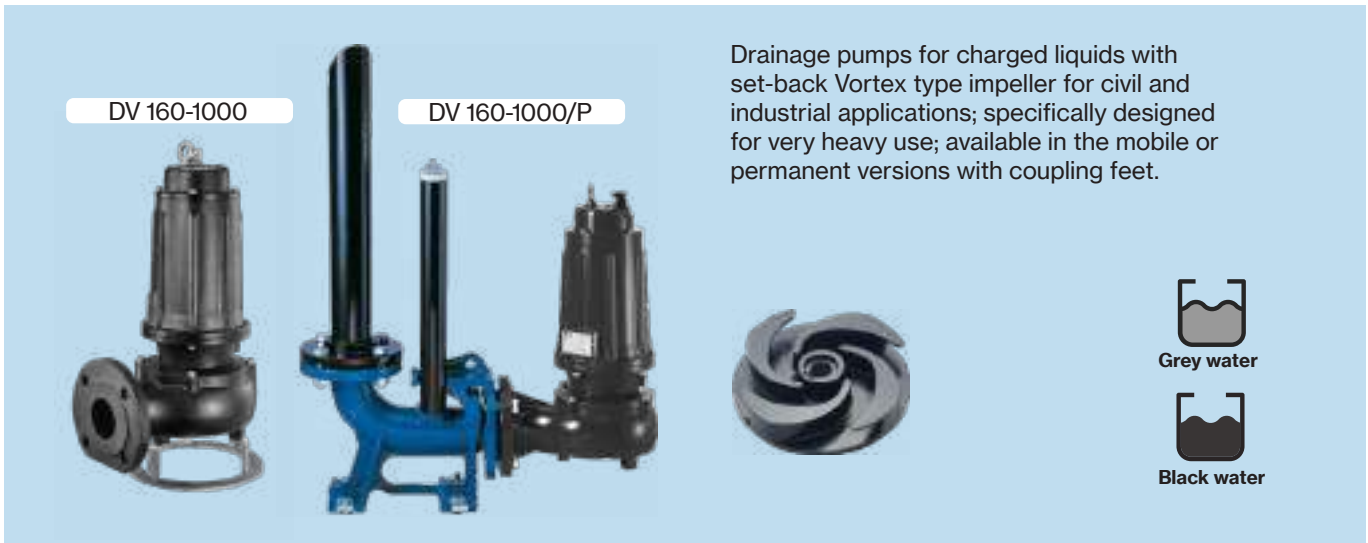


Drainage pumps for charged liquids with set-back Vortex type impeller for civil and industrial applications; specifically designed for very heavy use; available in the mobile or permanent versions with coupling feet.





Construction features



Painting	cataphoresis
Pump body	cast iron
	Impeller cast iron
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side
Motor shaft	stainless steel AISI 304
Free passage	Ø max 50 mm (160÷310; 750-1000) Ø max 45 mm (400-550)
Max submergence	20 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
Bolts	A2 stainless steel
Foot support	galvanized iron
Gaskets	NBR rubber

Motor

2 Poles induction motor	3~ 230V - 50Hz 3~ 400V - 50Hz 3~ 230/400V - 50Hz 3~ 400/690V - 50Hz
	1- 230V - 50Hz required run capacitor (35µF for 1,5HP model, 50µF for 2HP model)
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DV 160÷310	85×110×145	18	85×110×190	27
DVT 400-550	85×110×170	12	85×110×170	12
DVT 750-1000	100×120×190	12	100×120×190	12

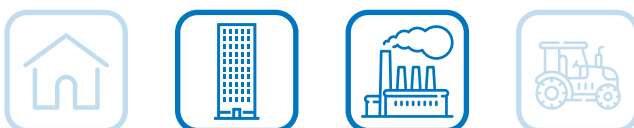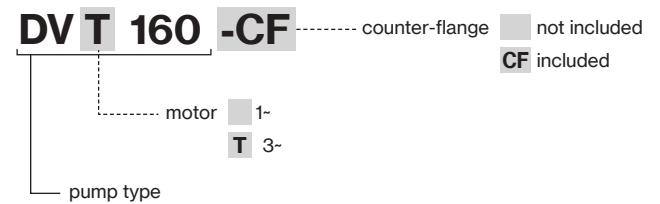

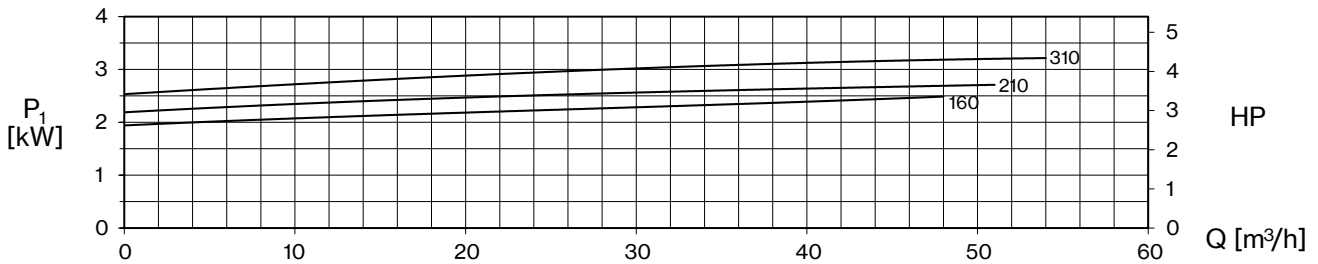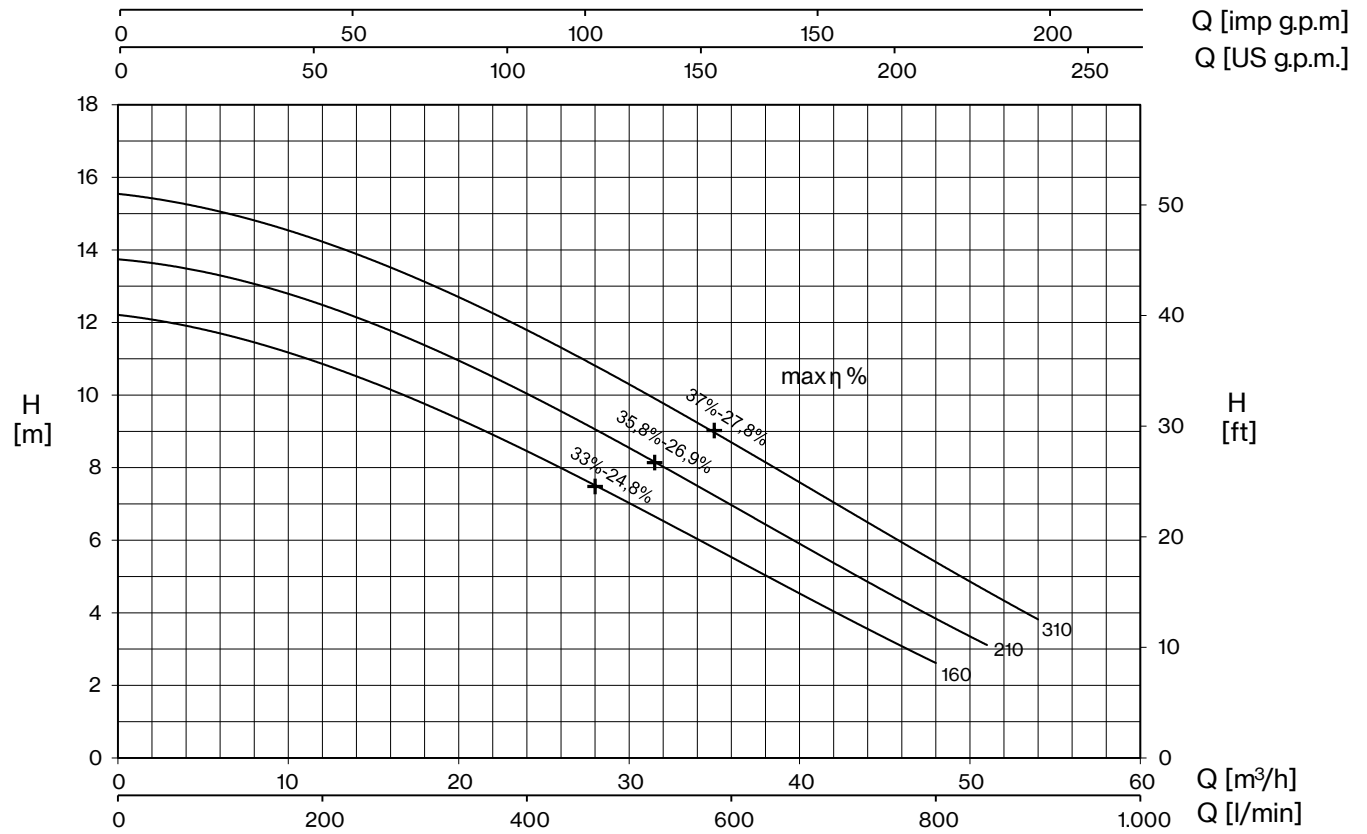

TYPE		AMPERE				
1~	3~	230V 50 Hz	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DV 160	DVT 160	11,3	7,1	4,1	-	-
DV 210	DVT 210	12,6	8,7	5	-	-
-	DVT 310	-	9,9	5,7	-	-

+ max η %


max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE		P2		P1 (kW)		Q (m³/h - l/min)							
1~	3~	HP	kW	1~	3~	0	12	24	36	42	48	51	54
						0	200	400	600	700	800	850	900
						H (m)							
DV 160	DVT 160	1,5	1,1	2,5	2,3	12,2	10,9	8,4	5,6	4,1	2,6		
DV 210	DVT 210	2	1,5	2,8	2,7	13,7	12,6	9,9	7,0	5,4	3,8	3,1	
-	DVT 310	3	2,2	-	3,3	15,5	14,4	11,6	8,8	7,1	5,4	4,5	3,8



DV

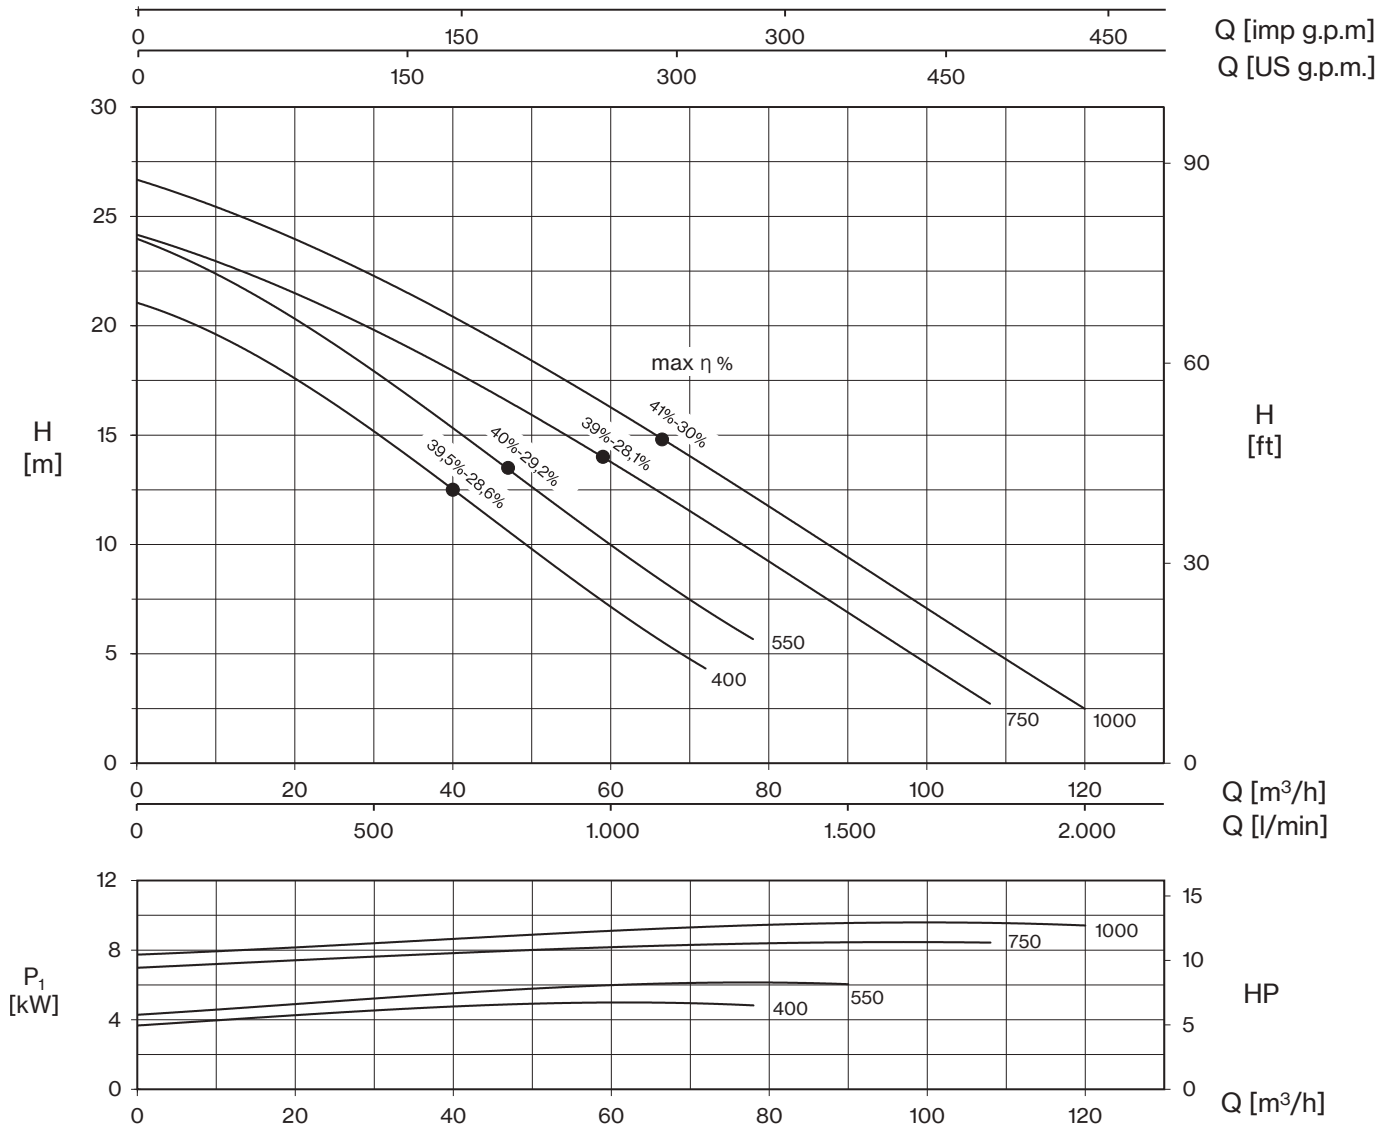

TYPE	AMPERE			
	3~ 230V 50 Hz (*)	3~ 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DVT 400	14,1	8,1	-	-
DVT 550	18,1	10,4	-	-
DVT 750	-	14,4	25	14,4
DVT 1000	-	16,4	28,5	16,4



+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution



TYPE	P2		P1 (kW)	Q (m³/h - l/min)																
				0	12	24	36	42	48	51	54	60	72	78	84	90	96	108	114	120
	HP	kW	3~	0	200	400	600	700	800	850	900	1000	1200	1300	1400	1500	1600	1800	1900	2000
DVT 400	4	3	4,9	21,0	19,4	16,6	13,5	12,0	10,4	9,6	8,8	7,2	4,3	2,8						
DVT 550	5,5	4	6,1	23,9	22,2	19,3	16,3	14,8	13,2	12,4	11,6	10	7,1	5,6	4,1	2,6				
DVT 750	7,5	5,5	8,5	24,2	22,7	20,7	18,7	17,6	16,4	15,8	15,2	13,9	11,1	9,7	8,2	6,8	5,4	2,8		
DVT 1000	10	7,5	9,6	26,7	25,2	23,2	21,2	20,0	18,8	18,2	17,6	16,3	13,7	12,3	10,8	9,4	8,0	5,1	3,8	2,6



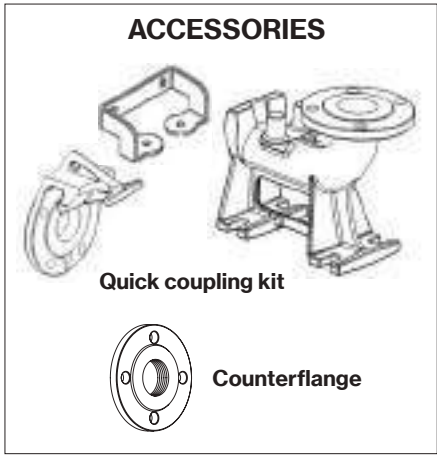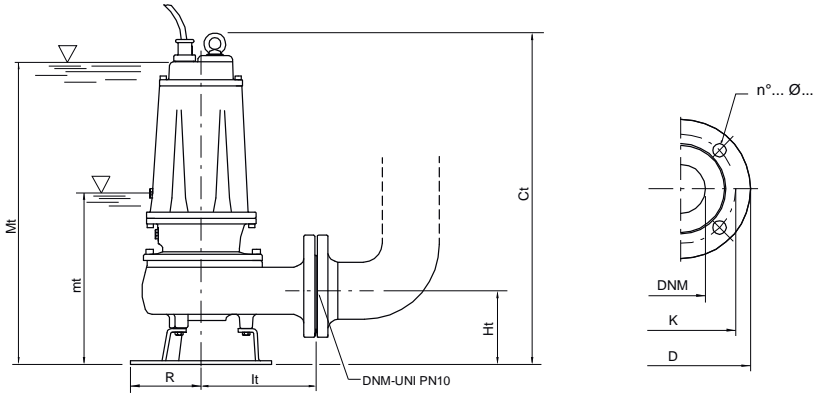

mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE		DIMENSIONS (mm)							Kg	
1~	3~	Ct	Ht	R	It	mt	Mt	DNM	1~	3~
DV 160	DVT 160	551	123	117	191	243	513	65	40,5	39,5
DV 210	DVT 210	551	123	117	191	243	513	65	41,5	40,5
-	DVT 310	551	123	117	191	243	513	65	-	41,5
-	DVT 400	645	148	160	210	285	600	80	-	68
-	DVT 550	645	148	160	210	285	600	80	-	71
-	DVT 750	725	178	180	232	358	670	80	-	90
-	DVT 1000	725	178	180	232	358	670	80	-	92,5

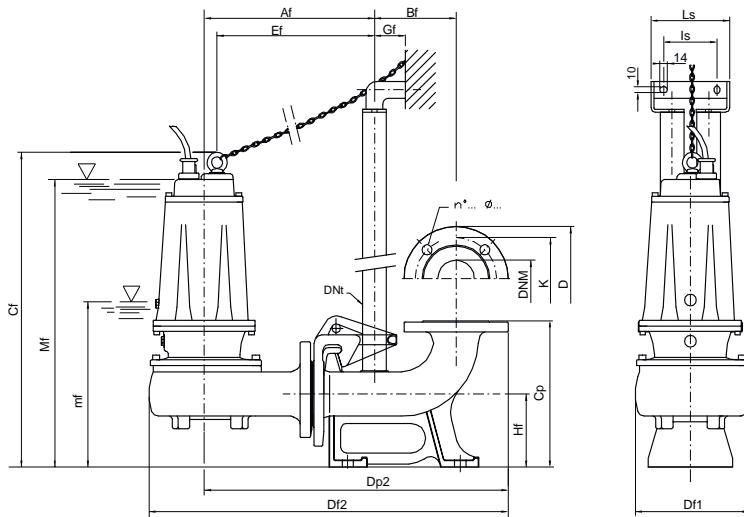

mf: minimum working level
 Mf: minimum submersion level for continuous duty

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
65	145	185	4... 18...
80	160	200	8... 18...

TYPE	DIMENSIONS (mm)																		
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNt	Ef	Gf	Hf	I1	I2	Is	Ls	mf	Mf	DNM	
DV 160/P - DVT 160/P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DV 210/P - DVT 210/P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DVT 310/P	303	145	559	260	200	639	541	1" 1/4	280	55	130	200	100	95	140	251	521	65	
DVT 400/P	350	165	690	340	220	720	615	2"	319	85	190	250	140	130	180	327	642	80	
DVT 550/P	350	165	690	340	220	720	615	2"	319	85	190	250	140	130	180	327	642	80	
DVT 750/P	370	165	745	340	235	750	638	2"	338	85	190	250	140	130	180	380	690	80	
DVT 1000/P	370	165	745	340	235	750	638	2"	338	85	190	250	140	130	180	380	690	80	


TYPE	PROTECTION		1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL		
	1- 230V	3- 400V	1- 230V	3- 400V	400/690 V	1- 230V	3- 400V	400/690 V
DV 160	PMC 15/35-15	PT 20-30-40/4.3-6.8	EQSM + 35µF	EQSMT 10		EQ2SM + 35µF	EQ2SMT 10	
DV 210	PMC 20/50-18	PT 20-30-40/4.3-6.8	EQSM + 50µF	EQSMT 10		EQ2SM + 50µF	EQ2SMT 10	
DVT 310		PT 40-50/5.7-9.1		EQSMT 10			EQ2SMT 10	
DVT 400		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DVT 550		PT 55-75/8.6-13.5		EQSMT 10			EQ2SMT 10	
DVT 750		PT 100/12.5-16.5		EQSMT 10	QST 7		EQ2SMT 10	Q2ST 7
DVT 1000		PT 125-150/16-21		EQSMT 10	QST 10		EQ2SMT 10	Q2ST 10





Drainage pumps for charged liquids with set-back Vortex type impeller for civil and industrial applications; specifically designed for very heavy use; available in the mobile or permanent versions with coupling feet.




Construction features



Painting	cataphoresis
Pump body	cast iron
	Impeller cast iron
Mechanical seal	double seal with oil barrier: silicon carbide on pump side, ceramic-graphite on motor side
Motor shaft	stainless steel AISI 304
Free passage	Ø max 50 mm
Max submergence	20 m
Liquid temperature	0 - 40 °C
Cable	H07 RN8F, 10 m
Bolts	A2 stainless steel
Foot support	galvanized iron
Gaskets	NBR rubber

Motor

4 Poles induction motor	3~ 230V - 50Hz 3~ 400V - 50Hz 3~ 230/400V - 50Hz 3~ 400/690V - 50Hz
Insulation class	F
Protection degree	IPX8

TYPE	LOTS			
	TRUCK		CONTAINER	
	PALLET (cm)	N° pumps	PALLET (cm)	N° pumps
DVT 250-4÷750-4	85×110×190	8	100×120×190	12

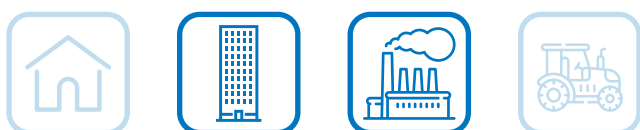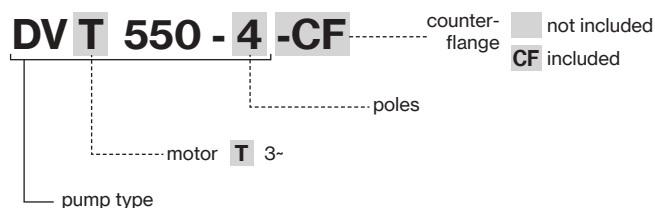

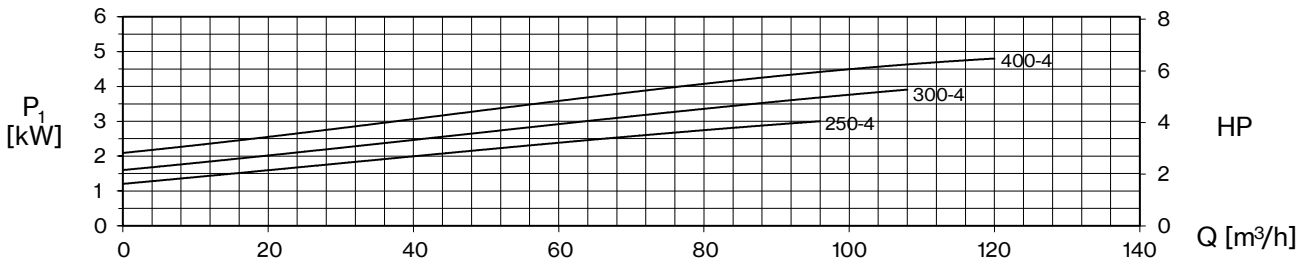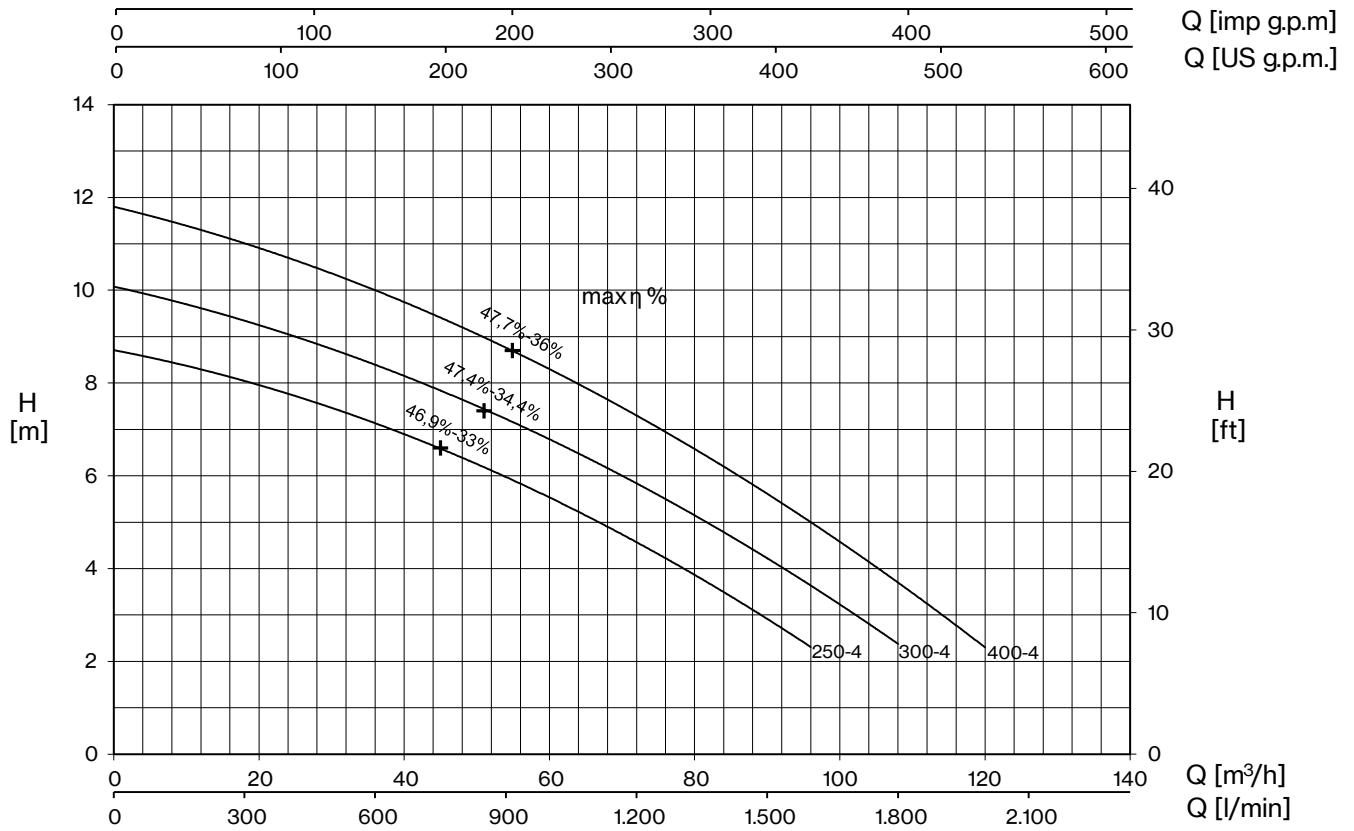

TYPE	AMPERE			
	3- 230V 50 Hz (*)	3- 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DVT 250-4	10	5,8	-	-
DVT 300-4	11,8	6,8	-	-
DVT 400-4	15,1	8,7	-	-

+ max η %


max hydraulic efficiency and respective total efficiency

(*) no standard execution

TYPE	P2		P1 (kW)	Q (m³/h - l/min)											
				0	12	24	36	48	60	72	84	96	108	120	
	HP	kW	3-	0	200	400	600	800	1000	1200	1400	1600	1800	2000	
DVT 250-4	2,5	1,8	3,3	8,7	8,3	7,8	7,1	6,4	5,5	4,6	3,5	2,3			
DVT 300-4	3	2,2	4,1	10,1	9,6	9,0	8,4	7,7	6,8	5,8	4,8	3,6	2,4		
DVT 400-4	4	3	4,9	11,8	11,3	10,7	10,0	9,2	8,3	7,3	6,2	5,0	3,7	2,3	



DV4

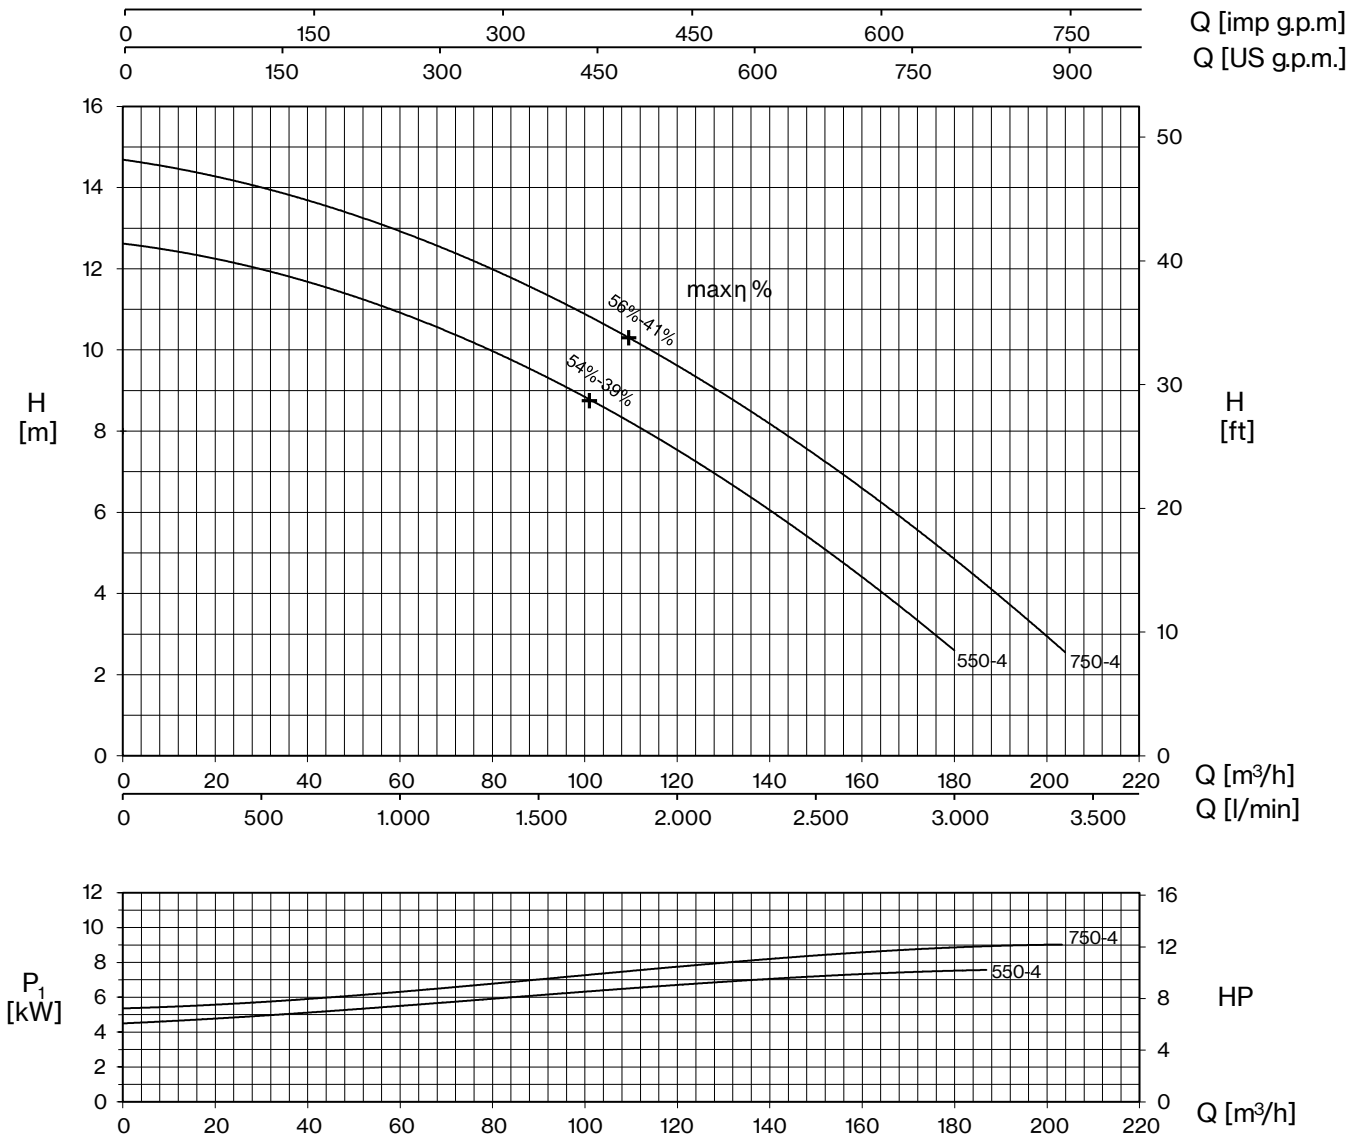

TYPE	AMPERE			
	3- 230V 50 Hz (*)	3- 400V 50 Hz	230/400 V 50 Hz λ / Δ (*)	400/690 V 50 Hz λ / Δ
DVT 550-4	-	12,9	22,3	12,9
DVT 750-4	-	15,4	26,6	15,4



+ max η %

max hydraulic efficiency and respective total efficiency

(*) no standard execution



TYPE	P ₂		P ₁ (kW)	Q (m³/h - l/min)											
				0	24	48	72	96	120	144	168	180	192	204	
	HP	kW	3~	0	400	800	1200	1600	2000	2400	2800	3000	3200	3400	
DVT 550-4	5,5	4	7,5	12,6	12,2	11,4	10,3	9,1	7,6	5,7	3,7	2,6			
DVT 750-4	7,5	5,5	9	14,7	14,2	13,3	12,4	11,2	9,6	7,9	5,9	4,8	3,7	2,6	



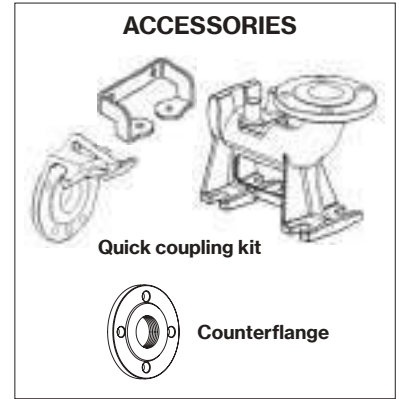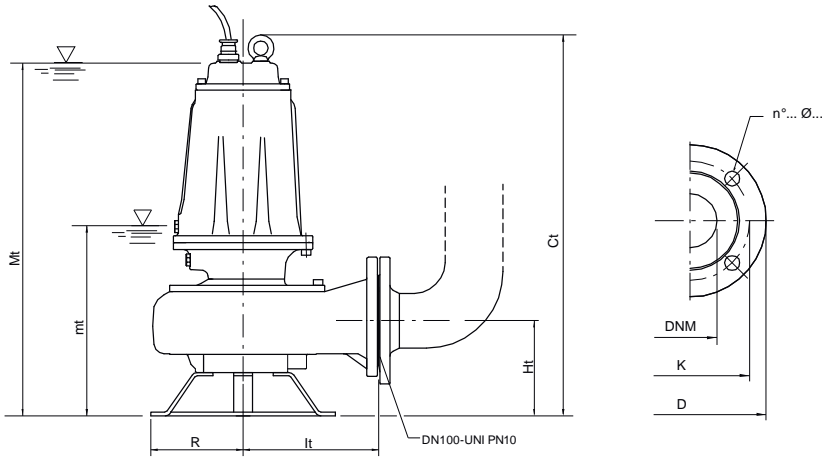

mt: minimum working level
 Mt: minimum submersion level for continuous duty

TYPE	DIMENSIONS (mm)								Kg
	Ct	Ht	R	It	mt	Mt	DNM		
DVT 250-4	660	165	160	235	300	614	100	69,5	
DVT 300-4	660	165	160	235	300	614	100	71	
DVT 400-4	660	165	160	235	300	614	100	74,5	
DVT 550-4	715	195	180	276	385	695	100	101,5	
DVT 750-4	715	195	180	276	385	695	100	106	

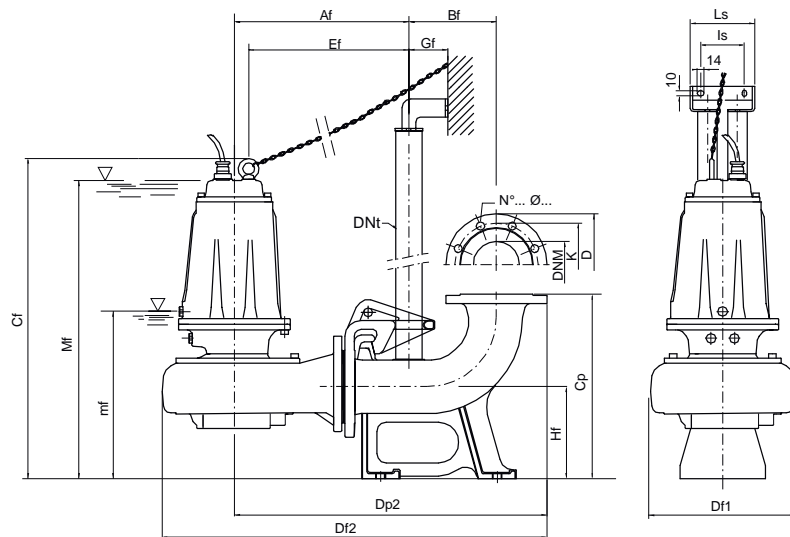

mf: minimum working level
 Mf: minimum submersion level for continuous duty

Flange UNI PN 10 (mm)			
DNM	K	D	n°... Ø...
100	180	220	8... 18...

TYPE	DIMENSIONS (mm)																		
	Af	Bf	Cf	Cp	Df1	Df2	Dp2	DNT	Ef	Gf	Hf	l1	l2	Is	Ls	mf	Mf	DNM	
DVT 250-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100	
DVT 300-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100	
DVT 400-4/P	378	190	695	400	317	835	678	2"	347	85	200	250	140	130	180	335	650	100	
DVT 550-4/P	419	190	755	400	371	900	719	2"	384	85	200	250	140	130	180	390	700	100	
DVT 750-4/P	419	190	755	400	371	900	719	2"	384	85	200	250	140	130	180	390	700	100	

TYPE	PROTECTION	1 PUMP CONTROL PANEL			2 PUMPS CONTROL PANEL	
		3- 400V	3- 400V	400/690 V	3- 400V	400/690 V
DVT 250-4	PT 40-50/5.7-9.1	EQSMT 10			EQ2SMT 10	
DVT 300-4	PT 40-50/5.7-9.1	EQSMT 10			EQ2SMT 10	
DVT 400-4	PT 55-75/8.6-13.5	EQSMT 10			EQ2SMT 10	
DVT 550-4	PT 55-75/8.6-13.5	EQSMT 10			EQ2SMT 10	
DVT 750-4	PT 100/12.5-16.5	EQSMT 10		QST 10	EQ2SMT 10	Q2ST 10







DEEPWELL BOREHOLE

DEEPWELL BOREHOLE PUMPS




- **5PES line:** 5" electric pumps with pressed steel body and stainless steel hydraulic.
- **4E, 6E lines:** 4", 6" electric well pumps with pressed steel body, and polymer hydraulics. Coupling to the motor according to Nema flange.
- **6- 8- 10LMG lines:** 6", 8" and 10" electric well pumps with cast iron hydraulics. Non-return valve in the delivery port and motor coupling according to Nema flange.
- **LM, LR and E14 lines:** 6", 8", 10", 12" and 14" electric well pumps manufactured with a micro-casting process that allows to obtain very smooth hydraulic surfaces and therefore high hydraulic efficiency values, all combined with a high mechanical resistance thanks to the cast steel structure. The range is available in AISI304, AISI316 and Duplex steel types with flow rates up to 860m³/h and 800 m maximum head. The check valve is incorporated in the delivery port, while coupling with the motor is ensured by NEMA flanging.

Applications:


- Water supply for civil and industrial uses
- Distribution in aqueducts
- Agricultural irrigation
- Installation on wells and groundwater withdrawal
- Reverse osmosis plants

DEEPWELL BOREHOLE PUMPS

Low-Medium flow

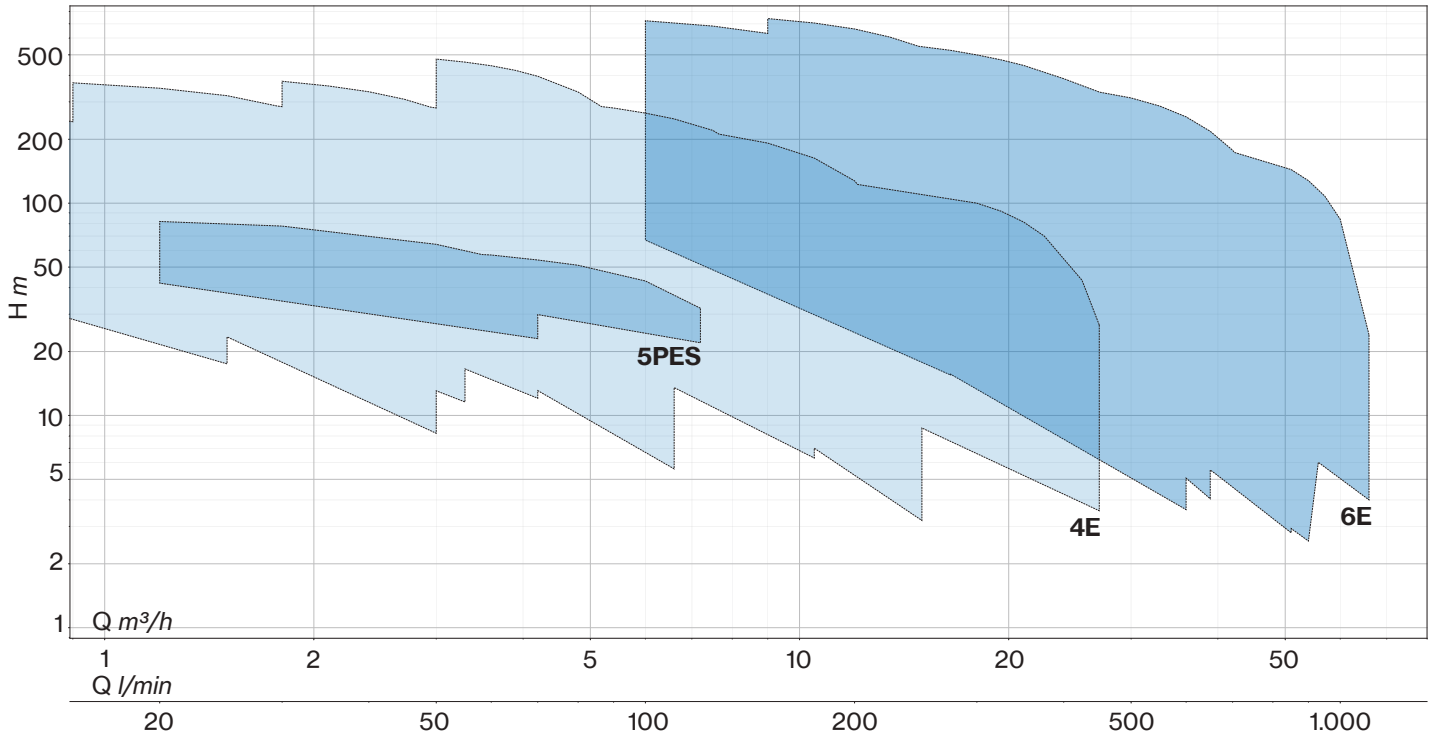


High flow

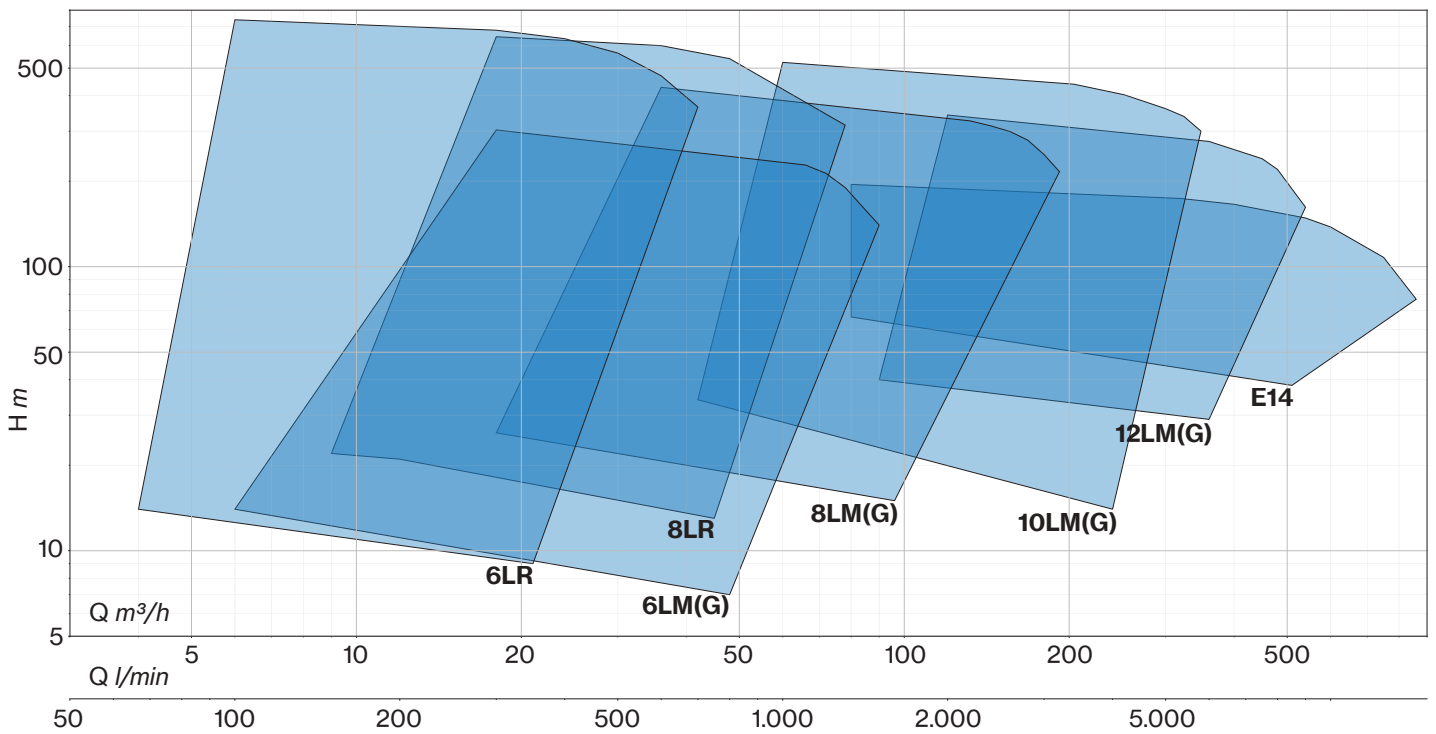


Name key


5 PES line

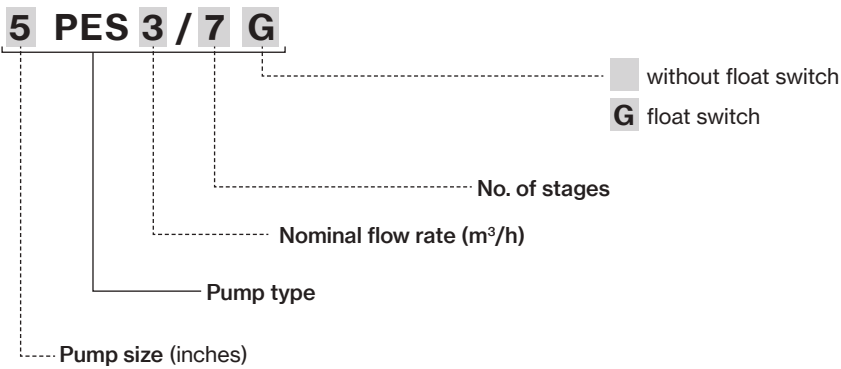


4E - 6E lines

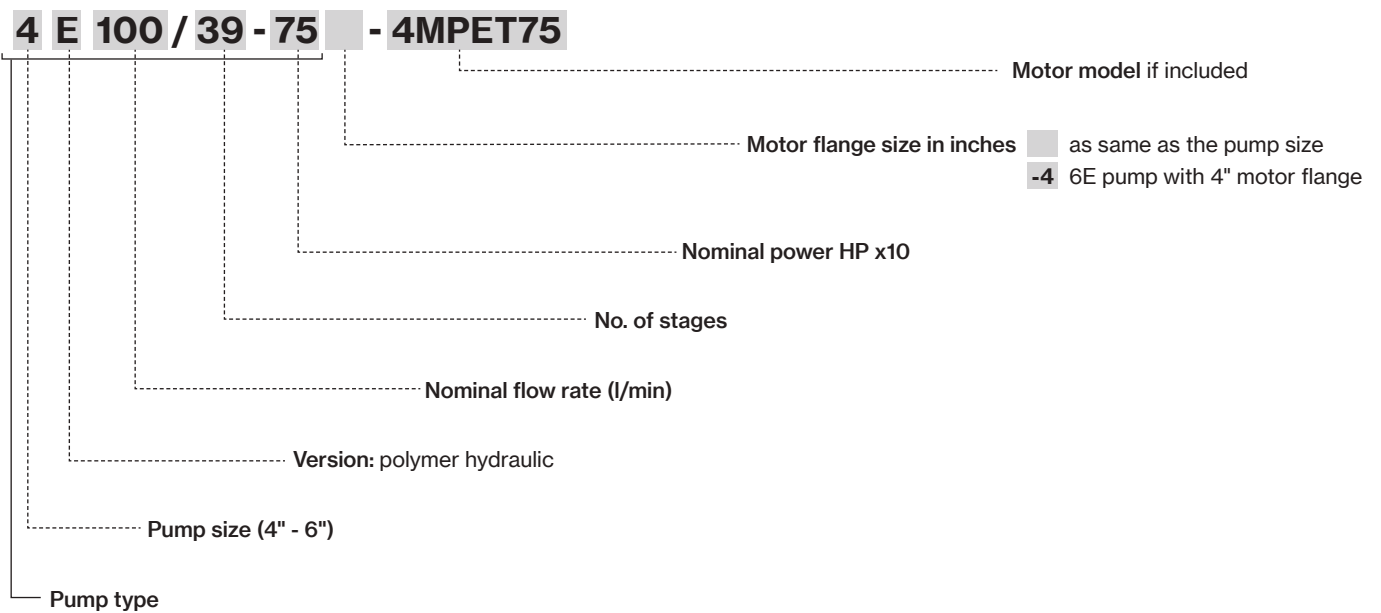

LR - LM lines

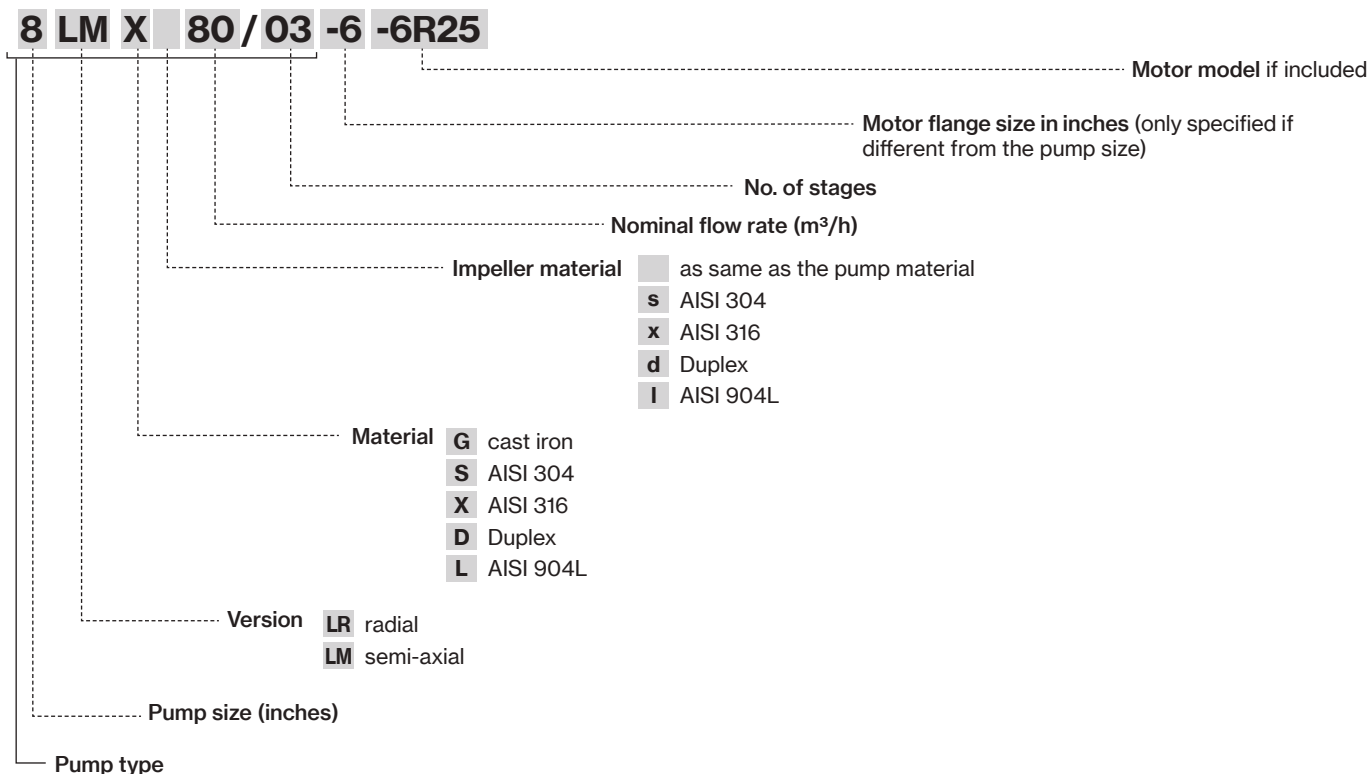

E14 line

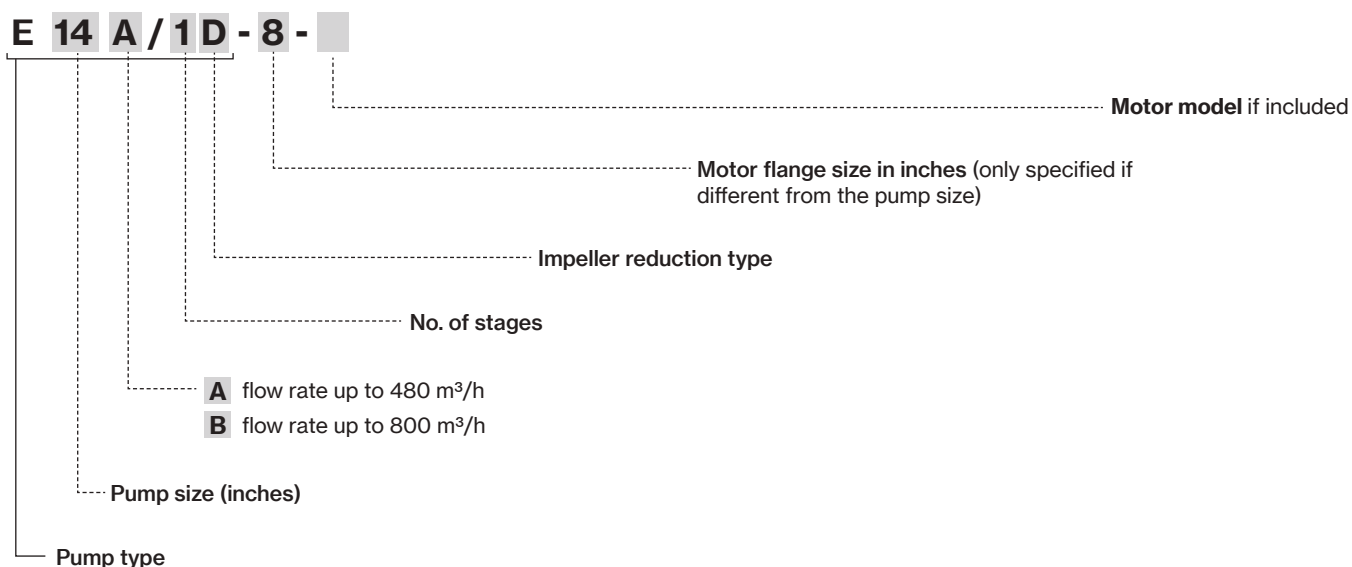

5PES

Deepwell Borehole

5" submersible multistage centrifugal pumps. All components in contact with fluid are made of AISI 304 stainless steel. Particularly suitable for water distribution rainwater collection, irrigation, fountains, wash down unit. Single phase versions have an internal capacitor and thermal motor protector.





Construction features

Delivery outlet	1" ¼ G
External jacket, impellers and diffusers	stainles steel AISI 304
Passage of solids	2 mm
Depth of immersion	max 20 m
Liquid temperature	+5 ÷ +40 °C
Quantity of sand in the water	max 50 g/m ³
Cable	H07 RNF, 20 m
Number of startups/hr	max 20

Motor



	3~ 380/415V - 50Hz
Asynchronous 2 poles	1~ 220/240V - 50Hz (with thermal protection)
Insulation class	F
Protection degree	IP68



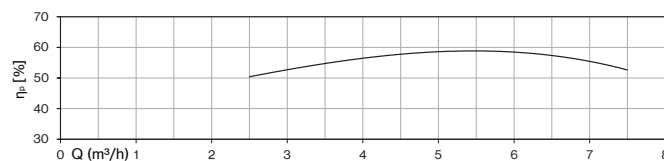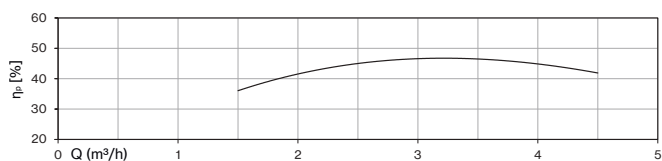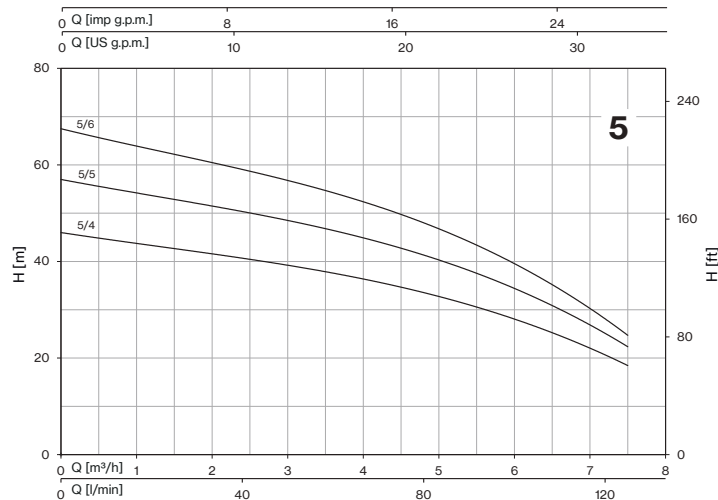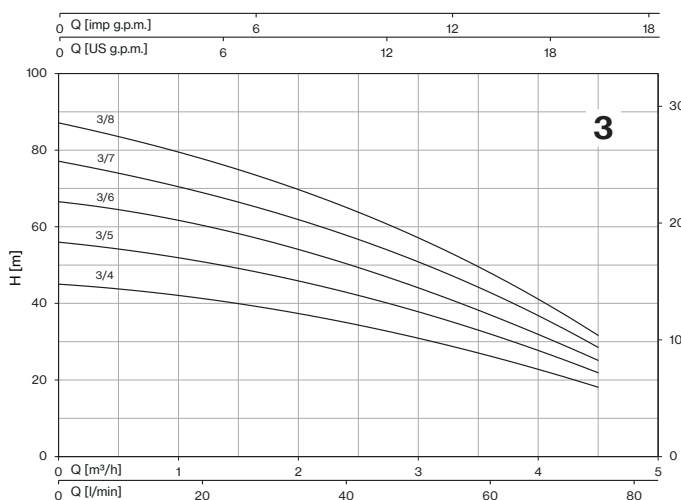

TYPE	MOTOR		INTERNAL CAPACITOR		RATED CURRENT			Q (m³/h - l/min)							
					1~	3~	3~	0	1,5	2	2,5	3	3,5	4	4,5
					220/240 V 50 Hz	220/240 V 50 Hz	380/415 V 50 Hz	H (m)							
5PES 3/4	0,75	0,55	16	450	4,0	3,5	2,0	45,0	40,0	37,5	34,0	31,0	27,0	23,0	18,0
5PES 3/5	1	0,75	20	450	4,7	3,7	2,1	56	49,0	46,0	42,0	38,0	33,0	27,5	22,0
5PES 3/6	1	0,75	20	450	5,2	4,0	2,3	66,5	58,5	54,0	49,0	44,0	38,5	32,0	25,0
5PES 3/7	1,2	0,9	30	450	6,7	4,4	2,5	77,0	67,0	62,0	56,0	50,0	45,0	37,5	28,0
5PES 3/8	1,5	1,1	30	450	7,2	4,7	2,7	87,0	75,5	70,0	63,0	56,0	50,5	42,0	31,0

TYPE	MOTOR		INTERNAL CAPACITOR		RATED CURRENT			Q (m³/h - l/min)										
					1~	3~	3~	0	2,5	3	3,5	4	4,5	5	5,5	6	7	7,5
					220/240 V 50 Hz	380/415 V 50 Hz	380/415 V 50 Hz	H (m)										
5PES 5/4	1	0,75	20	450	5,0	3,8	2,2	46,0	40,5	39,0	38,0	36,5	34,5	33,0	30,5	28,0	22,0	18,5
5PES 5/5	1,2	0,9	30	450	6,6	4,4	2,5	57,0	50,0	48,0	47,5	45,5	42,0	40,0	38,0	34,0	27,5	22,0
5PES 5/6	1,5	1,1	30	450	7,4	4,7	2,7	67,5	58,5	56,5	55,5	53,0	49,0	46,0	44,0	39,0	31,5	24,0

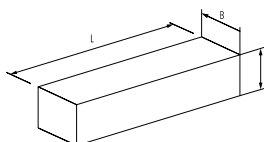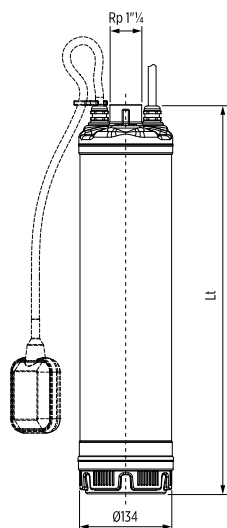

TYPE	DIMENSIONS (mm)				Kg	
	Lt	L	B	H	1~	3~
5PES 3/4	470	720	230	175	12,7	14
5PES 3/5	544	720	230	175	14,3	14,5
5PES 3/6	568	720	230	175	14,8	15
5PES 3/7	592	720	230	175	17	15,5
5PES 3/8	616	720	230	175	17,1	16
5PES 5/4	470	720	230	175	13,5	14
5PES 5/5	544	720	230	175	15,7	14,5
5PES 5/6	568	720	230	175	16,2	15



Submersible multistage centrifugal pumps for 4" wells, featuring independent floating impellers that reduce axial load on the motor and prevent wear in case of dry running. The pump bracket is designed for coupling with motors according to NEMA standards.

Common applications include civil and agricultural use. The pump materials are certified for drinking water, and due to their high efficiency and reliability, these pumps are highly recommended for residential applications and irrigation. The pumps are ideal for automatic water distribution in combination with pressure tanks, irrigation systems, and other uses.

Construction features

Suction and delivery outlet	stainless steel AISI 304
External jacket	stainless steel AISI 304
Impellers	polyoxymethylene
Diffusers	polyoxymethylene and AISI 304
Support bush with sleeve	polyoxymethylene and ceramic
Shaft	stainless steel AISI 431B
Coupling	stainless steel AISI 316L
Quantity of sand in the water	250 g/m ³
Max liquid temperature	45 °C



4E 15

50 Hz - 2900 rpm							Q									
TYPE	P2		SUITABLE MOTOR			l/min	0	5	8	10	13	15	18	20	23	25
			1- 230V		3~ 400V	l/sec	0	0,08	0,13	0,17	0,21	0,25	0,29	0,33	0,38	0,42
	HP	Kw	A	μF	A	m³/h	0	0,3	0,5	0,6	0,8	0,9	1,1	1,2	1,4	1,5
4E 15/12-05	0,5	0,37	3,6	20	1,6	H (m)	85	80	76	72	66	61	53	44	32	18
4E 15/18-07	0,75	0,55	4,5	25	2		128	120	114	107	100	91	80	66	48	26
4E 15/24-10	1	0,75	6	35	2,6		170	160	152	143	133	121	106	88	64	35
4E 15/36-15	1,5	1,1	8,2	40	3,4		255	240	229	215	199	182	159	131	95	53
4E 15/48-20	2	1,5	11	50	4,6		340	320	305	286	266	242	212	175	127	70

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	43,2
Max kW / St. =	0,031

4E 20

50 Hz - 2900 rpm							Q						
TYPE	P2		SUITABLE MOTOR			l/min	0	15	20	25	30	35	40
			1- 230V		3~ 400V	l/sec	0	0,25	0,33	0,42	0,50	0,58	0,67
	HP	Kw	A	μF	A	m³/h	0	0,9	1,2	1,5	1,8	2,1	2,4
4E 20/09-05	0,5	0,37	3,6	20	1,6	H (m)	60	56	50	43	35	26	15
4E 20/14-07	0,75	0,55	4,5	25	2		92	85	76	66	54	40	23
4E 20/19-10	1	0,75	6	35	2,6		122	112	101	86	71	53	30
4E 20/28-15	1,5	1,1	8,2	40	3,4		176	161	145	125	103	77	44
4E 20/38-20	2	1,5	11	50	4,6		231	212	191	164	135	101	58
4E 20/54-30	3	2,2	14,8	70	6,2		318	292	263	226	186	139	79

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	52,5
Max kW / St. =	0,039

4E 30

50 Hz - 2900 rpm							Q								
TYPE	P2		SUITABLE MOTOR			l/min	0	15	20	25	30	35	40	45	50
			1- 230V		3~ 400V	l/sec	0	0,25	0,33	0,42	0,50	0,58	0,67	0,75	0,83
	HP	Kw	A	μF	A	m³/h	0	0,9	1,2	1,5	1,8	2,1	2,4	2,7	3,0
4E 30/08-05	0,5	0,37	3,6	20	1,6	H (m)	55	51	48	44	39	33	26	18	8
4E 30/12-07	0,75	0,55	4,5	25	2		83	76	72	66	58	49	39	27	12
4E 30/16-10	1	0,75	6	35	2,6		110	101	96	88	78	66	52	36	16
4E 30/23-15	1,5	1,1	8,2	40	3,4		154	141	133	123	109	92	72	51	23
4E 30/32-20	2	1,5	11	50	4,6		214	197	186	171	151	128	101	70	32
4E 30/45-30	3	2,2	14,8	70	6,2		302	277	261	241	213	180	142	99	45
4E 30/60-40	4	3	-	-	7,8		402	369	348	321	284	240	189	132	60

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	53,4
Max kW / St. =	0,047



4E

4E 35

50 Hz - 2900 rpm							Q								
TYPE	P2		SUITABLE MOTOR			l/min	0	20	25	30	35	40	45	50	55
			1- 230V	3~ 400V	l/sec	0	0,33	0,42	0,50	0,58	0,67	0,75	0,83	0,92	
	HP	Kw	A	μF	A	m³/h	0	1,2	1,5	1,8	2,1	2,4	2,7	3,0	3,3
4E 35/07-05	0,5	0,37	3,6	20	1,6	H (m)	47	42	39	36	33	28	23	18	12
4E 35/11-07	0,75	0,55	4,5	25	2		74	66	62	57	52	45	37	28	18
4E 35/15-10	1	0,75	6	35	2,6		98	87	82	76	68	59	49	37	24
4E 35/22-15	1,5	1,1	8,2	40	3,4		140	125	118	109	98	85	70	54	35
4E 35/30-20	2	1,5	11	50	4,6		191	171	161	148	134	116	96	73	47
4E 35/42-30	3	2,2	14,8	70	6,2		273	244	229	212	191	166	137	104	67
4E 35/57-40	4	3	-	-	7,8		367	327	308	285	257	223	184	140	91

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	57,8
Max kW / St. =	0,05

4E 45

50 Hz - 2900 rpm							Q									
TYPE	P2		SUITABLE MOTOR			l/min	0	30	35	40	45	50	55	60	65	70
			1- 230V	3~ 400V	l/sec	0	0,50	0,58	0,67	0,75	0,83	0,92	1,00	1,08	1,17	
	HP	Kw	A	μF	A	m³/h	0	1,8	2,1	2,4	2,7	3,0	3,3	3,6	3,9	4,2
4E 45/06-05	0,5	0,37	3,6	20	1,6	H (m)	41	37	35	33	30	27	24	20	16	12
4E 45/09-07	0,75	0,55	4,5	25	2		62	55	52	49	45	41	36	31	25	18
4E 45/12-10	1	0,75	6	35	2,6		80	72	68	64	59	53	47	40	32	23
4E 45/18-15	1,5	1,1	8,2	40	3,4		120	107	102	96	88	80	70	59	48	35
4E 45/24-20	2	1,5	11	50	4,6		160	143	136	128	118	106	93	79	64	47
4E 45/36-30	3	2,2	14,8	70	6,2		240	215	204	191	176	159	140	119	95	70
4E 45/48-40	4	3	-	-	7,8		320	286	272	255	235	212	186	158	127	94
4E 45/63-55	5,5	4	-	-	9,9		420	375	357	335	309	278	244	207	167	123

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	64
Max kW / St. =	0,062

4E 55

50 Hz - 2900 rpm							Q							
TYPE	P2		SUITABLE MOTOR			l/min	0	45	50	55	60	65	70	80
			1- 230V	3~ 400V	l/sec	0	0,75	0,83	0,92	1,00	1,08	1,17	1,33	
	HP	Kw	A	μF	A	m³/h	0	2,7	3,0	3,3	3,6	3,9	4,2	4,8
4E 55/05-05	0,5	0,37	3,6	20	1,6	H (m)	33	28	27	25	23	21	19	13
4E 55/07-07	0,75	0,55	4,5	25	2		47	40	37	35	32	29	26	18
4E 55/10-10	1	0,75	6	35	2,6		67	57	54	50	46	42	37	26
4E 55/15-15	1,5	1,1	8,2	40	3,4		100	85	80	75	70	63	56	39
4E 55/20-20	2	1,5	11	50	4,6		130	110	104	97	90	81	72	50
4E 55/30-30	3	2,2	14,8	70	6,2		195	165	156	146	135	122	108	75
4E 55/40-40	4	3	-	-	7,8		260	220	208	195	180	162	144	100
4E 55/54-55	5,5	4	-	-	9,9		351	296	281	263	243	219	194	135

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	62,1
Max kW / St. =	0,076



4E 70

50 Hz - 2900 rpm							Q									
TYPE	P2		SUITABLE MOTOR			l/min	0	50	55	60	65	70	80	90	100	110
			1- 230V	3~ 400V	l/sec	0	0,83	0,92	1,00	1,08	1,17	1,33	1,50	1,67	1,83	
	HP	Kw	A	μF	A	m³/h	0	3,0	3,3	3,6	3,9	4,2	4,8	5,4	6,0	6,6
4E 70/04-05	0,5	0,37	3,6	20	1,6	H (m)	28	25	24	23	22	20	17	14	10	6
4E 70/06-07	0,75	0,55	4,5	25	2		41	37	36	34	33	31	26	20	15	8
4E 70/08-10	1	0,75	6	35	2,6		55	49	48	46	44	41	34	27	19	11
4E 70/12-15	1,5	1,1	8,2	40	3,4		83	74	72	69	65	61	52	41	29	17
4E 70/16-20	2	1,5	11	50	4,6		111	99	95	92	87	82	69	54	39	22
4E 70/24-30	3	2,2	14,8	70	6,2		166	148	143	138	131	123	103	81	58	34
4E 70/32-40	4	3	-	-	7,8		221	197	191	183	174	164	138	108	78	45
4E 70/42-55	5,5	4	-	-	9,9		290	259	250	241	229	215	181	142	102	59
4E 70/57-75	7,5	5,5	-	-	13,8		402	358	347	333	317	297	251	197	141	81
4E 70/76-100	10	7,5	-	-	19,5		536	478	462	444	422	396	334	263	188	109

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	66,8
Max kW / St. =	0,092

4E 100

50 Hz - 2900 rpm							Q							
TYPE	P2		SUITABLE MOTOR			l/min	0	80	90	100	110	125	150	175
			1- 230V	3~ 400V	l/sec	0	1,33	1,50	1,67	1,83	2,08	2,50	2,92	
	HP	Kw	A	μF	A	m³/h	0	4,8	5,4	6,0	6,6	7,5	9,0	10,5
4E 100/04-07	0,75	0,55	4,5	25	2	H (m)	29	23	22	21	19	17	12	6
4E 100/06-10	1	0,75	6	35	2,6		43	34	32	30	29	25	18	9
4E 100/09-15	1,5	1,1	8,2	40	3,4		64	50	48	45	42	37	26	14
4E 100/12-20	2	1,5	11	50	4,6		84	65	62	59	55	49	34	18
4E 100/17-30	3	2,2	14,8	70	6,2		119	92	88	84	79	69	48	26
4E 100/23-40	4	3	-	-	7,8		161	125	120	113	106	94	66	35
4E 100/31-55	5,5	4	-	-	9,9		217	169	161	153	143	126	88	47
4E 100/39-75	7,5	5,5	-	-	13,8		273	212	203	192	180	159	111	59
4E 100/54-100	10	7,5	-	-	19,5		378	294	281	266	249	220	154	81

MEI >= 0,4 (regulation EU N. 547/2012)

Max Eff. % =	71,5
Max kW / St. =	0,124

4E 150

50 Hz - 2900 rpm							Q								
TYPE	P2		SUITABLE MOTOR			l/min	0	100	110	125	150	175	200	225	250
			1- 230V	3~ 400V	l/sec	0	1,67	1,83	2,08	2,50	2,92	3,33	3,75	4,17	
	HP	Kw	A	μF	A	m³/h	0	6,0	6,6	7,5	9,0	10,5	12,0	13,5	15,0
4E 150/04-10	1	0,75	6	35	2,6	H (m)	27	24	23	22	20	17	13	8	3
4E 150/06-15	1,5	1,1	8,2	40	3,4		41	36	35	33	30	26	20	13	5
4E 150/08-20	2	1,5	11	50	4,6		55	48	47	45	40	34	27	17	6
4E 150/12-30	3	2,2	14,8	70	6,2		82	72	70	67	60	51	40	25	10
4E 150/15-40	4	3	-	-	7,8		103	90	88	84	75	64	50	32	12
4E 150/21-55	5,5	4	-	-	9,9		144	126	123	117	105	89	70	44	17
4E 150/28-75	7,5	5,5	-	-	13,8		196	171	167	159	143	121	95	60	23
4E 150/38-100	10	7,5	-	-	19,5		263	230	225	214	192	163	127	81	31

MEI >= 0,4 (regulation EU N. 547/2012)

Max Eff. % =	68,6
Max kW / St. =	0,184



4E

4E 225

50 Hz - 2900 rpm							Q									
TYPE	P2		SUITABLE MOTOR			l/min	0	150	175	200	225	250	275	300	325	350
			1- 230V	3~ 400V	l/sec	0	2,5	2,92	3,33	3,75	4,17	4,58	5	5,42	5,83	
	HP	Kw	A	μF	A	m³/h	0	9,0	10,5	12,0	13,5	15,0	16,5	18,0	19,5	21,0
4E 225/05-20	2	1,5	11	50	4,6	H (m)	36	28	26	23	21	19	16	13	11	8
4E 225/07-30	3	2,2	14,8	70	6,2		50	39	36	33	29	26	22	19	15	11
4E 225/10-40	4	3	-	-	7,8		72	55	51	47	42	37	32	27	21	15
4E 225/14-55	5,5	4	-	-	9,9		101	77	71	65	59	52	45	37	29	21
4E 225/19-75	7,5	5,5	-	-	13,8		137	105	97	88	80	70	61	50	40	29
4E 225/25-100	10	7,5	-	-	19,5		180	138	128	116	105	93	80	66	53	38

MEI >= 0,1 (regulation EU N. 547/2012)

Max Eff. % =	53,2
Max kW / St. =	0,298


4E 300

50 Hz - 2900 rpm							Q													
TYPE	P2		SUITABLE MOTOR			l/min	0	150	175	200	225	250	275	300	325	350	375	400	425	450
			1- 230V	3~ 400V	l/sec	0	2,50	2,92	3,33	3,75	4,17	4,58	5,00	5,42	5,83	6,25	6,67	7,08	7,50	
	HP	Kw	A	μF	A	m³/h	0	9,0	10,5	12,0	13,5	15,0	16,5	18,0	19,5	21,0	22,5	24,0	25,5	27,0
4E 300/04-15	1,5	1,1	8,2	40	3,4	H (m)	23	19	18	17	16	15	14	13	12	11	9	8	6	4
4E 300/06-20	2	1,5	11	50	4,6		35	29	27	25	24	23	21	20	18	16	14	11	9	5
4E 300/09-30	3	2,2	14,8	70	6,2		52	43	40	38	36	34	32	30	28	24	21	17	13	8
4E 300/12-40	4	3	-	-	7,8		69	57	54	51	48	45	43	40	37	33	28	23	17	11
4E 300/16-55	5,5	4	-	-	9,9		92	76	72	68	64	60	57	53	49	44	37	30	23	14
4E 300/22-75	7,5	5,5	-	-	13,8		127	105	98	93	88	83	78	73	67	60	51	42	32	20
4E 300/30-100	10	7,5	-	-	19,5		173	143	134	127	120	113	107	100	92	82	70	57	43	27

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	74,3
Max kW / St. =	0,243



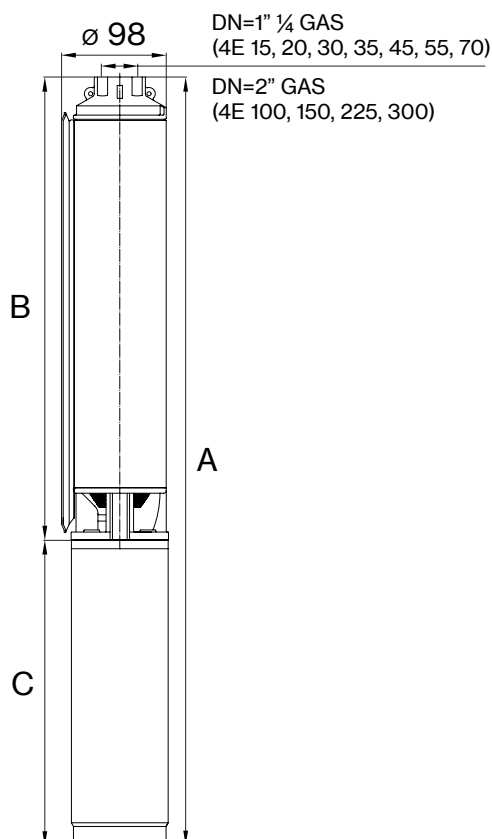

4E 15

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 15/12-05	701	701	376	325	325	11	10,5	4	7	6,5
4E 15/18-07	820	820	495	325	325	12,8	12,2	5,2	7,6	7
4E 15/24-10	1000	975	650	350	325	15,6	14,5	6,9	8,7	7,6
4E 15/36-15	1273	1238	888	385	350	19,7	18,1	9,4	10,3	8,7
4E 15/48-20	1581	1546	1161	420	385	24,3	22,7	12,3	12	10,4

4E 20

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 20/09-05	641	641	316	325	325	10,3	9,8	3,3	7	6,5
4E 20/14-07	741	741	416	325	325	12	11,4	4,4	7,6	7
4E 20/19-10	866	841	516	350	325	14,1	13	5,4	8,7	7,6
4E 20/28-15	1117	1082	732	385	350	18	16,4	7,7	10,3	8,7
4E 20/38-20	1350	1315	930	420	385	21,8	20,2	9,8	12	10,4
4E 20/54-30	1757	1707	1287	470	420	27,7	25,5	13,5	14,2	12

4E 30

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 30/08-05	598	598	273	325	325	10	9,5	3	7	6,5
4E 30/12-07	665	665	340	325	325	11,4	10,8	3,8	7,6	7
4E 30/16-10	758	733	408	350	325	13,2	12,1	4,5	8,7	7,6
4E 30/23-15	911	876	526	385	350	16,2	14,6	5,9	10,3	8,7
4E 30/32-20	1134	1099	714	420	385	20	18,4	8	12	10,4
4E 30/45-30	1439	1389	969	470	420	25,1	22,9	10,9	14,2	12
4E 30/60-40	-	1642	1224	-	418	-	28	13,8	-	14,2



4E

4E 35

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 35/07-05	602	602	277	325	325	9,9	9,4	2,9	7	6,5
4E 35/11-07	681	681	356	325	325	11,3	10,7	3,7	7,6	7
4E 35/15-10	786	761	436	350	325	13,2	12,1	4,5	8,7	7,6
4E 35/22-15	960	925	575	385	350	16,2	14,6	5,9	10,3	8,7
4E 35/30-20	1190	1155	770	420	385	20	18,4	8	12	10,4
4E 35/42-30	1478	1428	1008	470	420	24,6	22,4	10,4	14,2	12
4E 35/57-40	-	1762	1344	-	418	-	28,1	13,9	-	14,2

4E 45

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 45/06-05	582	582	257	325	325	9,7	9,2	2,7	7	6,5
4E 45/09-07	641	641	316	325	325	10,9	10,3	3,3	7,6	7
4E 45/12-10	726	701	376	350	325	12,6	11,5	3,9	8,7	7,6
4E 45/18-15	880	845	495	385	350	15,4	13,8	5,1	10,3	8,7
4E 45/24-20	1035	1000	615	420	385	18,3	16,7	6,3	12	10,4
4E 45/36-30	1360	1310	890	470	420	23,4	21,2	9,2	14,2	12
4E 45/48-40	-	1582	1164	-	418	-	26,2	12	-	14,2
4E 45/63-55	-	1932	1464	-	468	-	30,4	15,1	-	15,3

4E 55

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 55/05-05	562	562	237	325	325	9,5	9	2,5	7	6,5
4E 55/07-07	602	602	277	325	325	10,5	9,9	2,9	7,6	7
4E 55/10-10	686	661	336	350	325	12,2	11,1	3,5	8,7	7,6
4E 55/15-15	821	786	436	385	350	14,8	13,2	4,5	10,3	8,7
4E 55/20-20	955	920	535	420	385	17,5	15,9	5,5	12	10,4
4E 55/30-30	1240	1190	770	470	420	22,2	20	8	14,2	12
4E 55/40-40	-	1388	970	-	418	-	24,2	10	-	14,2
4E 55/54-55	-	1752	1284	-	468	-	28,5	13,2	-	15,3

4E 70

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 70/04-05	550	550	225	325	325	9,3	8,8	2,3	7	6,5
4E 70/06-07	594	594	269	325	325	10,4	9,8	2,8	7,6	7
4E 70/08-10	663	638	313	350	325	11,9	10,8	3,2	8,7	7,6
4E 70/12-15	785	750	400	385	350	14,4	12,8	4,1	10,3	8,7
4E 70/16-20	908	873	488	420	385	16,9	15,3	4,9	12	10,4
4E 70/24-30	1133	1083	663	470	420	20,9	18,7	6,7	14,2	12
4E 70/32-40	-	1292	874	-	418	-	23	8,8	-	14,2
4E 70/42-55	-	1562	1094	-	468	-	26,3	11	-	15,3
4E 70/57-75	-	1996	1458	-	538	-	33,7	15,1	-	18,6
4E 70/76-100	-	2722	1912	-	810	-	46,7	19,7	-	27



4E 100

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 100/04-07	609	609	284	325	325	10,5	9,9	2,9	7,6	7
4E 100/06-10	708	683	358	350	325	12,3	11,2	3,6	8,7	7,6
4E 100/09-15	854	819	469	385	350	14,9	13,3	4,6	10,3	8,7
4E 100/12-20	1000	965	580	420	385	17,6	16	5,6	12	10,4
4E 100/17-30	1234	1184	764	470	420	21,4	19,2	7,2	14,2	12
4E 100/23-40	-	1438	1020	-	418	-	23,6	9,4	-	14,2
4E 100/31-55	-	1820	1352	-	468	-	27,7	12,4	-	15,3
4E 100/39-75	-	2185	1647	-	538	-	34	15,4	-	18,6
4E 100/54-100	-	3012	2202	-	810	-	47,3	20,3	-	27

4E 150

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 150/04-10	646	621	296	350	325	11,7	10,6	3	8,7	7,6
4E 150/06-15	761	726	376	385	350	14	12,4	3,7	10,3	8,7
4E 150/08-20	876	841	456	420	385	16,4	14,8	4,4	12	10,4
4E 150/12-30	1086	1036	616	470	420	20,1	17,9	5,9	14,2	12
4E 150/15-40	-	1153	735	-	418	-	21,1	6,9	-	14,2
4E 150/21-55	-	1477	1009	-	468	-	24,5	9,2	-	15,3
4E 150/28-75	-	1828	1290	-	538	-	30,6	12	-	18,6
4E 150/38-100	-	2574	1764	-	810	-	43,1	16,1	-	27





4E 225









TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 225/05-20	781	746	361	420	385	15,1	13,5	3,1	12	10,4
4E 225/07-30	921	871	451	470	420	18,2	16	4	14,2	12
4E 225/10-40	-	1003	585	-	418	-	19,5	5,3	-	14,2
4E 225/14-55	-	1233	765	-	468	-	22,3	7	-	15,3
4E 225/19-75	-	1563	1025	-	538	-	27,9	9,3	-	18,6
4E 225/25-100	-	2104	1294	-	810	-	38,9	11,9	-	27







4E 300

TYPE	DIMENSIONS (mm)					WEIGHT (kg)				
	A (1-)	A (3-)	B	C (1-)	C (3-)	A (1-)	A (3-)	B	C (1-)	C (3-)
4E 300/04-15	789	754	404	385	350	13,4	11,8	3,1	10,3	8,7
4E 300/06-20	957	922	537	420	385	16,1	14,5	4,1	12	10,4
4E 300/09-30	1208	1158	738	470	420	-	17,7	5,7	14,2	12
4E 300/12-40	-	1357	939	-	418	-	21,5	7,3	-	14,2
4E 300/16-55	-	1674	1206	-	468	-	24,7	9,4	-	15,3
4E 300/22-75	-	2146	1608	-	538	-	31,1	12,5	-	18,6
4E 300/30-100	-	2955	2145	-	810	-	43,7	16,7	-	27



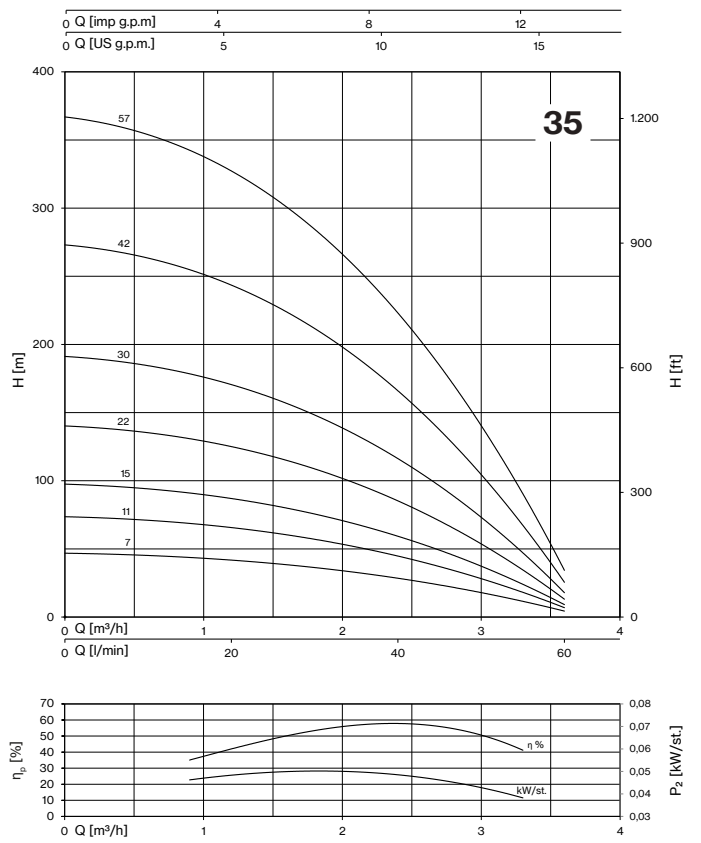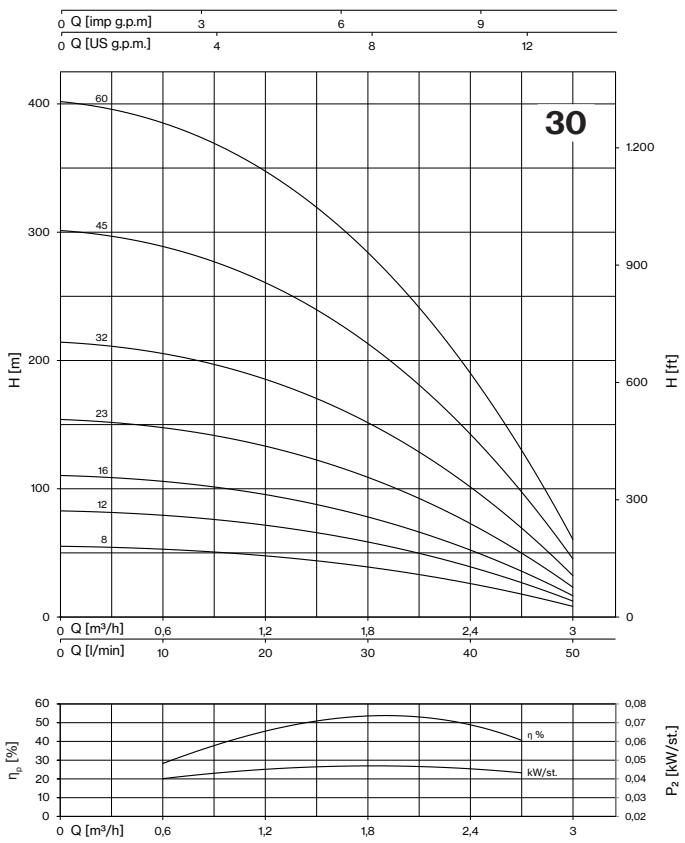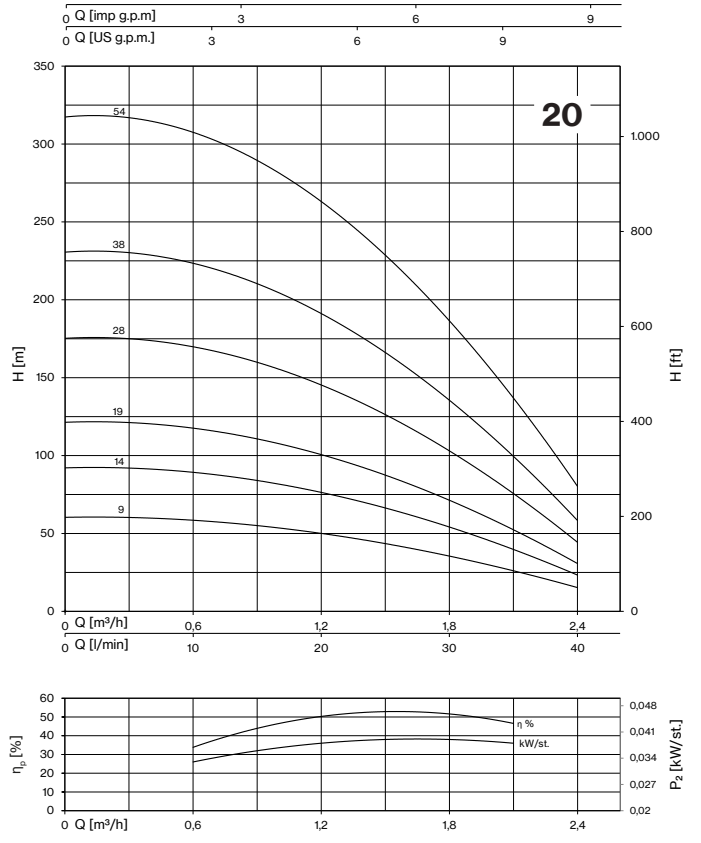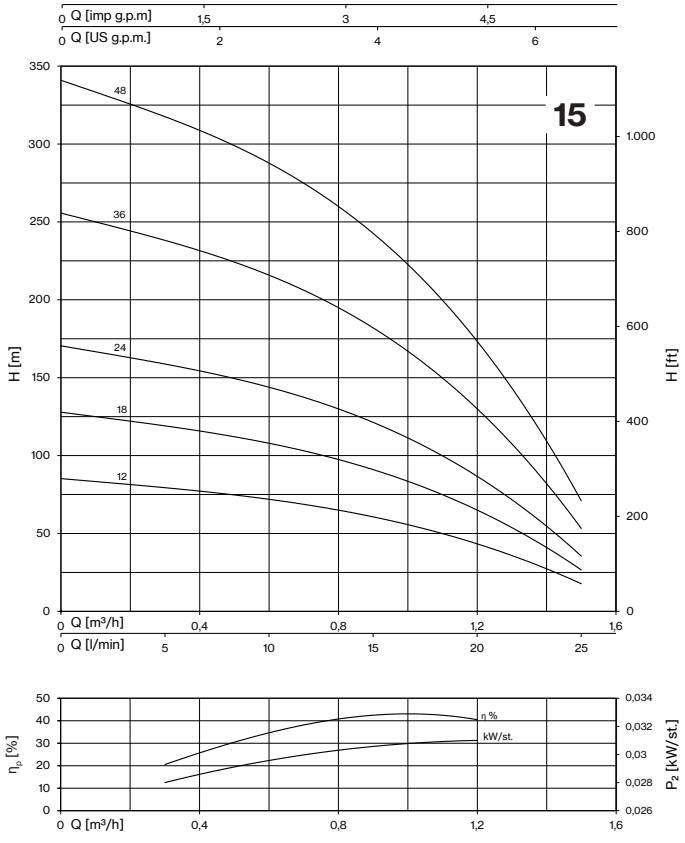

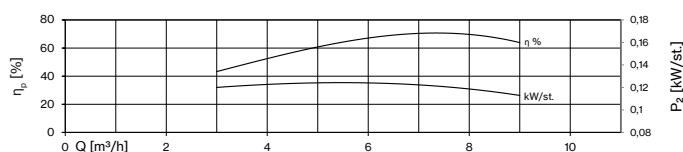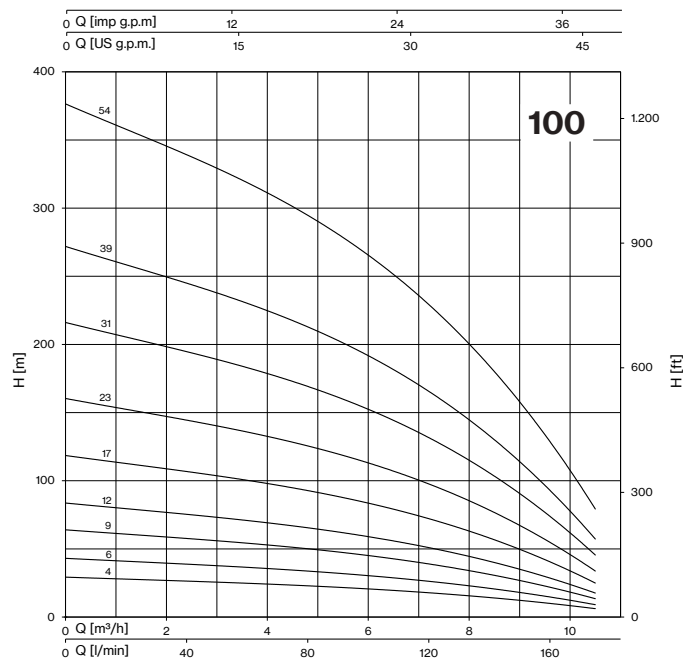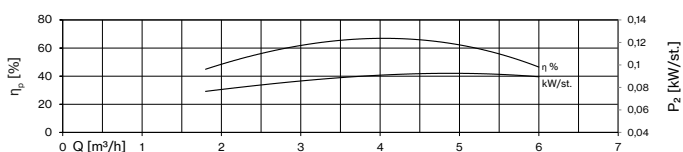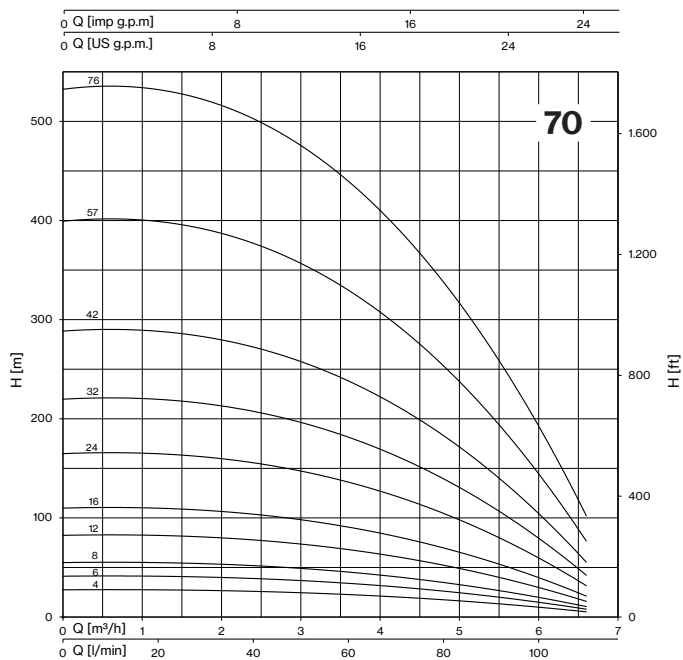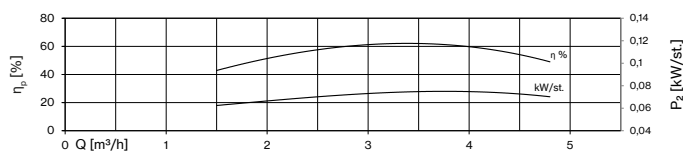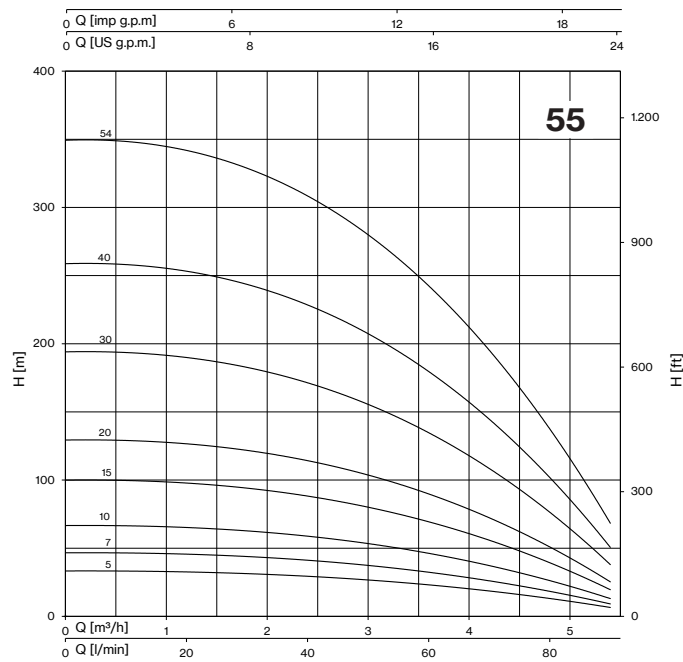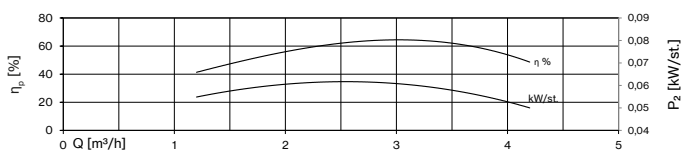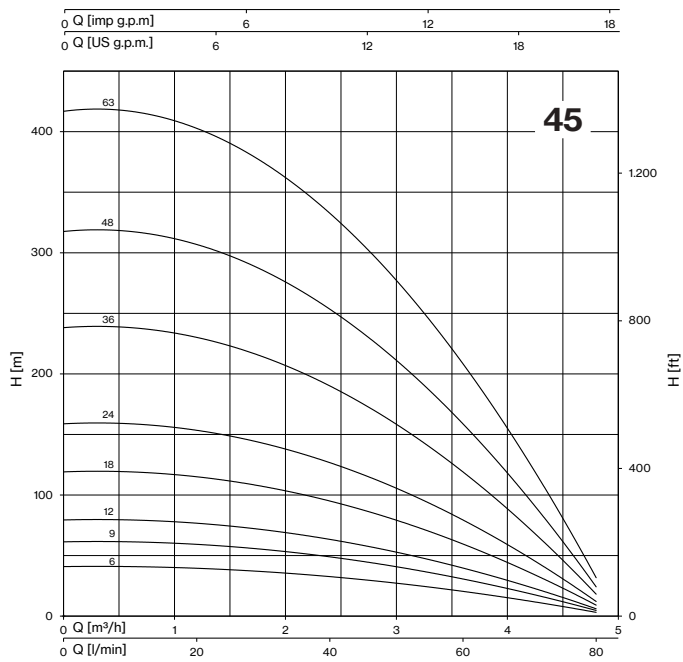

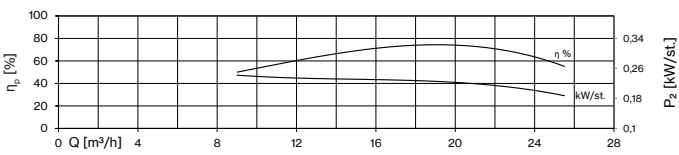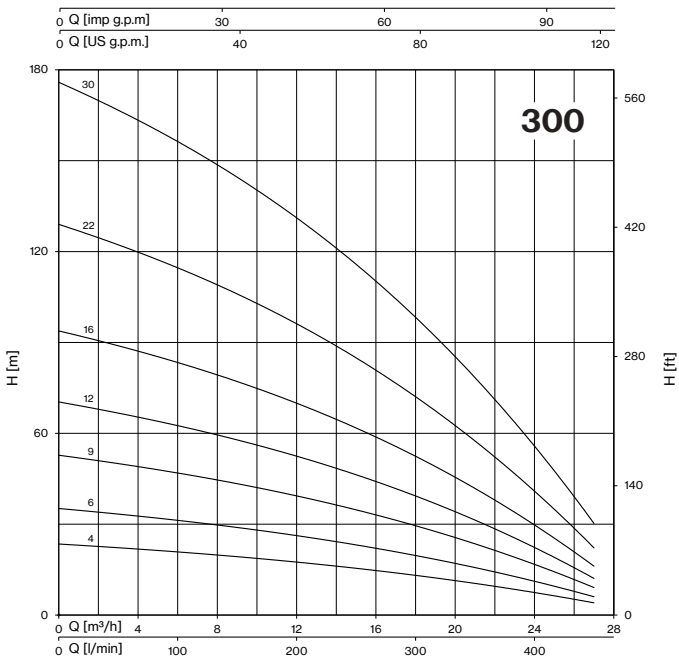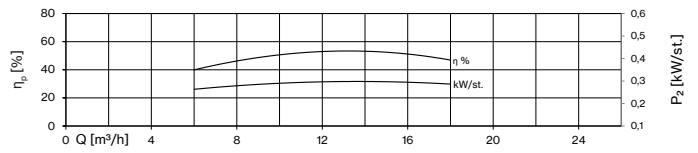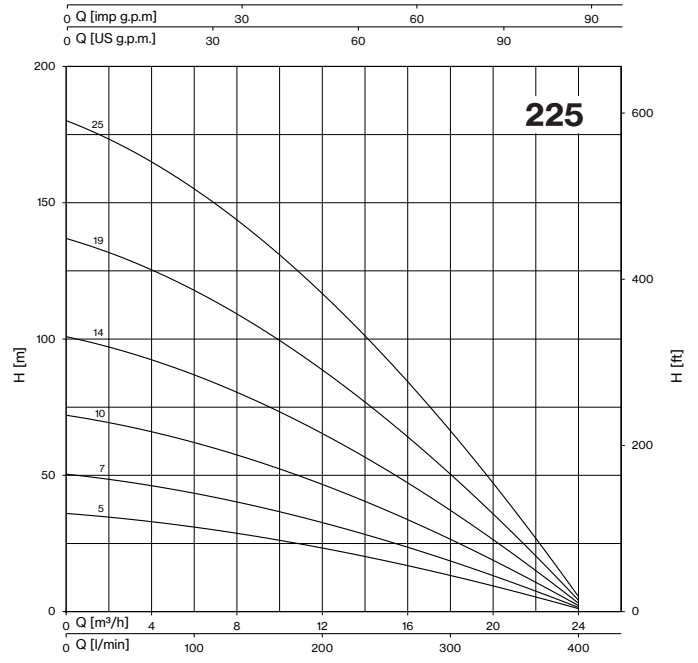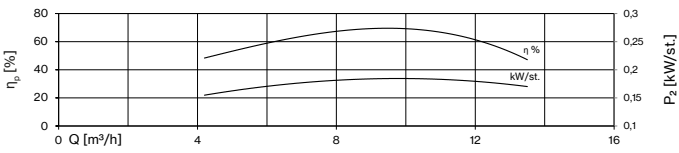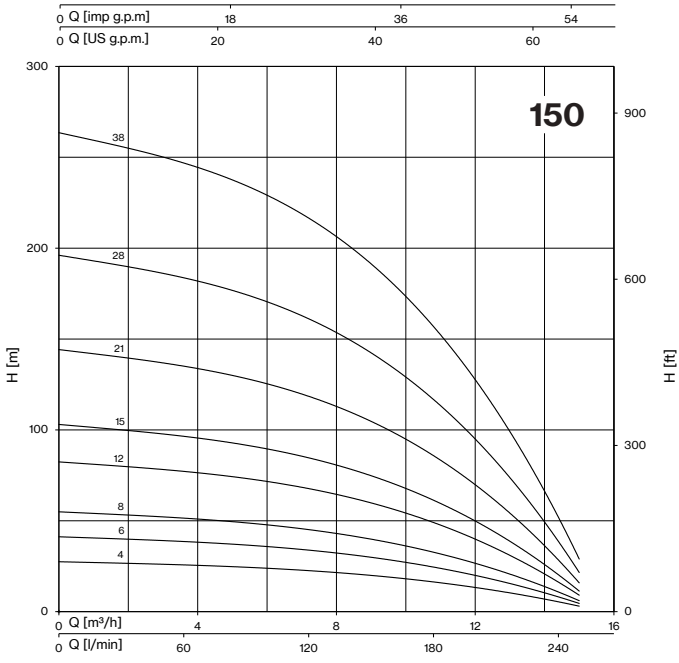

Submersible multistage centrifugal pumps for 6" wells, made of solid and sturdy construction. The pump bracket is designed according to NEMA standards for coupling with a 4" motor up to 7.5 HP or a 6" motor above 10 HP. High-pressure pumps, due to their excessive length, are delivered in separate liquid-ends and can be easily reassembled at the installation site. Common applications include civil and agricultural use. The pump materials are certified for drinking water, and due to their high efficiency and reliability, these pumps are highly recommended for residential, commercial, and agricultural applications.

The pumps are ideal for automatic water distribution in combination with pressure tanks, irrigation systems, and other uses.

Construction features

Suction and delivery outlet	stainless steel AISI 304
External jacket	stainless steel AISI 304L
Impellers	polyphenylene oxide
Diffusers	polyphenylene oxide and AISI 304
Support bush with sleeves	stainless steel AISI 316L
Shaft	stainless steel AISI 431B
Coupling	stainless steel AISI 316L
Quantity of sand in the water	150 g/m ³
Max liquid temperature	35 °C



6E

6E 175

50 Hz - 2900 rpm							Q									
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	100	120	125	150	175	200	225	250	275
	HP	kW		N	3- 400V		I/sec	0	1,67	2,00	2,08	2,50	2,92	3,33	3,75	4,17
			SIZE		A	m³/h	0	6,0	7,2	7,5	9,0	10,5	12,0	13,5	15,0	16,5
6E 175/05-30-4	3	2,2	1410	4" NEMA	6,2	H (m)	78	67	64	63	58	53	46	37	27	16
6E 175/06-40-4	4	3	1690		7,8		94	80	77	76	70	63	55	44	32	19
6E 175/07-55-4	5,5	4	1970		9,9		109	94	90	89	82	74	64	52	38	22
6E 175/08-55-4	5,5	4	2250		9,9		125	107	103	101	93	84	73	59	43	25
6E 175/09-55-4	5,5	4	2530		9,9		140	121	115	114	105	95	82	67	48	28
6E 175/12-75-4	7,5	5,5	3370		13,8		187	161	154	152	140	127	109	89	65	37
6E 175/16-100	10	7,5	4500	6" NEMA	16,9		250	214	205	202	187	169	146	118	86	50
6E 175/18-125	12,5	9,3	5060		21,5		281	241	231	228	210	190	164	133	97	56
6E 175/21-125	12,5	9,3	5900		21,5		328	281	269	266	245	222	192	155	113	65
6E 175/24-150	15	11	6740		23,7		374	322	308	304	280	253	219	178	129	74
6E 175/28-175	17,5	13	7870		27,8		437	375	359	354	327	295	255	207	151	87
6E 175/32-200*	20	15	8990		30,4		499	429	410	405	374	338	292	237	172	99
6E 175/40-250*	25	18,5	11240		38,3		624	536	513	506	467	422	365	296	215	124
6E 175/48-300*	30	22	13480		44		749	643	615	607	561	506	438	355	258	149
6E 175/54-400*	40	30	15170	62	842		724	692	683	631	570	492	400	291	167	

* High pressure pump supplied in blocks

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	68,1
Max kW / St. =	0,444

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,1	1,5	2,0	4,5

6E 225

50 Hz - 2900 rpm							Q									
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	150	175	200	225	250	275	300	325	350
	HP	kW		N	3- 400V		I/sec	0	2,50	2,92	3,33	3,75	4,17	4,58	5,00	5,42
			SIZE		A	m³/h	0	9,0	10,5	12,0	13,5	15,0	16,5	18,0	19,5	21,0
6E 225/05-40-4	4	3	1420	4" NEMA	7,8	H (m)	79	71	68	64	58	52	45	37	27	15
6E 225/06-55-4	5,5	4	1700		9,9		94	86	81	76	70	63	54	44	32	17
6E 225/07-75-4	7,5	5,5	1980		13,8		110	100	95	89	82	73	63	51	37	20
6E 225/08-75-4	7,5	5,5	2270		13,8		126	114	109	102	93	83	72	58	42	23
6E 225/09-75-4	7,5	5,5	2550		13,8		141	128	122	115	105	94	81	66	48	26
6E 225/12-100	10	7,5	3400		16,9		188	171	163	153	140	125	108	88	64	35
6E 225/15-125	12,5	9,2	4240	6" NEMA	21,5		236	214	204	191	175	156	135	110	80	44
6E 225/18-150	15	11	5090		23,7		283	257	244	229	210	188	162	131	95	52
6E 225/21-175	17,5	13	5940		27,8		330	299	285	267	245	219	189	153	111	61
6E 225/24-200	20	15	6790		30,4		377	342	326	306	280	250	216	175	127	70
6E 225/30-250	25	18,5	8480		38,3		471	428	407	382	350	313	269	219	159	87
6E 225/35-300*	30	22	9900		44		550	499	475	446	408	365	314	256	186	102
6E 225/40-400*	40	30	11310		62		628	570	543	509	466	417	359	292	212	116
6E 225/45-400*	40	30	12720		62		707	641	611	573	524	469	404	329	239	131
6E 225/52-500*	50	37	14700	72	816		741	706	662	606	542	467	380	276	151	

* High pressure pump supplied in blocks

MEI >= 0,7 (regulation EU N. 547/2012)

Max Eff. % =	69,6
Max kW / St. =	0,637

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,1	1,4	3,2	6,9



6E 350

50 Hz - 2900 rpm							Q										
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	225	250	275	300	350	400	450	500	550	600
	HP	kW		N	3- 400V		I/sec	0	3,75	4,17	4,58	5,00	5,83	6,67	7,50	8,33	9,17
			SIZE		A	m³/h	0	13,5	15,0	16,5	18,0	21,0	24,0	27,0	30,0	33,0	36,0
6E 350/02-20-4	2	1,5	790	4" NEMA	4,6	H (m)	28	23	22	21	20	18	15	13	10	7	4
6E 350/03-30-4	3	2,2	1180		6,2		42	34	33	32	30	27	23	19	15	10	5
6E 350/04-40-4	4	3	1570		7,8		56	46	44	42	40	36	31	26	20	14	7
6E 350/05-55-4	5,5	4	1960		9,9		70	57	55	53	50	45	39	32	25	17	9
6E 350/07-75-4	7,5	5,5	2750		13,8		98	80	77	74	70	62	54	45	35	24	13
6E 350/10-100	10	7,5	3920	6" NEMA	16,9		140	114	110	105	100	89	77	64	50	34	18
6E 350/12-125	12,5	9,3	4700		21,5		168	137	131	126	120	107	93	77	60	41	22
6E 350/15-150	15	11	5880		23,7		210	171	164	158	150	134	116	96	75	51	27
6E 350/17-175	17,5	13	6660		27,8		238	194	186	179	170	152	131	109	85	58	31
6E 350/20-200	20	15	7840		30,4		280	228	219	210	200	178	154	128	100	69	36
6E 350/25-250	25	18,5	9800		38,3		350	285	274	263	250	223	193	160	125	86	45
6E 350/30-300*	30	22	11760		44		420	342	329	315	300	268	232	192	149	103	54
6E 350/35-400*	40	30	13720		62		490	399	383	368	350	312	270	224	174	120	63
6E 350/40-400*	40	30	15680		62		560	456	438	420	400	357	309	256	199	137	72
6E 350/50-500*	50	37	19600		72		700	571	548	525	500	446	386	320	249	172	90

* High pressure pump supplied in blocks

MEI >= 0,4 (regulation EU N. 547/2012)

Max Eff. % =	69,1
Max kW / St. =	0,75

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,2	1,6	2	4,8

6E 400

50 Hz - 2900 rpm							Q										
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	300	325	350	375	400	450	500	550	600	650
	HP	kW		N	3- 400V		I/sec	0	5,00	5,42	5,83	6,25	6,67	7,50	8,33	9,17	10,00
			SIZE		A	m³/h	0	18,0	19,5	21,0	22,5	24,0	27,0	30,0	33,0	36,0	39,0
6E 400/03-40-4	4	3	1290	4" NEMA	7,8	H (m)	46	35	34	32	31	29	25	21	16	10	4
6E 400/04-55-4	5,5	4	1720		9,9		61	47	45	43	41	39	33	27	21	13	5
6E 400/06-75-4	7,5	5,5	2570		12,5		92	70	68	65	61	58	50	41	31	20	8
6E 400/08-100	10	7,5	3430	6" NEMA	16,9		122	94	90	86	82	77	67	55	42	27	11
6E 400/10-125	12,5	9,3	4290		21,5		153	117	113	108	102	97	84	69	52	34	14
6E 400/12-150	15	11	5150		23,7		184	141	135	129	123	116	100	82	63	40	16
6E 400/14-175	17,5	13	6000		27,8		214	164	158	151	143	135	117	96	73	47	19
6E 400/16-200	20	15	6860		30,4		245	187	180	172	164	154	134	110	83	54	22
6E 400/20-250	25	18,5	8570		38,3		306	234	225	215	205	193	167	137	104	67	27
6E 400/24-300	30	22	10290		44		367	281	270	258	246	232	200	164	125	81	32
6E 400/28-400*	40	30	12000		62		428	328	315	301	287	270	234	192	146	94	38
6E 400/32-400*	40	30	13710		62		490	375	360	344	328	309	267	219	167	108	43
6E 400/40-500*	50	37	17140		72		612	468	450	430	410	386	334	274	208	134	54

* High pressure pump supplied in blocks

MEI >= 0,4 (regulation EU N. 547/2012)

Max Eff. % =	67,8
Max kW / St. =	0,94

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,2	1,6	2,3	5,0



6E

6E 550

50 Hz - 2900 rpm							Q											
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	350	400	450	500	550	600	650	700	750	800	850
	HP	kW		N	3- 400V		I/sec	0	5,83	6,67	7,50	8,33	9,17	10,00	10,83	11,67	12,50	13,33
			SIZE		A	m³/h	0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0
6E 550/02-40-4	4	3	870	4" NEMA	7,8	H (m)	31	27	26	25	23	21	19	16	13	10	7	3
6E 550/03-55-4	5,5	4	1310		9,9		47	40	39	37	35	32	28	24	20	15	10	4
6E 550/04-75-4	7,5	5,5	1740		13,8		62	54	52	49	46	42	38	32	26	20	13	6
6E 550/05-100	10	7,5	2170	6" NEMA	16,9		78	67	65	62	58	53	47	40	33	25	17	7
6E 550/06-125	12,5	9,3	2610		21,5		93	81	78	74	70	64	57	48	39	30	20	8
6E 550/08-150	15	11	3480		23,7		124	108	104	99	93	85	76	65	53	40	26	11
6E 550/09-175	17,5	13	3910		27,8		140	121	117	111	104	96	85	73	59	45	30	13
6E 550/10-200	20	15	4340		30,4		155	135	130	124	116	106	95	81	66	50	33	14
6E 550/13-250	25	18,5	5650		38,3		202	175	169	161	151	138	123	105	86	64	43	18
6E 550/16-300	30	22	6950		44		248	216	208	198	186	170	151	129	105	79	53	22
6E 550/19-400	40	30	8250		62		295	256	246	235	220	202	180	154	125	94	63	27
6E 550/22-400	40	30	9550		62		341	296	285	272	255	234	208	178	145	109	73	31
6E 550/27-500*	50	37	11720	72	419	364	350	334	313	287	255	218	178	134	89	38		

* High pressure pump supplied in blocks

MEI >= 0,1 (regulation EU N. 547/2012)

Max Eff. % =	67,1
Max kW / St. =	1,423

Q (flow) =	25%	50%	75%	100%
NPSH (m)	2,0	2,3	2,7	6,5

6E 600

50 Hz - 2900 rpm							Q													
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	375	400	450	500	550	600	650	700	750	800	850	900	950
	HP	kW		N	3- 400V		I/sec	0	6,25	6,67	7,50	8,33	9,17	10,00	10,83	11,67	12,50	13,33	14,17	15,00
			SIZE		A	m³/h	0	22,5	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0
6E 600/02R-30-4	3	2,2	740	4" NEMA	6,2	H (m)	22	18	17	16	15	13	12	11	9	8	7	5	3	
6E 600/02-40-4	4	3	870		7,8		25	22	21	20	19	17	16	15	13	12	10	9	7	4
6E 600/03-55-4	5,5	4	1300		9,9		38	33	32	30	28	26	24	22	20	18	15	13	10	6
6E 600/04-75-4	7,5	5,5	1730	13,8	51		44	42	40	37	34	32	29	26	24	21	17	13	8	
6E 600/05-100	10	7,5	2160	6" NEMA	16,9		64	55	53	50	47	43	40	36	33	30	26	22	17	11

MEI >= 0,1 (regulation EU N. 547/2012)

Max Eff. % =	54,4
Max kW / St. =	1,43

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,0	1,3	2,1	3,7

6E 700


50 Hz - 2900 rpm							Q													
TYPE	P2		AXIAL LOAD	SUITABLE MOTOR		I/min	0	400	450	500	550	600	650	700	750	800	850	900	1000	1100
	HP	kW		N	3- 400V		I/sec	0	6,67	7,50	8,33	9,17	10,00	10,83	11,67	12,50	13,33	14,17	15,00	16,67
			SIZE		A	m³/h	0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	60,0	66,0
6E 700/04-100	10	7,5	1760	6" NEMA	16,9	H (m)	52	47	45	42	39	36	33	31	28	26	24	21	14	4
6E 700/06-125	12,5	9,3	2640		21,5		77	70	68	63	58	54	50	46	43	39	36	32	21	6
6E 700/07-150	15	11	3070		23,7		90	82	79	74	68	63	58	54	50	46	42	37	25	7
6E 700/08-175	17,5	13	3510		27,8		103	93	90	84	78	72	66	61	57	53	48	43	28	8
6E 700/09-200	20	15	3950		30,4		116	105	101	95	88	81	75	69	64	59	54	48	32	9
6E 700/12-250	25	18,5	5270		38,3		155	140	135	126	117	107	99	92	85	79	72	64	42	12
6E 700/14-300	30	22	6140		44		181	163	158	147	136	125	116	108	100	92	84	74	49	14
6E 700/17-400	40	30	7460		62		219	198	191	179	165	152	141	131	121	112	102	90	60	17
6E 700/19-400	40	30	8340		62		245	221	214	200	185	170	157	146	135	125	114	101	67	19
6E 700/24-500	50	37	10530	72	310	280	270	252	234	215	199	184	171	158	144	128	84	24		

MEI >= 0,1 (regulation EU N. 547/2012)

Max Eff. % =	55,8
Max kW / St. =	1,612

Q (flow) =	25%	50%	75%	100%
NPSH (m)	1,3	1,9	2,5	4,7



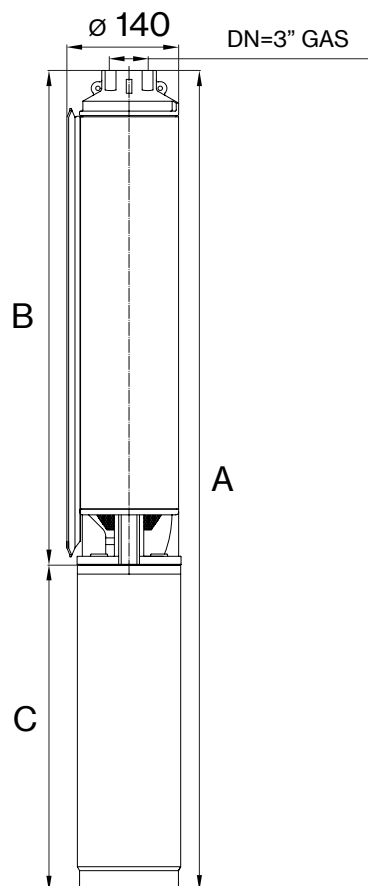

6E 175

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 175/05-30-4	4" NEMA	898	478	420	21,8	9,8	12
6E 175/06-40-4		934	516	418	23,2	10,4	12,8
6E 175/07-55-4		1022	554	468	26,4	11,1	15,3
6E 175/08-55-4		1060	592	468	27,1	11,8	15,3
6E 175/09-55-4		1098	630	468	27,7	12,4	15,3
6E 175/12-75-4		1282	744	538	33,3	14,4	18,9
6E 175/16-100	6" NEMA	1458	858	600	58,9	16,9	42
6E 175/18-125		1572	972	600	63,3	18,3	45
6E 175/21-125		1686	1086	600	67,2	22,2	45
6E 175/24-150		1900	1200	700	72,2	24,2	48
6E 175/28-175		2104	1404	700	77,7	27,7	50
6E 175/32-200*		2453	1693	760	95	41	54
6E 175/40-250*		2827	1997	830	112,5	47,5	65
6E 175/48-300*		3191	2301	890	124,1	54,1	70
6E 175/54-400*	3559	2529	1030	149	59	90	

* High pressure pump supplied in blocks

6E

6E 225

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 225/05-40-4	4" NEMA	896	478	418	22,6	9,8	12,8
6E 225/06-55-4		984	516	468	25,8	10,5	15,3
6E 225/07-75-4		1092	554	538	29,7	11,1	18,6
6E 225/08-75-4		1130	592	538	30,4	11,8	18,6
6E 225/09-75-4		1168	630	538	31	12,4	18,6
6E 225/12-100	6" NEMA	1344	744	600	56,3	14,3	42
6E 225/15-125		1458	858	600	61,3	16,3	45
6E 225/18-150		1672	972	700	66,2	18,2	48
6E 225/21-175		1786	1086	700	72,2	22,2	50
6E 225/24-200		1960	1200	760	78,1	24,1	54
6E 225/30-250		2310	1480	830	93,9	28,9	65
6E 225/35-300*		2697	1807	890	113,1	43,1	70
6E 225/40-400*		3027	1997	1030	137,2	47,2	90
6E 225/45-400*		3217	2187	1030	141,3	51,3	90
6E 225/52-500*		3623	2453	1170	158	57	101

* High pressure pump supplied in blocks

6E 350

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 350/02-20-4	4" NEMA	786	401	385	17,8	7,4	10,4
6E 350/03-30-4		878	458	420	20,3	8,3	12
6E 350/04-40-4		933	515	418	22	9,2	12,8
6E 350/05-55-4		1040	572	468	25,3	10	15,3
6E 350/07-75-4		1224	686	538	30,7	11,8	18,9
6E 350/10-100	6" NEMA	1457	857	600	56,3	14,3	42
6E 350/12-125		1571	971	600	61,1	16,1	45
6E 350/15-150		1842	1142	700	66,7	18,7	48
6E 350/17-175		2008	1308	700	71,2	21,2	50
6E 350/20-200		2254	1494	760	79,9	25,9	54
6E 350/25-250		2608	1778	830	95,3	30,3	65
6E 350/30-300*		3077	2187	890	119,1	49,1	70
6E 350/35-400*		3502	2472	1030	144,7	54,7	90
6E 350/40-400*		3891	2861	1030	152,5	62,5	90
6E 350/50-500*		4601	3431	1170	174,7	73,7	101

* High pressure pump supplied in blocks

6E 400

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 400/03-40-4	4" NEMA	877	459	418	22,6	9,8	12,8
6E 400/04-55-4		984	516	468	26,1	10,8	15,3
6E 400/06-75-4		1200	630	570	52,9	12,9	40
6E 400/08-100	6" NEMA	1344	744	600	56,9	14,9	42
6E 400/10-125		1458	858	600	62,1	17,1	45
6E 400/12/150		1672	972	700	67,2	19,2	48
6E 400/14-175		1786	1086	700	71,4	21,4	50
6E 400/16-200		1960	1200	760	77,4	23,4	54
6E 400/20-250		2310	1480	830	92,7	27,7	65
6E 400/24-300		2597	1707	890	101,5	31,5	70
6E 400/28-400*		3103	2073	1030	136,9	46,9	90
6E 400/32-400*		3331	2301	1030	141,2	51,2	90
6E 400/40-500*		3927	2757	1170	160,8	59,8	101
6E 400/46-600*	-	3099	-	-	66,3	-	

* High pressure pump supplied in blocks



6E 550

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 550/02-40-4	4" NEMA	826	408	418	21,3	8,5	12,8
6E 550/03-55-4		936	468	468	24,7	9,4	15,3
6E 550/04-75-4		1066	528	538	28,9	10,3	18,6
6E 550/05-100	6" NEMA	1188	588	600	53,2	11,2	42
6E 550/06-125		1248	648	600	57,1	12,1	45
6E 550/08-150		1468	768	700	61,9	13,9	48
6E 550/09-175		1528	828	700	65	15	50
6E 550/10-200		1648	888	760	69,9	15,9	54
6E 550/13-250		1898	1068	830	83,6	18,6	65
6E 550/16-300		2138	1248	890	91,5	21,5	70
6E 550/19-400		2510	1480	1030	117,6	27,6	90
6E 550/22-400		2690	1660	1030	120,6	30,6	90
6E 550/27-500*		3129	1959	1170	142,2	41,2	101
6E 550/32-600*		-	2397	-	-	53,1	-

* High pressure pump supplied in blocks

6E 600

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 600/02R-30-4	4" NEMA	828	408	420	20,5	8,5	12
6E 600/02-40-4		826	408	418	21,3	8,5	12,8
6E 600/03-55-4		936	468	468	24,7	9,4	15,3
6E 600/04-75-4		1066	528	538	28,8	10,2	18,6
6E 600/05-100	6" NEMA	1188	588	600	53,2	11,2	42





* High pressure pump supplied in blocks




6E 700

TYPE	SUITABLE MOTOR	DIMENSIONS (mm)			WEIGHT (kg)		
		A	B	C	A	B	C
6E 700/04-100	6" NEMA	1128	528	600	52,2	10,2	42
6E 700/06-125		1248	648	600	57	12	45
6E 700/07-150		1408	708	700	60,9	12,9	48
6E 700/08-175		1468	768	700	63,8	13,8	50
6E 700/09-200		1588	828	760	68,8	14,8	54
6E 700/12-250		1838	1008	830	80,7	15,7	65
6E 700/14-300		2018	1128	890	87,8	17,8	70
6E 700/17-400		2338	1308	1030	111,9	21,9	90
6E 700/19-400		2510	1480	1030	116,8	26,8	90
6E 700/24-500		2949	1779	1170	138,1	37,1	101

* High pressure pump supplied in blocks



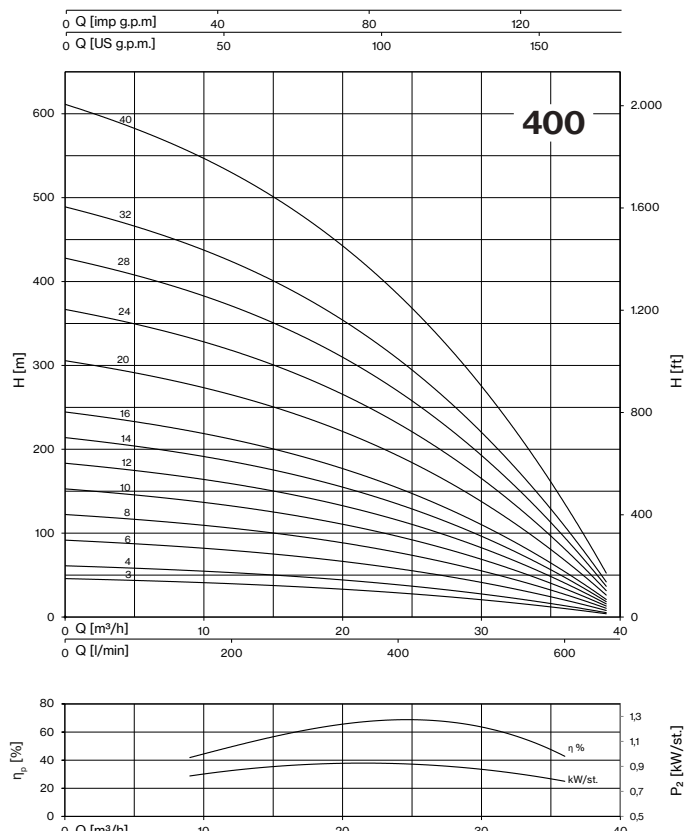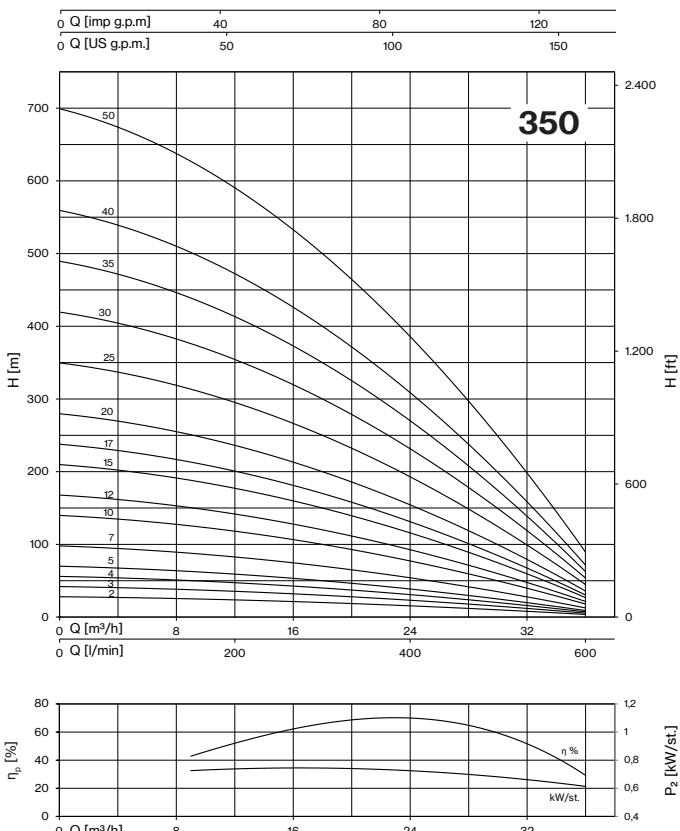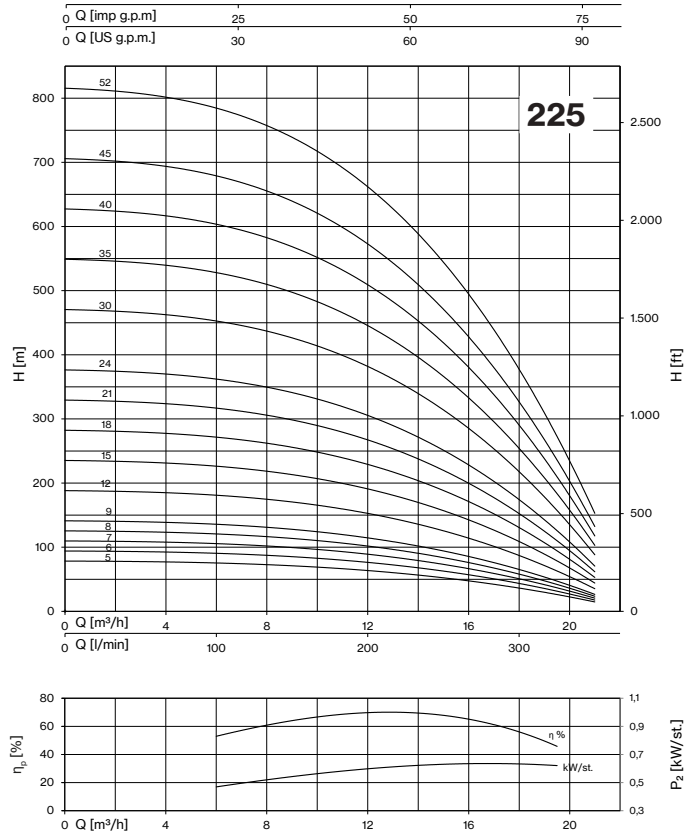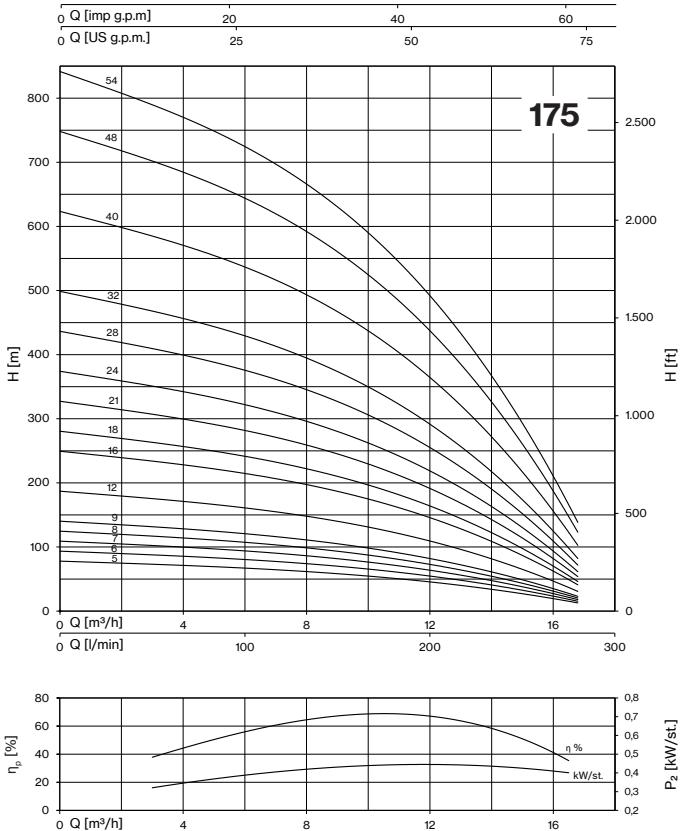

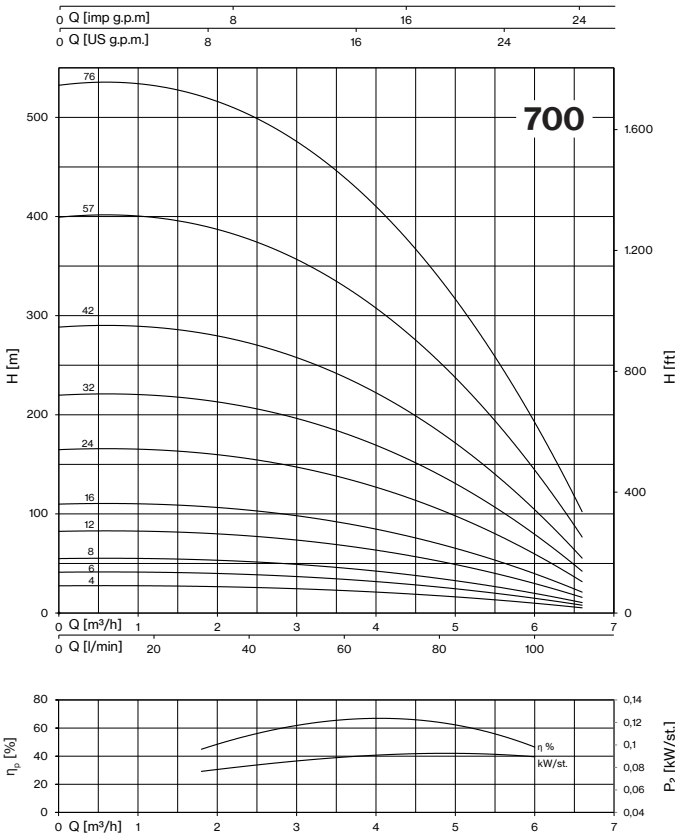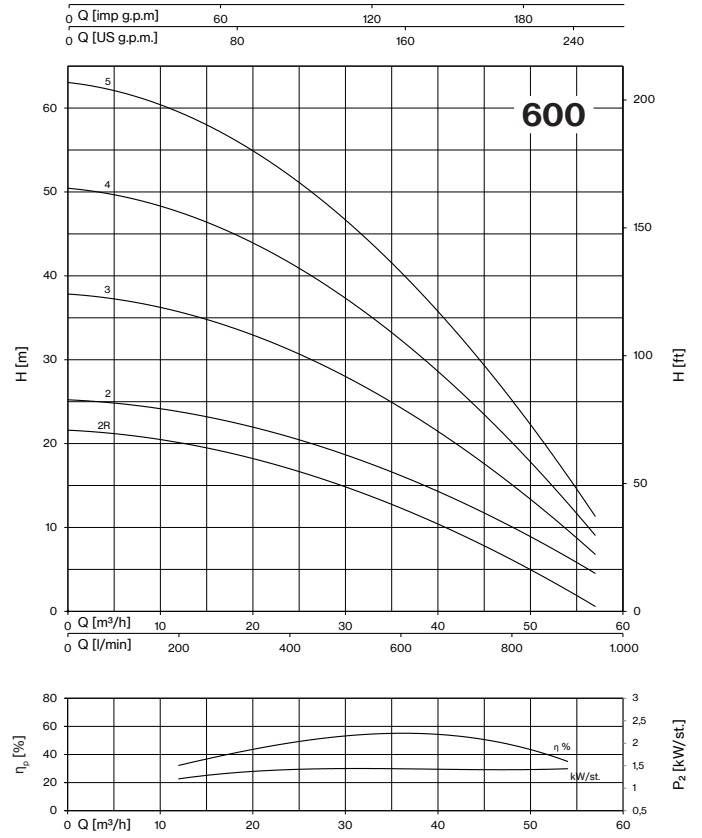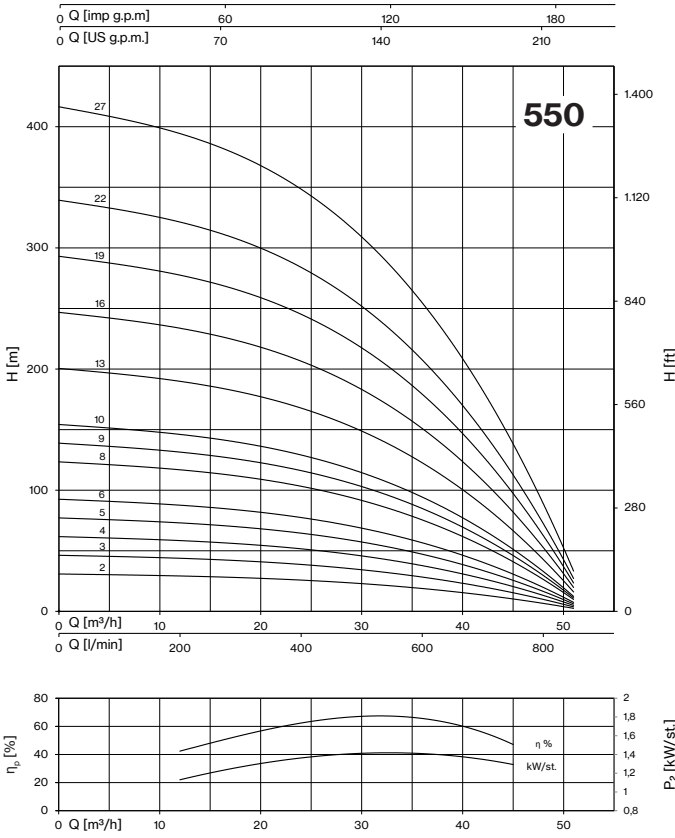

6-8-10LMG lines

Deepwell Borehole



Submersible multistage centrifugal pumps for 6", 8", 10" wells. Check valve built into the delivery outlet. Pump flange for coupling with motors are made according to NEMA standards. Most common applications are civil and agricultural.

Construction features



Suction and delivery outlet	cast iron GG25
Valve	stainless steel AISI 304
Impellers and diffusers	cast iron GG25; AISI 304 impeller on request
Upper bushings	NBR rubber
Shaft pump side	stainless steel AISI 304
Quantity of sand in the water	max 50 g/m ³



50 Hz - 2900 rpm					Q						
TYPE	P2		400 V	l/min	0	300	400	500	600	700	800
	HP	kW	A	l/sec	0	5,00	6,67	8,33	10,00	11,67	13,33
				m ³ /h	0	18	24	30	36	42	48
6LMG 38/03	5,5	4	7,5	H (m)	43	36	33	30	27	22	15
6LMG 38/04	7,5	5,5	12,5		57	48	44	40	37	30	20
6LMG 38/05	10	7,5	17,5		71	60	55	50	46	37	25
6LMG 38/06	10	7,5	17,5		86	72	66	60	55	45	30
6LMG 38/07	12,5	9,2	21		100	84	77	70	64	52	35
6LMG 38/08	15	11	24,5		114	96	88	80	73	59	40
6LMG 38/09	15	11	24,5		129	108	99	90	82	67	45
6LMG 38/10	17,5	13	28		143	120	110	100	91	74	50
6LMG 38/11	17,5	13	28		157	132	121	110	101	82	55
6LMG 38/12	20	15	32		171	144	132	120	110	89	60
6LMG 38/13	20	15	32		186	156	143	130	119	97	65
6LMG 38/14	25	18,5	40		200	168	154	140	128	104	70
6LMG 38/15	25	18,5	40		214	180	165	150	137	111	75

Max Eff. % =	74
Max kW / St. =	1,22

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

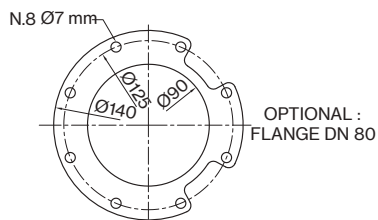
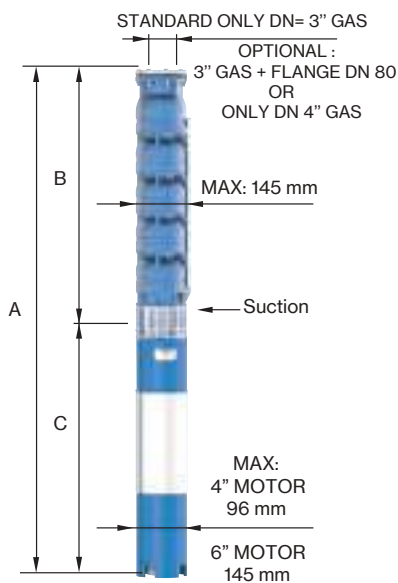


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 38/03	1242	596	646	40	19
6LMG 38/04	1368	697	671	45	23
6LMG 38/05	1499	798	701	55	28
6LMG 38/06	1600	899	701	55	32
6LMG 38/07	1751	1000	751	60	36
6LMG 38/08	1912	1101	811	65	40
6LMG 38/09	2013	1202	811	65	44
6LMG 38/10	2144	1303	841	70	48
6LMG 38/11	2245	1404	841	70	52
6LMG 38/12	2436	1505	931	75	56
6LMG 38/13	2537	1606	931	75	60
6LMG 38/14	2698	1707	991	83	64
6LMG 38/15	2799	1808	991	83	69





6LMG 38

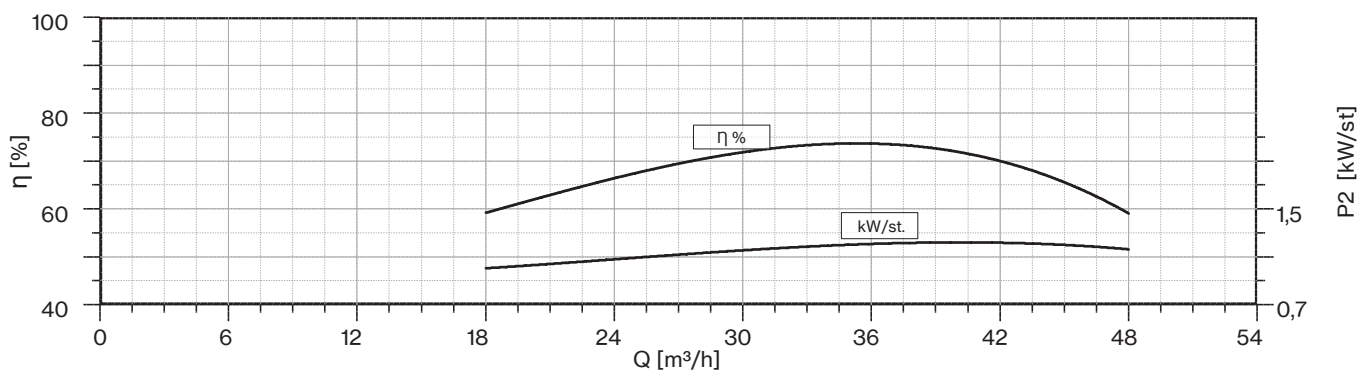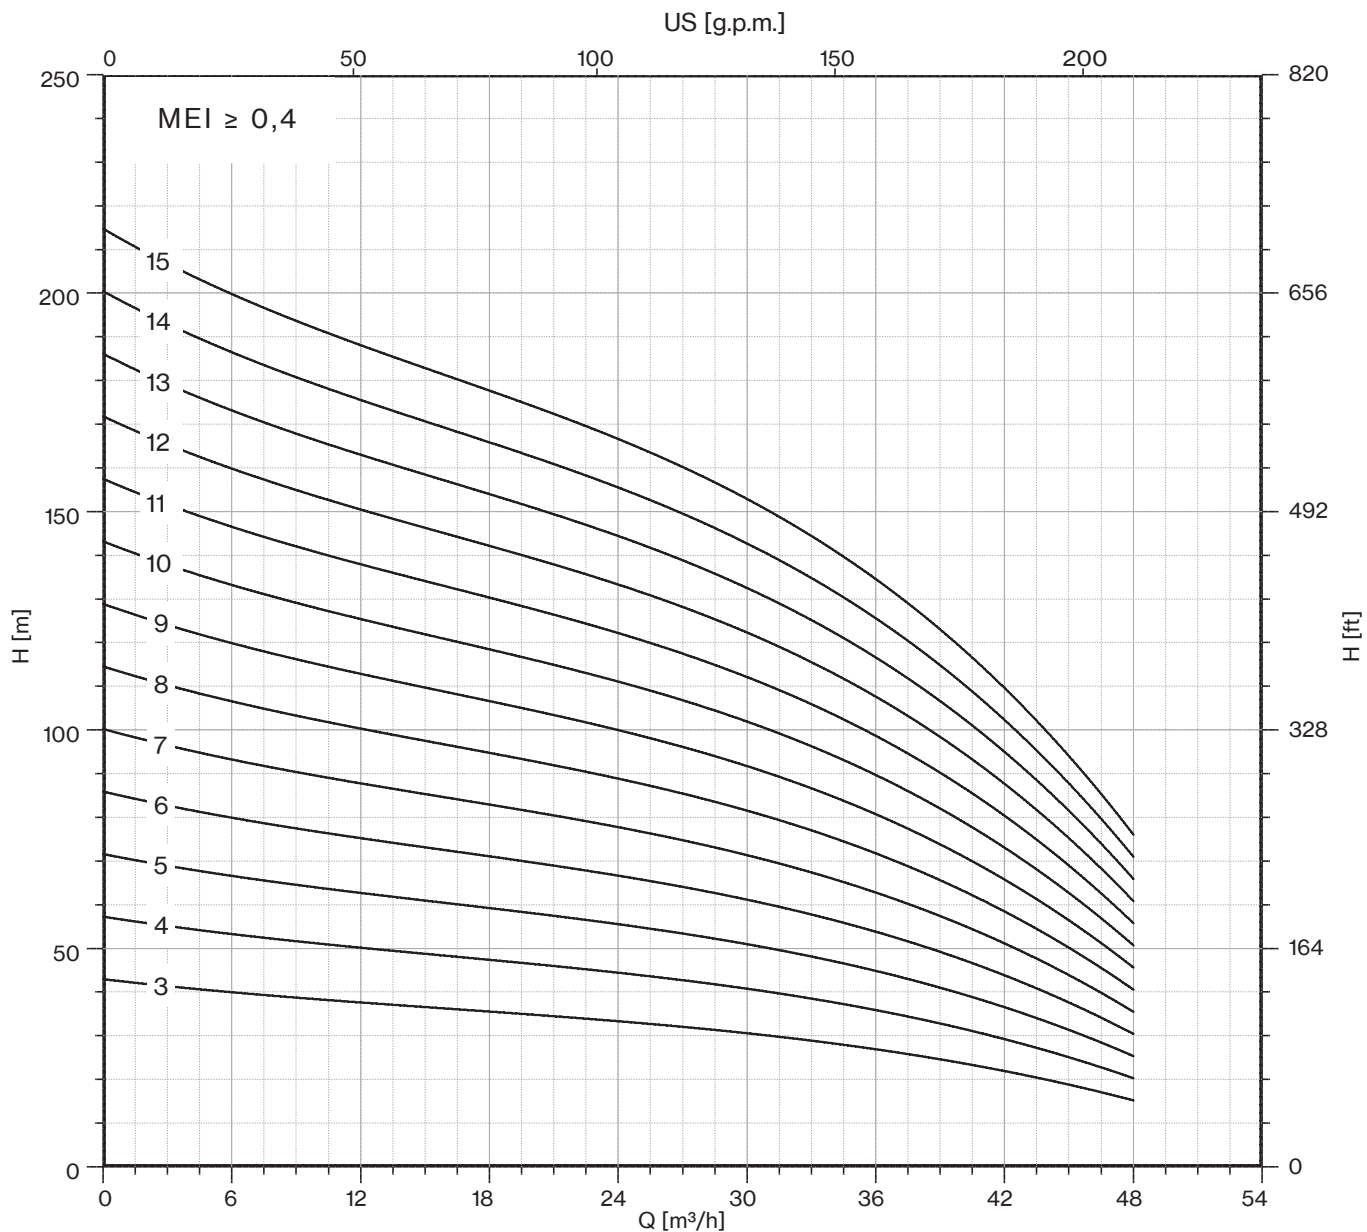

50 Hz - 2900 rpm				Q							
TYPE	P2		400 V	l/min	0	300	400	500	600	700	800
	HP	kW	A	l/sec	0	5,00	6,67	8,33	10,00	11,67	13,33
				m ³ /h	0	18	24	30	36	42	48
6LMG 38/16	30	22	47,5	H (m)	229	192	176	160	146	119	80
6LMG 38/17	30	22	47,5		243	204	187	170	155	126	85
6LMG 38/18	30	22	47,5		257	216	198	180	165	134	90
6LMG 38/19	35	26	55		271	228	209	190	174	141	95
6LMG 38/20	35	26	55		286	240	220	200	183	149	100
6LMG 38/21	35	26	55		300	252	231	210	192	156	105
6LMG 38/22	35	26	55		314	264	242	220	201	163	110
6LMG 38/23	40	30	62,5		329	276	253	230	210	171	115
6LMG 38/24	40	30	62,5		343	288	264	240	219	178	120
6LMG 38/25	40	30	62,5		357	300	275	250	229	186	125
6LMG 38/26	50	37	78		371	312	286	260	238	193	130
6LMG 38/27	50	37	78		386	324	297	270	247	201	135
6LMG 38/28	50	37	78		400	336	308	280	256	208	140
6LMG 38/29	50	37	78		414	348	319	290	265	215	145
6LMG 38/30	50	37	78		429	360	330	300	274	223	150

Max Eff. % =	74
Max kW / St. =	1,22

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

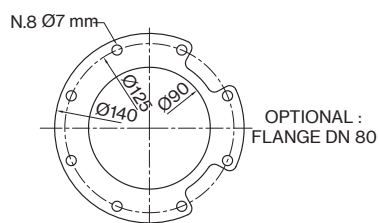
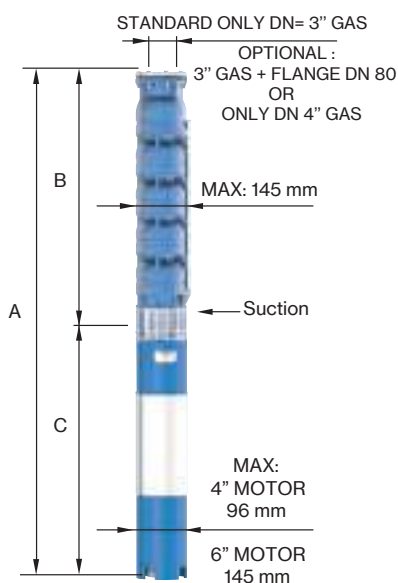


FOR COMMERCIAL TUBE
 EXTERNAL DIAMETER: 88,9 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 38/16	2980	1909	1071	92	73
6LMG 38/17	3081	2010	1071	92	77
6LMG 38/18	3182	2111	1071	92	81
6LMG 38/19	3393	2212	1181	100	85
6LMG 38/20	3494	2313	1181	100	89
6LMG 38/21	3595	2414	1181	100	93
6LMG 38/22	3696	2515	1181	100	97
6LMG 38/23	3867	2616	1251	108	101
6LMG 38/24	3968	2717	1251	108	105
6LMG 38/25	4069	2818	1251	108	110
6LMG 38/26	4260	2919	1341	118	114
6LMG 38/27	4361	3020	1341	118	118
6LMG 38/28	4462	3121	1341	118	122
6LMG 38/29	4563	3222	1341	118	126
6LMG 38/30	4664	3323	1341	118	130





6LMG 38

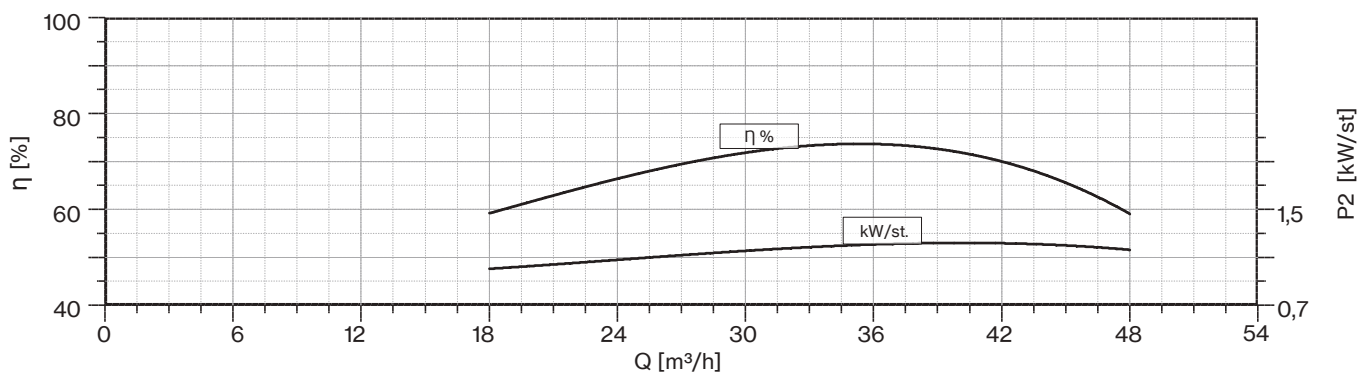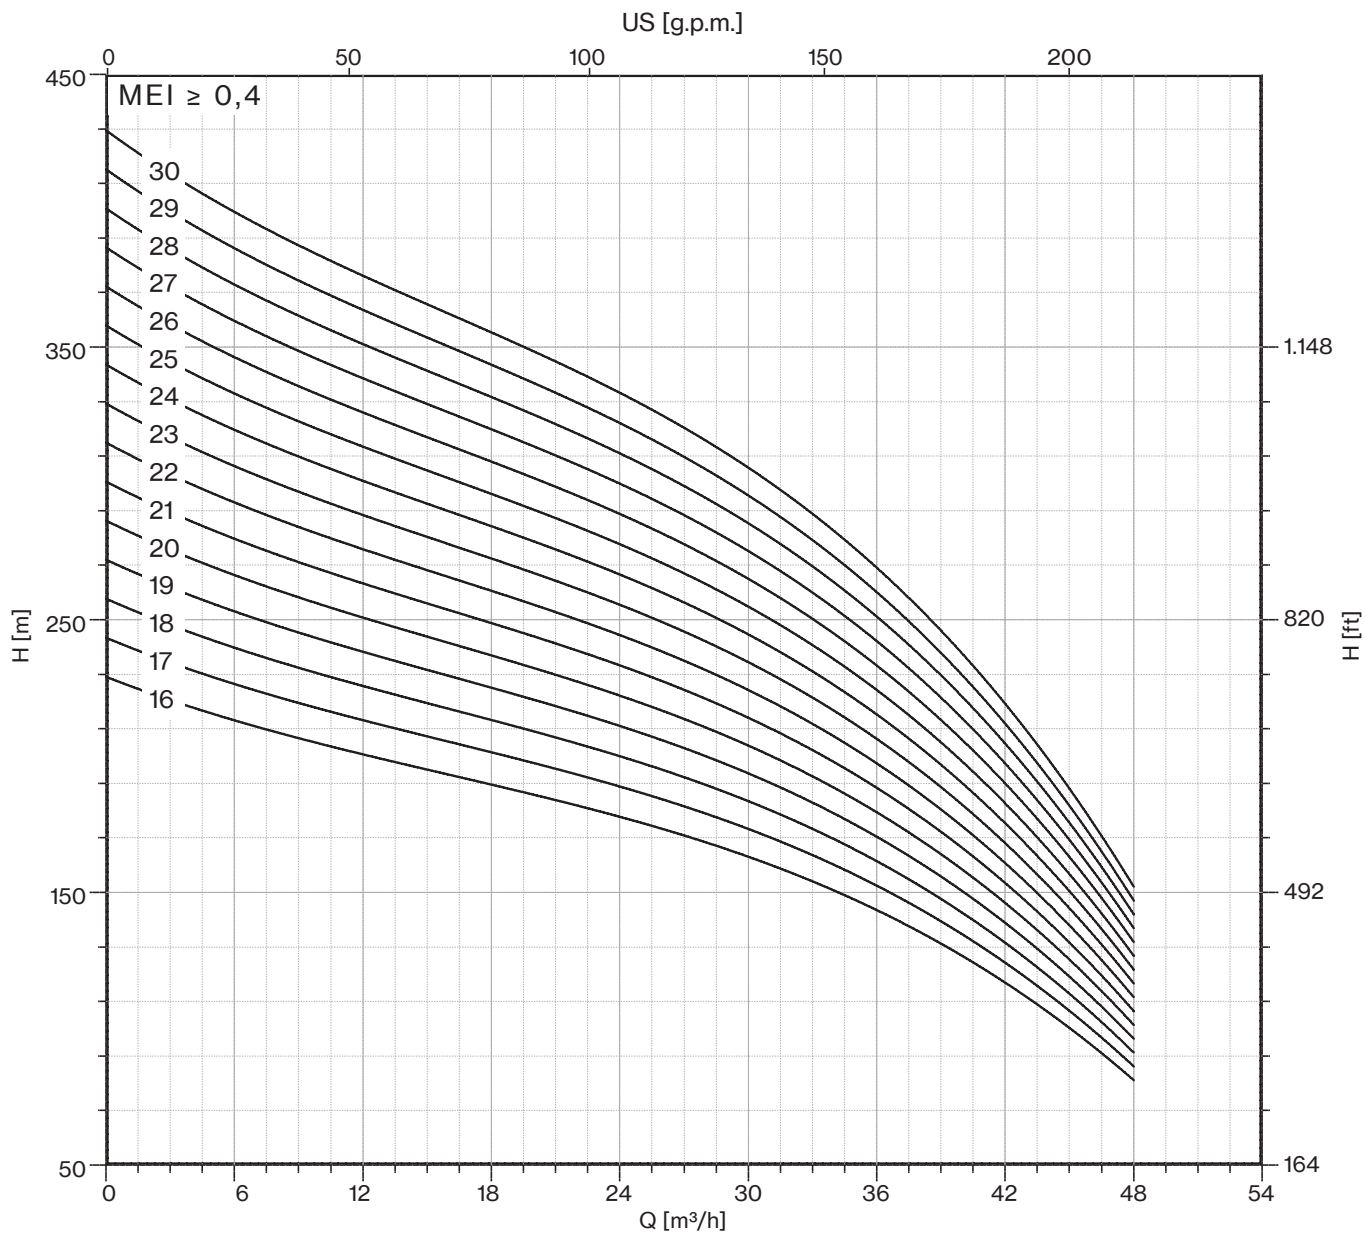

50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	400	500	600	700	800	900	1000
	HP	kW	A	l/sec	0	6,67	8,33	10,00	11,67	13,33	15,00	16,67
				m ³ /h	0	24	30	36	42	48	54	60
6LMG 48/03	5,5	4	7,5	H (m)	40	32	31	29	26	22	17	10
6LMG 48/04	7,5	5,5	12,5		53	43	41	38	34	29	22	13
6LMG 48/05	10	7,5	17,5		67	53	51	48	43	36	28	17
6LMG 48/06	12,5	9,2	21		80	64	61	57	51	43	33	20
6LMG 48/07	12,5	9,2	21		93	75	71	67	60	50	39	23
6LMG 48/08	15	11	24,5		107	85	81	76	68	57	44	27
6LMG 48/09	17,5	13	28		120	96	92	86	77	65	50	30
6LMG 48/10	17,5	13	28		133	107	102	95	85	72	55	33
6LMG 48/11	20	15	32		147	117	112	105	94	79	61	37
6LMG 48/12	20	15	32		160	128	122	114	102	86	66	40
6LMG 48/13	25	18,5	40		173	139	132	124	111	93	72	43
6LMG 48/14	25	18,5	40		187	149	142	133	119	100	77	47
6LMG 48/15	30	22	47,5		200	160	153	143	128	108	83	50

Max Eff. % =	74
Max kW / St. =	1,32

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,45	3,5	3,8	5

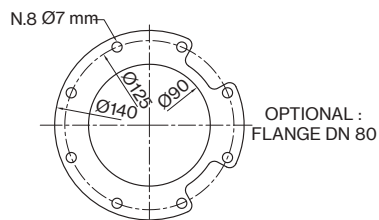
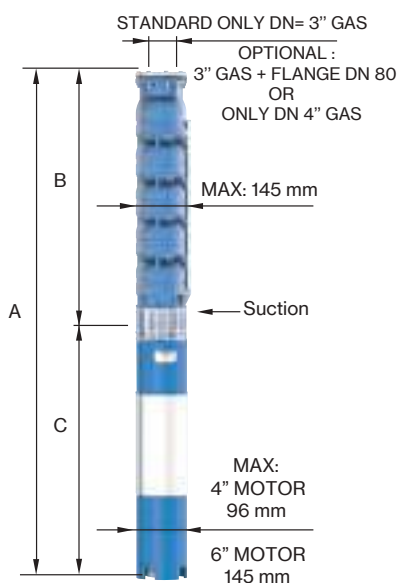


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 48/03	1242	596	646	40	19
6LMG 48/04	1368	697	671	45	23
6LMG 48/05	1499	798	701	55	28
6LMG 48/06	1650	899	751	60	32
6LMG 48/07	1751	1000	751	60	36
6LMG 48/08	1912	1101	811	65	40
6LMG 48/09	2043	1202	841	70	44
6LMG 48/10	2144	1303	841	70	48
6LMG 48/11	2335	1404	931	75	52
6LMG 48/12	2436	1505	931	75	56
6LMG 48/13	2597	1606	991	83	60
6LMG 48/14	2698	1707	991	83	64
6LMG 48/15	2879	1808	1071	92	69





6LMG 48

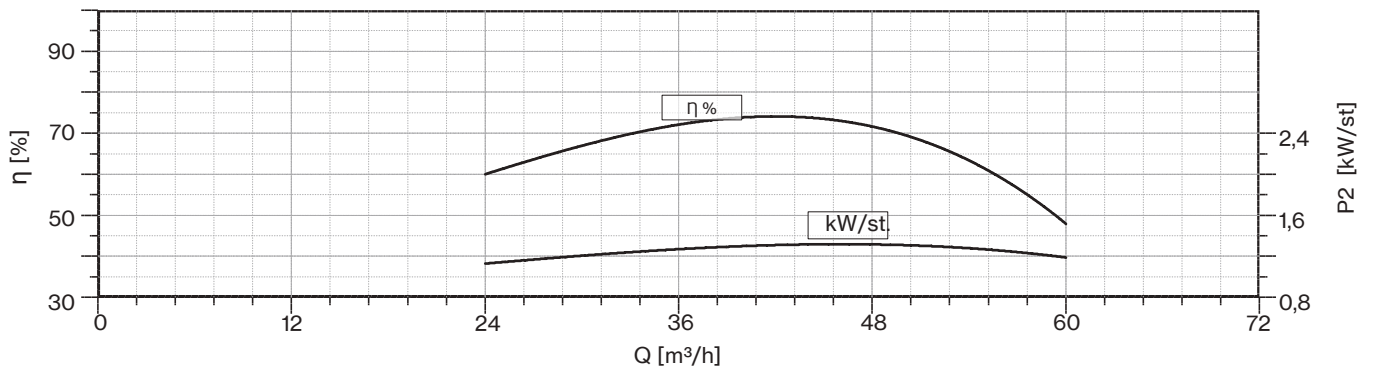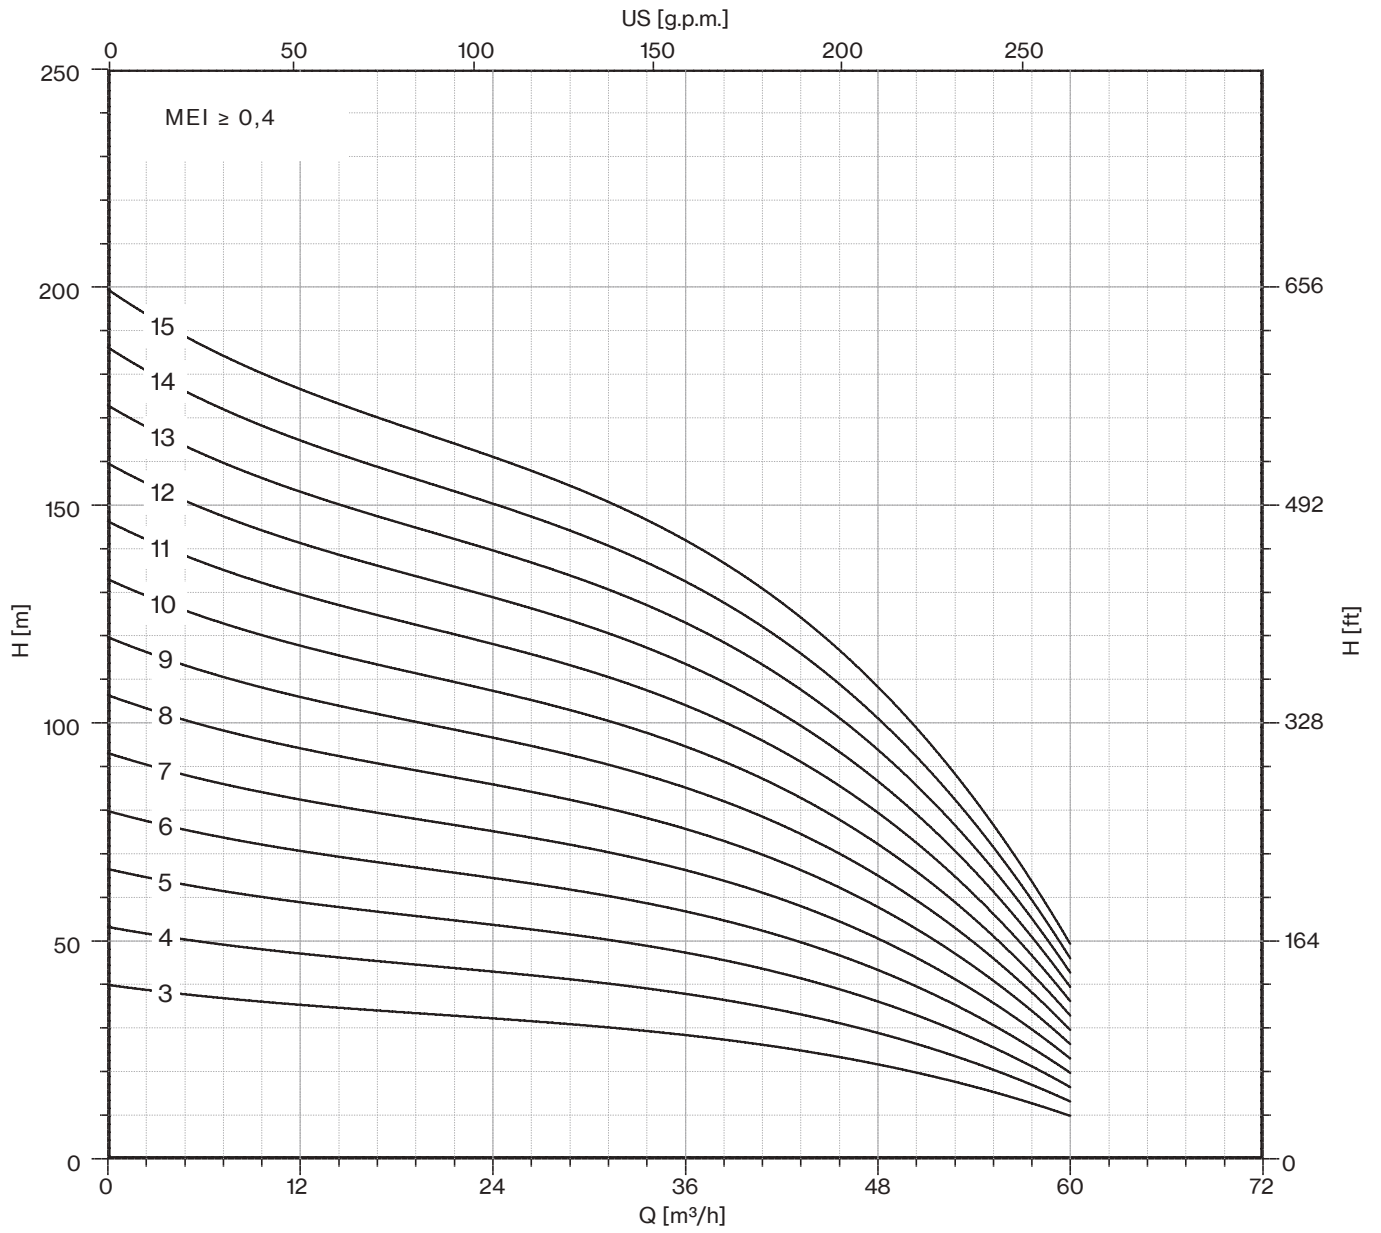

50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	400	500	600	700	800	900	1000
	HP	kW	A	l/sec	0	6,67	8,33	10,00	11,67	13,33	15,00	16,67
				m ³ /h	0	24	30	36	42	48	54	60
6LMG 48/16	30	22	47,5	H (m)	213	171	163	152	136	115	88	53
6LMG 48/17	30	22	47,5		227	181	173	162	145	122	94	57
6LMG 48/18	35	26	55		240	192	183	171	153	129	99	60
6LMG 48/19	35	26	55		253	203	193	181	162	136	105	63
6LMG 48/20	35	26	55		267	213	203	190	170	143	110	67
6LMG 48/21	40	30	62,5		280	224	214	200	179	151	116	70
6LMG 48/22	40	30	62,5		293	235	224	209	187	158	121	73
6LMG 48/23	40	30	62,5		307	245	234	219	196	165	127	77
6LMG 48/24	50	37	78		320	256	244	228	204	172	132	80
6LMG 48/25	50	37	78		333	267	254	238	213	179	138	83
6LMG 48/26	50	37	78		347	277	264	247	221	186	143	87
6LMG 48/27	50	37	78		360	288	275	257	230	194	149	90
6LMG 48/28	50	37	78		373	299	285	266	238	201	154	93

Max Eff. % =	74
Max kW / St. =	1,32

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,45	3,5	3,8	5

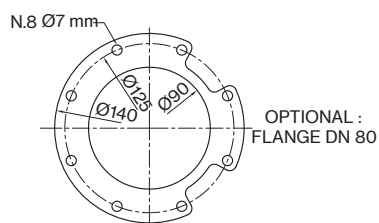
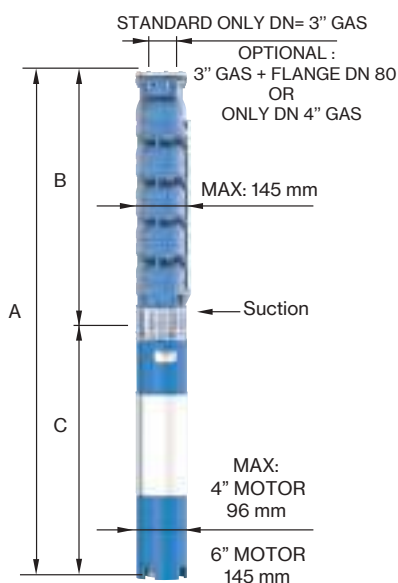


FOR COMMERCIAL TUBE
 EXTERNAL DIAMETER: 88,9 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 48/16	2980	1909	1071	92	73
6LMG 48/17	3081	2010	1071	92	77
6LMG 48/18	3292	2111	1181	100	81
6LMG 48/19	3393	2212	1181	100	85
6LMG 48/20	3494	2313	1181	100	89
6LMG 48/21	3665	2414	1251	108	93
6LMG 48/22	3766	2515	1251	108	97
6LMG 48/23	3867	2616	1251	108	101
6LMG 48/24	4058	2717	1341	118	105
6LMG 48/25	4159	2818	1341	118	110
6LMG 48/26	4260	2919	1341	118	114
6LMG 48/27	4361	3020	1341	118	118
6LMG 48/28	4462	3121	1341	118	122




6LMG 48

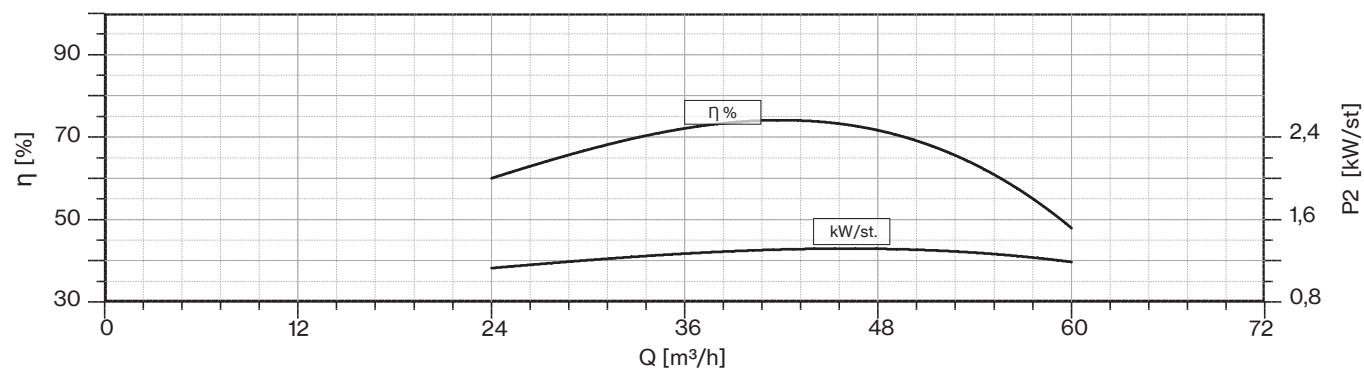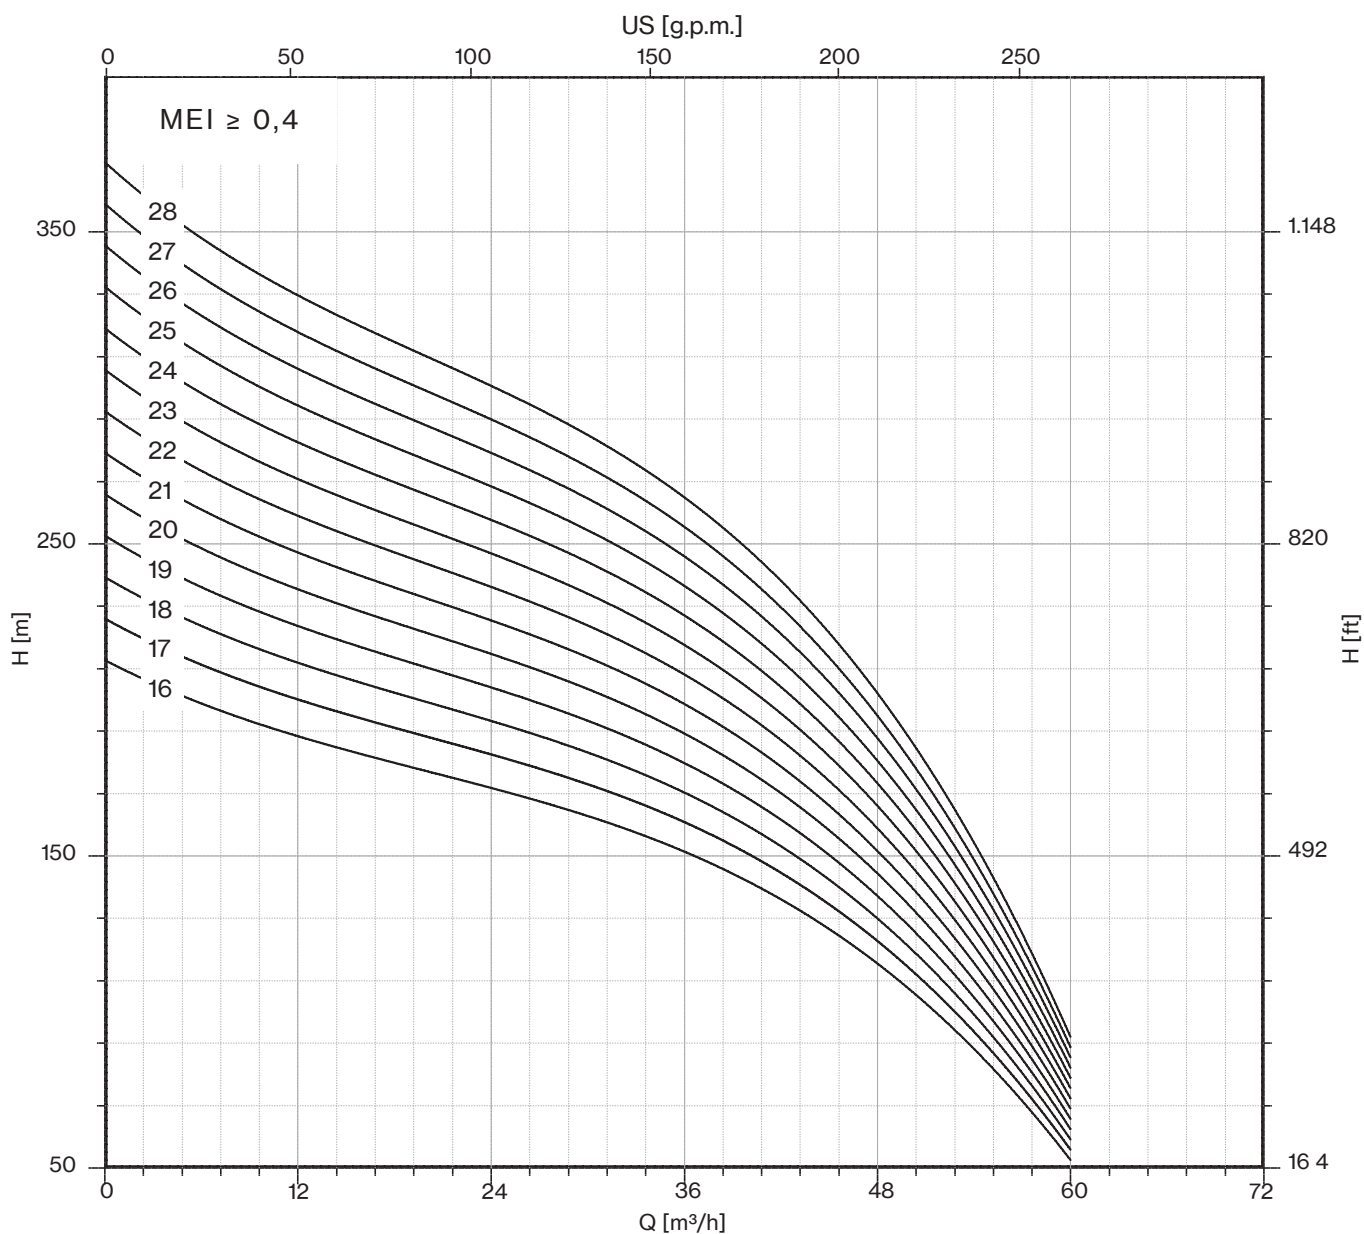

50 Hz - 2900 rpm				Q						
TYPE	P2		400 V	l/min	0	500	600	800	1000	1200
	HP	kW	A	l/sec	0	8,33	10,00	13,33	16,67	20,00
				m ³ /h	0	30	36	48	60	72
6LMG 60/03	7,5	5,5	12,5	H (m)	39	30	28	24	18	8
6LMG 60/04	10	7,5	17,5		52	40	38	32	24	10
6LMG 60/05	10	7,5	17,5		65	50	47	40	30	13
6LMG 60/06	12,5	9,2	21		78	60	56	48	35	16
6LMG 60/07	15	11	24,5		91	70	66	56	41	18
6LMG 60/08	17,5	13	28		104	80	75	64	47	21
6LMG 60/09	17,5	13	28		117	90	85	72	53	23
6LMG 60/10	20	15	32		130	100	94	80	59	26
6LMG 60/11	25	18,5	40		143	110	103	87	65	29
6LMG 60/12	25	18,5	40		156	120	113	95	71	31
6LMG 60/13	25	18,5	40		169	130	122	103	77	34
6LMG 60/14	30	22	47,5		182	140	132	111	83	36
6LMG 60/15	30	22	47,5		195	150	141	119	89	39
6LMG 60/16	35	26	55		208	160	150	127	94	42
6LMG 60/17	35	26	55		221	170	160	135	100	44
6LMG 60/18	35	26	55		234	180	169	143	106	47
6LMG 60/19	40	30	62,5		247	190	179	151	112	49
6LMG 60/20	40	30	62,5		260	200	188	159	118	52
6LMG 60/21	40	30	62,5		273	210	197	167	124	55
6LMG 60/22	50	37	78		286	220	207	175	130	57
6LMG 60/23	50	37	78		299	230	216	183	136	60
6LMG 60/24	50	37	78		312	240	226	191	142	62
6LMG 60/25	50	37	78		325	250	235	199	148	65

Max Eff. % =	73,6
Max kW / St. =	1,44



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

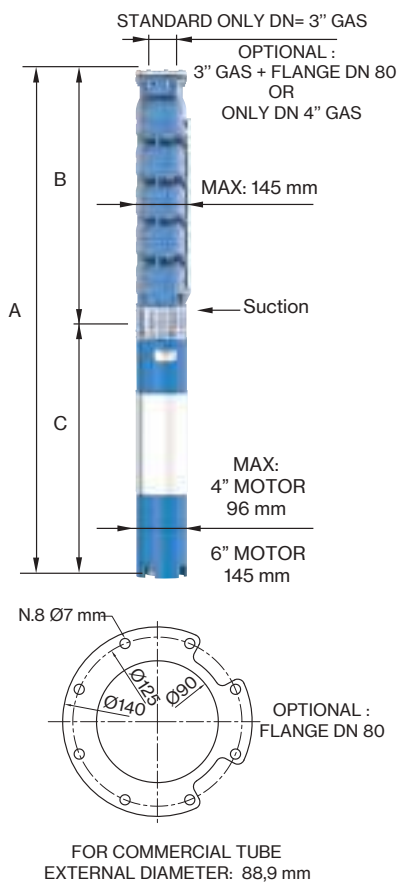

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 60/03	1285	614	671	45	21
6LMG 60/04	1422	721	701	55	25
6LMG 60/05	1529	828	701	55	30
6LMG 60/06	1686	935	751	60	34
6LMG 60/07	1853	1042	811	65	39
6LMG 60/08	1990	1149	841	70	43
6LMG 60/09	2097	1256	841	70	48
6LMG 60/10	2294	1363	931	75	52
6LMG 60/11	2461	1470	991	83	57
6LMG 60/12	2568	1577	991	83	61
6LMG 60/13	2675	1684	991	83	66
6LMG 60/14	2862	1791	1071	92	70
6LMG 60/15	2969	1898	1071	92	75
6LMG 60/16	3186	2005	1181	100	79
6LMG 60/17	3293	2112	1181	100	84
6LMG 60/18	3400	2219	1181	100	88
6LMG 60/19	3577	2326	1251	108	93
6LMG 60/20	3684	2433	1251	108	97
6LMG 60/21	3791	2540	1251	108	102
6LMG 60/22	3988	2647	1341	118	106
6LMG 60/23	4095	2754	1341	118	111
6LMG 60/24	4202	2861	1341	118	115
6LMG 60/25	4309	2968	1341	118	120




6LMG 60

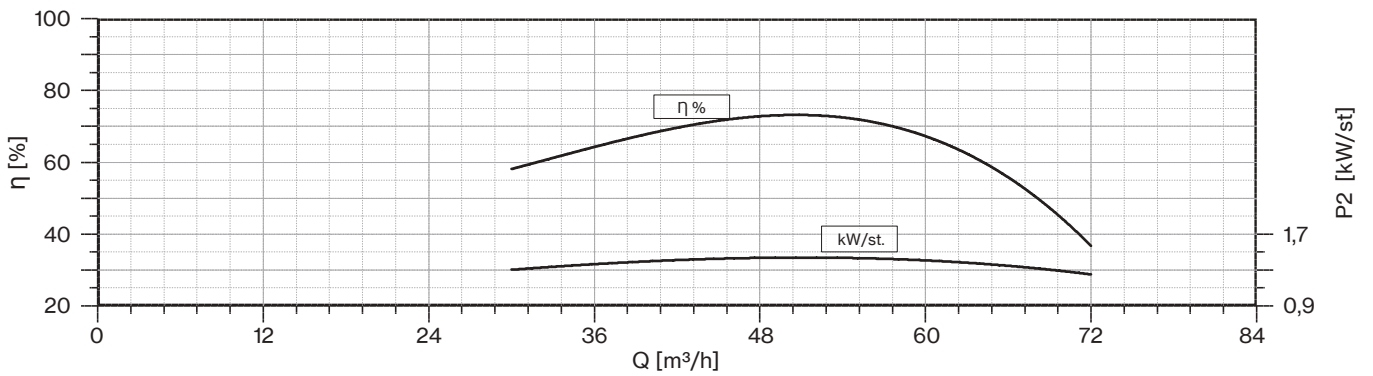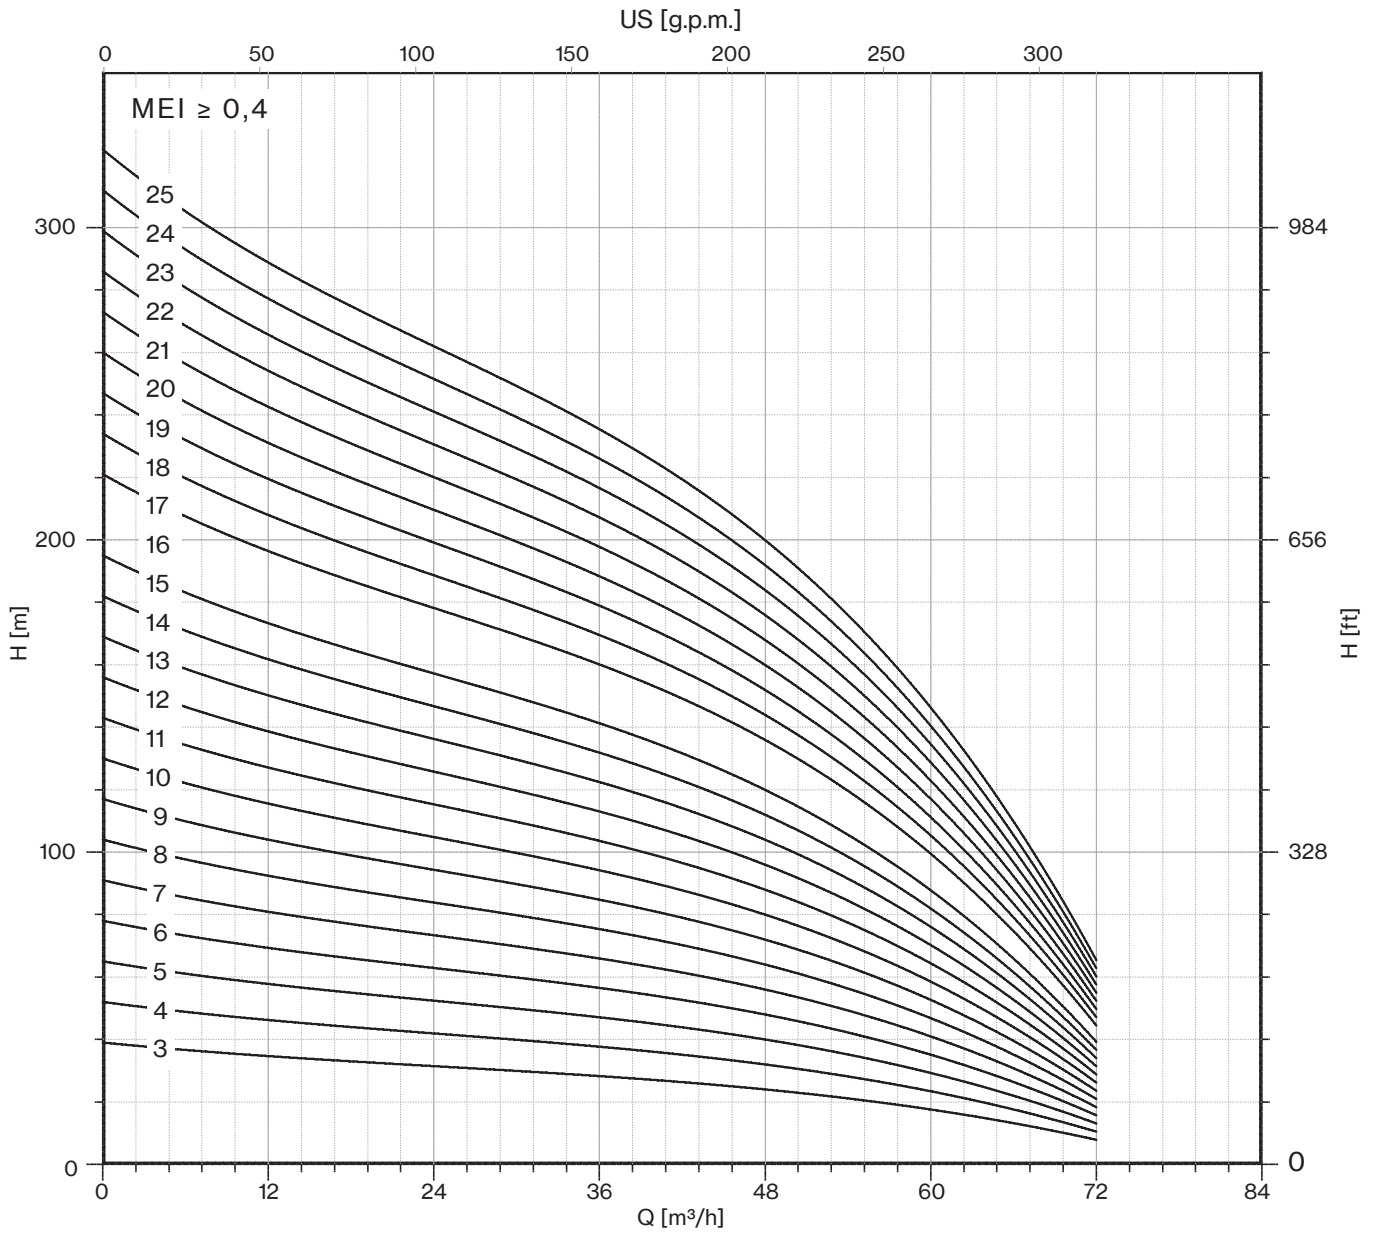

50 Hz - 2900 rpm				Q						
TYPE	P2		400 V	l/min	0	600	800	1000	1200	1400
	HP	kW	A	l/sec	0	10,00	13,33	16,67	20,00	23,33
				m ³ /h	0	36	48	60	72	84
6LMG 70/03	7,5	5,5	12,5	H (m)	39	29	26	23	17	6
6LMG 70/04	10	7,5	17,5		52	39	35	31	23	8
6LMG 70/05	12,5	9,2	21		65	49	44	39	29	10
6LMG 70/06	15	11	24,5		78	59	53	47	34	12
6LMG 70/07	17,5	13	28		91	69	62	55	40	14
6LMG 70/08	20	15	32		104	78	70	62	46	16
6LMG 70/09	20	15	32		117	88	79	70	51	18
6LMG 70/10	25	18,5	40		130	98	88	78	57	20
6LMG 70/11	30	22	47,5		143	108	97	86	63	22
6LMG 70/12	30	22	47,5		156	118	106	94	68	24
6LMG 70/13	30	22	47,5		169	127	114	101	74	26
6LMG 70/14	35	26	55		182	137	123	109	80	28
6LMG 70/15	35	26	55		195	147	132	117	86	30
6LMG 70/16	40	30	62,5		208	157	141	125	91	32
6LMG 70/17	40	30	62,5		221	167	150	133	97	34
6LMG 70/18	50	37	78		234	176	158	140	103	36
6LMG 70/19	50	37	78		247	186	167	148	108	38
6LMG 70/20	50	37	78		260	196	176	156	114	40
6LMG 70/21	50	37	78		273	206	185	164	120	42

Max Eff. % =	74
Max kW / St. =	1,74



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

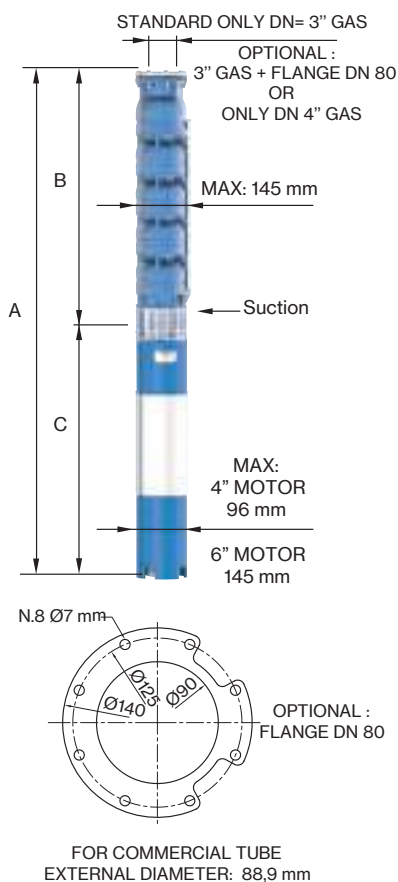

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LMG 70/03	1285	614	671	45	21
6LMG 70/04	1422	721	701	55	25
6LMG 70/05	1579	828	751	60	30
6LMG 70/06	1746	935	811	65	34
6LMG 70/07	1883	1042	841	70	39
6LMG 70/08	2080	1149	931	75	43
6LMG 70/09	2187	1256	931	75	48
6LMG 70/10	2354	1363	991	83	52
6LMG 70/11	2541	1470	1071	92	57
6LMG 70/12	2648	1577	1071	92	61
6LMG 70/13	2755	1684	1071	92	66
6LMG 70/14	2972	1791	1181	100	70
6LMG 70/15	3079	1898	1181	100	75
6LMG 70/16	3256	2005	1251	108	79
6LMG 70/17	3363	2112	1251	108	84
6LMG 70/18	3560	2219	1341	118	88
6LMG 70/19	3667	2326	1341	118	93
6LMG 70/20	3774	2433	1341	118	97
6LMG 70/21	3881	2540	1341	118	102




6LMG 70

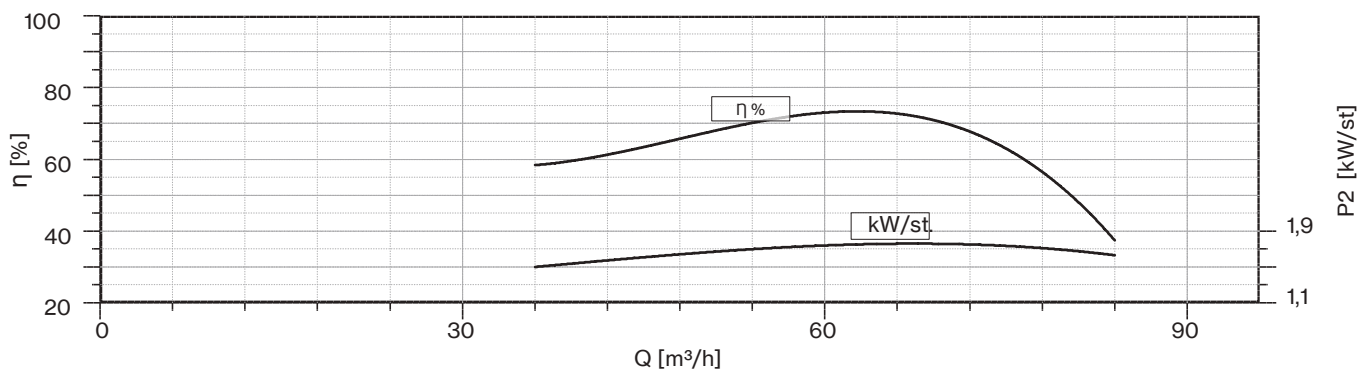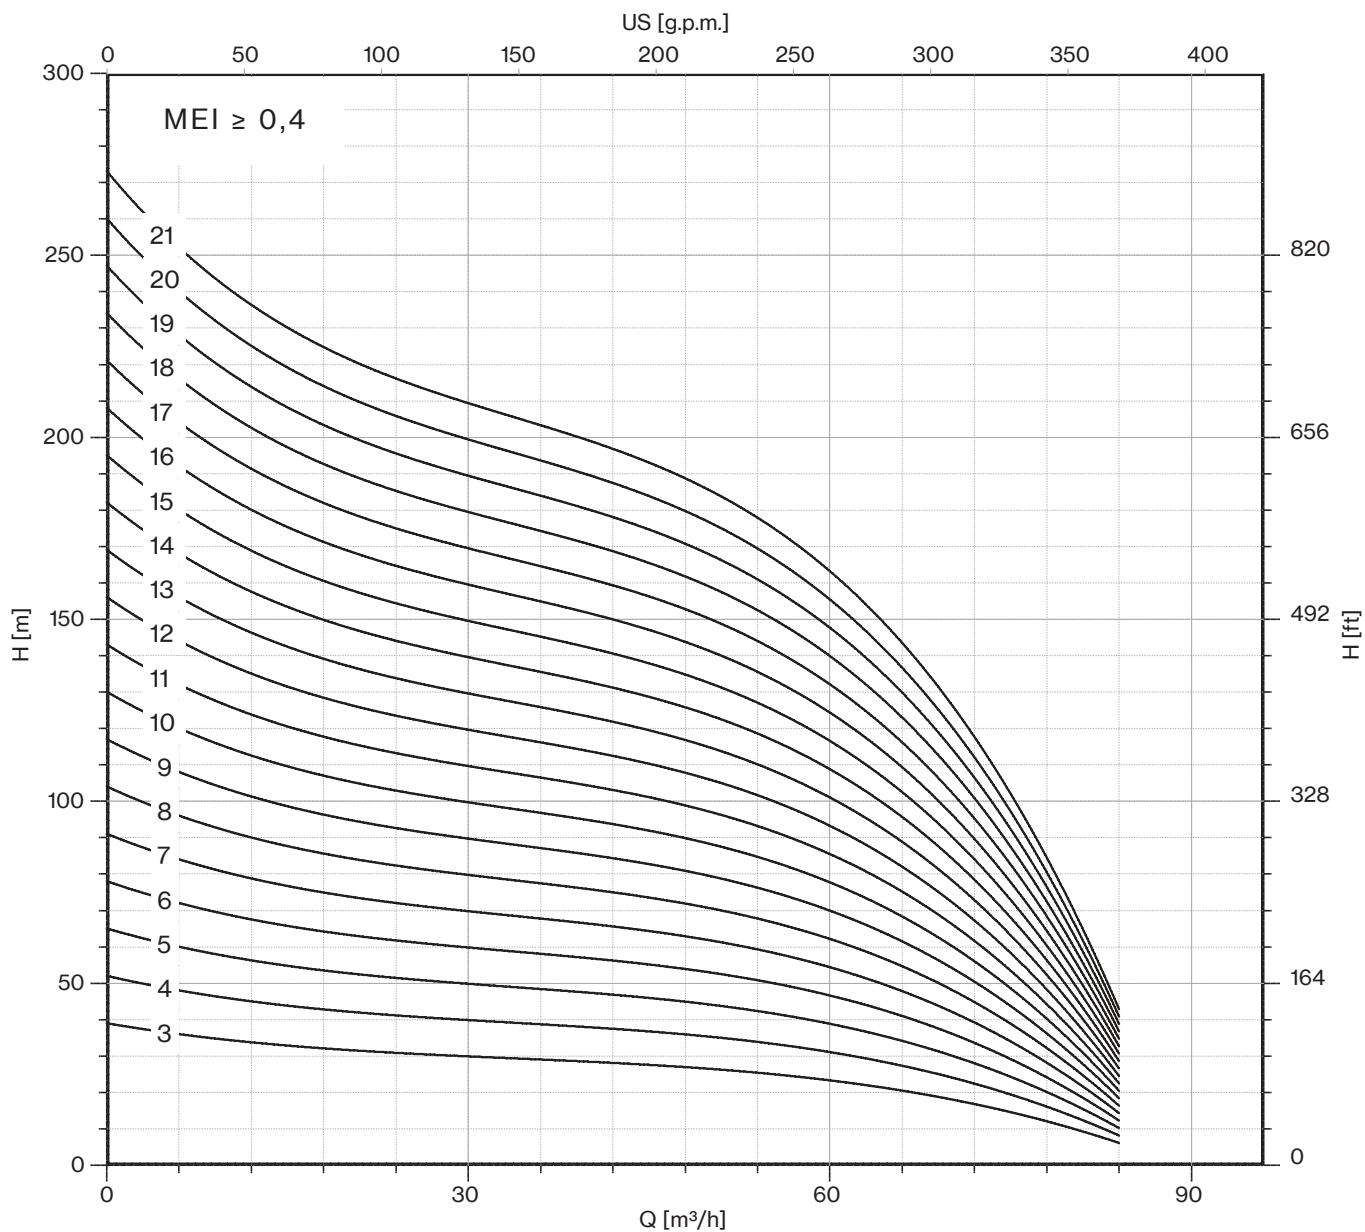


50 Hz - 2900 rpm				Q							
TYPE	P2		400 V	l/min	0	600	800	1000	1200	1400	1600
	HP	kW	A	l/sec	0	10,00	13,33	16,67	20,00	23,33	26,67
				m ³ /h	0	36	48	60	72	84	96
8LMG 80/01	7,5	5,5	12,5	H (m)	26	22	21	19	18	15	11
8LMG 80/02	15	11	24,5		53	45	42	39	35	30	23
8LMG 80/03	20	15	32		79	67	63	58	53	44	34
8LMG 80/04	30	22	47,5		105	89	84	78	70	59	45
8LMG 80/05	35	26	55		131	111	105	97	88	74	56
8LMG 80/06	40	30	62,5		158	134	126	116	105	89	68
8LMG 80/07	50	37	78		184	156	147	136	123	103	79
8LMG 80/08	60	45	92		210	178	168	155	140	118	90
8LMG 80/09	60	45	92		236	200	189	174	158	133	101
8LMG 80/10	75	55	113,5		263	223	210	194	175	148	113
8LMG 80/11	75	55	113,5		289	245	231	213	193	162	124
8LMG 80/12	90	66	134,5		315	267	252	233	210	177	135
8LMG 80/13	90	66	134,5		341	289	273	252	228	192	146
8LMG 80/14	100	75	149,5		368	312	294	271	245	207	158
8LMG 80/15	100	75	149,5		394	334	315	291	263	221	169

Max Eff. % =	70
Max kW / St. =	5,1

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	3,5	4,5

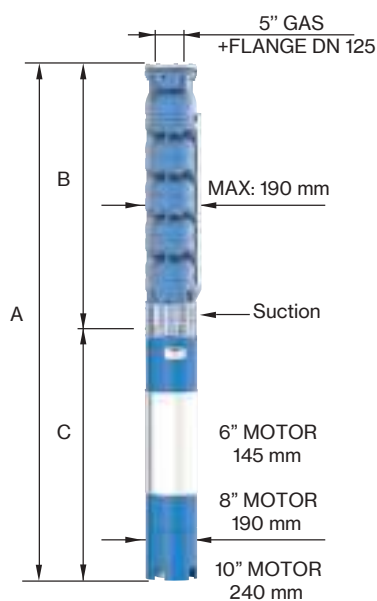



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LMG 80/01	1198	527	671	45	23
8LMG 80/02	1463	652	811	65	31
8LMG 80/03	1708	777	931	75	39
8LMG 80/04	1973	902	1071	92	48
8LMG 80/05	2208	1027	1181	100	56
8LMG 80/06	2403	1152	1251	108	64
8LMG 80/07	2618	1277	1341	118	73
8LMG 80/08	2525	1402	1123	178	81
8LMG 80/09	2650	1527	1123	178	89
8LMG 80/10	2885	1652	1233	200	98
8LMG 80/11	3010	1777	1233	200	106
8LMG 80/12	3205	1902	1303	214	114
8LMG 80/13	3330	2027	1303	214	122
8LMG 80/14	3535	2152	1383	230	131
8LMG 80/15	3660	2277	1383	230	139

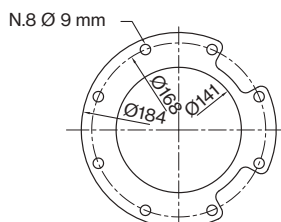

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm




8LMG 80

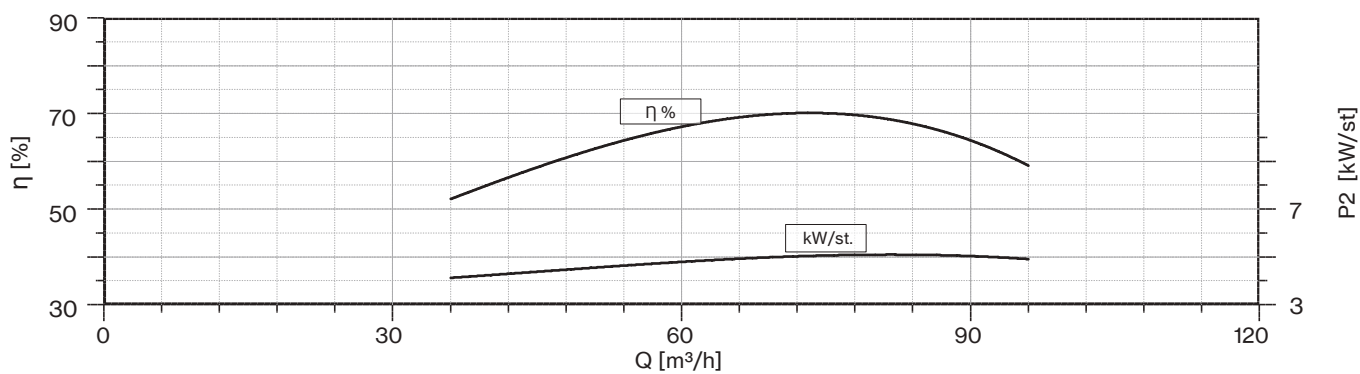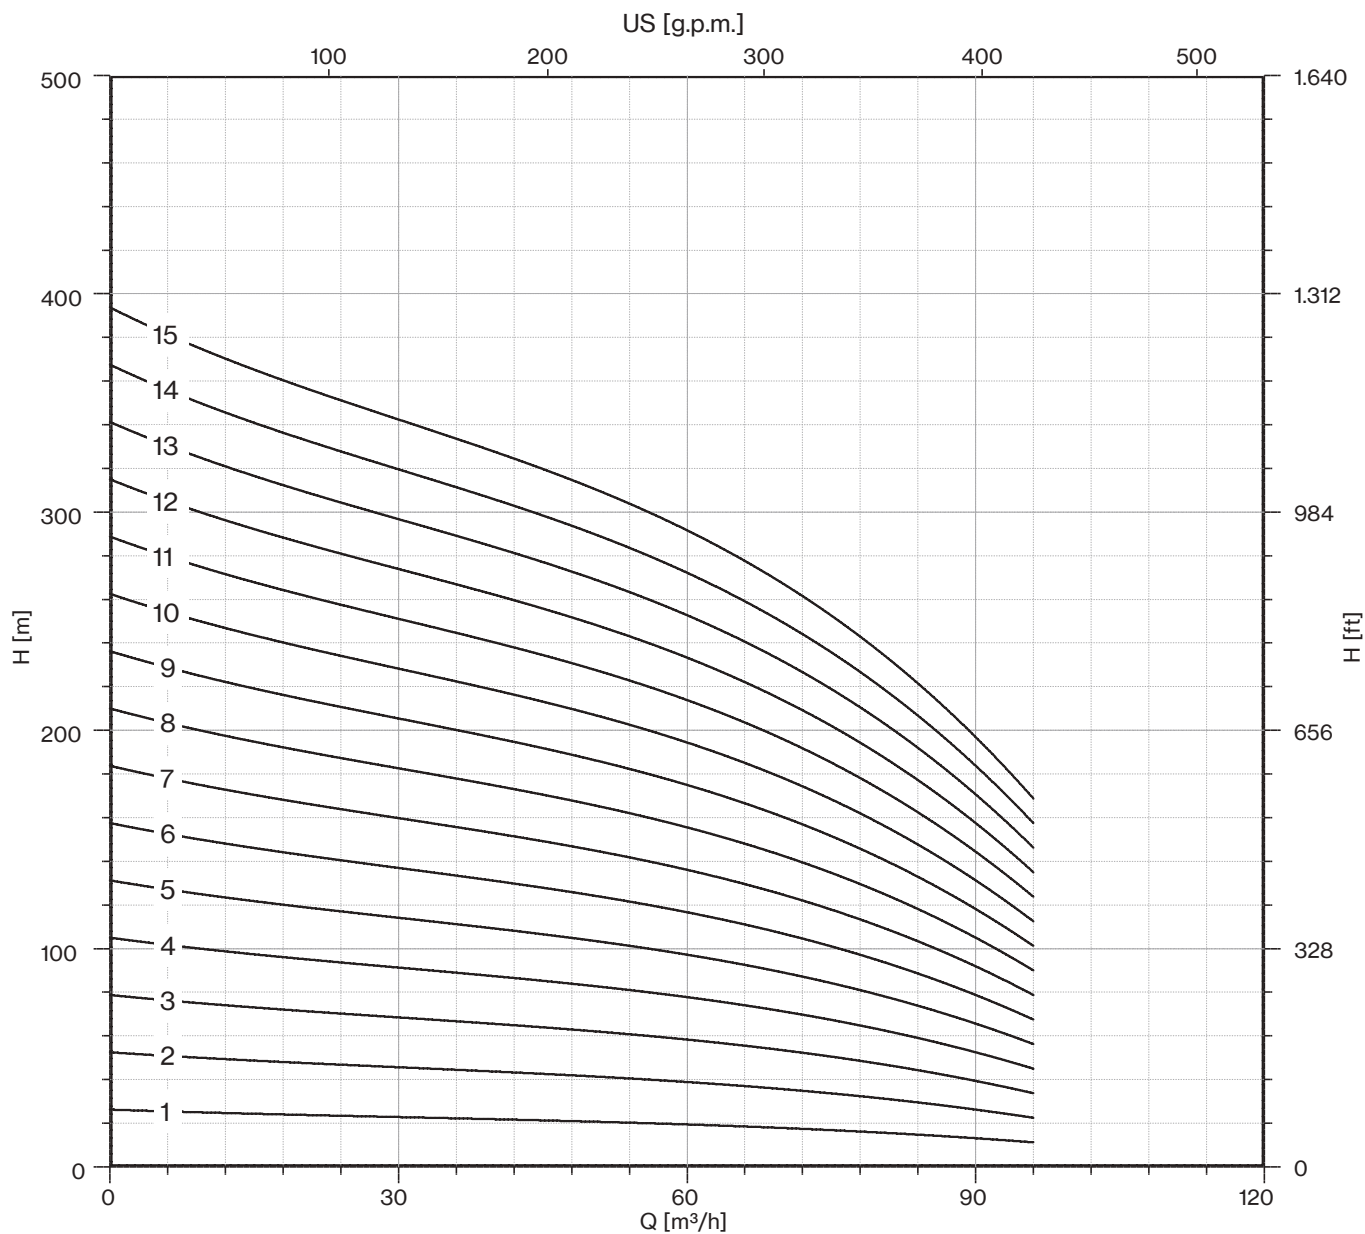


50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	800	1000	1200	1400	1600	1800	2000
	HP	kW	A	l/sec	0	13,33	16,67	20,00	23,33	26,67	30,00	33,33
				m ³ /h	0	48	60	72	84	96	108	120
8LMG 92/01	10	7,5	17,5	H (m)	26	22	21	20	18	15	13	10
8LMG 92/02	17,5	13	28		53	44	42	39	35	31	25	20
8LMG 92/03	25	18,5	40		79	66	63	59	53	46	38	29
8LMG 92/04	35	26	55		105	89	84	78	70	61	50	39
8LMG 92/05	40	30	62,5		131	111	104	98	88	76	63	49
8LMG 92/06	50	37	78		158	133	125	117	105	92	75	59
8LMG 92/07	60	45	92		184	155	146	137	123	107	88	68
8LMG 92/08	75	55	113,5		210	177	167	156	140	122	100	78
8LMG 92/09	75	55	113,5		236	199	188	176	158	137	113	88
8LMG 92/10	90	66	134,5		263	221	209	195	175	153	125	98
8LMG 92/11	90	66	134,5		289	243	230	215	193	168	138	107
8LMG 92/12	100	75	149,5		315	266	251	234	210	183	150	117
8LMG 92/13	100	75	149,5		341	288	271	254	228	198	163	127
8LMG 92/14	125	92	185		368	310	292	273	245	214	175	137
8LMG 92/15	125	92	185		394	332	313	293	263	229	188	146

Max Eff. % =	70
Max kW / St. =	5,9

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	4	5	8

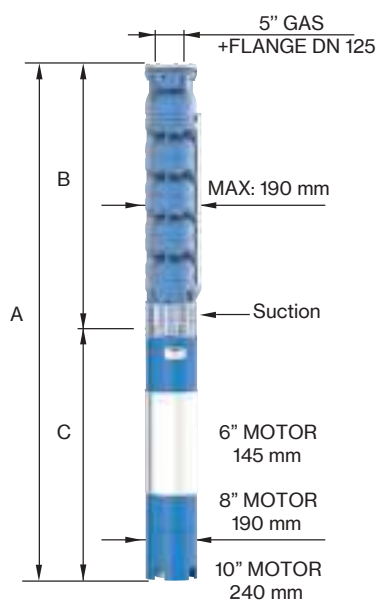



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
TYPE	A	B	C	MOTOR	PUMP
8LMG 92/01	1228	527	701	55	23
8LMG 92/02	1493	652	841	70	31
8LMG 92/03	1768	777	991	83	39
8LMG 92/04	2083	902	1181	100	48
8LMG 92/05	2278	1027	1251	108	56
8LMG 92/06	2493	1152	1341	118	64
8LMG 92/07	2400	1277	1123	178	73
8LMG 92/08	2635	1402	1233	200	81
8LMG 92/09	2760	1527	1233	200	89
8LMG 92/10	2955	1652	1303	214	98
8LMG 92/11	3080	1777	1303	214	106
8LMG 92/12	3285	1902	1383	230	114
8LMG 92/13	3410	2027	1383	230	122
8LMG 92/14	3735	2152	1583	270	131
8LMG 92/15	3860	2277	1583	270	139

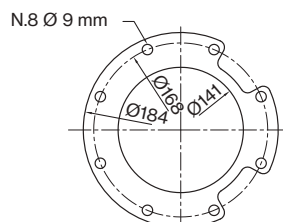

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm





8LMG 92

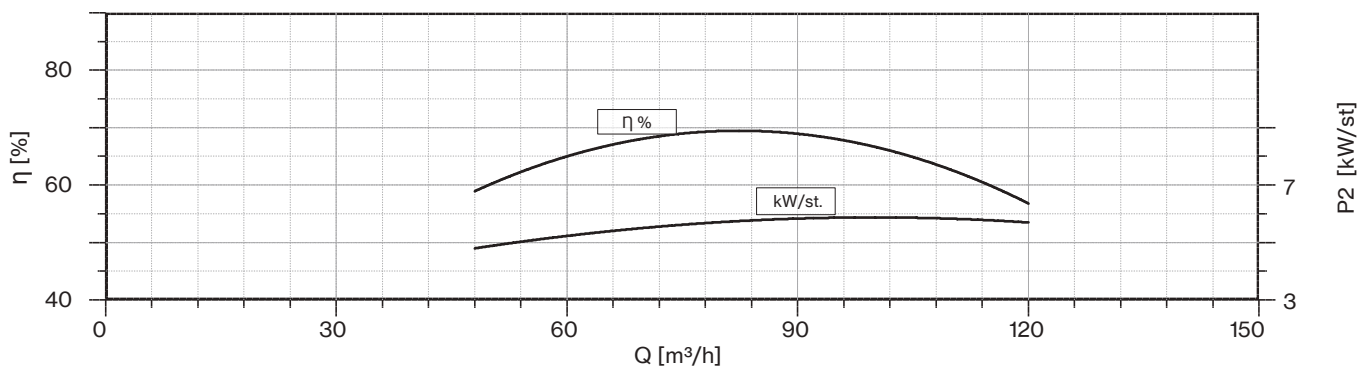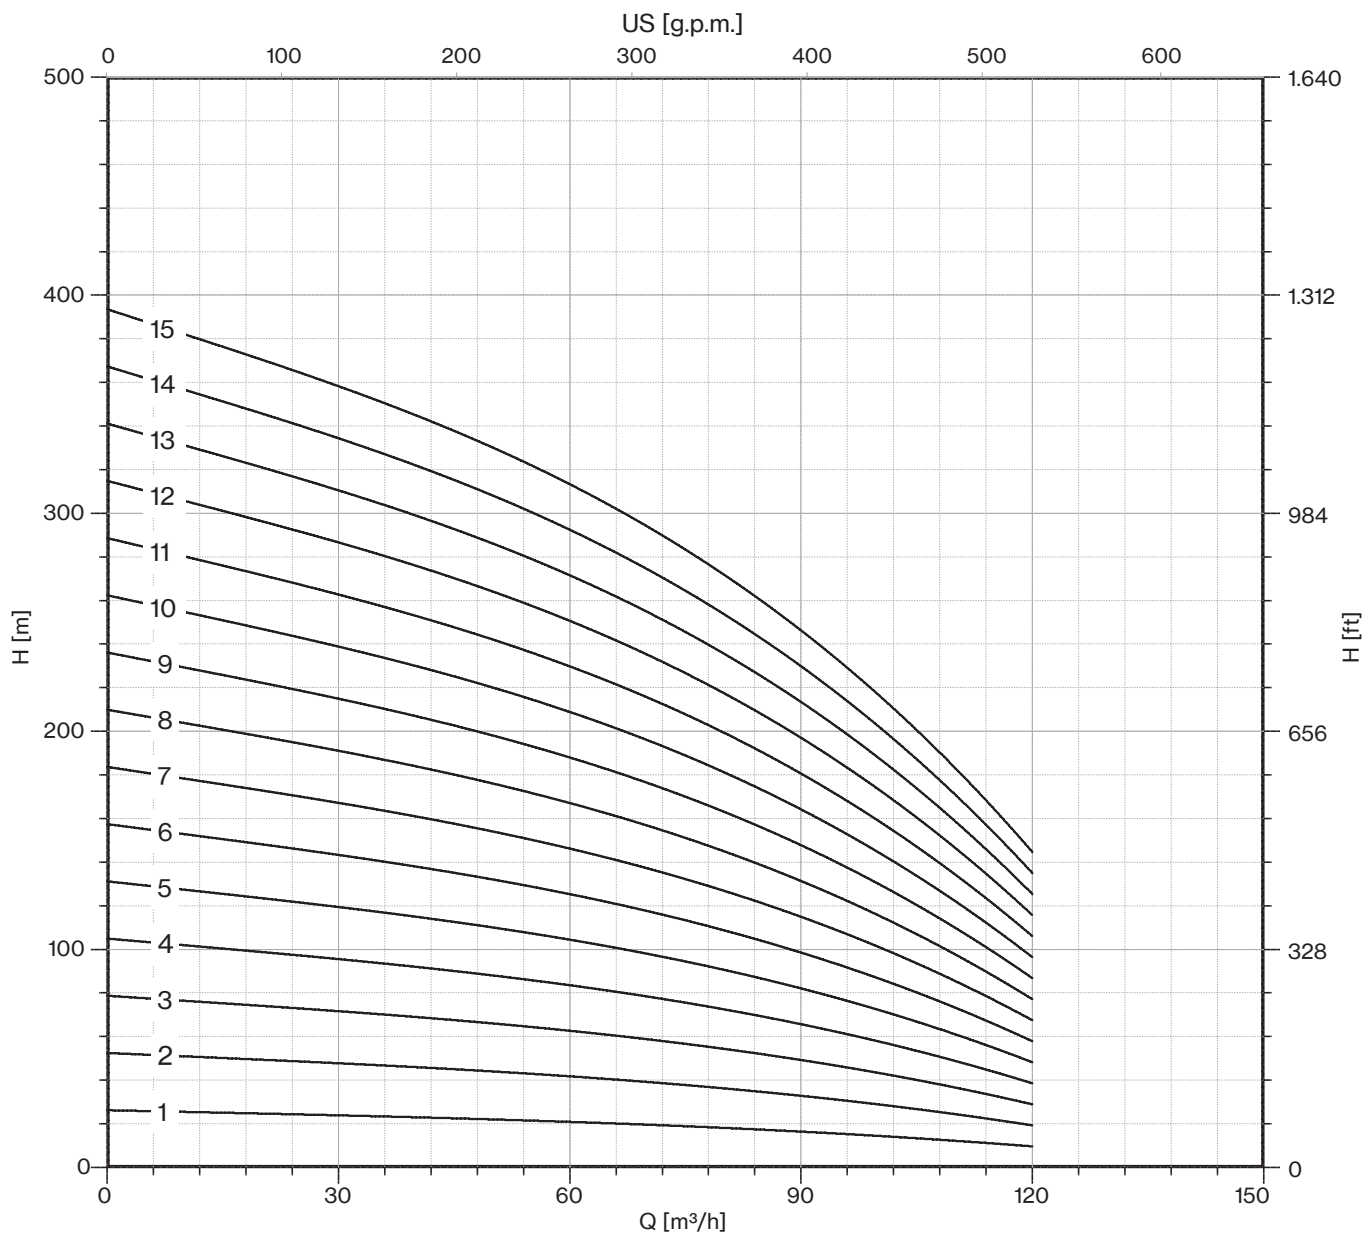

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1000	1200	1400	1600	1800	2000	2200	2400
	HP	kW	A	l/sec	0	16,67	20,00	23,33	26,67	30,00	33,33	36,67	40,00
				m ³ /h	0	60	72	84	96	108	120	132	144
8LMG 110/01	10	7,5	17,5	H (m)	26	22	21	20	19	18	16	14	11
8LMG 110/02	20	15	32		53	44	42	40	38	35	32	28	22
8LMG 110/03	30	22	47,5		79	66	63	60	57	53	48	42	33
8LMG 110/04	40	30	62,5		105	87	84	80	76	71	65	55	45
8LMG 110/05	50	37	78		131	109	105	100	95	89	81	69	56
8LMG 110/06	60	45	92		158	131	126	120	114	106	97	83	67
8LMG 110/07	75	55	113,5		184	153	147	140	133	124	113	97	78
8LMG 110/08	90	66	134,5		210	175	168	160	152	142	129	111	89
8LMG 110/09	90	66	134,5		237	197	189	180	171	159	145	125	100
8LMG 110/10	100	75	149,5		263	219	210	200	190	177	161	139	111
8LMG 110/11	125	92	185		289	240	231	220	209	195	178	152	123
8LMG 110/12	125	92	185		315	262	252	240	228	213	194	166	134
8LMG 110/13	125	92	185		342	284	273	260	247	230	210	180	145

Max Eff. % =	74
Max kW / St. =	7,3

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	3,5	4,5	8

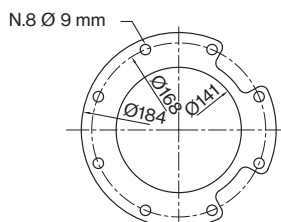
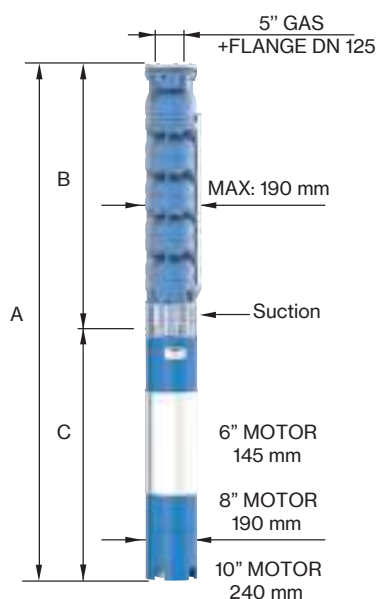


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LMG 110/01	1228	527	701	55	23
8LMG 110/02	1583	652	931	75	32
8LMG 110/03	1848	777	1071	92	40
8LMG 110/04	2153	902	1251	108	49
8LMG 110/05	2368	1027	1341	118	58
8LMG 110/06	2275	1152	1123	178	66
8LMG 110/07	2510	1277	1233	200	75
8LMG 110/08	2705	1402	1303	214	83
8LMG 110/09	2830	1527	1303	214	92
8LMG 110/10	3035	1652	1383	230	101
8LMG 110/11	3360	1777	1583	270	109
8LMG 110/12	3485	1902	1583	270	118
8LMG 110/13	3610	2027	1583	270	126





8LMG 110

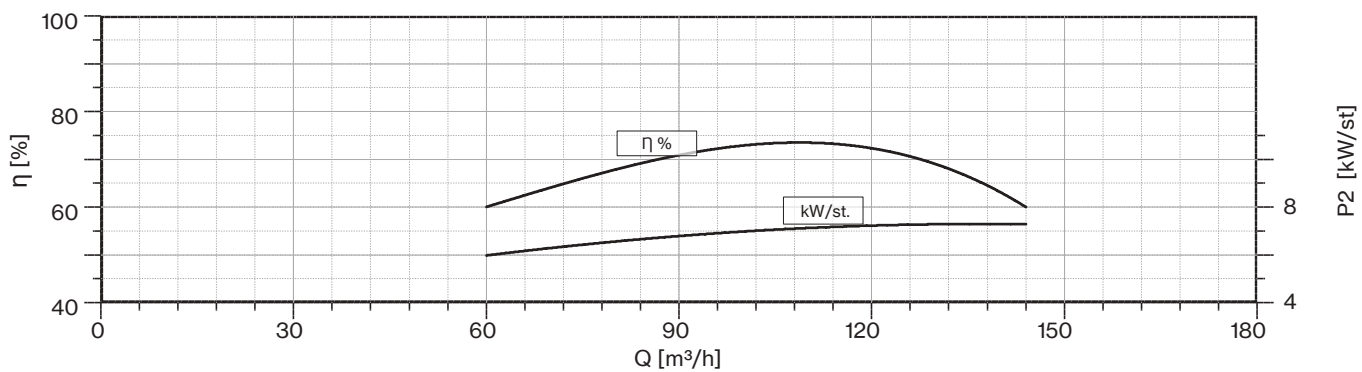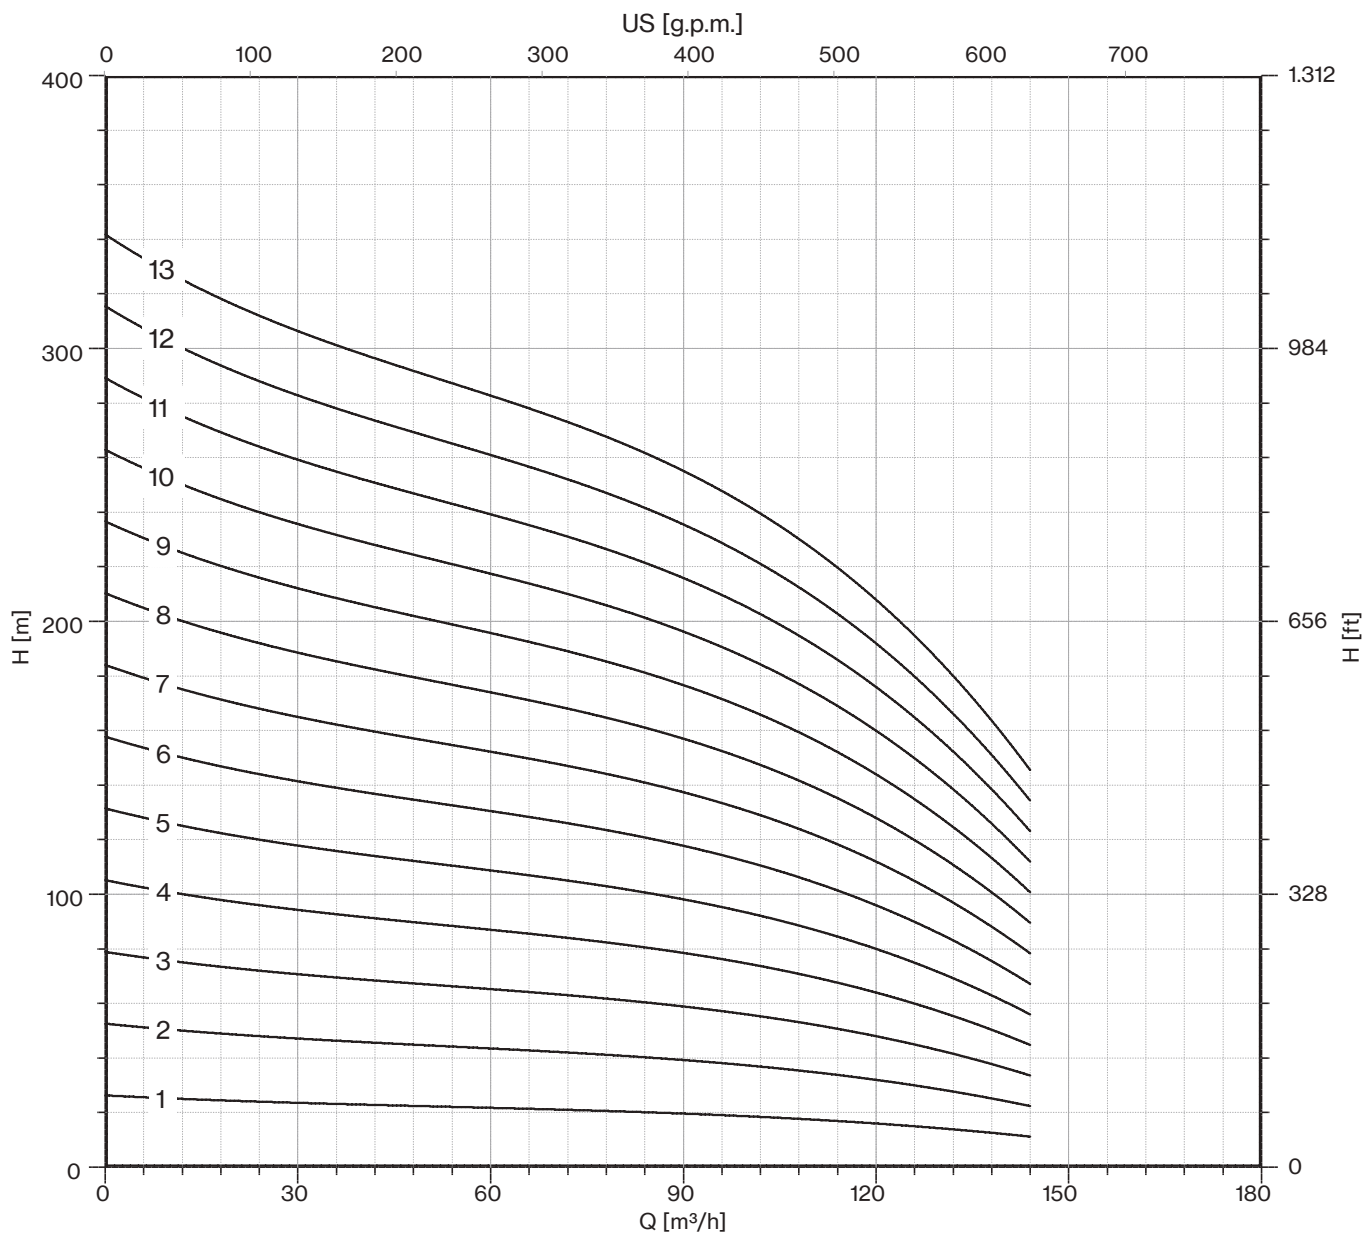

50 Hz - 2900 rpm				Q										
TYPE	P2		400 V	l/min	0	1200	1400	1600	1800	2000	2200	2400	2600	2800
	HP	kW	A	l/sec	0	20,00	23,33	26,67	30,00	33,33	36,67	40,00	43,33	46,67
				m ³ /h	0	72	84	96	108	120	132	144	156	168
8LMG 130/01	10	7,5	17,5	H (m)	26	21	20	19	18	17	15	13	11	8
8LMG 130/02	20	15	32		53	42	41	38	36	34	31	27	21	15
8LMG 130/03	35	26	55		79	63	61	57	54	51	46	40	32	23
8LMG 130/04	40	30	62,5		106	85	81	77	73	67	62	54	43	30
8LMG 130/05	60	45	92		132	106	101	96	91	84	77	67	54	38
8LMG 130/06	75	55	113,5		159	127	122	115	109	101	93	81	64	45
8LMG 130/07	75	55	113,5		185	148	142	134	127	118	108	94	75	53
8LMG 130/08	90	66	134,5		211	169	162	153	145	135	123	107	86	61
8LMG 130/09	100	75	149,5		238	190	183	172	163	152	139	121	96	68
8LMG 130/10	100	75	149,5		264	211	203	191	181	169	154	134	107	76
8LMG 130/11	125	92	185		291	233	223	211	200	185	170	148	118	83
8LMG 130/12	125	92	185		317	254	243	230	218	202	185	161	129	91
8LMG 130/13	150	110	219		344	275	264	249	236	219	201	175	139	98
8LMG 130/14	150	110	220		370	296	284	268	254	236	216	188	150	106

Max Eff. % =	75
Max kW / St. =	7,7

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	3	5	9

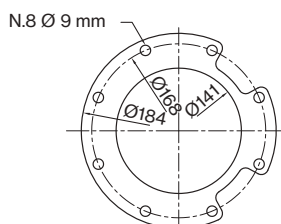
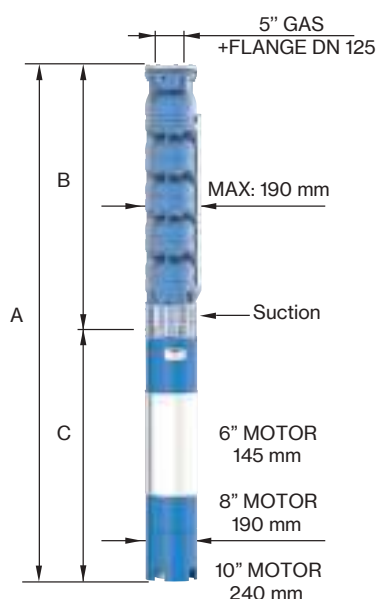


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LMG 130/01	1228	527	701	55	23
8LMG 130/02	1583	652	931	75	32
8LMG 130/03	1958	777	1181	100	41
8LMG 130/04	2153	902	1251	108	49
8LMG 130/05	2150	1027	1123	178	58
8LMG 130/06	2385	1152	1233	200	67
8LMG 130/07	2510	1277	1233	200	75
8LMG 130/08	2705	1402	1303	214	84
8LMG 130/09	2910	1527	1383	230	93
8LMG 130/10	3035	1652	1383	230	102
8LMG 130/11	3360	1777	1583	270	110
8LMG 130/12	3485	1902	1583	270	119
8LMG 130/13	3760	2027	1733	300	128
8LMG 130/14	3885	2152	1733	300	136




8LMG 130

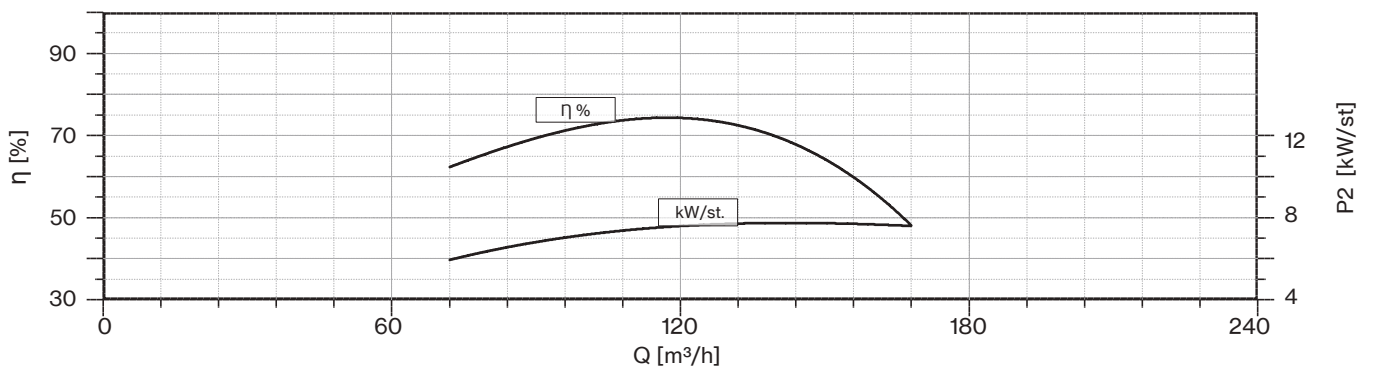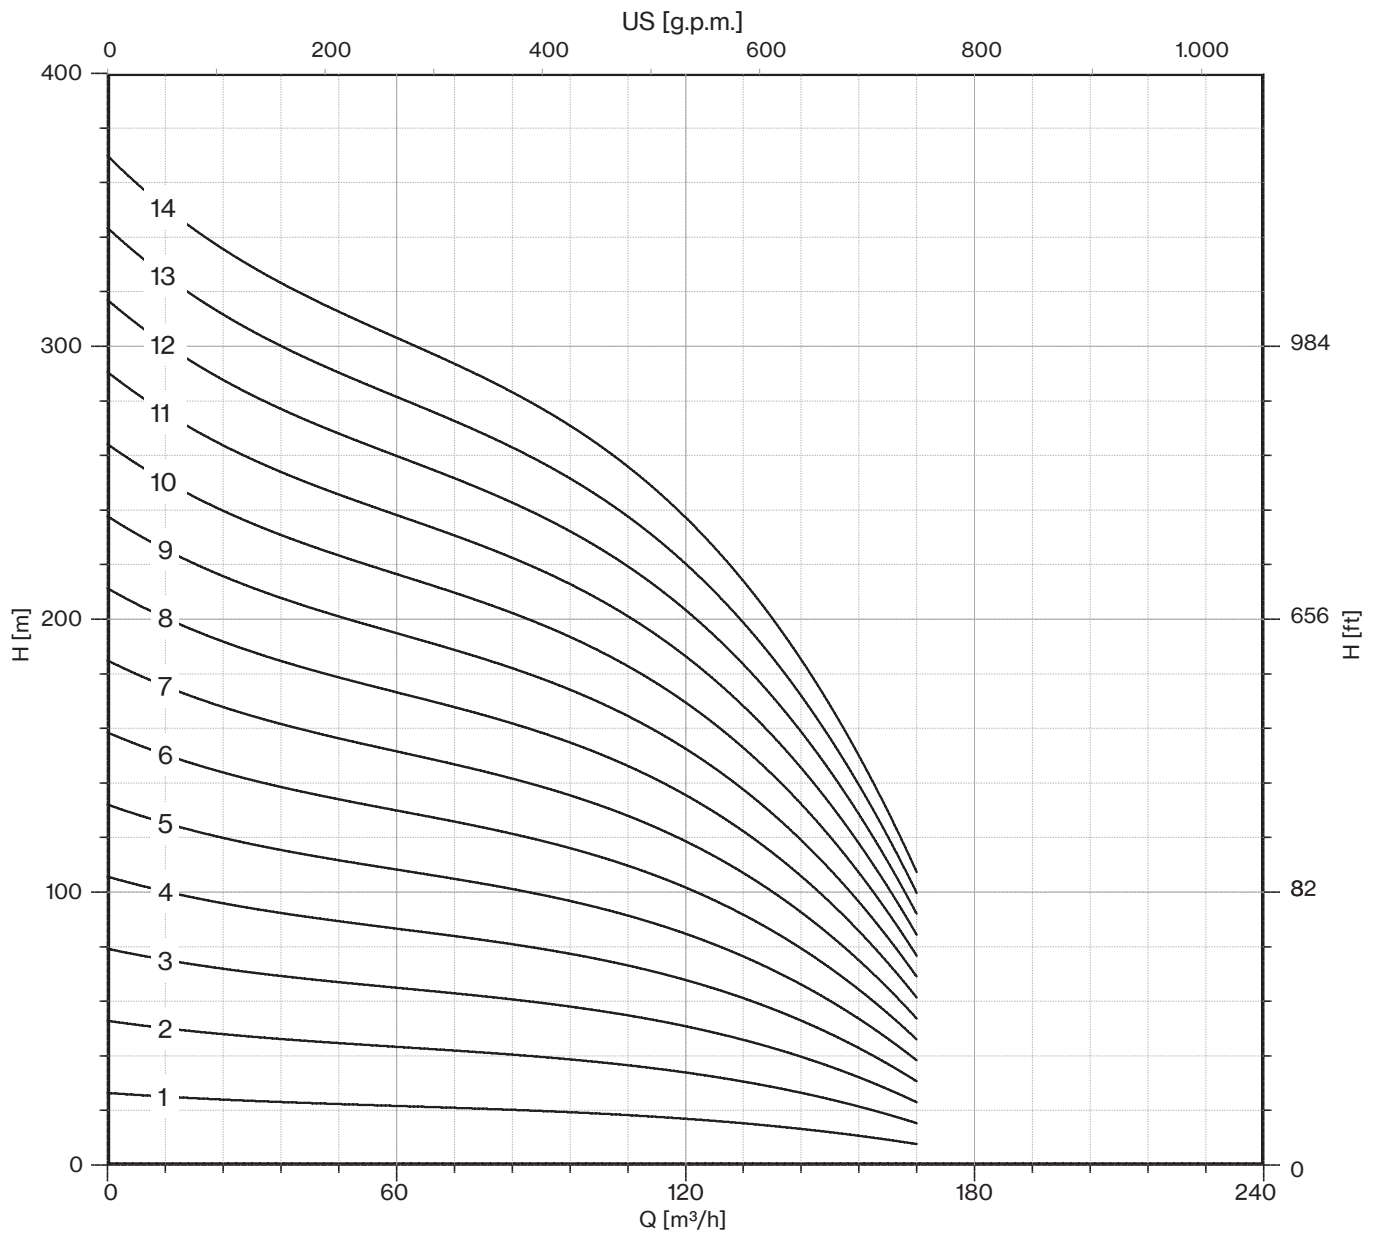


50 Hz - 2900 rpm				Q										
TYPE	P2		400 V	l/min	0	1600	1800	2000	2200	2400	2600	2800	3000	3200
	HP	kW	A	l/sec	0	26,67	30,00	33,33	36,67	40,00	43,33	46,67	50,00	53,33
				m ³ /h	0	96	108	120	132	144	156	168	180	192
8LMG 160/01	12,5	9,2	21	H (m)	24	19	18	17	16	16	15	13	12	10
8LMG 160/02	25	18,5	40		49	38	36	35	33	31	30	27	24	20
8LMG 160/03	35	26	55		73	57	54	52	49	47	45	40	36	30
8LMG 160/04	50	37	78		97	76	72	69	66	63	59	54	48	40
8LMG 160/05	60	45	92		121	95	90	86	82	79	74	67	60	50
8LMG 160/06	75	55	113,5		146	114	108	104	99	94	89	81	72	60
8LMG 160/07	90	66	134,5		170	133	126	121	115	110	104	94	84	70
8LMG 160/08	100	75	149,5		194	152	144	138	131	126	119	107	96	80
8LMG 160/09	100	75	149,5		219	171	162	156	148	141	134	121	108	90
8LMG 160/10	125	92	185		243	190	180	173	164	157	149	134	120	100
8LMG 160/11	125	92	185		267	209	198	190	181	173	163	148	132	110
8LMG 160/12	150	110	219		291	228	216	207	197	189	178	161	144	120
8LMG 160/13	150	110	219		316	247	234	225	214	204	193	175	156	130

Max Eff. % =	74
Max kW / St. =	8,6

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	3	5	9

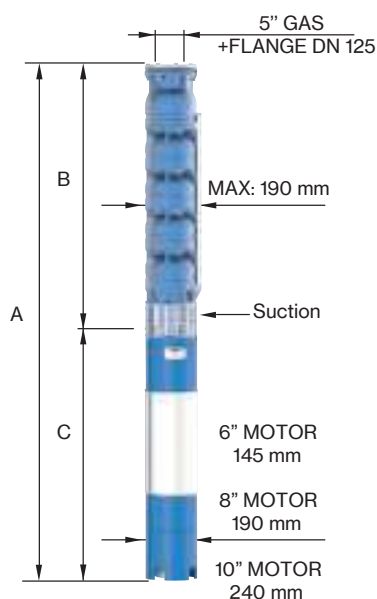



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LMG 160/01	1303	552	751	60	24
8LMG 160/02	1693	702	991	83	33
8LMG 160/03	2033	852	1181	100	42
8LMG 160/04	2343	1002	1341	118	51
8LMG 160/05	2275	1152	1123	178	60
8LMG 160/06	2535	1302	1233	200	69
8LMG 160/07	2755	1452	1303	214	78
8LMG 160/08	2985	1602	1383	230	87
8LMG 160/09	3135	1752	1383	230	96
8LMG 160/10	3485	1902	1583	270	105
8LMG 160/11	3635	2052	1583	270	114
8LMG 160/12	3935	2202	1733	300	123
8LMG 160/13	4085	2352	1733	300	132

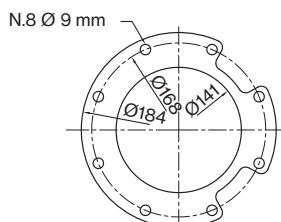

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm




8LMG 160

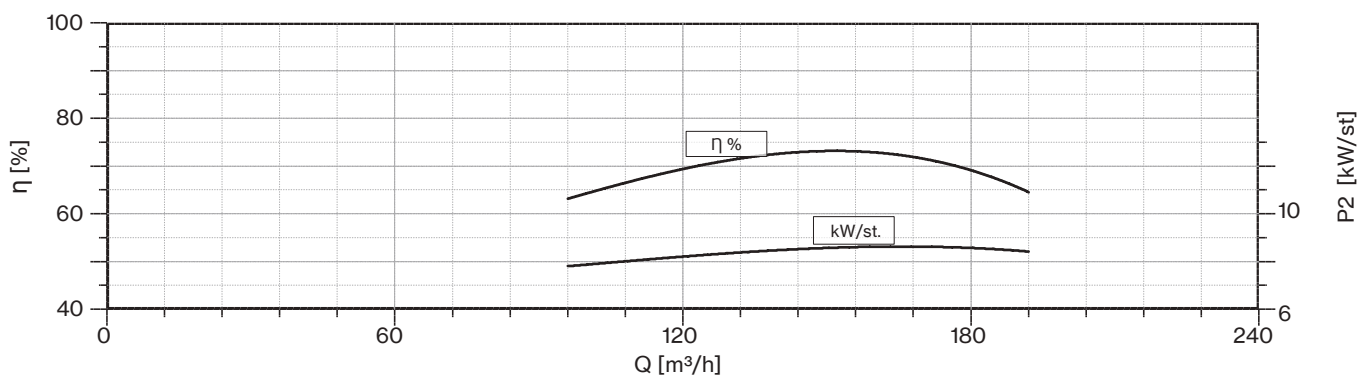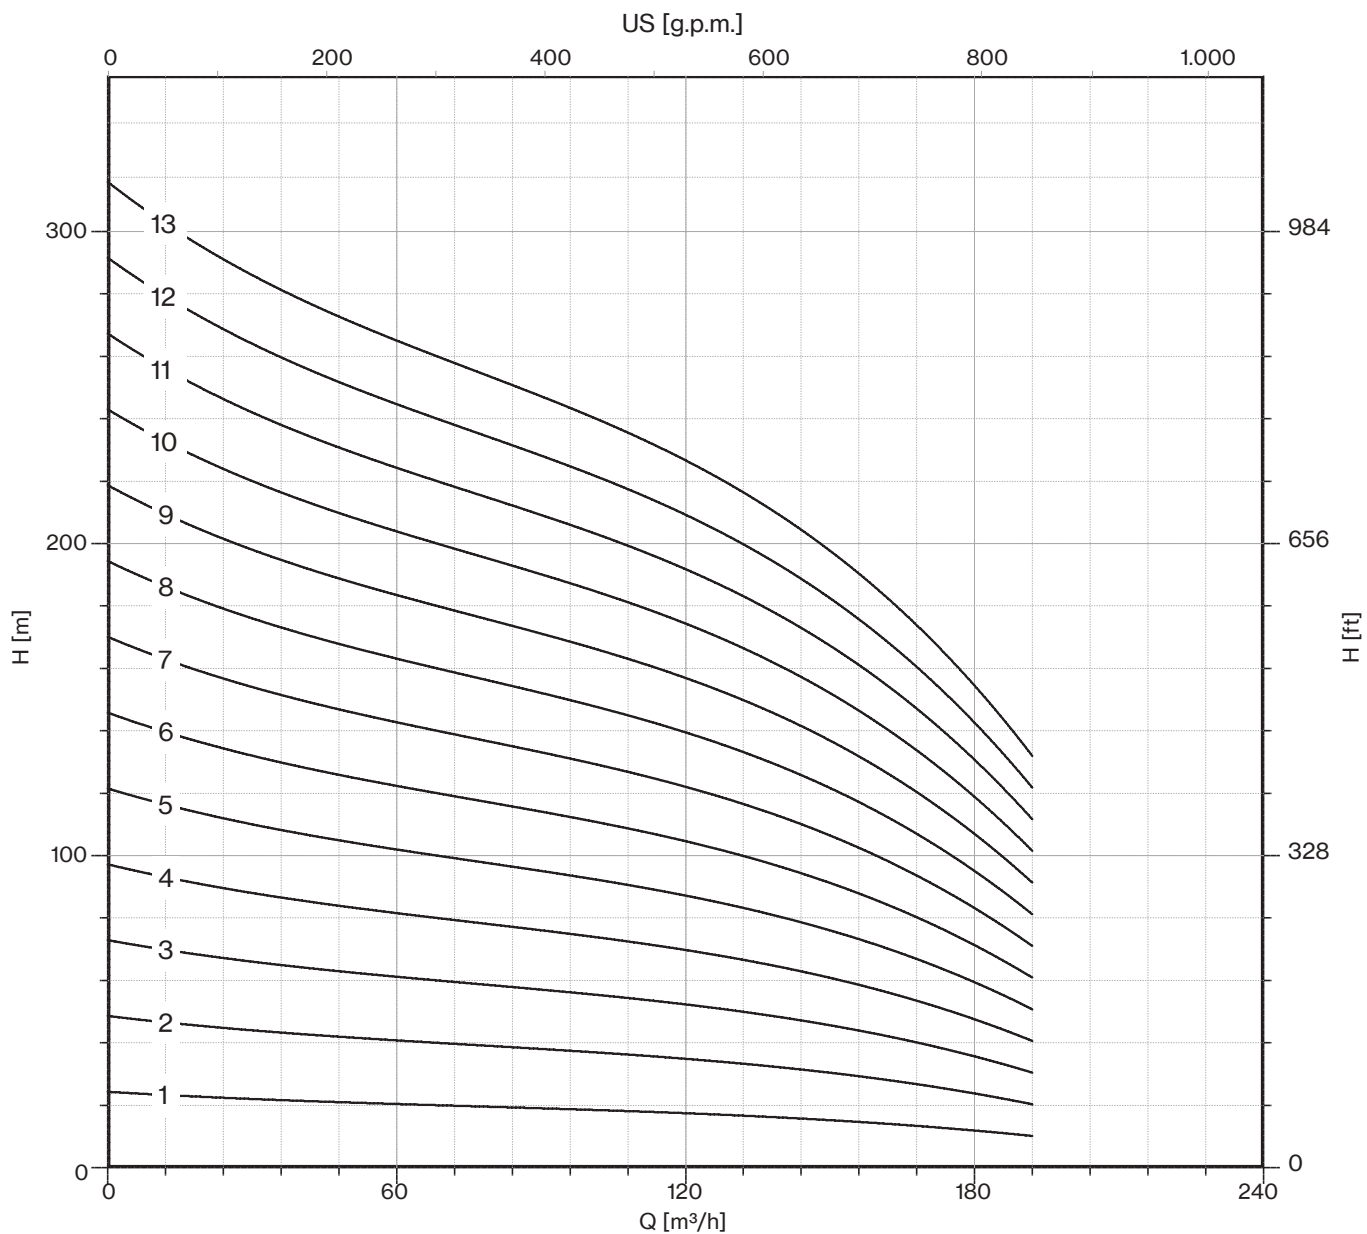

50 Hz - 2900 rpm				Q							
TYPE	P2		400 V	I/min	0	1800	2200	2600	3000	3400	3800
	HP	kW		I/sec	0	30,00	36,67	43,33	50,00	56,67	63,33
			A	m³/h	0	108	132	156	180	204	228
10LMG 190/01 DR 20	20	15	32	H (m)	32	29	28	25	24	20	16
10LMG 190/01 DR 10	25	18,5	40		37	33	31	29	27	22	18
10LMG 190/01	30	22	47,5		42	37	35	32	30	25	20
10LMG 190/02 DR 20	40	30	62,5		65	58	55	50	48	40	32
10LMG 190/02 DR 10	50	37	78		73	66	62	57	54	45	36
10LMG 190/02	60	45	92		83	74	70	64	60	50	40
10LMG 190/03 DR 20	75	55	113,5		97	88	83	76	71	59	47
10LMG 190/03 DR 10	75	55	113,5		110	99	94	86	80	67	53
10LMG 190/03	90	66	134,5		125	111	105	96	90	75	60
10LMG 190/04 DR 20	90	66	134,5		130	117	110	101	95	79	63
10LMG 190/04 DR 10	100	75	149,5		146	132	125	114	107	90	71
10LMG 190/04	100	75	149,5		166	148	140	128	120	100	80
10LMG 190/05 DR 20	100	75	149,5		162	146	138	126	119	99	79
10LMG 190/05 DR 10	125	92	185		183	165	156	143	134	112	89
10LMG 190/05	150	110	219		208	185	175	160	150	125	100
10LMG 190/06 DR 20	125	92	185		194	175	166	151	143	119	95
10LMG 190/06 DR 10	150	110	219		220	198	187	172	161	134	107
10LMG 190/06	175	130	254,5		250	222	210	192	180	150	120
10LMG 190/07 DR 20	150	110	219		227	204	193	176	167	139	111
10LMG 190/07 DR 10	175	130	254,5		256	231	218	200	188	157	125
10LMG 190/07	200	150	290	291	259	245	224	210	175	140	
10LMG 190/08 DR 20	175	130	254,5	259	234	221	202	190	158	126	
10LMG 190/08 DR 10	200	150	290	293	264	250	229	214	179	142	
10LMG 190/08	225	165	330	333	296	280	256	240	200	160	

Max Eff. % DR20 =	74
Max Eff. % DR10 =	75
Max Eff. % =	75,5
Max kW / St. DR20 =	15,7
Max kW / St. DR10 =	17,5
Max kW / St. =	19,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,6	5,3	8,1	14


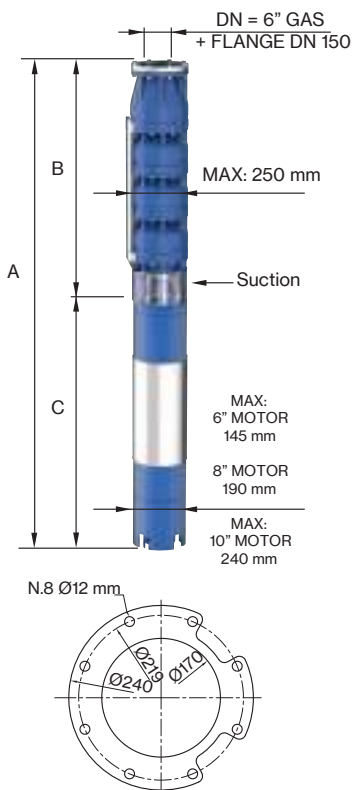


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LMG 190/01 DR 20	1556	625	931	75	50
10LMG 190/01 DR 10	1616	625	991	83	50
10LMG 190/01	1696	625	1071	92	50
10LMG 190/02 DR 20	2056	805	1251	108	68
10LMG 190/02 DR 10	2146	805	1341	118	68
10LMG 190/02	1928	805	1123	178	68
10LMG 190/03 DR 20	2218	985	1233	200	87
10LMG 190/03 DR 10	2218	985	1233	200	87
10LMG 190/03	2288	985	1303	214	87
10LMG 190/04 DR 20	2468	1165	1303	214	105
10LMG 190/04 DR 10	2548	1165	1383	230	105
10LMG 190/04	2548	1165	1383	230	105
10LMG 190/05 DR 20	2728	1345	1383	230	124
10LMG 190/05 DR 10	2928	1345	1583	270	124
10LMG 190/05	3078	1345	1733	300	124
10LMG 190/06 DR 20	3108	1525	1583	270	142
10LMG 190/06 DR 10	3258	1525	1733	300	142
10LMG 190/06	3159	1525	1634	385	142
10LMG 190/07 DR 20	3438	1705	1733	300	161
10LMG 190/07 DR 10	3339	1705	1634	385	161
10LMG 190/07	3439	1705	1734	415	161
10LMG 190/08 DR 20	3519	1885	1634	385	179
10LMG 190/08 DR 10	3619	1885	1734	415	179
10LMG 190/08	3739	1885	1854	444	179




10LMG 190

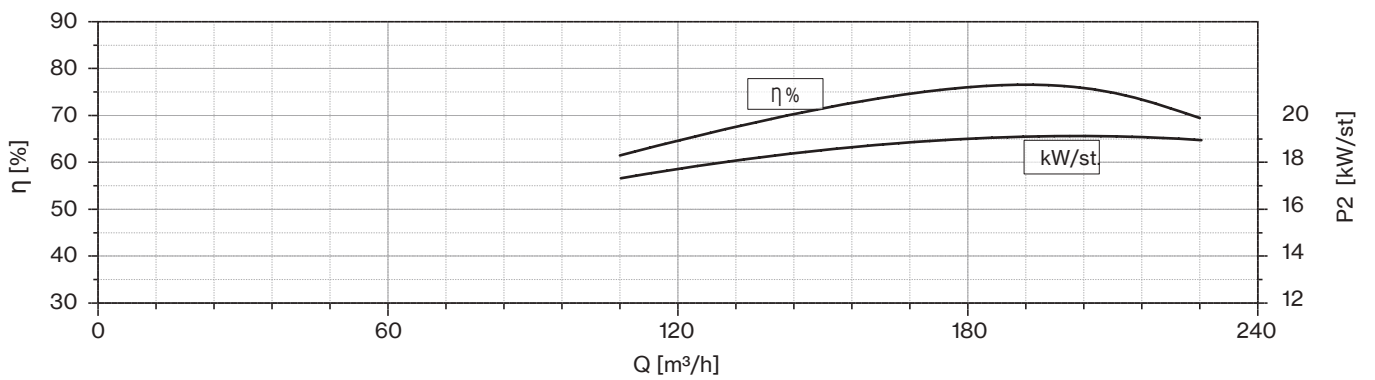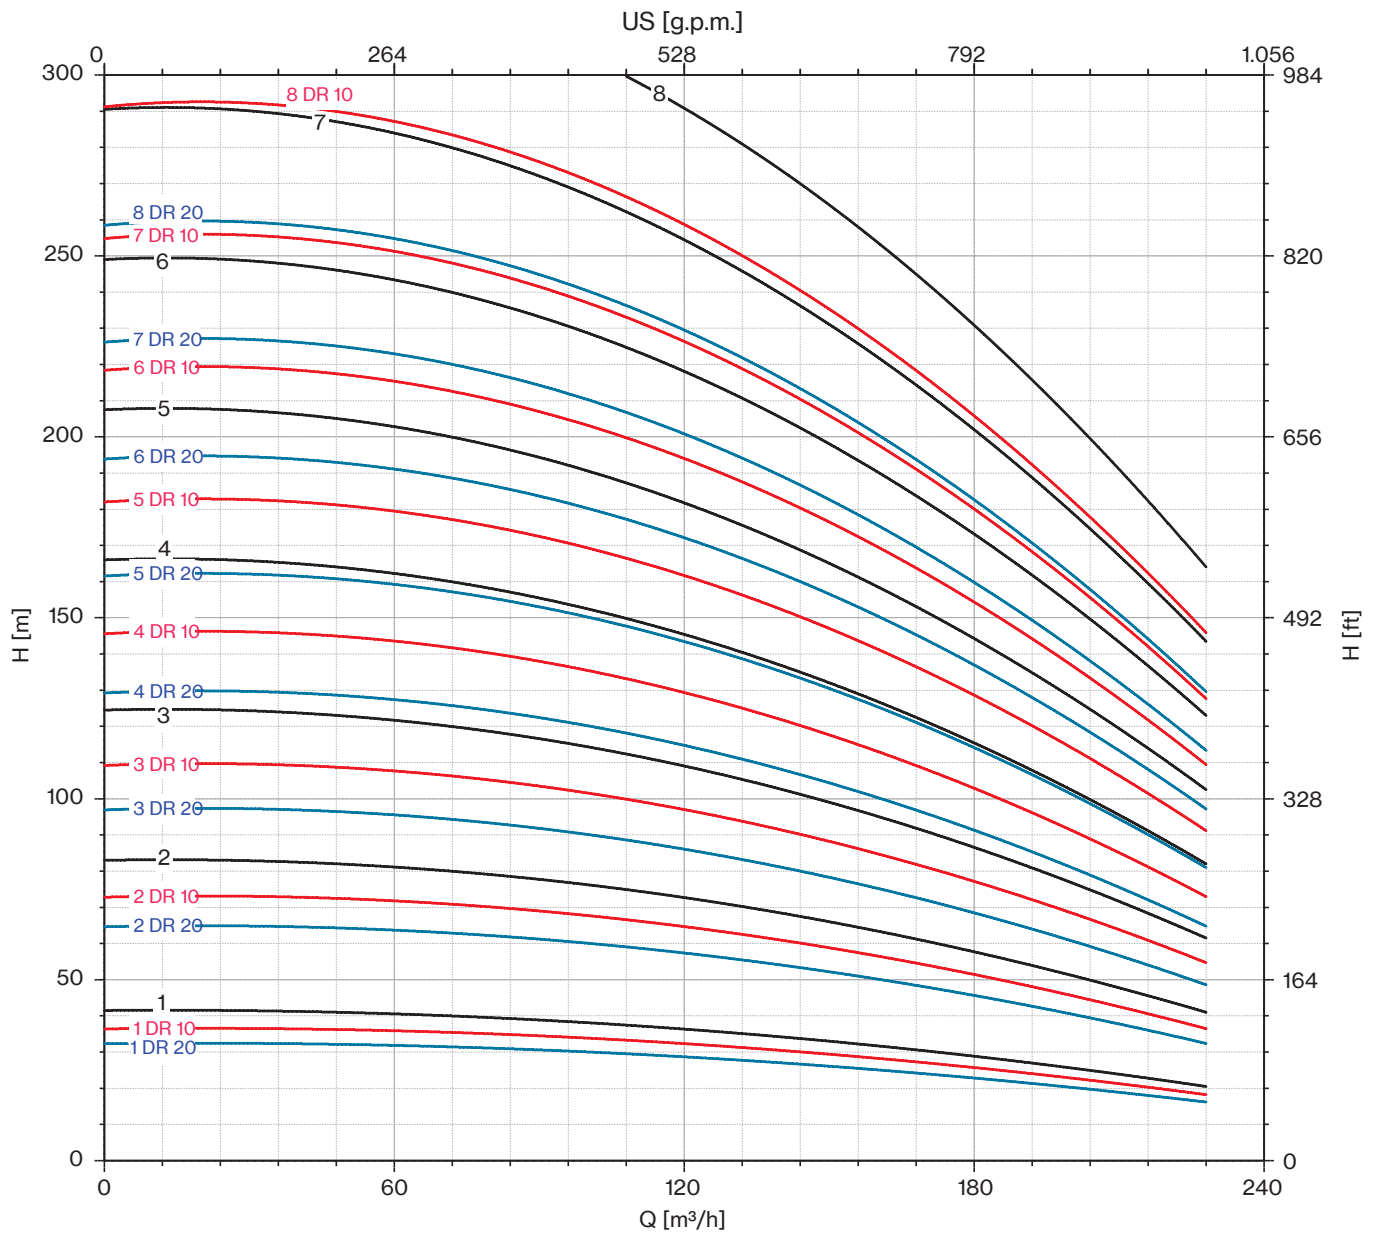

50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	2200	2600	3000	3400	3800	4200	4400
	HP	kW	A	l/sec	0	36,67	43,33	50,00	56,67	63,33	70,00	73,33
				m ³ /h	0	132	156	180	204	228	252	264
10LMG 230/01 DR 20	25	18,5	40	H (m)	34	29	28	26	24	22	19	16
10LMG 230/01 DR 10	30	22	47,5		38	33	31	29	27	25	21	17
10LMG 230/01	30	22	47,5		43	37	35	33	30	28	24	22
10LMG 230/02 DR 20	50	37	78		68	58	55	52	48	44	38	33
10LMG 230/02 DR 10	60	45	92		77	66	62	59	54	50	43	35
10LMG 230/02	60	45	92		86	74	70	66	60	56	48	44
10LMG 230/03 DR 20	75	55	113,5		102	88	83	78	71	67	57	49
10LMG 230/03 DR 10	90	66	134,5		115	99	94	88	80	75	64	52
10LMG 230/03	100	75	149,5		129	111	105	99	90	84	72	66
10LMG 230/04 DR 20	100	75	149,5		136	117	110	104	95	89	76	66
10LMG 230/04 DR 10	125	92	185		154	132	125	118	107	100	86	70
10LMG 230/04	125	92	185		172	148	140	132	120	112	96	88
10LMG 230/05 DR 20	125	92	185		170	146	138	130	119	111	95	82
10LMG 230/05 DR 10	150	110	219		192	165	156	147	134	125	107	87
10LMG 230/05	175	130	254,5		215	185	175	165	150	140	120	110
10LMG 230/06 DR 20	150	110	219		204	175	166	156	143	133	114	98
10LMG 230/06 DR 10	175	130	254,5		230	198	187	176	161	150	128	104
10LMG 230/06	200	150	290		258	222	210	198	180	168	144	132
10LMG 230/07 DR 20	175	130	254,5		238	204	193	182	167	155	133	115
10LMG 230/07 DR 10	200	150	290		269	231	218	206	188	175	150	122
10LMG 230/07	225	165	330	301	259	245	231	210	196	168	154	

Max Eff. % DR20 =	75,5
Max Eff. % DR10 =	76
Max Eff. % =	76,5
Max kW / St. DR20 =	18,3
Max kW / St. DR10 =	20,5
Max kW / St. =	23

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,7	5,4	8,3	14,2


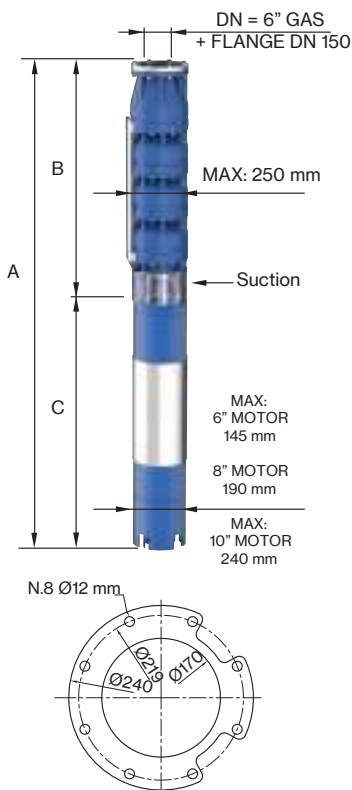


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LMG 230/01 DR 20	1616	625	991	83	50
10LMG 230/01 DR 10	1696	625	1071	92	50
10LMG 230/01	1696	625	1071	92	50
10LMG 230/02 DR 20	2146	805	1341	118	68
10LMG 230/02 DR 10	1928	805	1123	178	68
10LMG 230/02	1928	805	1123	178	68
10LMG 230/03 DR 20	2218	985	1233	200	87
10LMG 230/03 DR 10	2288	985	1303	214	87
10LMG 230/03	2368	985	1383	230	87
10LMG 230/04 DR 20	2548	1165	1383	230	105
10LMG 230/04 DR 10	2748	1165	1583	270	105
10LMG 230/04	2748	1165	1583	270	105
10LMG 230/05 DR 20	2928	1345	1583	270	124
10LMG 230/05 DR 10	3078	1345	1733	300	124
10LMG 230/05	2979	1345	1634	385	124
10LMG 230/06 DR 20	3258	1525	1733	300	142
10LMG 230/06 DR 10	3159	1525	1634	385	142
10LMG 230/06	3259	1525	1734	415	142
10LMG 230/07 DR 20	3339	1705	1634	385	161
10LMG 230/07 DR 10	3439	1705	1734	415	161
10LMG 230/07	3559	1705	1854	444	161




10LMG 230

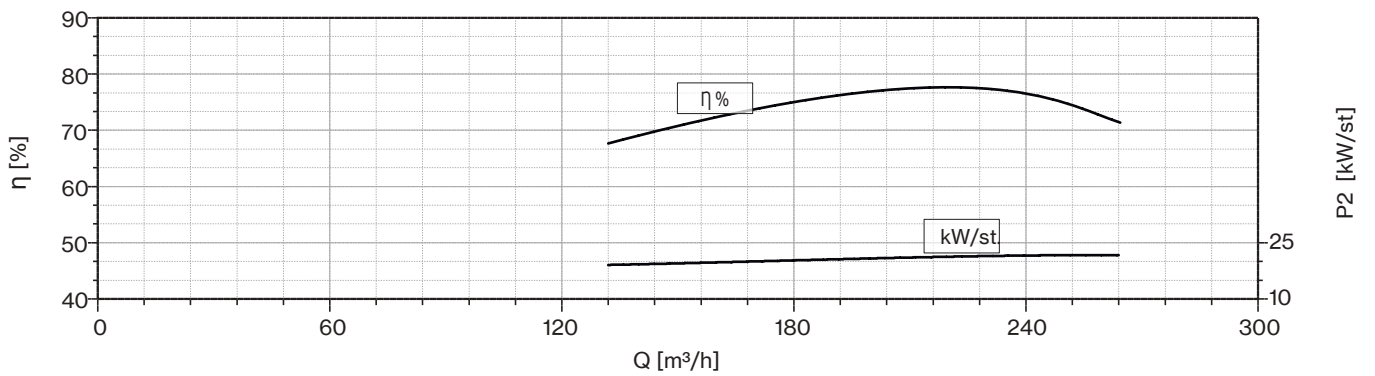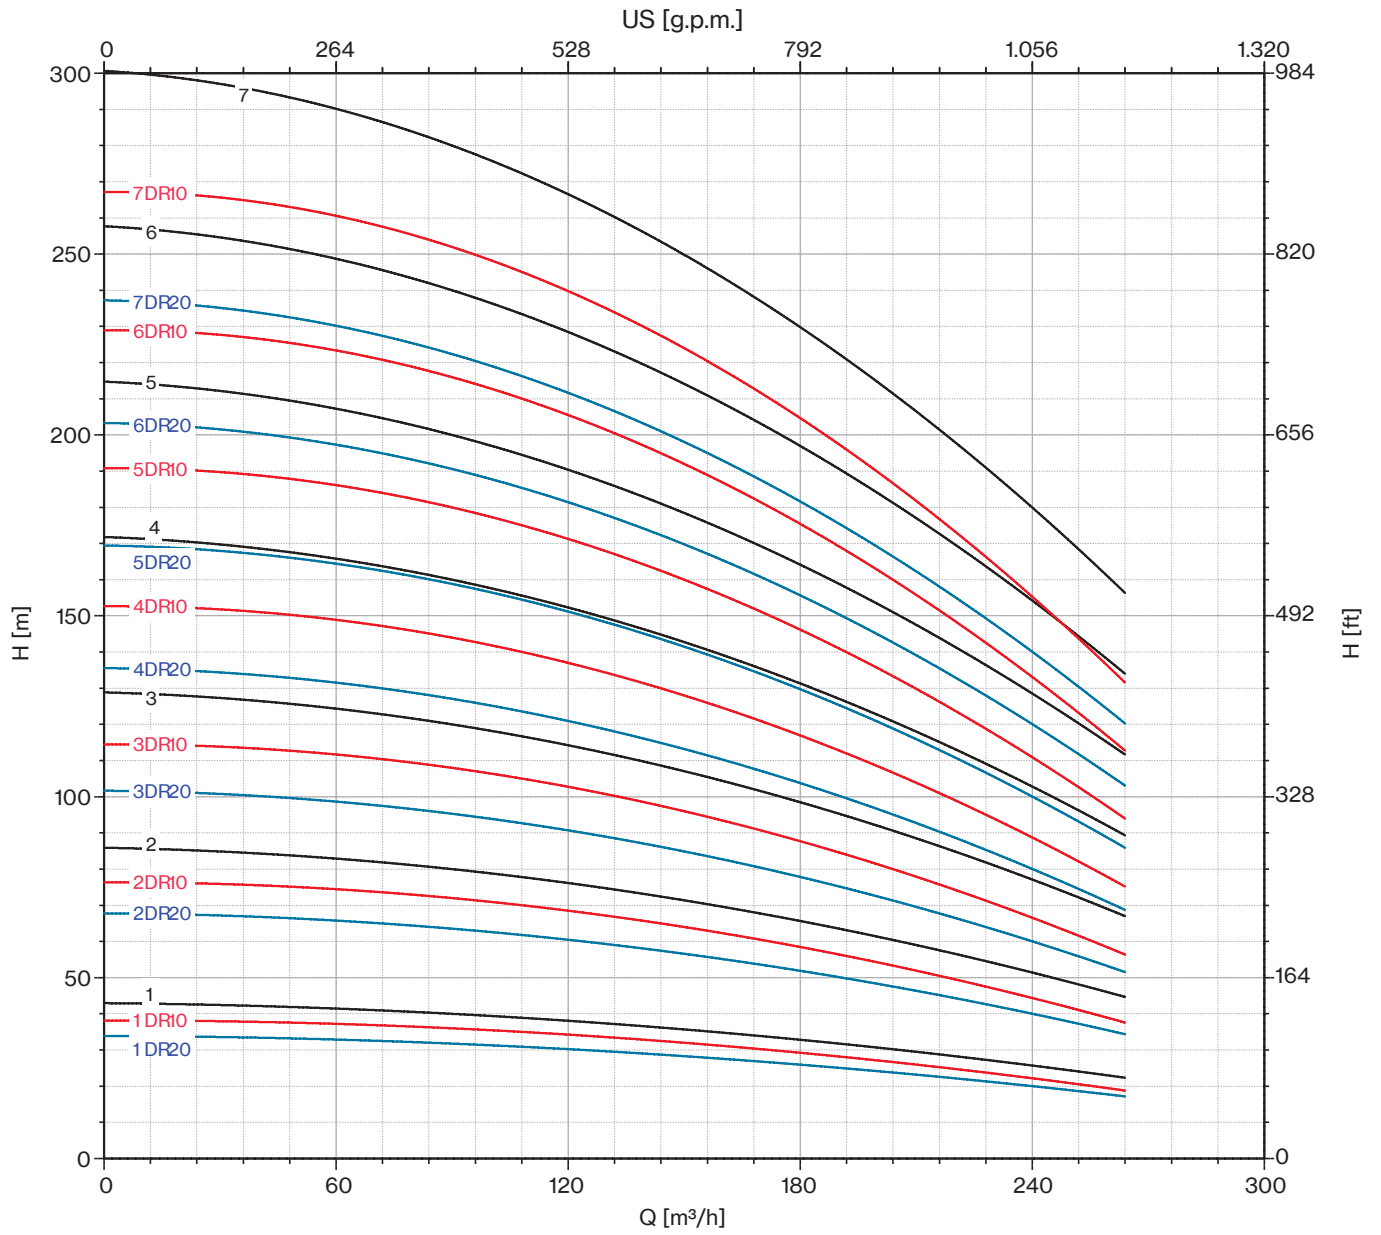

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	2400	2800	3200	3600	4000	4400	4800	5000
	HP	kW	A	l/sec	0	40,00	46,67	53,33	60,00	66,67	73,33	80,00	83,33
				m³/h	0	144	168	192	216	240	264	288	300
10LMG 250/01 DR 20	30	22	47,5	H(m)	34	28	27	26	25	22	21	18	17
10LMG 250/01 DR 10	35	26	55		38	32	30	29	28	25	23	20	20
10LMG 250/01	35	26	55		43	36	34	33	31	28	26	23	22
10LMG 250/02 DR 20	60	45	92		68	57	54	52	49	44	41	36	35
10LMG 250/02 DR 10	75	55	113,5		77	64	61	59	55	50	46	41	39
10LMG 250/02	75	55	113,5		86	72	68	66	62	56	52	46	44
10LMG 250/03 DR 20	90	66	134,5		102	85	81	79	74	67	62	55	52
10LMG 250/03 DR 10	100	75	149,5		115	96	91	88	83	75	70	61	59
10LMG 250/03	125	92	185		129	108	102	99	93	84	78	69	66
10LMG 250/04 DR 20	125	92	185		136	114	108	105	98	89	82	73	70
10LMG 250/04 DR 10	125	92	185		154	128	122	118	110	100	93	82	78
10LMG 250/04	150	110	219		172	144	136	132	124	112	104	92	88
10LMG 250/05 DR 20	150	110	219		170	142	135	131	123	111	103	91	87
10LMG 250/05 DR 10	175	130	254,5		192	160	152	147	138	125	116	102	98
10LMG 250/05	175	130	254,5		215	180	170	165	155	140	130	115	110
10LMG 250/06 DR 20	175	130	254,5		204	170	162	157	148	133	124	109	104
10LMG 250/06 DR 10	200	150	290		230	192	182	176	166	150	139	122	118
10LMG 250/06	225	165	330		258	216	204	198	186	168	156	138	132
10LMG 250/07 DR 20	225	165	330		238	199	189	183	172	155	144	127	122
10LMG 250/07 DR 10	225	165	330		269	224	213	206	193	175	162	143	137

Max Eff. % DR20 =	75,5
Max Eff. % DR10 =	76
Max Eff. % =	76,5
Max kW / St. DR20 =	21,9
Max kW / St. DR10 =	23,5
Max kW / St. =	26,3

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,9	5,5	8,5	14,4

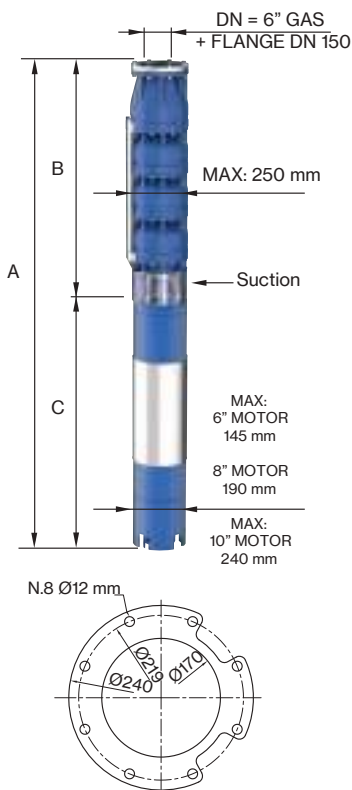



FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LMG 250/01 DR 20	1696	625	1071	92	50
10LMG 250/01 DR 10	1806	625	1181	100	50
10LMG 250/01	1806	625	1181	100	50
10LMG 250/02 DR 20	1928	805	1123	178	68
10LMG 250/02 DR 10	2038	805	1233	200	68
10LMG 250/02	2038	805	1233	200	68
10LMG 250/03 DR 20	2288	985	1303	214	87
10LMG 250/03 DR 10	2368	985	1383	230	87
10LMG 250/03	2568	985	1583	270	87
10LMG 250/04 DR 20	2748	1165	1583	270	105
10LMG 250/04 DR 10	2748	1165	1583	270	105
10LMG 250/04	2898	1165	1733	300	105
10LMG 250/05 DR 20	3078	1345	1733	300	124
10LMG 250/05 DR 10	2979	1345	1634	385	124
10LMG 250/05	2979	1345	1634	385	124
10LMG 250/06 DR 20	3159	1525	1634	385	142
10LMG 250/06 DR 10	3259	1525	1734	415	142
10LMG 250/06	3379	1525	1854	444	142
10LMG 250/07 DR 20	3559	1705	1854	444	161
10LMG 250/07 DR 10	3559	1705	1854	444	161



10LMG 250

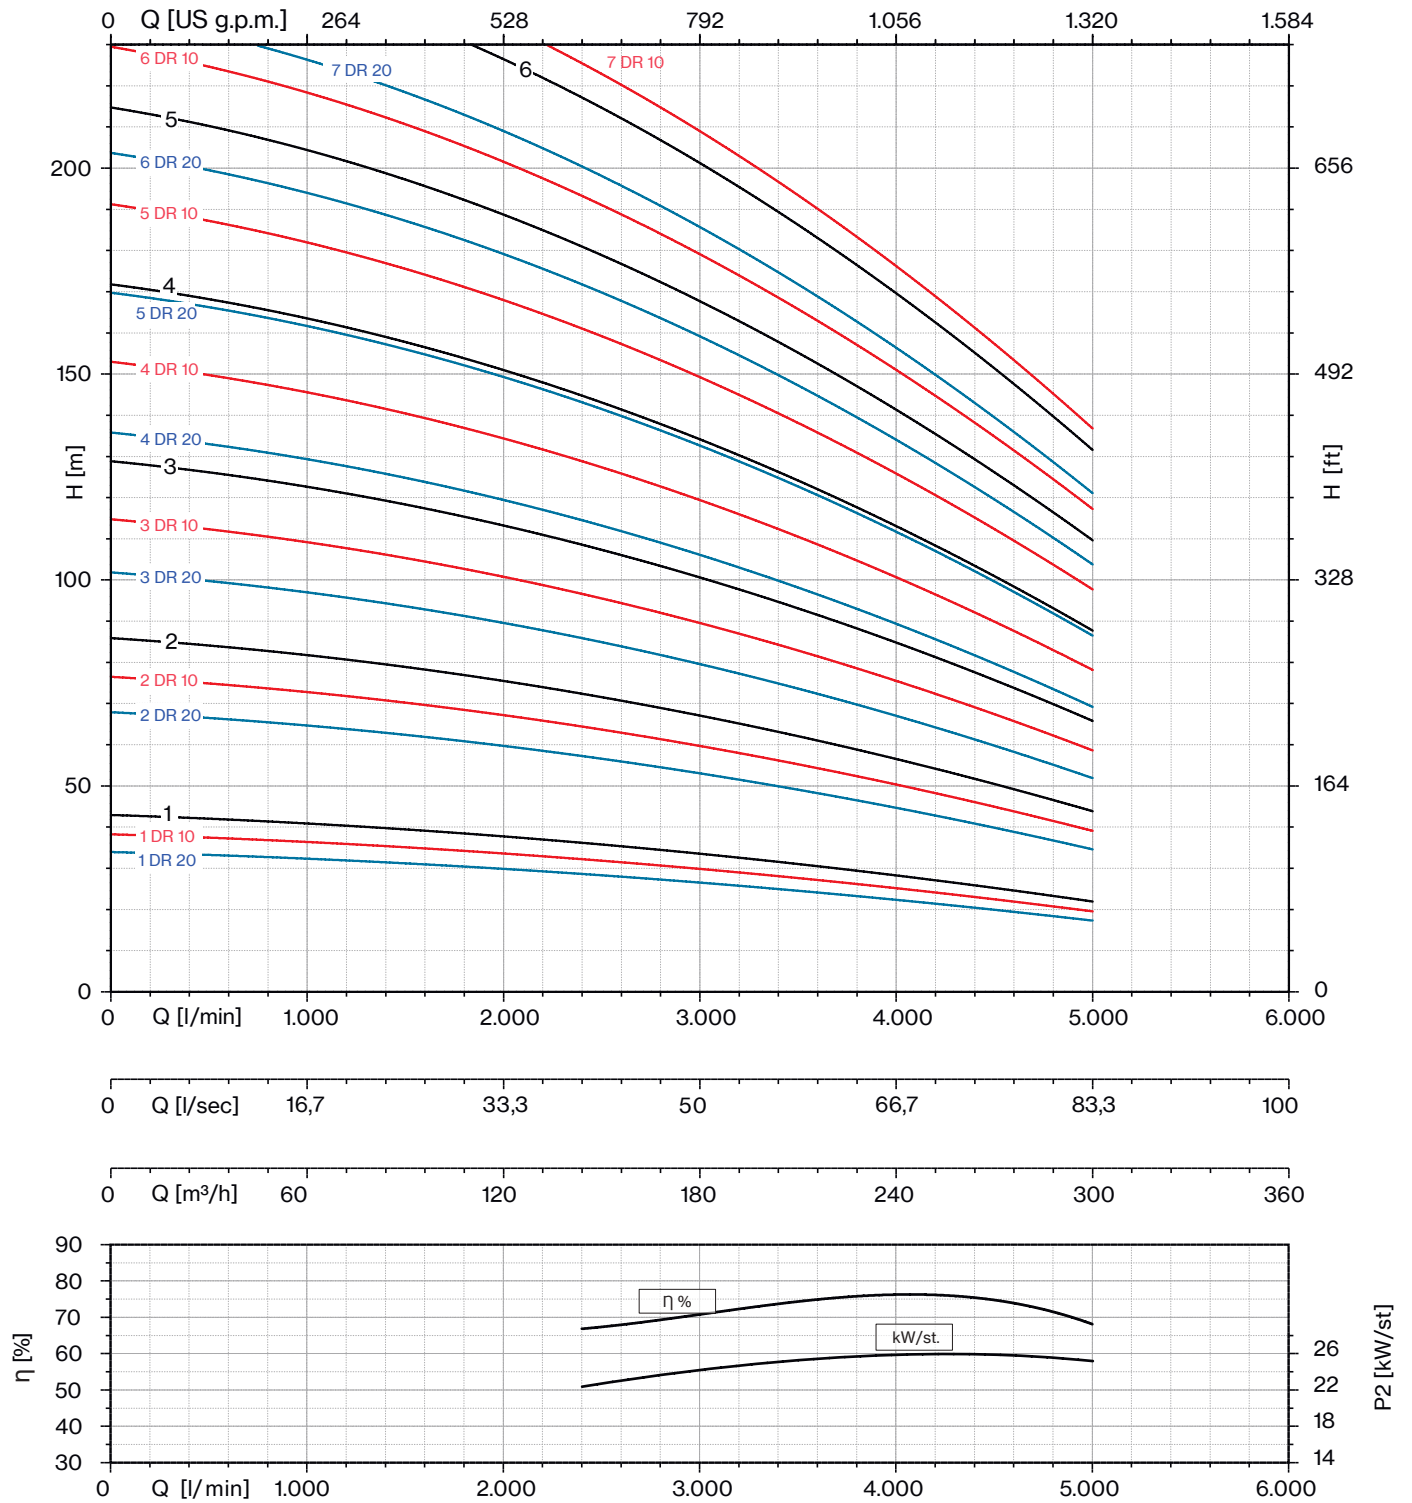

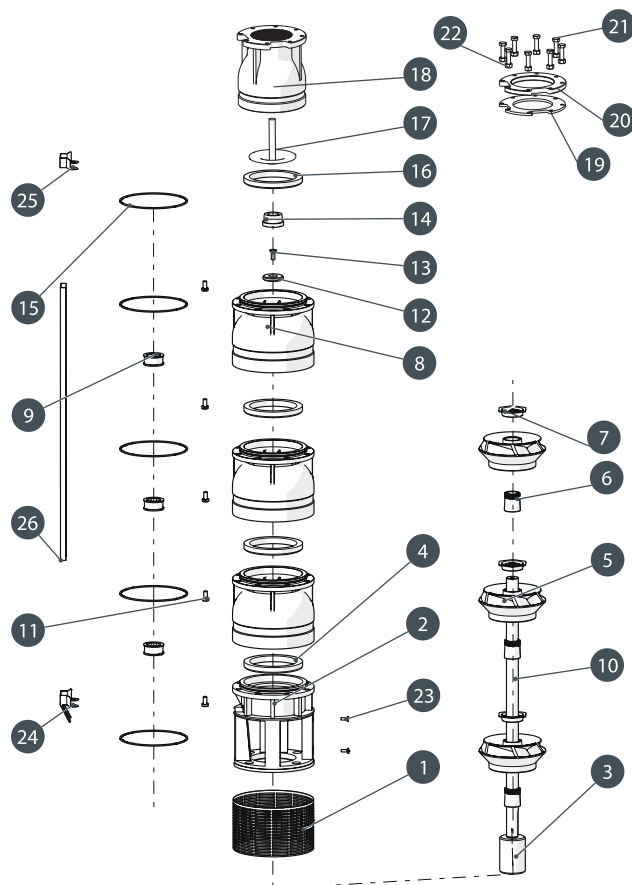

N. CODE	DESCRIPTION	MATERIAL
1	SUCTION STRAINER	AISI 304
2	SUCTION CAGE	CAST IRON
3	JOINT	AISI 304
4	USURY RING	NBR
5	IMPELLER	CAST IRON
6	CONE	AISI 304
7	HEXAGONAL RING	AISI 304
8	DIFFUSEUR	AISI 304
9	BEARING BUSH	NBR
10	PUMP SHAFT	AISI 304
11	N.8 SCREW FOR DIFFUSEUR	AISI 304
12	RING	AISI 304
13	SCREW FOR DISK	AISI 304
14	COUNTERTHRUST	PTFE + 25% CARBON
15	O-RING	NBR
16	GASKET VALVE	NBR
17	CAP VALVE	AISI 304
18	BODY VALVE	CAST IRON
19	SEAL COUNTERFLANGE	NBR
20	COUNTERFLANGE	IRON
21	N.8 SCREW FOR COUNTERFLANGE	AISI 304
22	N.8 NUT FOR COUNTERFLANGE	AISI 304
23	N.2 SCREW FOR SUCTION STRAINER	AISI 304
24	LOWER FLANGE	AISI 304
25	UPPER FLANGE	AISI 304
26	COVER CABLE	AISI 304

6LR & 6LM lines

Deepwell Borehole



6LR line



6LM line



Submersible multistage centrifugal pumps for 6" wells. Check valve built into the delivery outlet. Pump flange for coupling with motors are made according to NEMA standards. Most common applications are civil and agricultural. All components are made of stainless steel with lost wax Microfusion technology. The standard material is AISI 304 stainless steel, alternatively the following materials are available on request: AISI 316 Steel, Duplex steel. Bushing bearings and wear-rings made of sand abrasion-resistant rubber, reverse-Thrust ring in PTFE/Graphite.

General operating data:

- Capacity up to 90 m³/h
- Pressure up to 750 m
- Hydraulic efficiency 6", up to 78,5%
- Pressure up to 75 bar
- Powers up to 66 kW
- Rotation speed up to 2.900 rpm
- Maximum depth: 350 m
- Maximum quantity of permitted sand: 100 gr/m³
- Drinking water compatibility according to DM174 MEI >= 0,4 (EU directive No.547/2012)
- Performance tolerance: ISO9906-3B

Construction features

Suction and delivery outlet	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Valve	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Impellers and diffusers	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Upper bushings	NBR rubber
Shaft pump side	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Quantity of sand in the water	max 100 g/m ³

Motor


Asynchronous 2 pole	rewindable water cooled
Insulation class	Y (max 30 °C) - PPC winding type F (max 50 °C) - PE2+PA or LPE winding type
Protection degree	IP68
Liquid temperature	max 30 °C (max 50 °C on request)
Depth of immersion	max 350 m



50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	66	100	150	200	250	300	350
	HP	kW	A	l/sec	0	1,1	1,7	2,5	3,3	4,2	5,0	5,8
				m ³ /h	0	4	6	9	12	15	18	21
6LR 14/01	1	0,75	2,2	H (m)	15	14	14	14	13	12	10	9
6LR 14/02	2	1,5	4,0		29	29	28	27	25	23	20	17
6LR 14/03	3	2,2	5,5		44	43	42	41	38	35	31	26
6LR 14/04	4	3	7,5		58	57	56	54	50	46	41	34
6LR 14/05	5,5	4	10,0		73	71	70	68	63	58	51	43
6LR 14/06	7,5	5,5	12,5		87	86	84	81	75	69	61	51
6LR 14/07	7,5	5,5	12,5		102	100	98	95	88	81	71	60
6LR 14/08	10	7,5	16,3		116	114	112	108	100	92	82	68
6LR 14/09	10	7,5	16,3		131	128	126	122	113	104	92	77
6LR 14/10	10	7,5	16,3		145	143	140	135	125	115	102	85
6LR 14/11	12,5	9,2	19,9		160	157	154	149	138	127	112	94
6LR 14/12	12,5	9,2	19,9		174	171	168	162	150	138	122	102
6LR 14/13	15	11	23,4		189	185	182	176	163	150	133	111
6LR 14/14	15	11	23,4		203	200	196	189	175	161	143	119
6LR 14/15	17,5	13	27,3		218	214	210	203	188	173	153	128
6LR 14/16	17,5	13	27,3		232	228	224	216	200	184	163	136
6LR 14/17	17,5	13	27,3		247	242	238	230	213	196	173	145
6LR 14/18	20	15	31,5		261	257	252	243	225	207	184	153
6LR 14/19	20	15	31,5		276	271	266	257	238	219	194	162
6LR 14/20	20	15	31,5		290	285	280	270	250	230	204	170
6LR 14/21	25	18,5	38,3		305	299	294	284	263	242	214	179
6LR 14/22	25	18,5	38,3		319	314	308	297	275	253	224	187
6LR 14/23	25	18,5	38,3		334	328	322	311	288	265	235	196
6LR 14/24	25	18,5	38,3		348	342	336	324	300	276	245	204
6LR 14/25	25	18,5	38,3		363	356	350	338	313	288	255	213

Max Eff. % =	71
Max kW / St. =	0,74



Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4	6

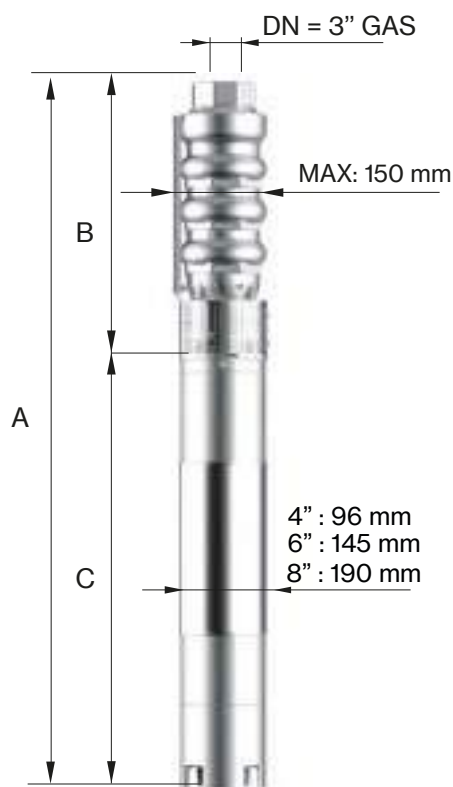

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 14/01	614	277	337	10	9
6LR 14/02	736	344	392	13	12
6LR 14/03	863	411	452	15	16
6LR 14/04	1035	478	557	19	19
6LR 14/05	1142	545	597	22	23
6LR 14/06	1310	612	698	27	27
6LR 14/07	1377	679	698	27	30
6LR 14/08	1472	771	701	55	35
6LR 14/09	1539	838	701	55	39
6LR 14/10	1606	905	701	55	43
6LR 14/11	1723	972	751	60	46
6LR 14/12	1790	1039	751	60	50
6LR 14/13	1917	1106	811	65	53
6LR 14/14	1984	1173	811	65	57
6LR 14/15	2081	1240	841	70	61
6LR 14/16	2148	1307	841	70	64
6LR 14/17	2215	1374	841	70	68
6LR 14/18	2372	1441	931	75	71
6LR 14/19	2439	1508	931	75	75
6LR 14/20	2506	1575	931	75	79
6LR 14/21	2633	1642	991	83	82
6LR 14/22	2700	1709	991	83	86
6LR 14/23	2767	1776	991	83	89
6LR 14/24	2834	1843	991	83	93
6LR 14/25	2901	1910	991	83	97




6LR 14

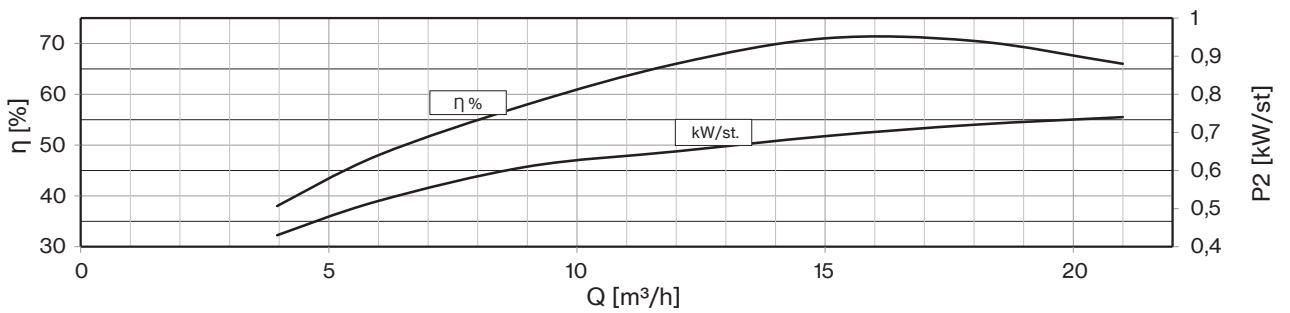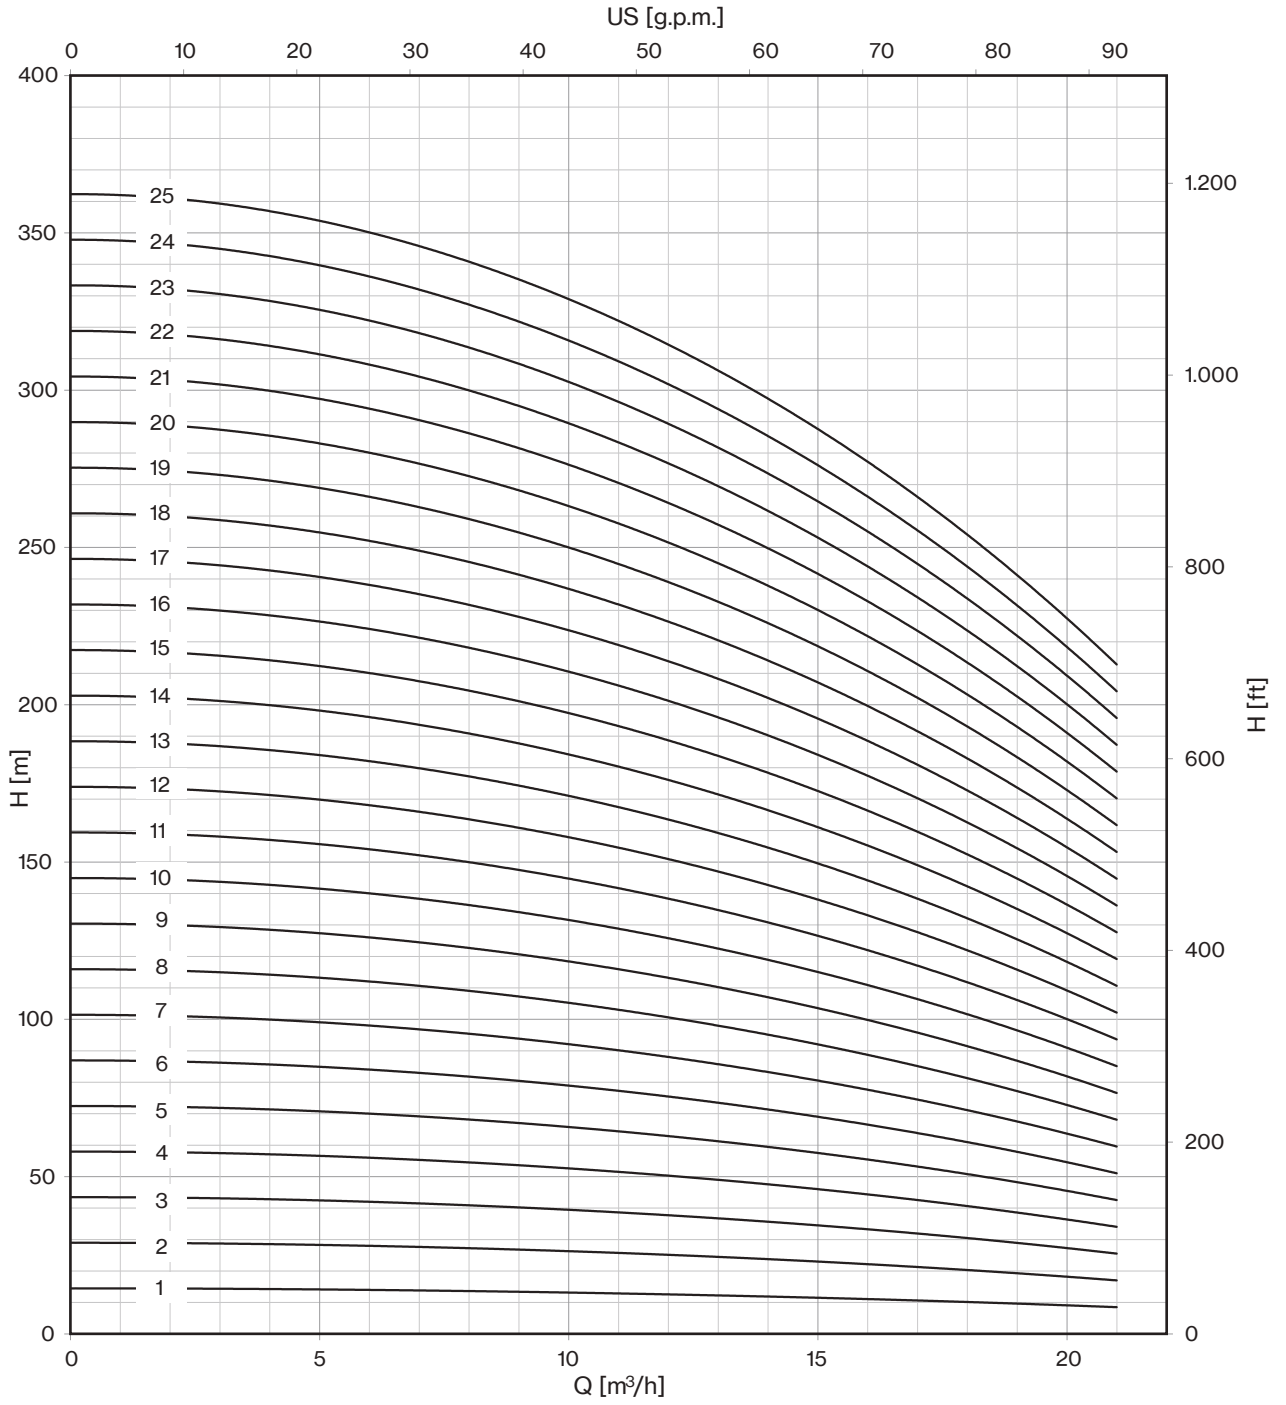

50 Hz - 2900 rpm				Q								
TYPE	P2		400 V	l/min	0	66	100	150	200	250	300	350
	HP	kW	A	l/sec	0	1,1	1,7	2,5	3,3	4,2	5,0	5,8
				m ³ /h	0	4	6	9	12	15	18	21
6LR 14/26	30	22	45,1	H (m)	377	371	364	351	325	299	265	221
6LR 14/27	30	22	45,1		392	385	378	365	338	311	275	230
6LR 14/28	30	22	45,1		406	399	392	378	350	322	286	238
6LR 14/29	30	22	45,1		421	413	406	392	363	334	296	247
6LR 14/30*	35	26	52,9		435	428	420	405	375	345	306	255
6LR 14/31*	35	26	52,9		450	442	434	419	388	357	316	264
6LR 14/32*	35	26	52,9		464	456	448	432	400	368	326	272
6LR 14/33*	35	26	52,9		479	470	462	446	413	380	337	281
6LR 14/34*	35	26	52,9		493	485	476	459	425	391	347	289
6LR 14/35*	35	26	52,9		508	499	490	473	438	403	357	298
6LR 14/36*	40	30	61,1		522	513	504	486	450	414	367	306
6LR 14/37*	40	30	61,1		537	527	518	500	463	426	377	315
6LR 14/38*	40	30	61,1		551	542	532	513	475	437	388	323
6LR 14/39*	40	30	61,1		566	556	546	527	488	449	398	332
6LR 14/40*	40	30	61,1		580	570	560	540	500	460	408	340
6LR 14/41*	50	37	75,8		595	584	574	554	513	472	418	349
6LR 14/42*	50	37	75,8		609	599	588	567	525	483	428	357
6LR 14/43*	50	37	75,8		624	613	602	581	538	495	439	366
6LR 14/44*	50	37	75,8		638	627	616	594	550	506	449	374
6LR 14/45*	50	37	75,8		653	641	630	608	563	518	459	383
6LR 14/46*	50	37	75,8		667	656	644	621	575	529	469	391
6LR 14/47*	50	37	75,8		682	670	658	635	588	541	479	400
6LR 14/48*	50	37	75,8		696	684	672	648	600	552	490	408
6LR 14/49*	50	37	75,8		711	698	686	662	613	564	500	417
6LR 14/50*	50	37	75,8		725	713	700	675	625	575	510	425

Max Eff. % =	71
Max kW / St. =	0,74

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4	6


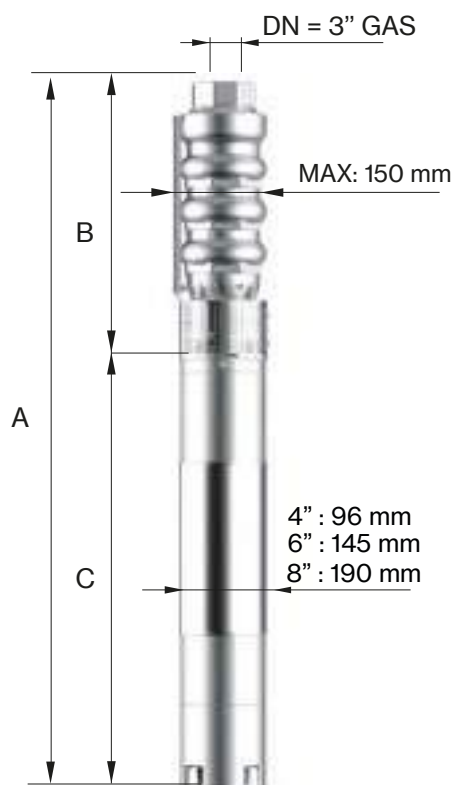


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
6LR 14/26	3048	1977	1071		92	99
6LR 14/27	3115	2044	1071		92	102
6LR 14/28	3182	2111	1071		92	106
6LR 14/29	3249	2178	1071		92	109
6LR 14/30*	3506	2325	1181		100	117
6LR 14/31*	3573	2392	1181		100	120
6LR 14/32*	3640	2459	1181		100	124
6LR 14/33*	3707	2526	1181		100	127
6LR 14/34*	3774	2593	1181		100	131
6LR 14/35*	3841	2660	1181		100	135
6LR 14/36*	3978	2727	1251		108	138
6LR 14/37*	4045	2794	1251		108	142
6LR 14/38*	4112	2861	1251		108	145
6LR 14/39*	4179	2928	1251		108	149
6LR 14/40*	4246	2995	1251		108	153
6LR 14/41*	4403	3062	1341		118	156
6LR 14/42*	4470	3129	1341		118	160
6LR 14/43*	4537	3196	1341		118	163
6LR 14/44*	4604	3263	1341		118	167
6LR 14/45*	4671	3330	1341		118	171
6LR 14/46*	4738	3397	1341		118	174
6LR 14/47*	4805	3464	1341		118	178
6LR 14/48*	4872	3531	1341		118	181
6LR 14/49*	4939	3598	1341		118	185
6LR 14/50*	5006	3665	1341		118	189

* Coupled pump shaft




6LR 14

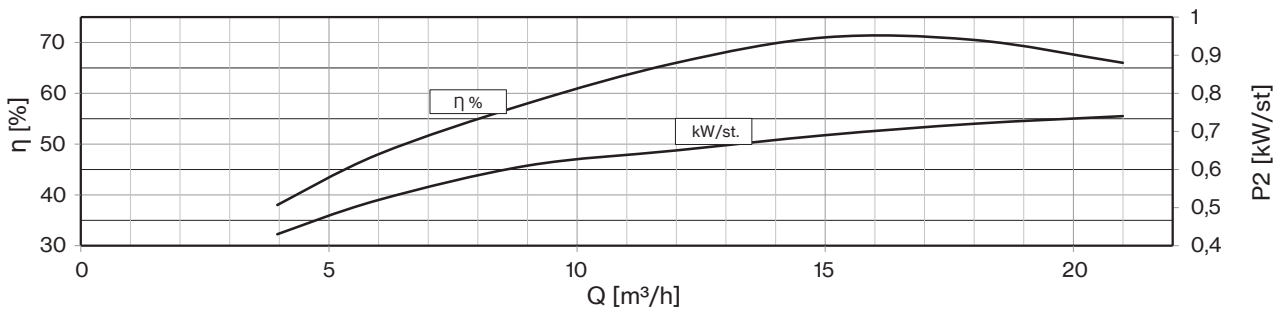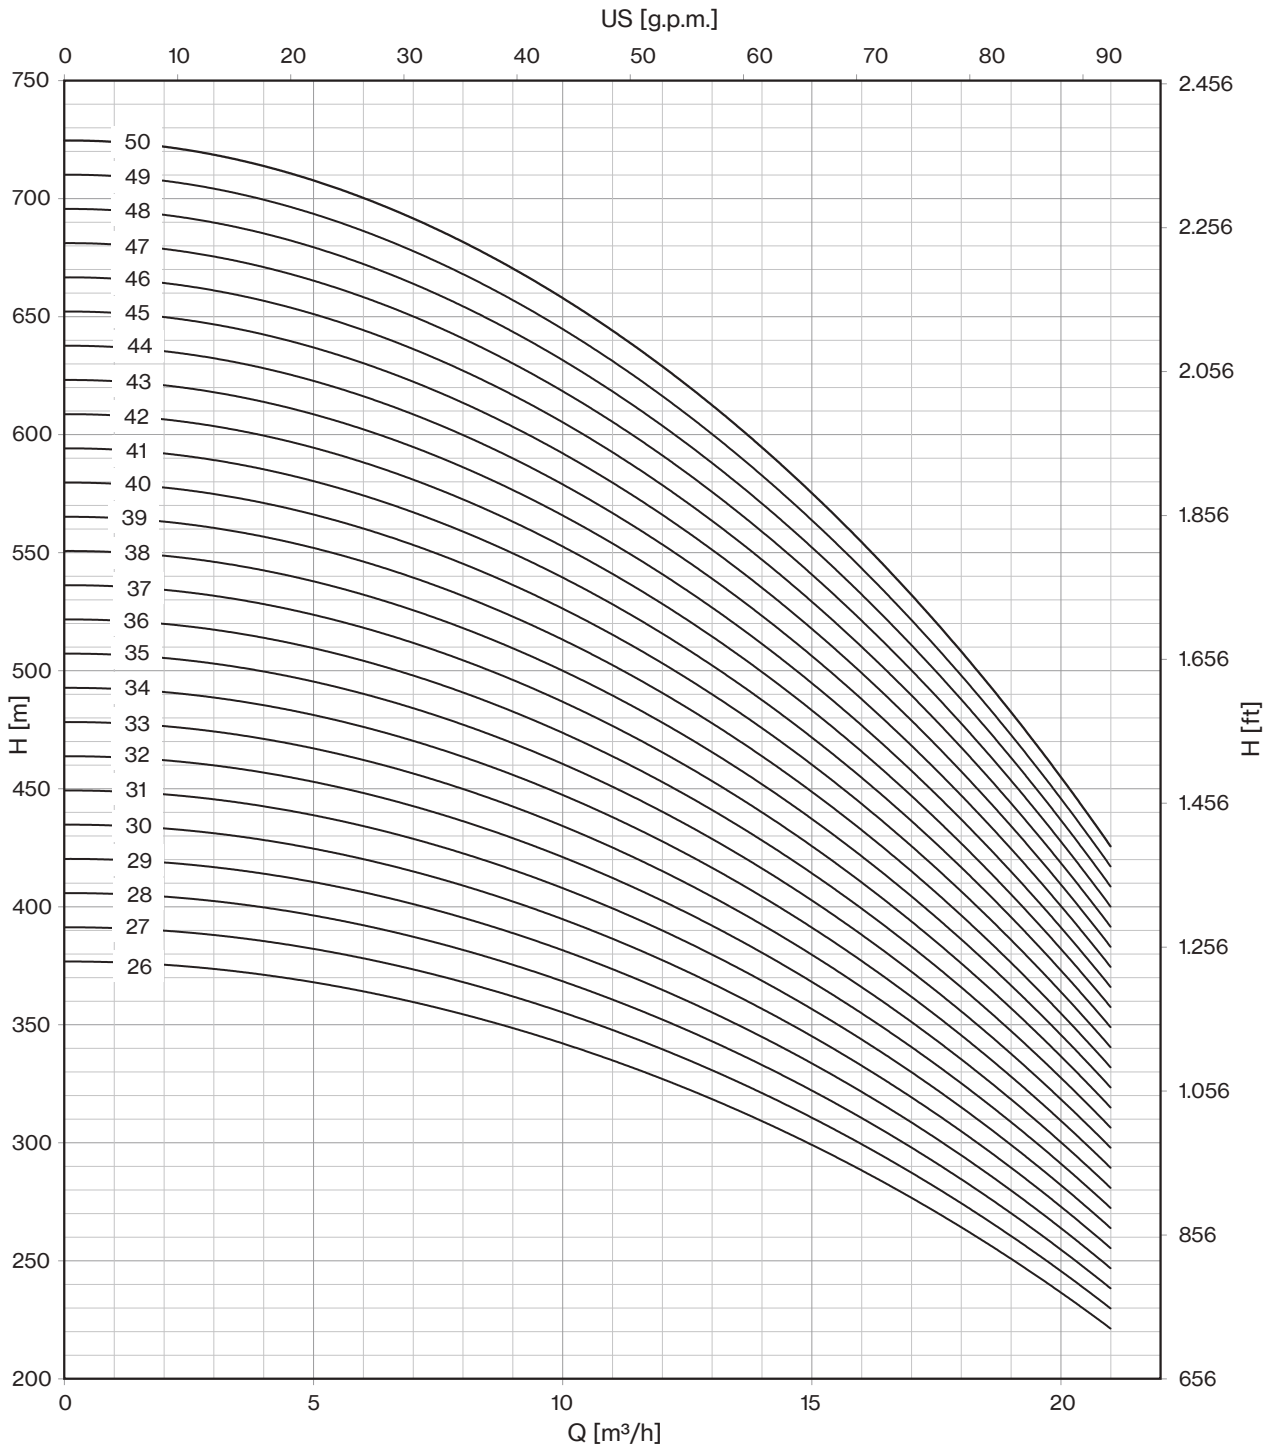

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	150	200	250	300	350	400	450
	HP	kW	A	l/sec	0	1,7	2,5	3,3	4,2	5,0	5,8	6,7	7,5
				m ³ /h	0	6	9	12	15	18	21	24	27
6LR 20/01	2	1,5	4,0	H (m)	16	15	14	14	13	12	11	9	7
6LR 20/02	3	2,2	5,5		31	30	28	28	26	25	22	19	15
6LR 20/03	4	3	7,5		47	45	42	41	40	37	33	28	22
6LR 20/04	5,5	4	10,0		62	60	56	55	53	49	44	37	29
6LR 20/05	7,5	5,5	12,5		78	75	71	69	66	62	55	47	37
6LR 20/06	7,5	5,5	12,5		93	90	85	83	79	74	66	56	44
6LR 20/07	10	7,5	16,3		109	105	99	97	92	86	77	65	51
6LR 20/08	10	7,5	16,3		124	120	113	110	106	98	88	74	58
6LR 20/09	12,5	9,2	19,9		140	135	127	124	119	111	99	84	66
6LR 20/10	12,5	9,2	19,9		155	150	141	138	132	123	110	93	73
6LR 20/11	15	11	23,4		171	165	155	152	145	135	121	102	80
6LR 20/12	15	11	23,4		186	180	169	166	158	148	132	112	88
6LR 20/13	17,5	13	27,3		202	195	183	179	172	160	143	121	95
6LR 20/14	17,5	13	27,3		217	210	197	193	185	172	154	130	102
6LR 20/15	20	15	31,5		233	225	212	207	198	185	165	140	110
6LR 20/16	20	15	31,5		248	240	226	221	211	197	176	149	117
6LR 20/17	25	18,5	38,3		264	255	240	235	224	209	187	158	124
6LR 20/18	25	18,5	38,3		279	270	254	248	238	221	198	167	131
6LR 20/19	25	18,5	38,3		295	285	268	262	251	234	209	177	139
6LR 20/20	25	18,5	38,3		310	300	282	276	264	246	220	186	146
6LR 20/21	30	22	45,1		326	315	296	290	277	258	231	195	153
6LR 20/22	30	22	45,1		341	330	310	304	290	271	242	205	161
6LR 20/23	30	22	45,1		357	345	324	317	304	283	253	214	168
6LR 20/24	30	22	45,1		372	360	338	331	317	295	264	223	175



Max Eff. % =	73
Max kW / St. =	0,91

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4	6

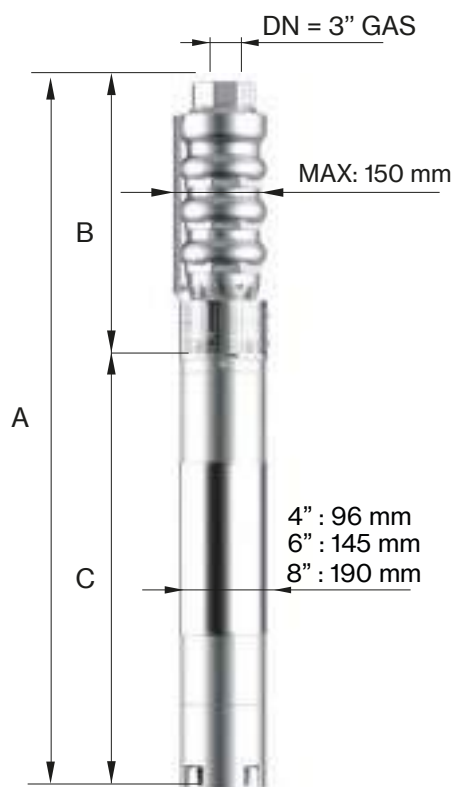

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 20/01	669	277	392	13	9
6LR 20/02	796	344	452	15	12
6LR 20/03	968	411	557	19	16
6LR 20/04	1075	478	597	22	19
6LR 20/05	1243	545	698	27	23
6LR 20/06	1310	612	698	27	27
6LR 20/07	1405	704	701	55	32
6LR 20/08	1472	771	701	55	35
6LR 20/09	1589	838	751	60	39
6LR 20/10	1656	905	751	60	43
6LR 20/11	1783	972	811	65	46
6LR 20/12	1850	1039	811	65	50
6LR 20/13	1947	1106	841	70	53
6LR 20/14	2014	1173	841	70	57
6LR 20/15	2171	1240	931	75	61
6LR 20/16	2238	1307	931	75	64
6LR 20/17	2365	1374	991	83	68
6LR 20/18	2432	1441	991	83	71
6LR 20/19	2499	1508	991	83	75
6LR 20/20	2566	1575	991	83	79
6LR 20/21	2713	1642	1071	92	82
6LR 20/22	2780	1709	1071	92	86
6LR 20/23	2847	1776	1071	92	89
6LR 20/24	2914	1843	1071	92	93


6LR 20

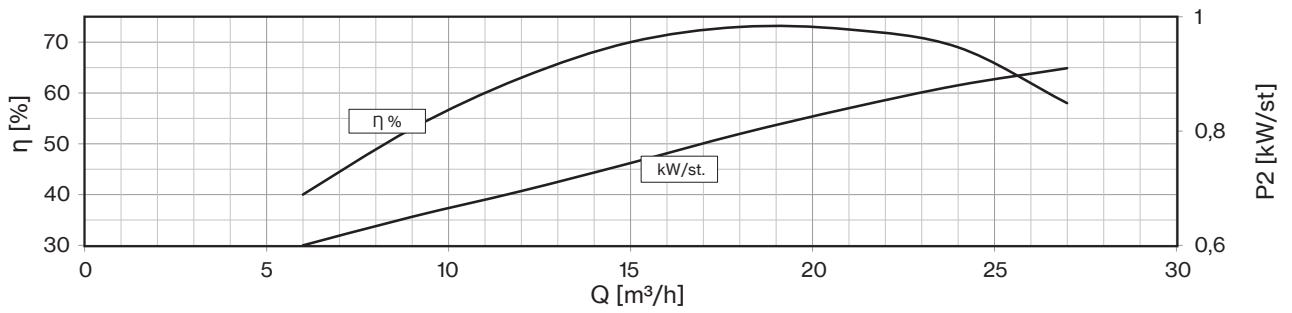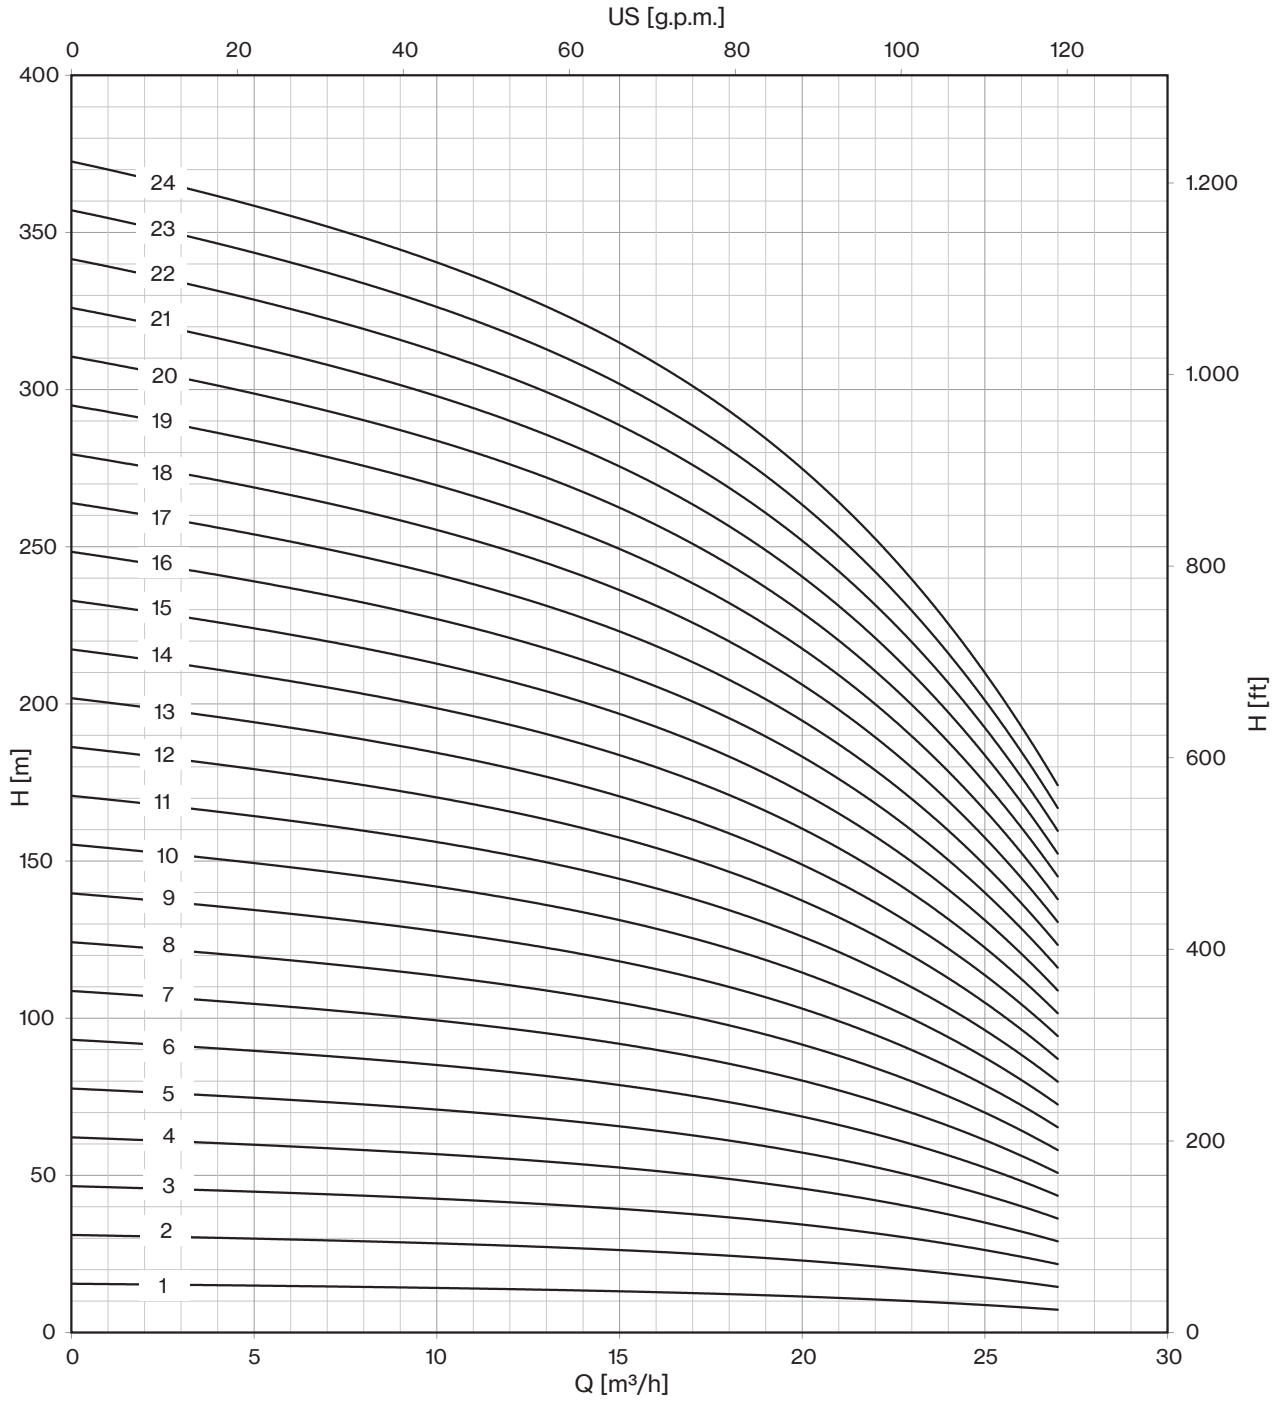

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	150	200	250	300	350	400	450
	HP	kW	A	l/sec	0	1,7	2,5	3,3	4,2	5,0	5,8	6,7	7,5
				m ³ /h	0	6	9	12	15	18	21	24	27
6LR 20/25	35	26	52,9	H (m)	388	375	353	345	330	308	275	233	183
6LR 20/26	35	26	52,9		403	390	367	359	343	320	286	242	190
6LR 20/27	35	26	52,9		419	405	381	373	356	332	297	251	197
6LR 20/28	35	26	52,9		434	420	395	386	370	344	308	260	204
6LR 20/29	40	30	61,1		450	435	409	400	383	357	319	270	212
6LR 20/30*	40	30	61,1		465	450	423	414	396	369	330	279	219
6LR 20/31*	40	30	61,1		481	465	437	428	409	381	341	288	226
6LR 20/32*	40	30	61,1		496	480	451	442	422	394	352	298	234
6LR 20/33*	40	30	61,1		512	495	465	455	436	406	363	307	241
6LR 20/34*	50	37	75,8		527	510	479	469	449	418	374	316	248
6LR 20/35*	50	37	75,8		543	525	494	483	462	431	385	326	256
6LR 20/36*	50	37	75,8		558	540	508	497	475	443	396	335	263
6LR 20/37*	50	37	75,8		574	555	522	511	488	455	407	344	270
6LR 20/38*	50	37	75,8		589	570	536	524	502	467	418	353	277
6LR 20/39*	50	37	75,8		605	585	550	538	515	480	429	363	285
6LR 20/40*	50	37	75,8		620	600	564	552	528	492	440	372	292
6LR 20/41*	60	45	86,3		636	615	578	566	541	504	451	381	299
6LR 20/42*	60	45	86,3		651	630	592	580	554	517	462	391	307
6LR 20/43*	60	45	86,3		667	645	606	593	568	529	473	400	314
6LR 20/44*	60	45	86,3		682	660	620	607	581	541	484	409	321
6LR 20/45*	60	45	86,3		698	675	635	621	594	554	495	419	329
6LR 20/46*	60	45	86,3		713	690	649	635	607	566	506	428	336
6LR 20/47*	60	45	86,3		729	705	663	649	620	578	517	437	343
6LR 20/48*	60	45	86,3		744	720	677	662	634	590	528	446	350

Max Eff. % =	73
Max kW / St. =	0,91

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4	6


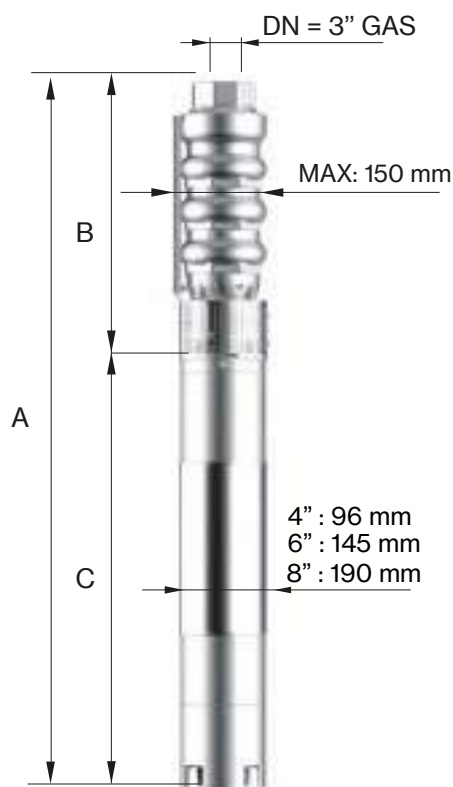


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 20/25	3091	1910	1181	100	97
6LR 20/26	3158	1977	1181	100	100
6LR 20/27	3225	2044	1181	100	104
6LR 20/28	3292	2111	1181	100	107
6LR 20/29	3429	2178	1251	108	111
6LR 20/30*	3576	2325	1251	108	118
6LR 20/31*	3643	2392	1251	108	122
6LR 20/32*	3710	2459	1251	108	125
6LR 20/33*	3777	2526	1251	108	129
6LR 20/34*	3934	2593	1341	118	132
6LR 20/35*	4001	2660	1341	118	136
6LR 20/36*	4068	2727	1341	118	140
6LR 20/37*	4135	2794	1341	118	143
6LR 20/38*	4257	2916	1341	118	148
6LR 20/39*	4324	2983	1341	118	151
6LR 20/40*	4391	3050	1341	118	155
6LR 20/41*	4240	3117	1123	178	159
6LR 20/42*	4307	3184	1123	178	162
6LR 20/43*	4374	3251	1123	178	166
6LR 20/44*	4441	3318	1123	178	169
6LR 20/45*	4508	3385	1123	178	173
6LR 20/46*	4575	3452	1123	178	177
6LR 20/47*	4642	3519	1123	178	180
6LR 20/48*	4709	3586	1123	178	184

* Coupled pump shaft



6LR 20

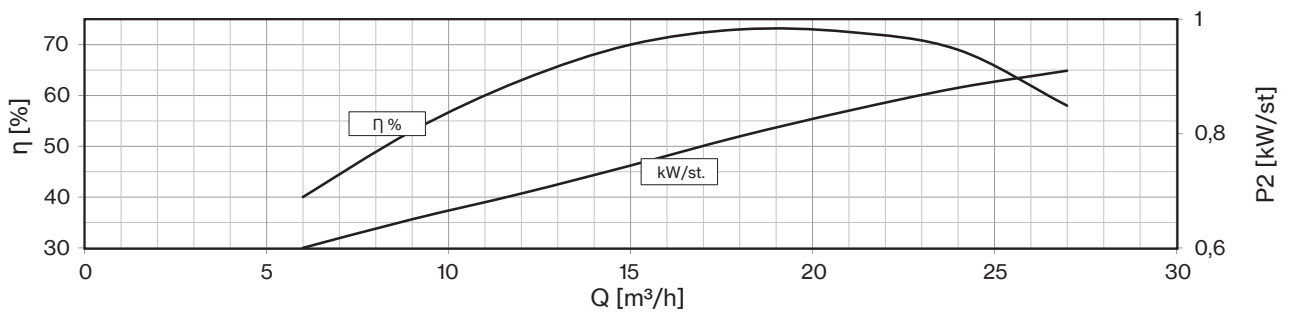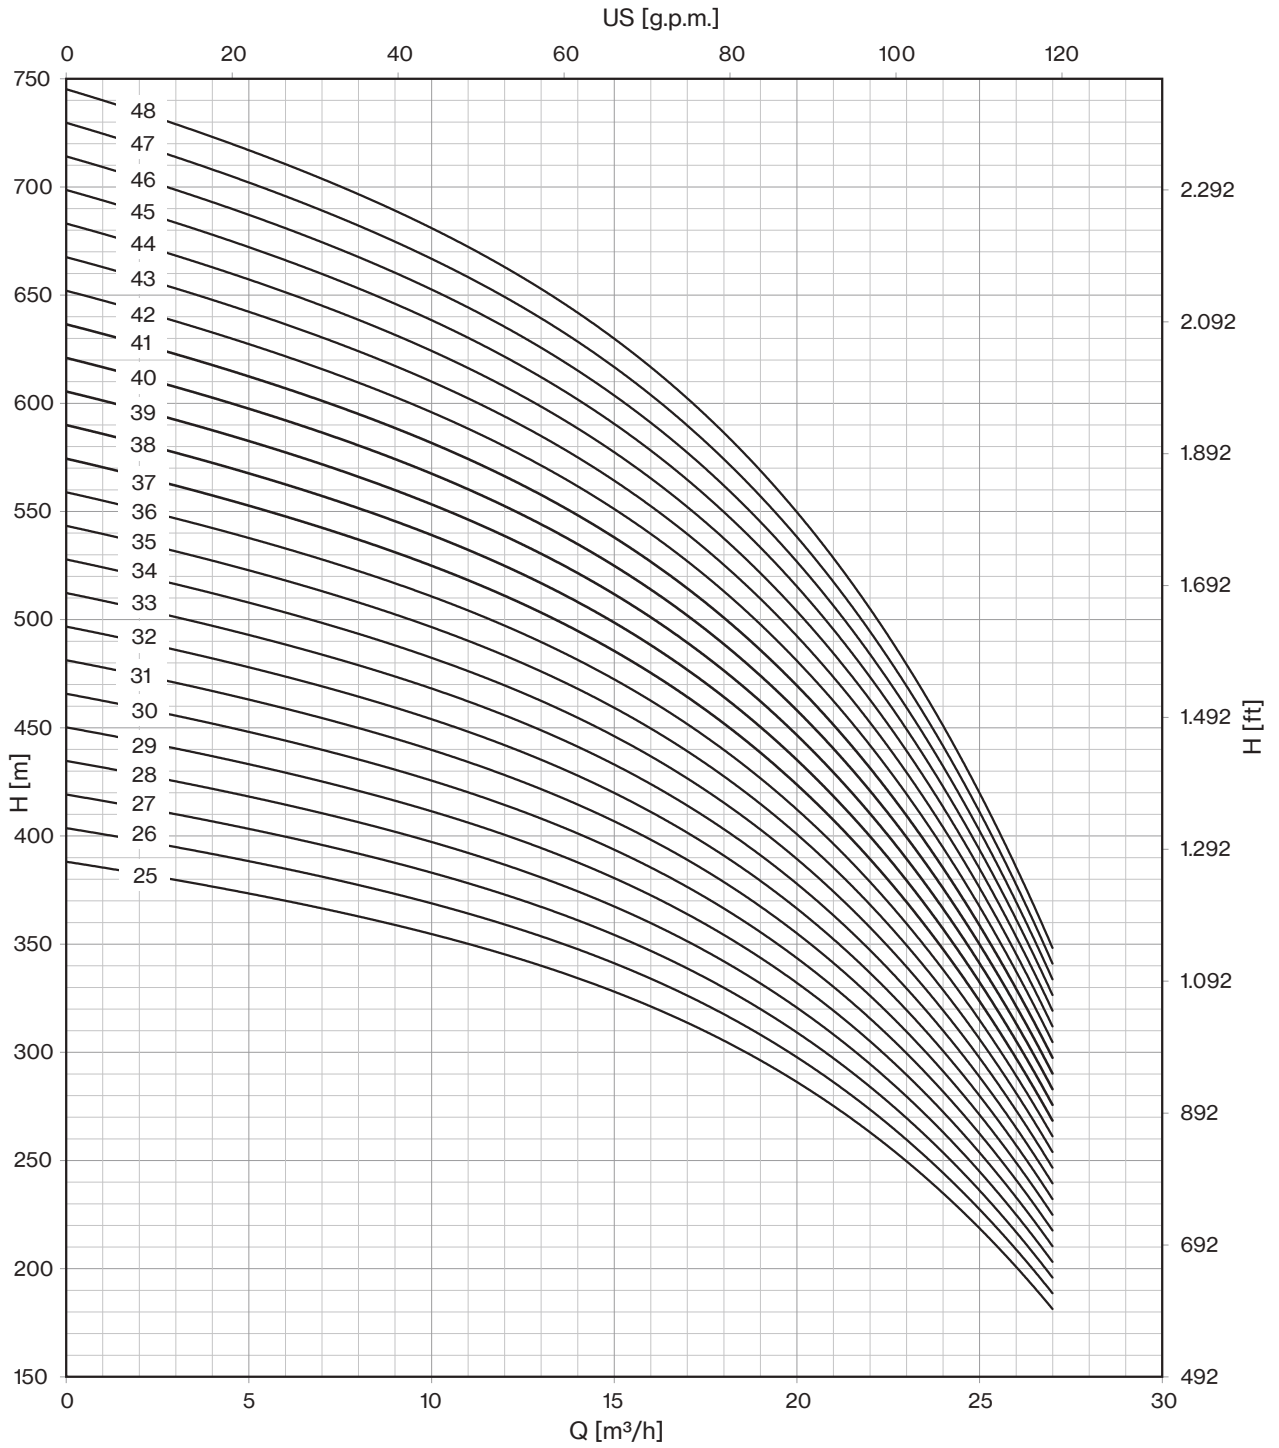

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	200	300	350	400	450	500	550
	HP	kW	A	l/sec	0	1,7	3,3	5,0	5,8	6,7	7,5	8,3	9,2
				m ³ /h	0	6	12	18	21	24	27	30	33
6LR 25/01	2	1,5	4,0	H (m)	15	14	13	13	12	12	11	10	8
6LR 25/02	4	3	7,5		30	29	27	25	25	23	21	19	17
6LR 25/03	5,5	4	10,0		45	43	40	38	37	35	32	29	25
6LR 25/04	7,5	5,5	12,5		60	57	54	51	49	46	43	38	34
6LR 25/05	10	7,5	16,3		75	72	67	64	62	58	54	48	42
6LR 25/06	10	7,5	16,3		90	86	80	76	74	70	64	57	50
6LR 25/07	12,5	9,2	19,9		105	100	94	89	86	81	75	67	59
6LR 25/08	12,5	9,2	19,9		120	114	107	102	98	93	86	76	67
6LR 25/09	15	11	23,4		135	129	121	114	111	104	96	86	76
6LR 25/10	17,5	13	27,3		150	143	134	127	123	116	107	95	84
6LR 25/11	17,5	13	27,3		165	157	147	140	135	128	118	105	92
6LR 25/12	20	15	31,5		180	172	161	152	148	139	128	114	101
6LR 25/13	20	15	31,5		195	186	174	165	160	151	139	124	109
6LR 25/14	25	18,5	38,3		210	200	188	178	172	162	150	133	118
6LR 25/15	25	18,5	38,3		225	215	201	191	185	174	161	143	126
6LR 25/16	25	18,5	38,3		240	229	214	203	197	186	171	152	134
6LR 25/17	30	22	45,1		255	243	228	216	209	197	182	162	143
6LR 25/18	30	22	45,1		270	257	241	229	221	209	193	171	151
6LR 25/19	30	22	45,1		285	272	255	241	234	220	203	181	160
6LR 25/20	35	26	52,9		300	286	268	254	246	232	214	190	168
6LR 25/21	35	26	52,9		315	300	281	267	258	244	225	200	176
6LR 25/22	35	26	52,9		330	315	295	279	271	255	235	209	185
6LR 25/23	40	30	61,1		345	329	308	292	283	267	246	219	193
6LR 25/24	40	30	61,1		360	343	322	305	295	278	257	228	202
6LR 25/25	40	30	61,1		375	358	335	318	308	290	268	238	210



Max Eff. % =	77
Max kW / St. =	1,14

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4,5	6,6



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 25/01	669	277	392	13	10
6LR 25/02	901	344	557	19	14
6LR 25/03	1008	411	597	22	17
6LR 25/04	1176	478	698	27	21
6LR 25/05	1246	545	701	55	25
6LR 25/06	1338	637	701	55	28
6LR 25/07	1455	704	751	60	32
6LR 25/08	1522	771	751	60	35
6LR 25/09	1649	838	811	65	39
6LR 25/10	1746	905	841	70	43
6LR 25/11	1813	972	841	70	46
6LR 25/12	1970	1039	931	75	50
6LR 25/13	2037	1106	931	75	53
6LR 25/14	2164	1173	991	83	57
6LR 25/15	2231	1240	991	83	61
6LR 25/16	2298	1307	991	83	64
6LR 25/17	2445	1374	1071	92	68
6LR 25/18	2512	1441	1071	92	71
6LR 25/19	2579	1508	1071	92	75
6LR 25/20	2756	1575	1181	100	79
6LR 25/21	2823	1642	1181	100	82
6LR 25/22	2890	1709	1181	100	86
6LR 25/23	3027	1776	1251	108	89
6LR 25/24	3094	1843	1251	108	93
6LR 25/25	3161	1910	1251	108	97


6LR 25

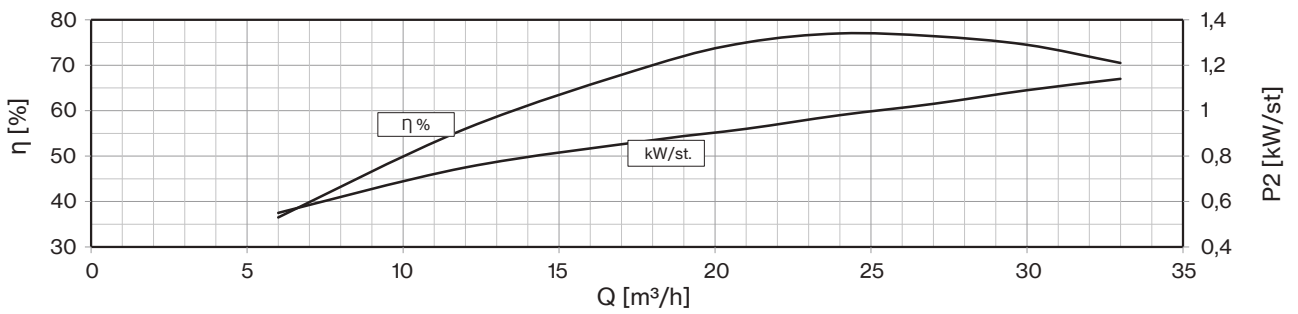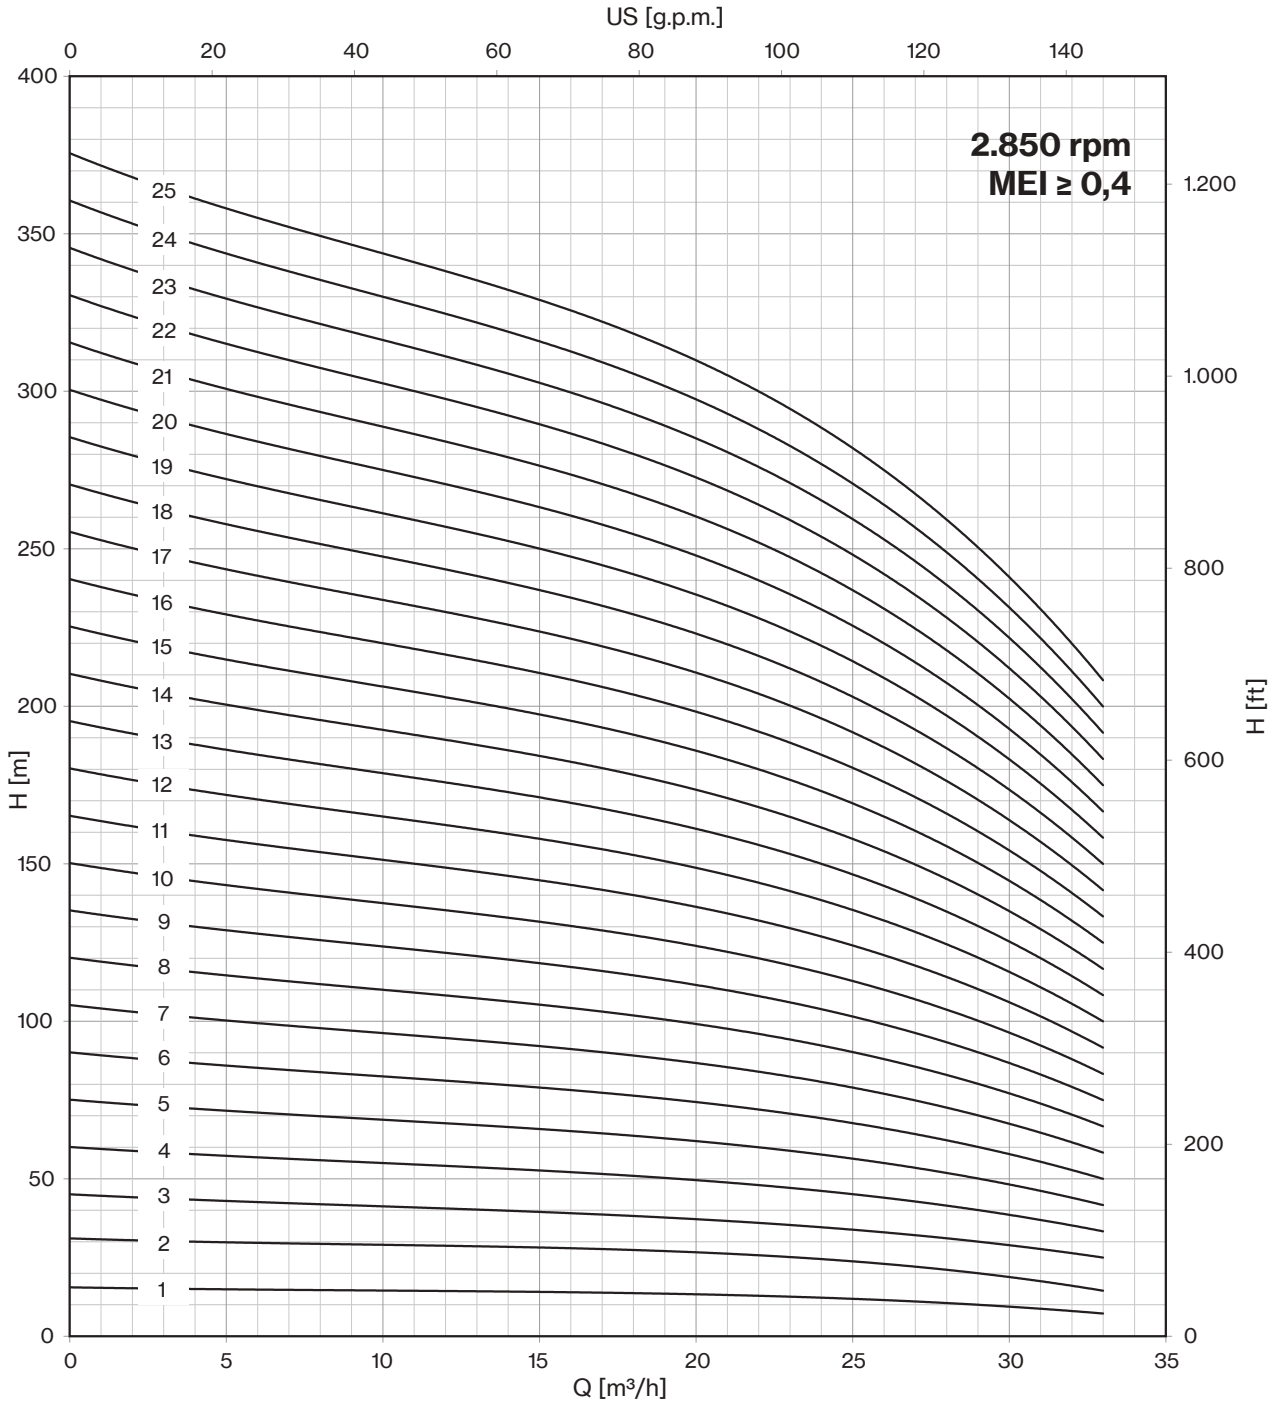

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	200	300	350	400	450	500	550
	HP	kW	A	l/sec	0	1,7	3,3	5,0	5,8	6,7	7,5	8,3	9,2
				m ³ /h	0	6	12	18	21	24	27	30	33
6LR 25/26*	40	30	61,1	H (m)	390	372	348	330	320	302	278	247	218
6LR 25/27*	50	37	75,8		405	386	362	343	332	313	289	257	227
6LR 25/28*	50	37	75,8		420	400	375	356	344	325	300	266	235
6LR 25/29*	50	37	75,8		435	415	389	368	357	336	310	276	244
6LR 25/30*	50	37	75,8		450	429	402	381	369	348	321	285	252
6LR 25/31*	50	37	75,8		465	443	415	394	381	360	332	295	260
6LR 25/32*	50	37	75,8		480	458	429	406	394	371	342	304	269
6LR 25/33*	60	45	86,3		495	472	442	419	406	383	353	314	277
6LR 25/34*	60	45	86,3		510	486	456	432	418	394	364	323	286
6LR 25/35*	60	45	86,3		525	501	469	445	431	406	375	333	294
6LR 25/36*	60	45	86,3		540	515	482	457	443	418	385	342	302
6LR 25/37*	60	45	86,3		555	529	496	470	455	429	396	352	311
6LR 25/38*	60	45	86,3		570	543	509	483	467	441	407	361	319
6LR 25/39*	60	45	86,3		585	558	523	495	480	452	417	371	328
6LR 25/40*	75	55	106,2		600	572	536	508	492	464	428	380	336
6LR 25/41*	75	55	106,2		615	586	549	521	504	476	439	390	344
6LR 25/42*	75	55	106,2		630	601	563	533	517	487	449	399	353
6LR 25/43*	75	55	106,2		645	615	576	546	529	499	460	409	361
6LR 25/44*	75	55	106,2		660	629	590	559	541	510	471	418	370
6LR 25/45*	75	55	106,2		675	644	603	572	554	522	482	428	378
6LR 25/46*	75	55	106,2		690	658	616	584	566	534	492	437	386
6LR 25/47*	75	55	106,2		705	672	630	597	578	545	503	447	395
6LR 25/48*	75	55	106,2		720	686	643	610	590	557	514	456	403
6LR 25/49*	90	66	126,0		735	701	657	622	603	568	524	466	412
6LR 25/50*	90	66	126,0		750	715	670	635	615	580	535	475	420

Max Eff. % =	77
Max kW / St. =	1,14

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4,5	6,6


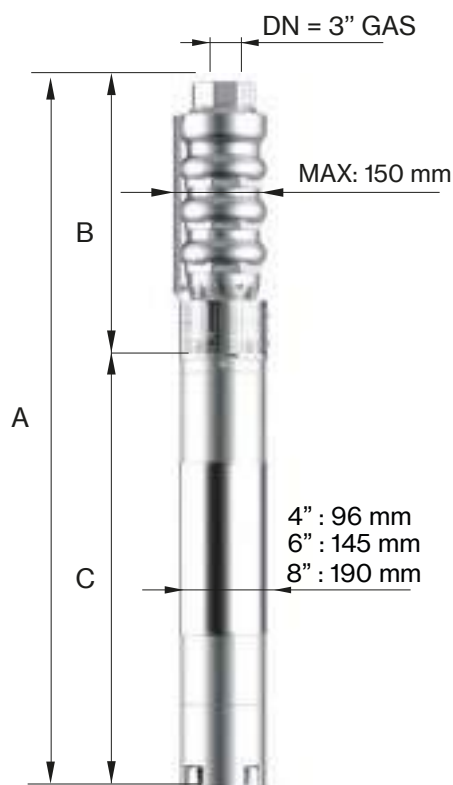


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 25/26*	3308	2057	1251	108	104
6LR 25/27*	3465	2124	1341	118	107
6LR 25/28*	3532	2191	1341	118	111
6LR 25/29*	3599	2258	1341	118	114
6LR 25/30*	3666	2325	1341	118	118
6LR 25/31*	3733	2392	1341	118	122
6LR 25/32*	3800	2459	1341	118	125
6LR 25/33*	3649	2526	1123	178	129
6LR 25/34*	3716	2593	1123	178	132
6LR 25/35*	3783	2660	1123	178	136
6LR 25/36*	3850	2727	1123	178	140
6LR 25/37*	3972	2849	1123	178	144
6LR 25/38*	4039	2916	1123	178	148
6LR 25/39*	4106	2983	1123	178	151
6LR 25/40*	4283	3050	1233	200	155
6LR 25/41*	4350	3117	1233	200	159
6LR 25/42*	4417	3184	1233	200	162
6LR 25/43*	4484	3251	1233	200	166
6LR 25/44*	4551	3318	1233	200	169
6LR 25/45*	4618	3385	1233	200	173
6LR 25/46*	4685	3452	1233	200	177
6LR 25/47*	4752	3519	1233	200	180
6LR 25/48*	4819	3586	1233	200	184
6LR 25/49*	4955	3653	1302	214	187
6LR 25/50*	5022	3720	1302	214	191

* Coupled pump shaft



6LR 25

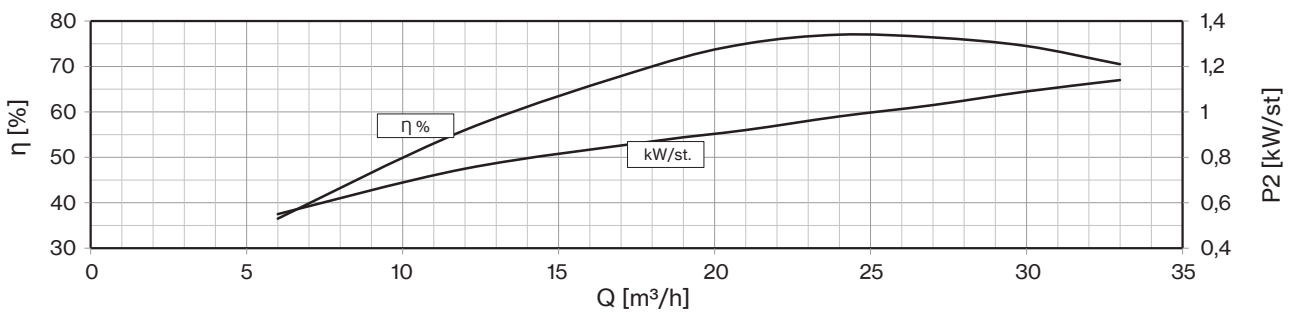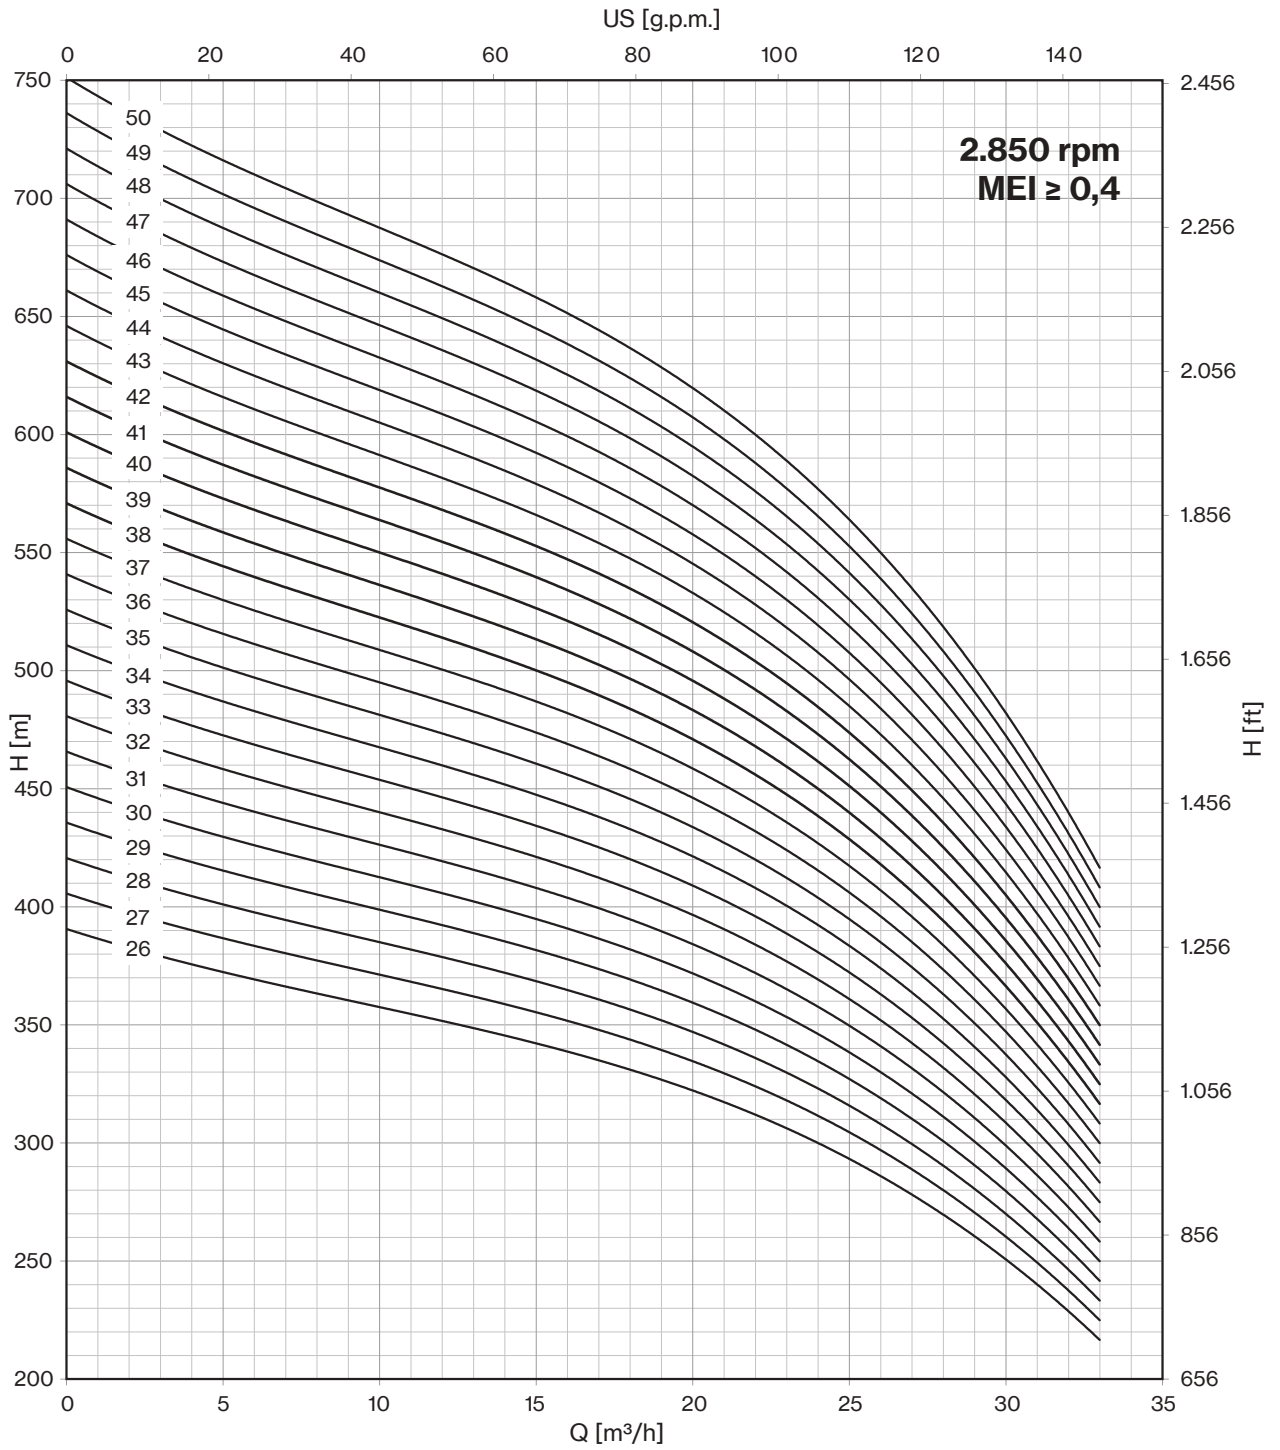

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	150	200	300	400	500	600	700
	HP	kW	A	l/sec	0	1,7	2,5	3,3	5,0	6,7	8,3	10,0	11,7
				m ³ /h	0	6	9	12	18	24	30	36	42
6LR 32/01	2	1,5	4,0	H(m)	15	15	14	14	14	13	11	9	7
6LR 32/02	4	3	7,5		30	30	29	28	27	25	23	19	15
6LR 32/03	5,5	4	10,0		45	44	43	42	41	38	34	28	22
6LR 32/04	7,5	5,5	12,5		60	59	58	56	54	51	45	38	29
6LR 32/05	10	7,5	16,3		75	74	72	71	68	64	57	47	37
6LR 32/06	12,5	9,2	19,9		90	89	86	85	82	76	68	56	44
6LR 32/07	15	11	23,4		105	104	101	99	95	89	79	66	51
6LR 32/08	15	11	23,4		120	118	115	113	109	102	90	75	58
6LR 32/09	17,5	13	27,3		135	133	130	127	122	114	102	85	66
6LR 32/10	20	15	31,5		150	148	144	141	136	127	113	94	73
6LR 32/11	20	15	31,5		165	163	158	155	150	140	124	103	80
6LR 32/12	25	18,5	38,3		180	178	173	169	163	152	136	113	88
6LR 32/13	25	18,5	38,3		195	192	187	183	177	165	147	122	95
6LR 32/14	25	18,5	38,3		210	207	202	197	190	178	158	132	102
6LR 32/15	30	22	45,1		225	222	216	212	204	191	170	141	110
6LR 32/16	30	22	45,1		240	237	230	226	218	203	181	150	117
6LR 32/17	35	26	52,9		255	252	245	240	231	216	192	160	124
6LR 32/18	35	26	52,9		270	266	259	254	245	229	203	169	131
6LR 32/19	35	26	52,9		285	281	274	268	258	241	215	179	139
6LR 32/20	40	30	61,1		300	296	288	282	272	254	226	188	146
6LR 32/21	40	30	61,1		315	311	302	296	286	267	237	197	153
6LR 32/22	40	30	61,1		330	326	317	310	299	279	249	207	161
6LR 32/23	50	37	75,8		345	340	331	324	313	292	260	216	168
6LR 32/24	50	37	75,8		360	355	346	338	326	305	271	226	175
6LR 32/25	50	37	75,8		375	370	360	353	340	318	283	235	183

Max Eff. % =	77
Max kW / St. =	1,32



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,9	7,5



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 32/01	669	277	392	13	9
6LR 32/02	901	344	557	19	12
6LR 32/03	1008	411	597	22	16
6LR 32/04	1176	478	698	27	19
6LR 32/05	1271	570	701	55	25
6LR 32/06	1388	637	751	60	28
6LR 32/07	1515	704	811	65	32
6LR 32/08	1582	771	811	65	35
6LR 32/09	1679	838	841	70	39
6LR 32/10	1836	905	931	75	43
6LR 32/11	1903	972	931	75	46
6LR 32/12	2030	1039	991	83	50
6LR 32/13	2097	1106	991	83	53
6LR 32/14	2164	1173	991	83	57
6LR 32/15	2311	1240	1071	92	61
6LR 32/16	2378	1307	1071	92	64
6LR 32/17	2555	1374	1181	100	68
6LR 32/18	2622	1441	1181	100	71
6LR 32/19	2689	1508	1181	100	75
6LR 32/20	2826	1575	1251	108	79
6LR 32/21	2893	1642	1251	108	82
6LR 32/22	2960	1709	1251	108	86
6LR 32/23	3117	1776	1341	118	89
6LR 32/24	3184	1843	1341	118	93
6LR 32/25	3251	1910	1341	118	97



6LR 32

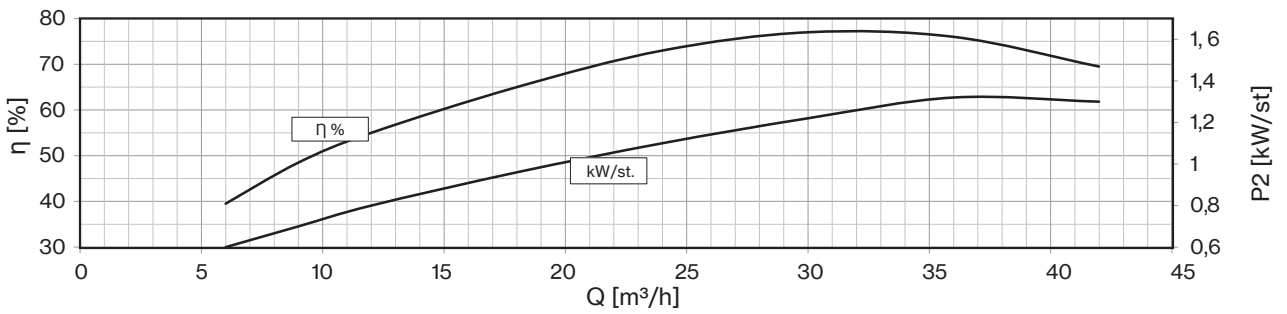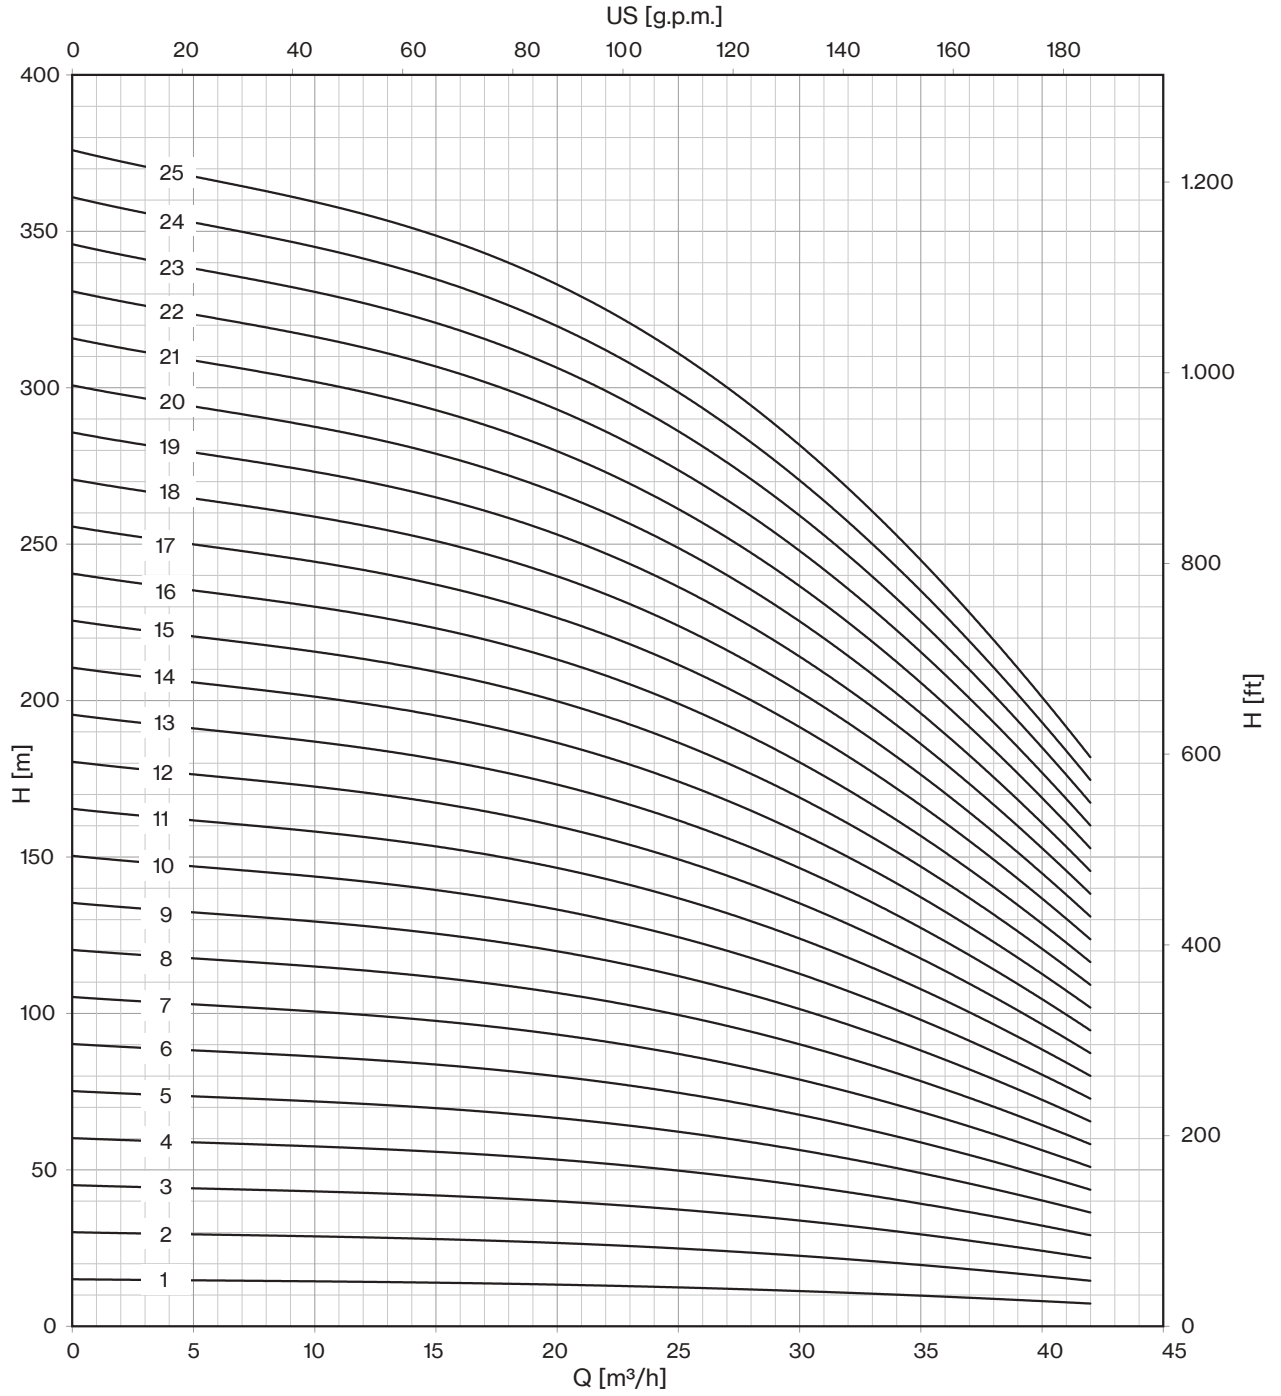

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	150	200	300	400	500	600	700
	HP	kW	A	l/sec	0	1,7	2,5	3,3	5,0	6,7	8,3	10,0	11,7
				m ³ /h	0	6	9	12	18	24	30	36	42
6LR 32/26*	50	37	75,8	H (m)	390	385	374	367	354	330	294	244	190
6LR 32/27*	50	37	75,8		405	400	389	381	367	343	305	254	197
6LR 32/28*	50	37	75,8		420	414	403	395	381	356	316	263	204
6LR 32/29*	60	45	86,3		435	429	418	409	394	368	328	273	212
6LR 32/30*	60	45	86,3		450	444	432	423	408	381	339	282	219
6LR 32/31*	60	45	86,3		465	459	446	437	422	394	350	291	226
6LR 32/32*	60	45	86,3		480	474	461	451	435	406	362	301	234
6LR 32/33*	60	45	86,3		495	488	475	465	449	419	373	310	241
6LR 32/34*	60	45	86,3		510	503	490	479	462	432	384	320	248
6LR 32/35*	75	55	106,2		525	518	504	494	476	445	396	329	256
6LR 32/36*	75	55	106,2		540	533	518	508	490	457	407	338	263
6LR 32/37*	75	55	106,2		555	548	533	522	503	470	418	348	270
6LR 32/38*	75	55	106,2		570	562	547	536	517	483	429	357	277
6LR 32/39*	75	55	106,2		585	577	562	550	530	495	441	367	285
6LR 32/40*	75	55	106,2		600	592	576	564	544	508	452	376	292
6LR 32/41*	75	55	106,2		615	607	590	578	558	521	463	385	299
6LR 32/42*	90	66	126,0		630	622	605	592	571	533	475	395	307
6LR 32/43*	90	66	126,0		645	636	619	606	585	546	486	404	314
6LR 32/44*	90	66	126,0		660	651	634	620	598	559	497	414	321
6LR 32/45*	90	66	126,0		675	666	648	635	612	572	509	423	329
6LR 32/46*	90	66	126,0		690	681	662	649	626	584	520	432	336
6LR 32/47*	90	66	126,0		705	696	677	663	639	597	531	442	343
6LR 32/48*	90	66	126,0		720	710	691	677	653	610	542	451	350
6LR 32/49*	90	66	126,0		735	725	706	691	666	622	554	461	358
6LR 32/50*	90	66	126,0		750	740	720	705	680	635	565	470	365

Max Eff. % =	77
Max kW / St. =	1,32

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,9	7,5





50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LR 32/26*	3398	2057	1341	118	104
6LR 32/27*	3465	2124	1341	118	107
6LR 32/28*	3532	2191	1341	118	111
6LR 32/29*	3381	2258	1123	178	114
6LR 32/30*	3503	2380	1123	178	118
6LR 32/31*	3570	2447	1123	178	123
6LR 32/32*	3637	2514	1123	178	126
6LR 32/33*	3704	2581	1123	178	130
6LR 32/34*	3771	2648	1123	178	133
6LR 32/35*	3948	2715	1233	200	137
6LR 32/36*	4015	2782	1233	200	141
6LR 32/37*	4082	2849	1233	200	144
6LR 32/38*	4149	2916	1233	200	148
6LR 32/39*	4216	2983	1233	200	151
6LR 32/40*	4283	3050	1233	200	155
6LR 32/41*	4350	3117	1233	200	159
6LR 32/42*	4486	3184	1302	214	162
6LR 32/43*	4553	3251	1302	214	166
6LR 32/44*	4620	3318	1302	214	169
6LR 32/45*	4687	3385	1302	214	173
6LR 32/46*	4754	3452	1302	214	177
6LR 32/47*	4821	3519	1302	214	180
6LR 32/48*	4888	3586	1302	214	184
6LR 32/49*	4955	3653	1302	214	187
6LR 32/50*	5022	3720	1302	214	191

* Coupled pump shaft




6LR 32

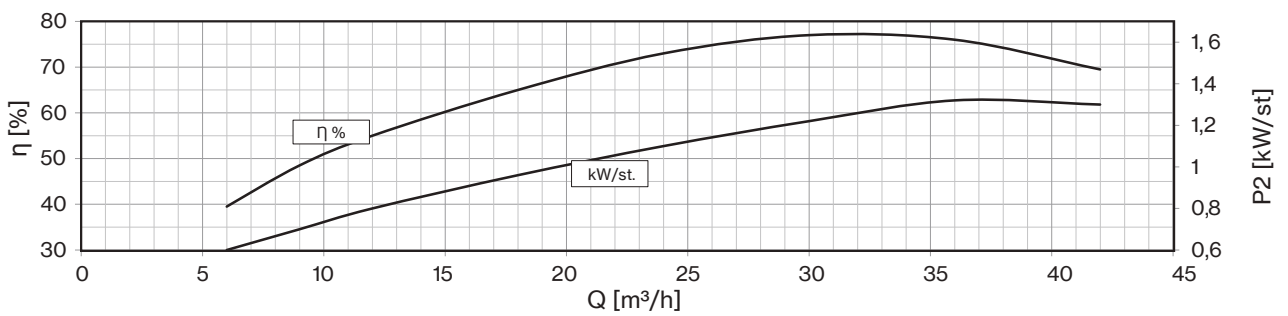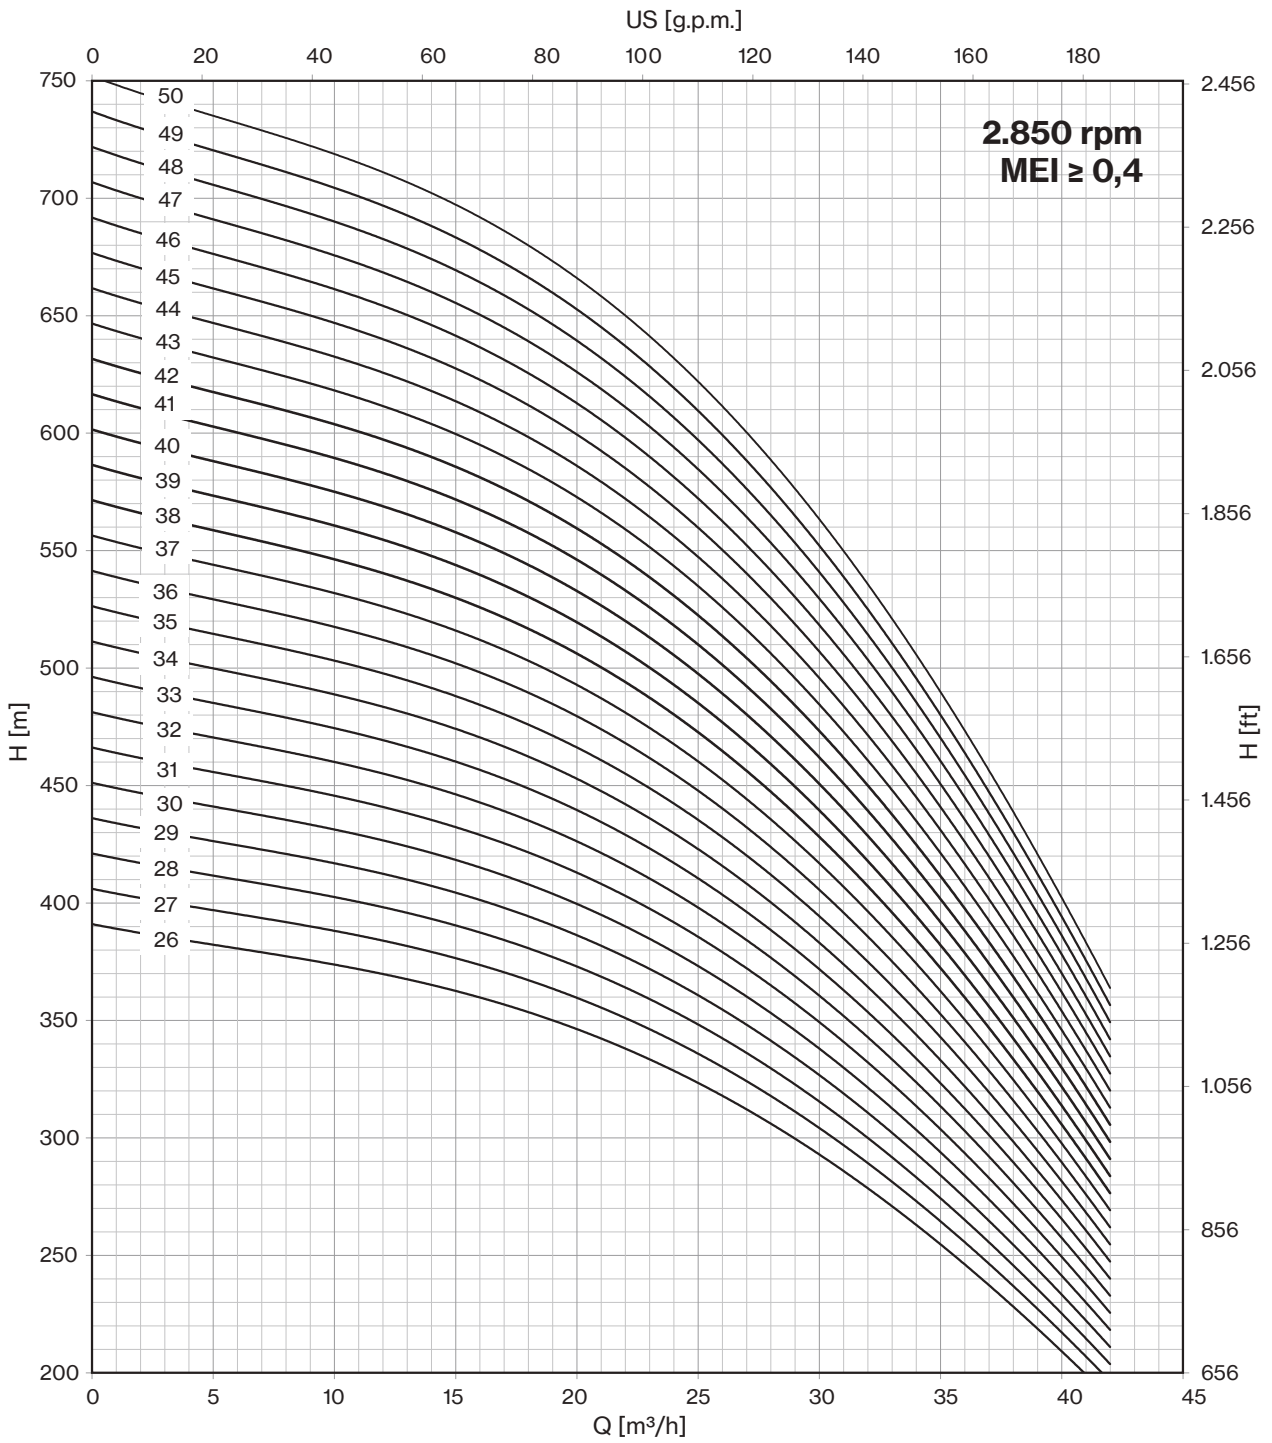


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	200	300	400	500	600	700	800
	HP	kW	A	l/sec	0	1,7	3,3	5,0	6,7	8,3	10,0	11,7	13,3
				m ³ /h	0	6	12	18	24	30	36	42	48
6LM 38/01	2	1,5	4,0	H (m)	14	14	13	13	12	11	10	9	7
6LM 38/02	4	3	7,5		29	27	26	25	24	23	20	17	14
6LM 38/03	5,5	4	10,0		43	41	39	38	36	34	31	26	20
6LM 38/04	7,5	5,5	12,5		57	55	52	51	48	45	41	35	27
6LM 38/05	10	7,5	16,3		71	69	65	64	60	56	51	44	34
6LM 38/06	12,5	9,2	19,9		86	82	78	76	72	68	61	52	41
6LM 38/07	15	11	23,4		100	96	91	89	84	79	71	61	48
6LM 38/08	15	11	23,4		114	110	104	102	96	90	81	70	55
6LM 38/09	17,5	13	27,3		129	123	117	114	108	102	92	78	61
6LM 38/10	20	15	31,5		143	137	130	127	120	113	102	87	68
6LM 38/11	20	15	31,5		157	151	143	140	132	124	112	96	75
6LM 38/12	25	18,5	38,3		172	164	156	152	144	136	122	104	82
6LM 38/13	25	18,5	38,3		186	178	169	165	156	147	132	113	89
6LM 38/14	30	22	45,1		200	192	182	178	168	158	143	122	95
6LM 38/15	30	22	45,1		214	206	195	191	180	169	153	131	102
6LM 38/16	30	22	45,1		229	219	208	203	192	181	163	139	109

Max Eff. % =	76
Max kW / St. =	1,33

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

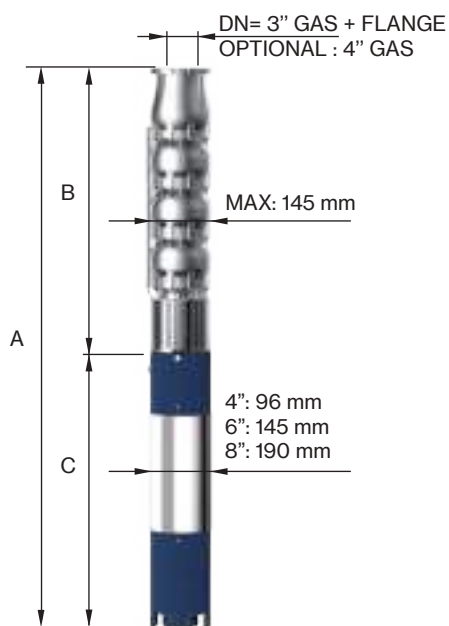



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 38/01	746	354	392	13	8
6LM 38/02	1012	455	557	19	12
6LM 38/03	1153	556	597	22	15
6LM 38/04	1355	657	698	27	19
6LM 38/05	1499	798	701	55	23
6LM 38/06	1650	899	751	60	26
6LM 38/07	1811	1000	811	65	30
6LM 38/08	1912	1101	811	65	33
6LM 38/09	2043	1202	841	70	37
6LM 38/10	2234	1303	931	75	41
6LM 38/11	2335	1404	931	75	44
6LM 38/12	2496	1505	991	83	48
6LM 38/13	2597	1606	991	83	51
6LM 38/14	2778	1707	1071	92	55
6LM 38/15	2879	1808	1071	92	59
6LM 38/16	2980	1909	1071	92	62

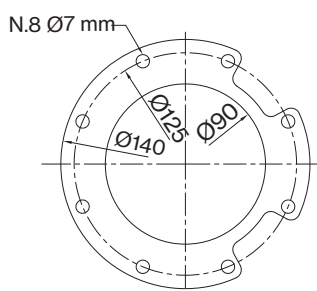

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 38

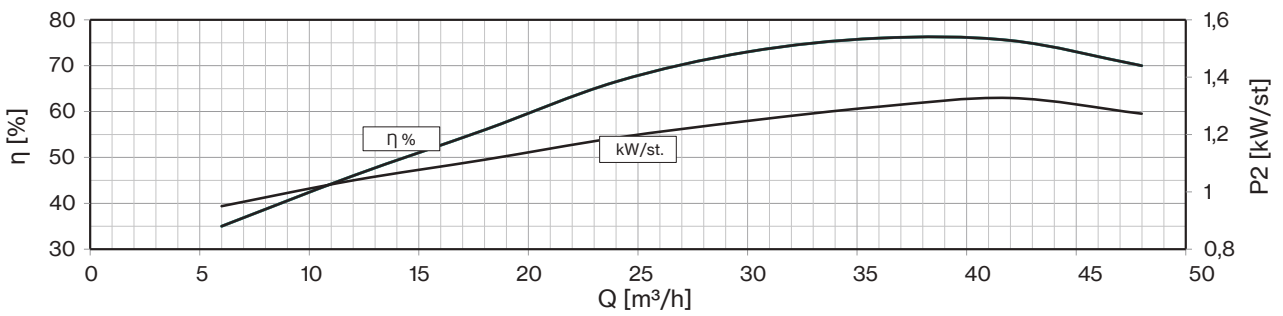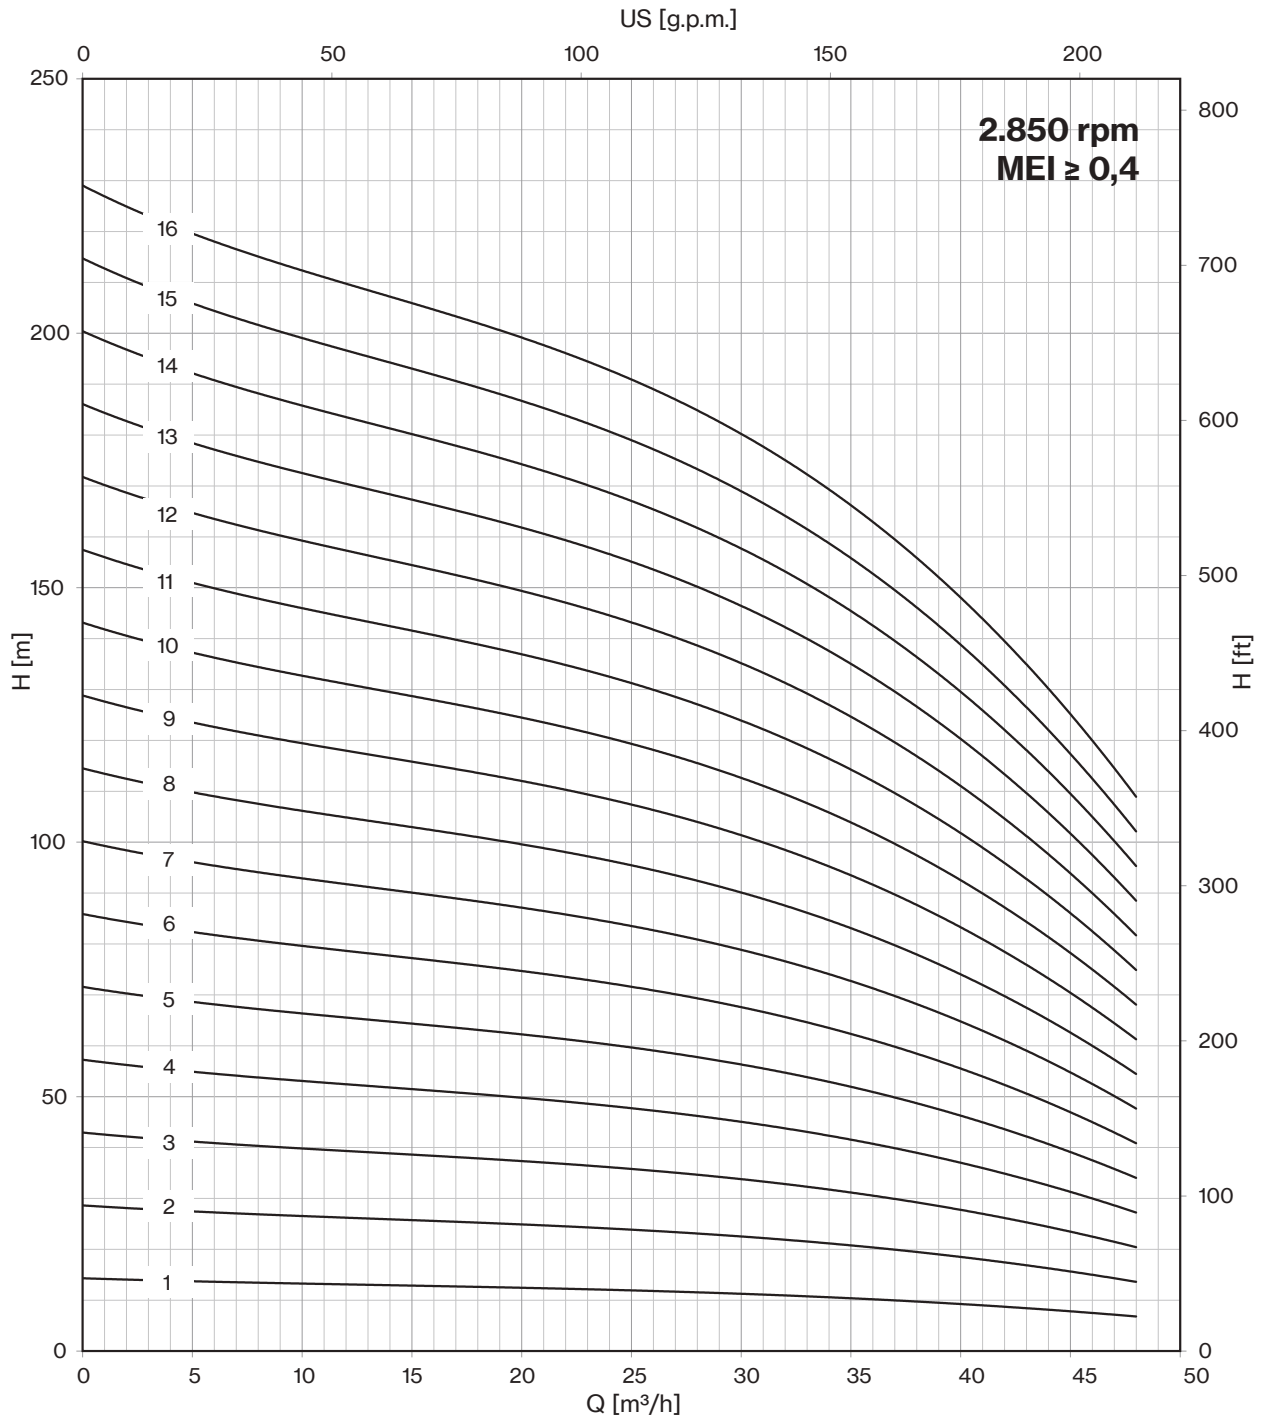


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	100	200	300	400	500	600	700	800
	HP	kW	A	l/sec	0	1,7	3,3	5,0	6,7	8,3	10,0	11,7	13,3
				m ³ /h	0	6	12	18	24	30	36	42	48
6LM 38/17	35	26	52,9	H (m)	243	233	221	216	204	192	173	148	116
6LM 38/18	35	26	52,9		257	247	234	229	216	203	183	157	123
6LM 38/19	35	26	52,9		272	260	247	241	228	215	194	165	129
6LM 38/20	40	30	61,1		286	274	260	254	240	226	204	174	136
6LM 38/21	40	30	61,1		300	288	273	267	252	237	214	183	143
6LM 38/22	40	30	61,1		315	301	286	279	264	249	224	191	150
6LM 38/23	50	37	75,8		329	315	299	292	276	260	234	200	157
6LM 38/24	50	37	75,8		343	329	312	305	288	271	244	209	164
6LM 38/25	50	37	75,8		357	343	325	318	300	282	255	218	170
6LM 38/26	50	37	75,8		372	356	338	330	312	294	265	226	177
6LM 38/27	50	37	75,8		386	370	351	343	324	305	275	235	184
6LM 38/28	60	45	86,3		400	384	364	356	336	316	285	244	191
6LM 38/29	60	45	86,3		415	397	377	368	348	328	295	252	198
6LM 38/30	60	45	86,3		429	411	390	381	360	339	306	261	204
6LM 38/31	60	45	86,3		443	425	403	394	372	350	316	270	211
6LM 38/32	60	45	86,3		457	438	416	407	384	361	326	279	218
6LM 38/33	60	45	86,3	472	452	429	419	396	373	336	287	225	

Max Eff. % =	76
Max kW / St. =	1,33

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

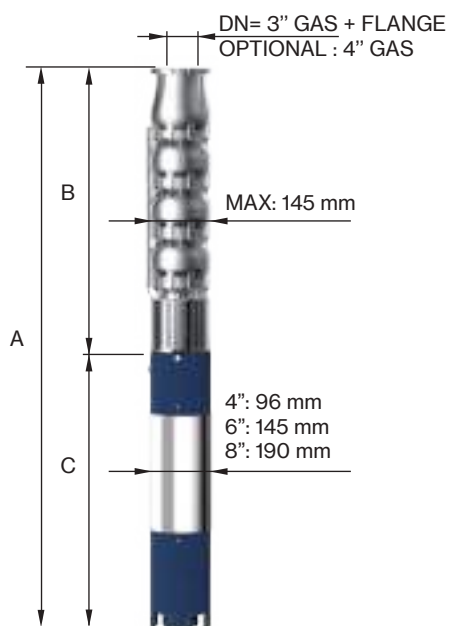



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 38/17	3191	2010	1181	100	66
6LM 38/18	3292	2111	1181	100	69
6LM 38/19	3393	2212	1181	100	73
6LM 38/20	3564	2313	1251	108	77
6LM 38/21	3665	2414	1251	108	80
6LM 38/22	3766	2515	1251	108	84
6LM 38/23	3957	2616	1341	118	87
6LM 38/24	4058	2717	1341	118	91
6LM 38/25	4159	2818	1341	118	95
6LM 38/26	4260	2919	1341	118	98
6LM 38/27	4361	3020	1341	118	102
6LM 38/28	4311	3188	1123	178	109
6LM 38/29	4412	3289	1123	178	113
6LM 38/30	4513	3390	1123	178	116
6LM 38/31	4614	3491	1123	178	120
6LM 38/32	4715	3592	1123	178	124
6LM 38/33	4816	3693	1123	178	127

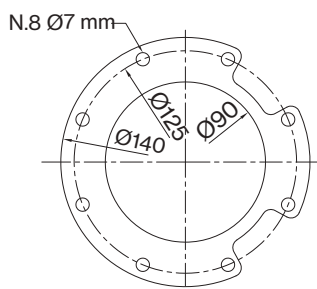

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 38

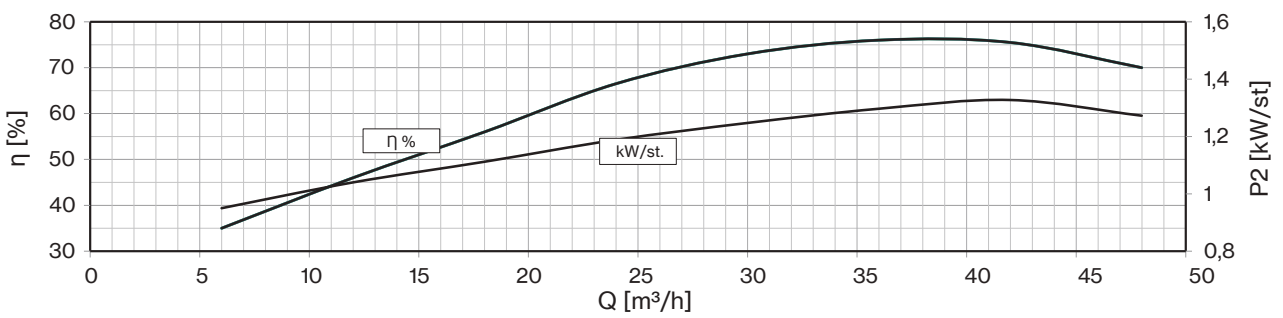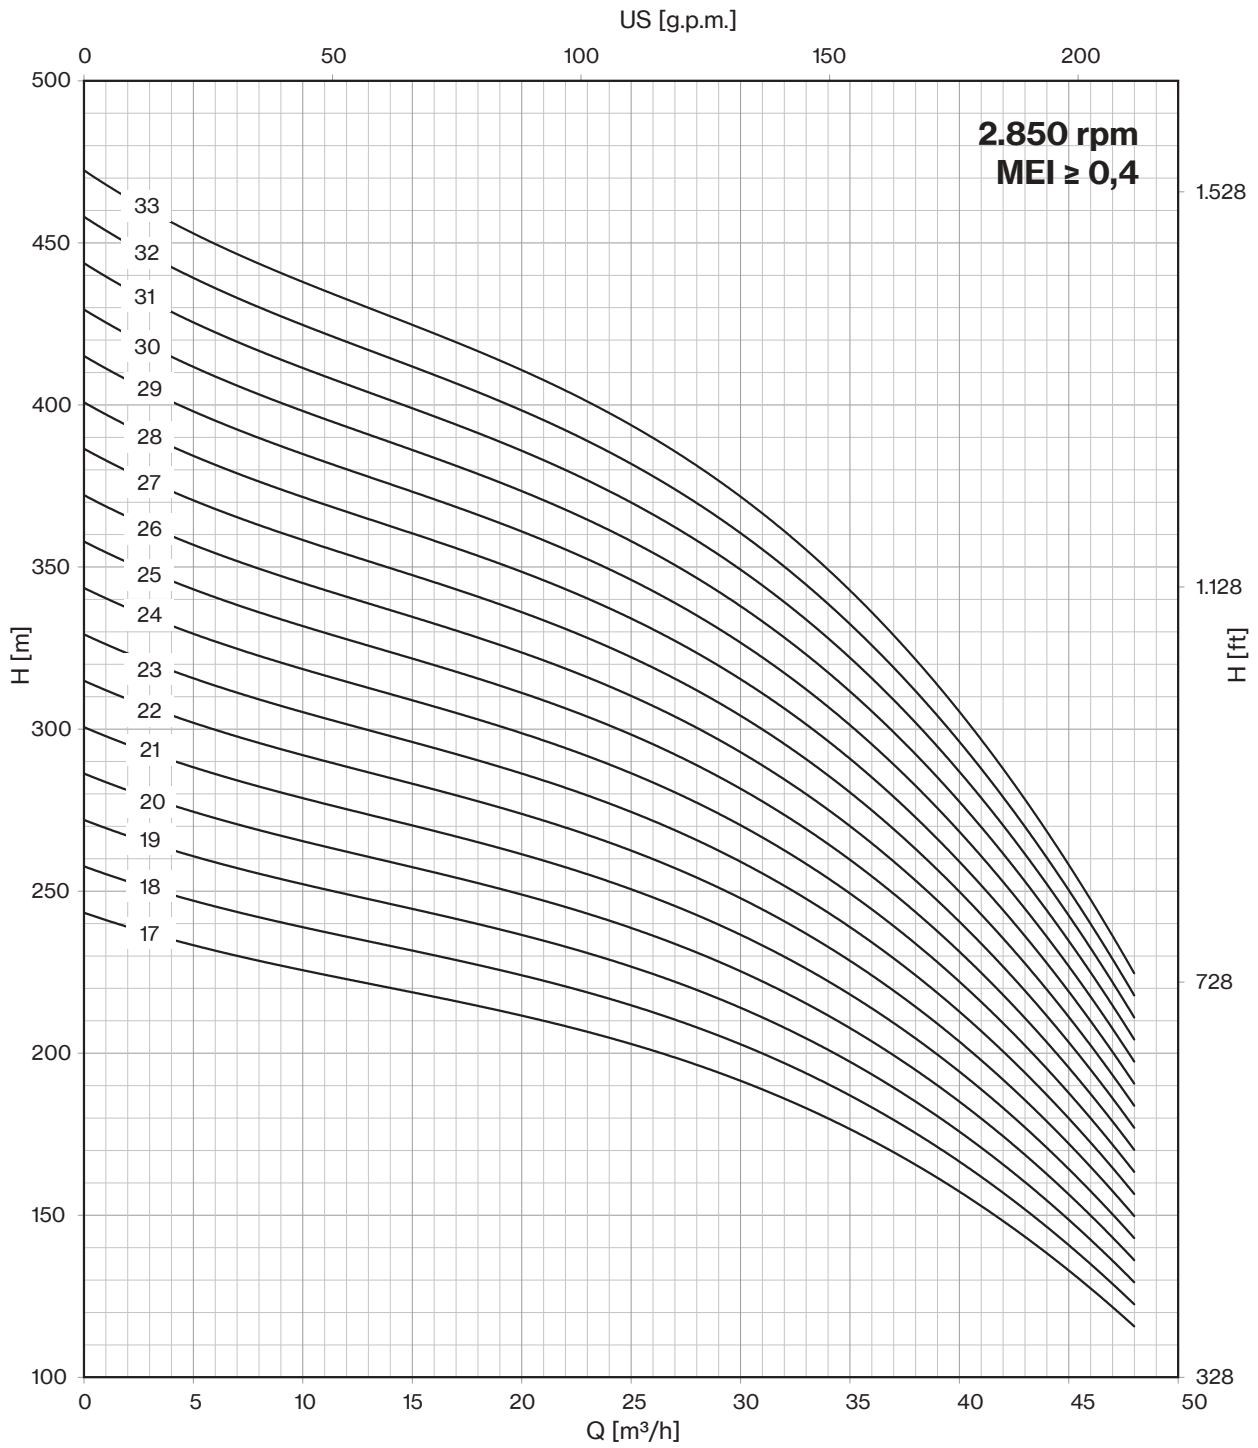


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	200	400	500	600	700	800	900	1000
	HP	kW	A	l/sec	0	3,3	6,7	8,3	10,0	11,7	13,3	15,0	16,7
				m ³ /h	0	12	24	30	36	42	48	54	60
6LM 48/01	2	1,5	4,0	H (m)	14	14	11	11	11	10	9	7	6
6LM 48/02	4	3	7,5		28	27	23	22	21	20	18	15	13
6LM 48/03	7,5	5,5	12,5		42	41	34	33	32	29	26	22	19
6LM 48/04	10	7,5	16,3		56	54	46	44	42	39	35	30	26
6LM 48/05	10	7,5	16,3		70	68	57	56	53	49	44	37	32
6LM 48/06	12,5	9,2	19,9		84	81	68	67	64	59	53	44	38
6LM 48/07	15	11	23,4		98	95	80	78	74	69	62	52	45
6LM 48/08	17,5	13	27,3		112	108	91	89	85	78	70	59	51
6LM 48/09	17,5	13	27,3		126	122	103	100	95	88	79	67	58
6LM 48/10	20	15	31,5		140	135	114	111	106	98	88	74	64
6LM 48/11	25	18,5	38,3		154	149	125	122	117	108	97	81	70
6LM 48/12	25	18,5	38,3		168	162	137	133	127	118	106	89	77
6LM 48/13	30	22	45,1		182	176	148	144	138	127	114	96	83
6LM 48/14	30	22	45,1		196	189	160	155	148	137	123	104	90
6LM 48/15	30	22	45,1		210	203	171	167	159	147	132	111	96
6LM 48/16	35	26	52,9		224	216	182	178	170	157	141	118	102

Max Eff. % =	78,5
Max kW / St. =	1,44

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,45	3,5	3,8	5

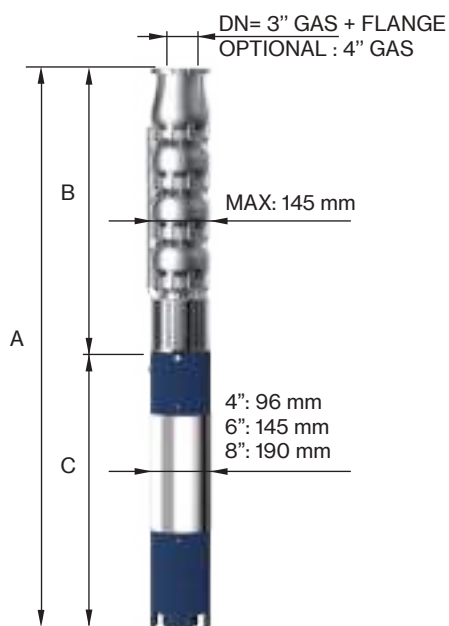



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 48/01	746	354	392	13	8
6LM 48/02	1012	455	557	19	12
6LM 48/03	1254	556	698	27	15
6LM 48/04	1358	657	701	55	19
6LM 48/05	1499	798	701	55	23
6LM 48/06	1650	899	751	60	26
6LM 48/07	1811	1000	811	65	30
6LM 48/08	1942	1101	841	70	33
6LM 48/09	2043	1202	841	70	37
6LM 48/10	2234	1303	931	75	41
6LM 48/11	2395	1404	991	83	44
6LM 48/12	2496	1505	991	83	48
6LM 48/13	2677	1606	1071	92	51
6LM 48/14	2778	1707	1071	92	55
6LM 48/15	2879	1808	1071	92	59
6LM 48/16	3090	1909	1181	100	62

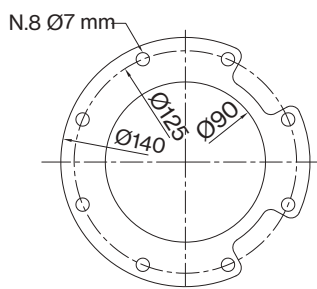

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 48

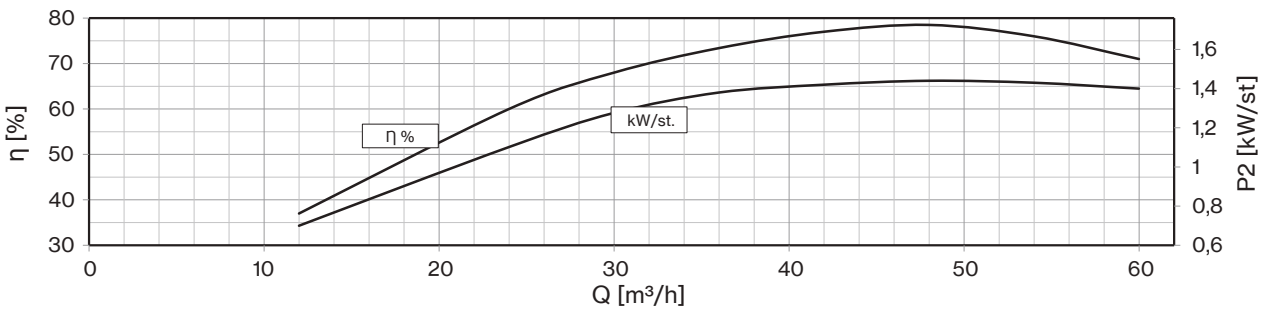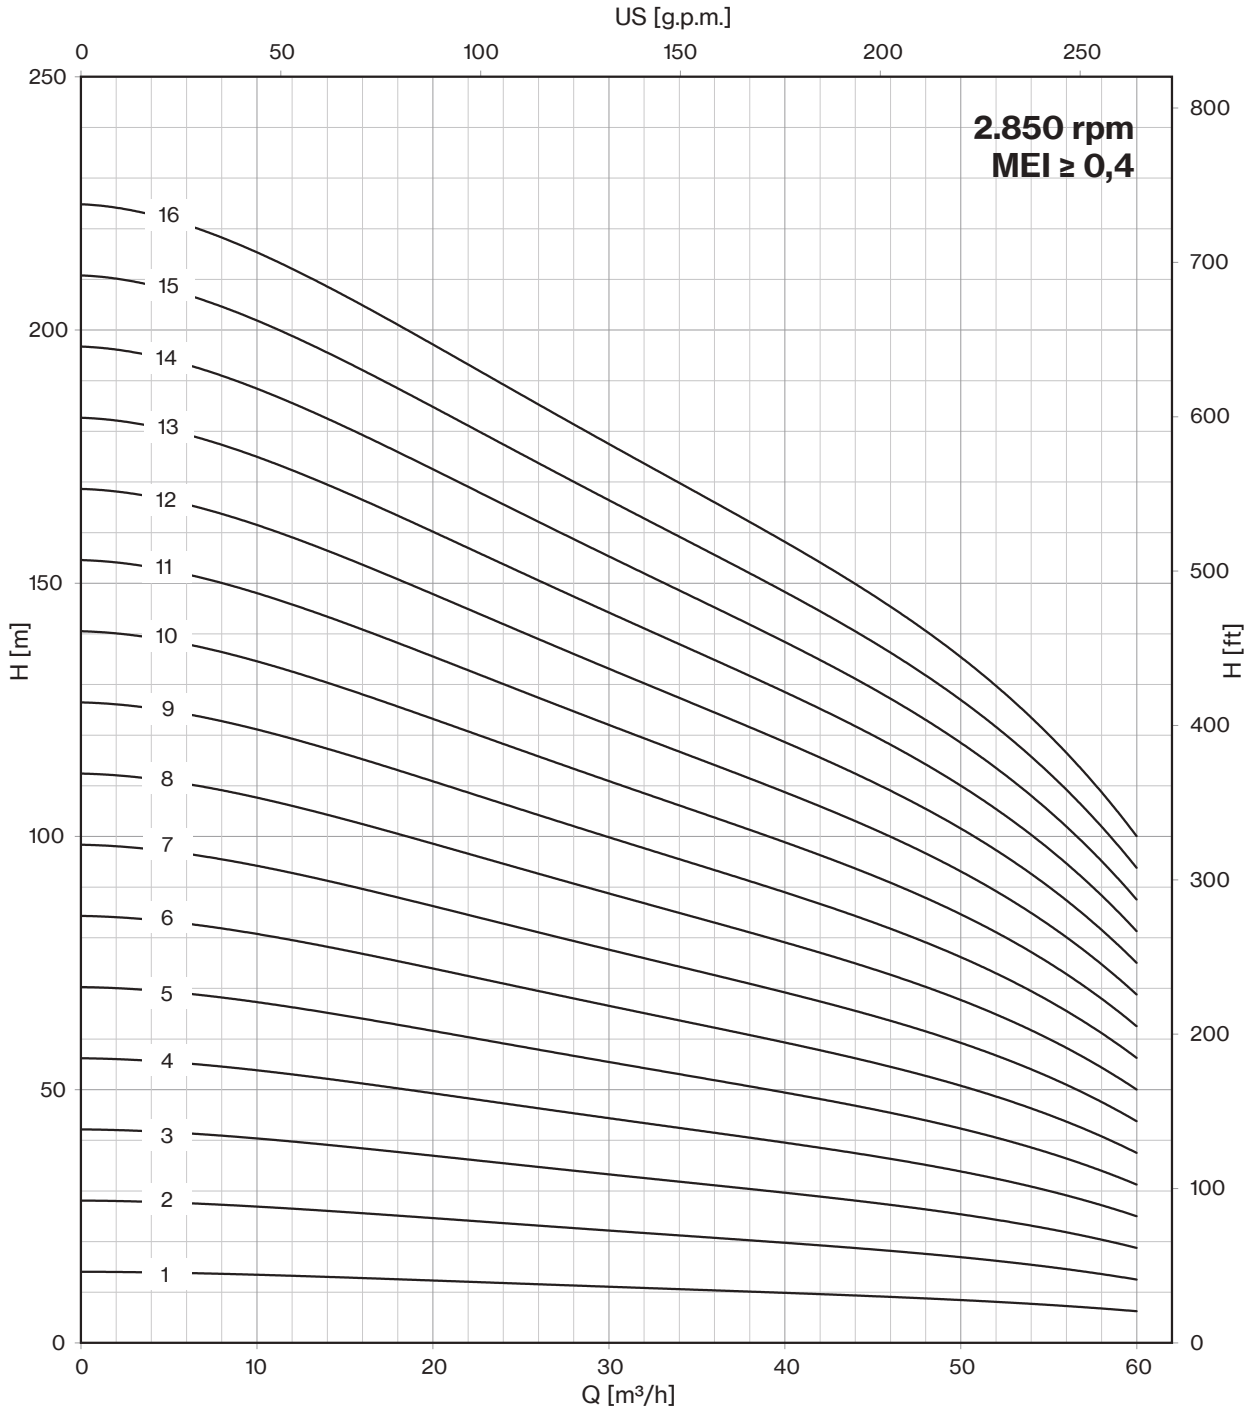


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	200	400	500	600	700	800	900	1000
	HP	kW	A	l/sec	0	3,3	6,7	8,3	10,0	11,7	13,3	15,0	16,7
				m ³ /h	0	12	24	30	36	42	48	54	60
6LM 48/17	35	26	52,9	H (m)	238	230	194	189	180	167	150	126	109
6LM 48/18	35	26	52,9		252	243	205	200	191	176	158	133	115
6LM 48/19	40	30	61,1		266	257	217	211	201	186	167	141	122
6LM 48/20	40	30	61,1		280	270	228	222	212	196	176	148	128
6LM 48/21	50	37	75,8		294	284	239	233	223	206	185	155	134
6LM 48/22	50	37	75,8		308	297	251	244	233	216	194	163	141
6LM 48/23	50	37	75,8		322	311	262	255	244	225	202	170	147
6LM 48/24	50	37	75,8		336	324	274	266	254	235	211	178	154
6LM 48/25	50	37	75,8		350	338	285	278	265	245	220	185	160
6LM 48/26	60	45	86,3		364	351	296	289	276	255	229	192	166
6LM 48/27	60	45	86,3		378	365	308	300	286	265	238	200	173
6LM 48/28	60	45	86,3		392	378	319	311	297	274	246	207	179
6LM 48/29	60	45	86,3		406	392	331	322	307	284	255	215	186
6LM 48/30	60	45	86,3	420	405	342	333	318	294	264	222	192	

Max Eff. % =	78,5
Max kW / St. =	1,44

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,45	3,5	3,8	5

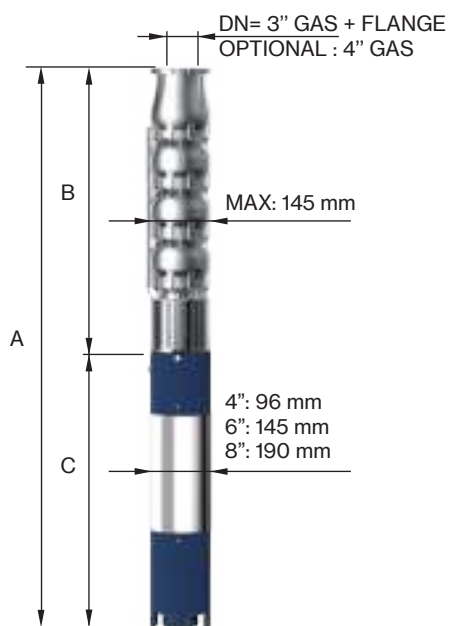



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 48/17	3191	2010	1181	100	66
6LM 48/18	3292	2111	1181	100	69
6LM 48/19	3463	2212	1251	108	73
6LM 48/20	3564	2313	1251	108	77
6LM 48/21	3755	2414	1341	118	80
6LM 48/22	3856	2515	1341	118	84
6LM 48/23	3957	2616	1341	118	87
6LM 48/24	4058	2717	1341	118	91
6LM 48/25	4159	2818	1341	118	95
6LM 48/26	4109	2986	1123	178	102
6LM 48/27	4210	3087	1123	178	106
6LM 48/28	4311	3188	1123	178	109
6LM 48/29	4412	3289	1123	178	113
6LM 48/30	4513	3390	1123	178	116

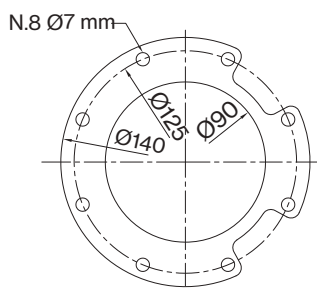

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 48

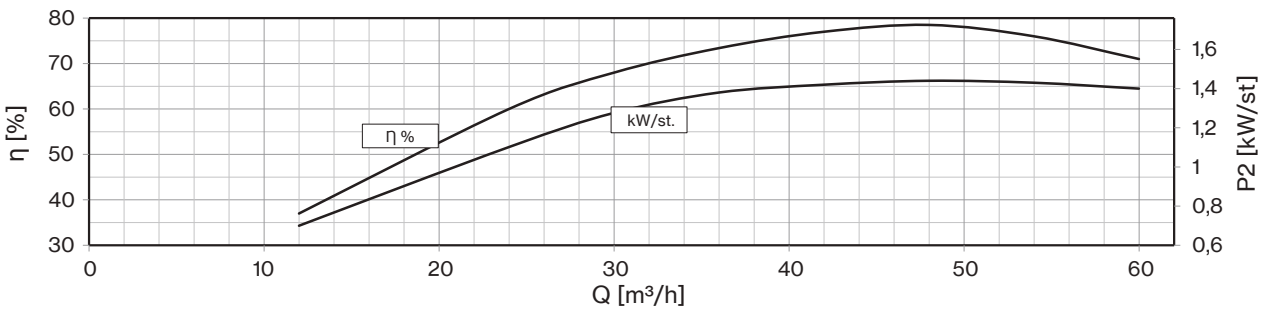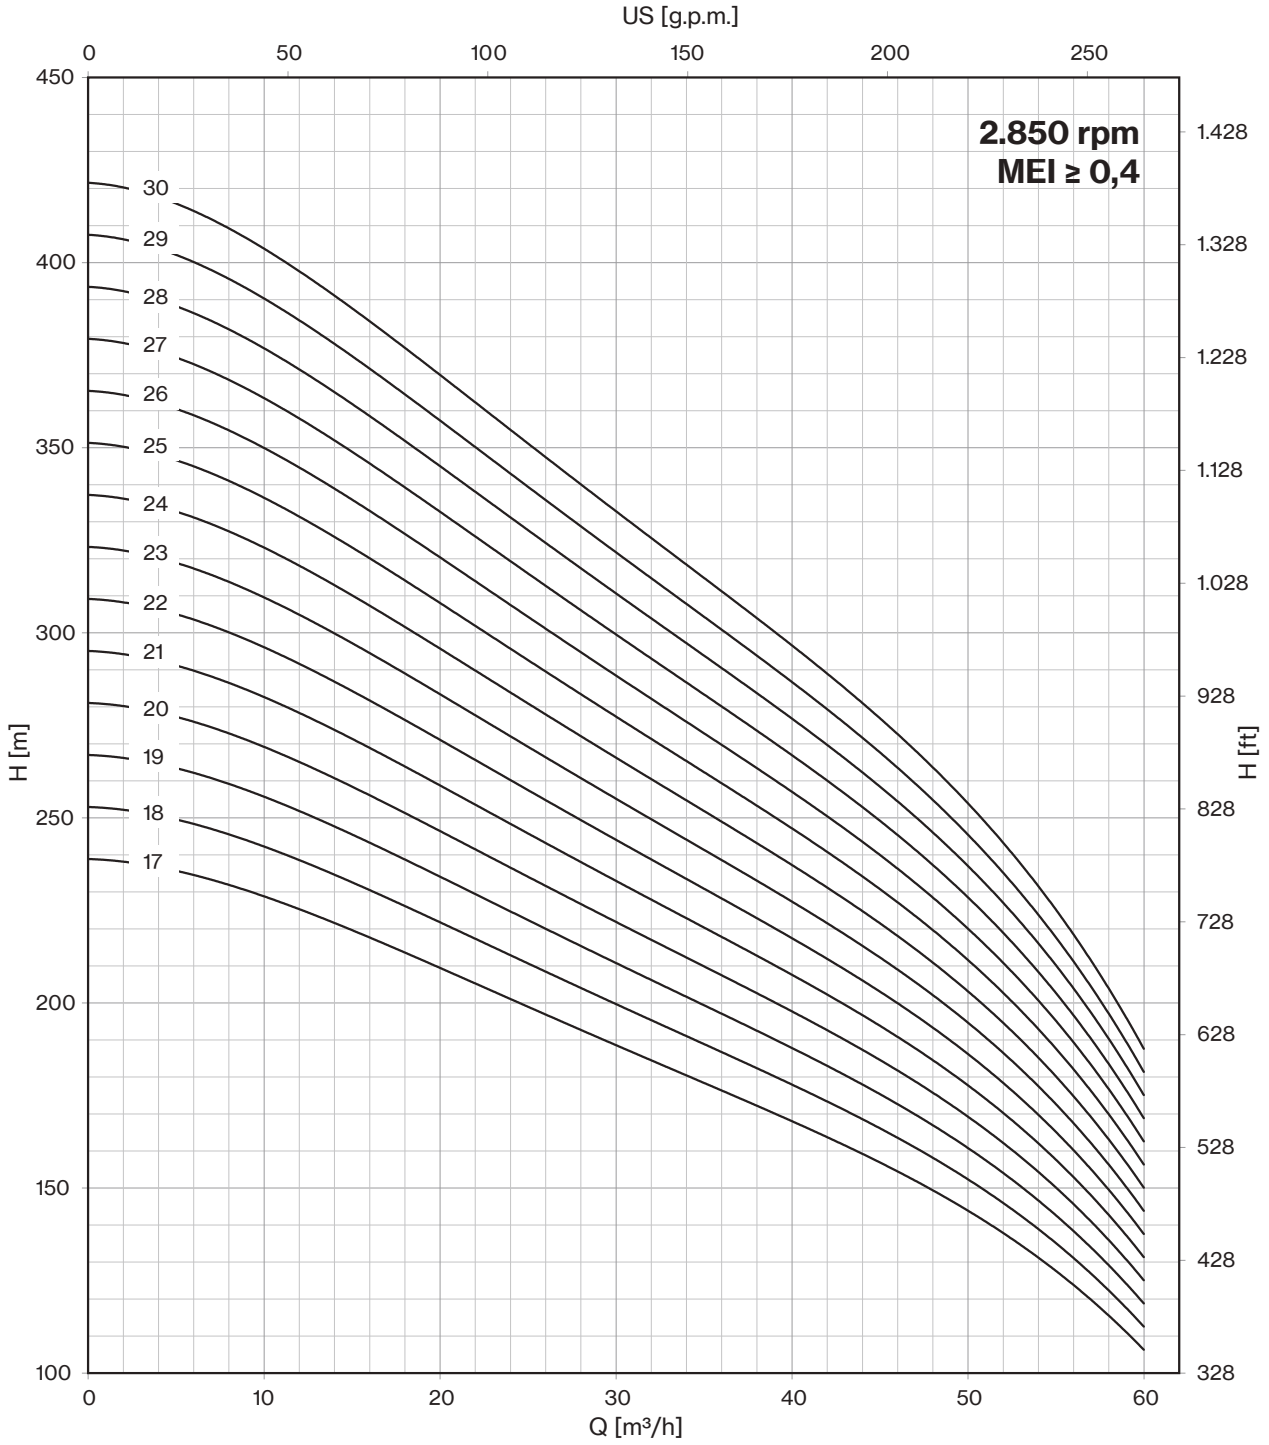


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	600	700	800	900	1000	1100	1200
	HP	kW	A	l/sec	0	5,0	10,0	11,7	13,3	15,0	16,7	18,3	20,0
				m ³ /h	0	18	36	42	48	54	60	66	72
6LM 60/01	3	2	5,50	H (m)	14	12	10	10	9	9	8	7	6
6LM 60/02	5,5	4	10,00		27	25	21	19	18	17	16	14	12
6LM 60/03	7,5	5,5	12,50		41	37	31	29	27	26	23	21	18
6LM 60/04	10	7,5	16,30		55	49	41	38	36	34	31	28	24
6LM 60/05	12,5	9,2	19,90		69	62	52	48	46	43	39	35	30
6LM 60/06	15	11	23,40		82	74	62	58	55	51	47	41	36
6LM 60/07	17,5	13	27,30		96	86	72	67	64	60	55	48	42
6LM 60/08	20	15	31,50		110	98	82	77	73	68	62	55	48
6LM 60/09	20	15	31,50		123	111	93	86	82	77	70	62	54
6LM 60/10	25	18,5	38,30		137	123	103	96	91	85	78	69	60
6LM 60/11	25	18,5	38,30		151	135	113	106	100	94	86	76	66
6LM 60/12	30	22	45,10		164	148	124	115	109	102	94	83	72
6LM 60/13	30	22	45,10		178	160	134	125	118	111	101	90	78
6LM 60/14	35	26	52,90		192	172	144	134	127	119	109	97	84
6LM 60/15	35	26	52,90		206	185	155	144	137	128	117	104	90
6LM 60/16	40	30	61,10		219	197	165	154	146	136	125	110	96

Max Eff. % =	77
Max kW / St. =	1,65

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

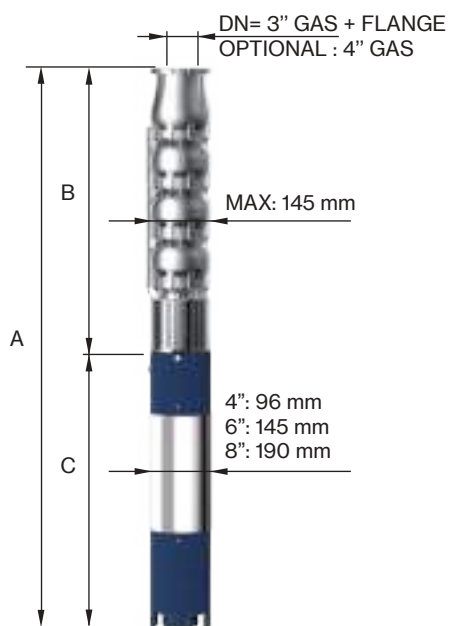



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 60/01	812	360	452	15	8
6LM 60/02	1064	467	597	22	12
6LM 60/03	1272	574	698	27	16
6LM 60/04	1422	721	701	55	20
6LM 60/05	1579	828	751	60	24
6LM 60/06	1746	935	811	65	27
6LM 60/07	1883	1042	841	70	31
6LM 60/08	2080	1149	931	75	35
6LM 60/09	2187	1256	931	75	39
6LM 60/10	2354	1363	991	83	43
6LM 60/11	2461	1470	991	83	46
6LM 60/12	2648	1577	1071	92	50
6LM 60/13	2755	1684	1071	92	54
6LM 60/14	2972	1791	1181	100	58
6LM 60/15	3079	1898	1181	100	62
6LM 60/16	3256	2005	1251	108	65

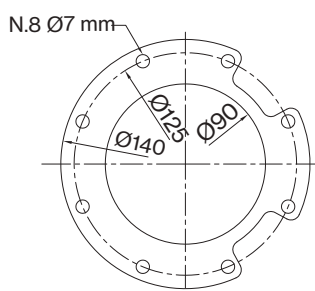

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 60

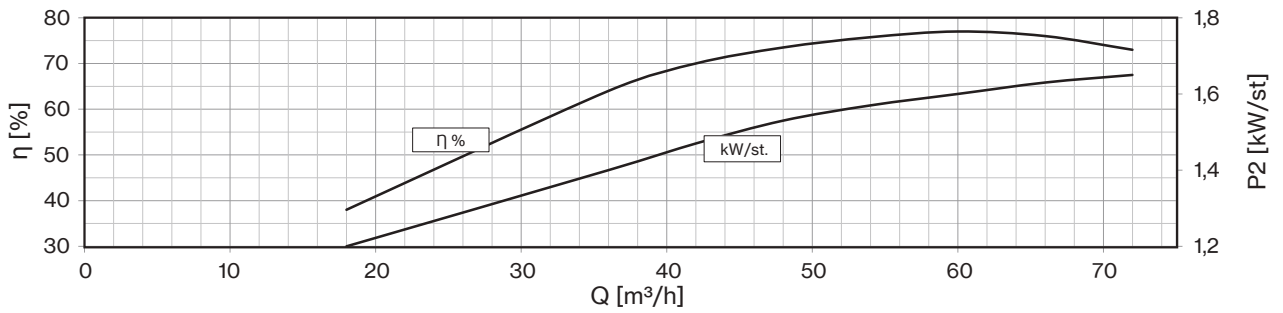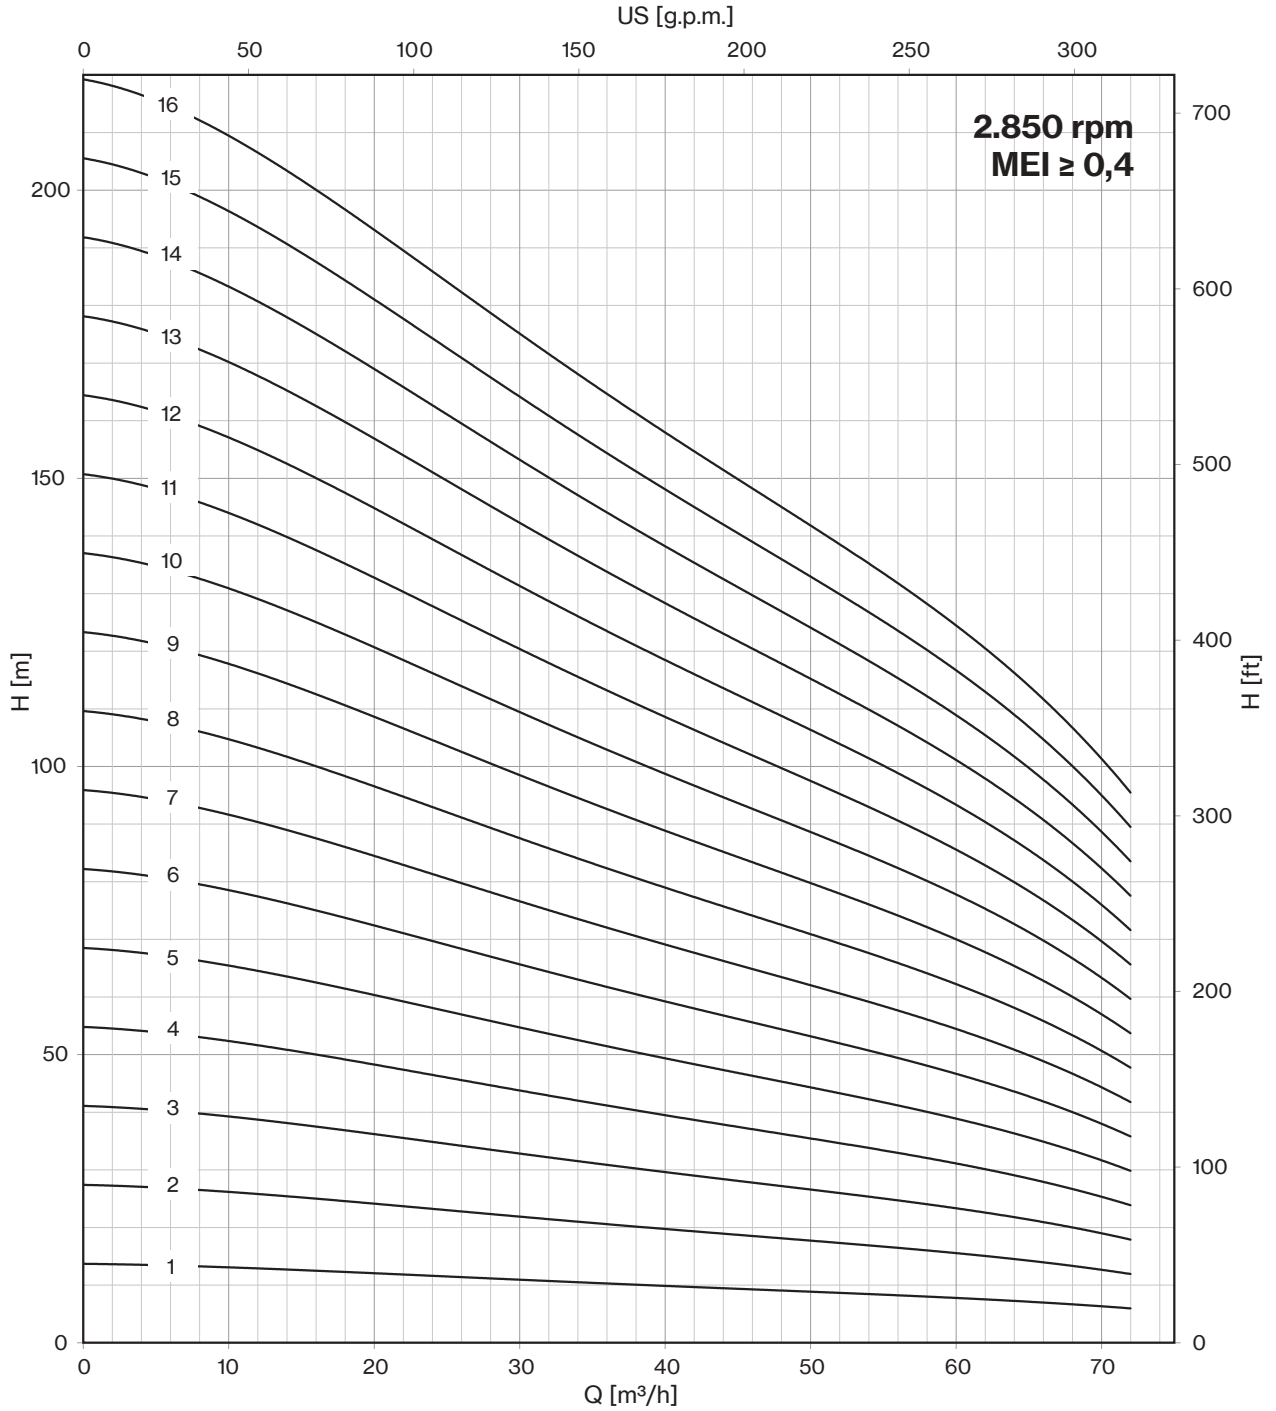


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	600	700	800	900	1000	1100	1200
	HP	kW	A	l/sec	0	5,0	10,0	11,7	13,3	15,0	16,7	18,3	20,0
				m ³ /h	0	18	36	42	48	54	60	66	72
6LM 60/17	40	30	61,1	H (m)	233	209	175	163	155	145	133	117	102
6LM 60/18	40	30	61,1		247	221	185	173	164	153	140	124	108
6LM 60/19	50	37	75,8		260	234	196	182	173	162	148	131	114
6LM 60/20	50	37	75,8		274	246	206	192	182	170	156	138	120
6LM 60/21	50	37	75,8		288	258	216	202	191	179	164	145	126
6LM 60/22	50	37	75,8		301	271	227	211	200	187	172	152	132
6LM 60/23	60	45	86,3		315	283	237	221	209	196	179	159	138
6LM 60/24	60	45	86,3		329	295	247	230	218	204	187	166	144
6LM 60/25	60	45	86,3		343	308	258	240	228	213	195	173	150
6LM 60/26	60	45	86,3		356	320	268	250	237	221	203	179	156
6LM 60/27	60	45	86,3		370	332	278	259	246	230	211	186	162
6LM 60/28	75	55	106,2		384	344	288	269	255	238	218	193	168
6LM 60/29	75	55	106,2		397	357	299	278	264	247	226	200	174
6LM 60/30	75	55	106,2		411	369	309	288	273	255	234	207	180
6LM 60/31	75	55	106,2		425	381	319	298	282	264	242	214	186
6LM 60/32	75	55	106,2		438	394	330	307	291	272	250	221	192
6LM 60/33	75	55	106,2		452	406	340	317	300	281	257	228	198

Max Eff. % =	77
Max kW / St. =	1,65

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

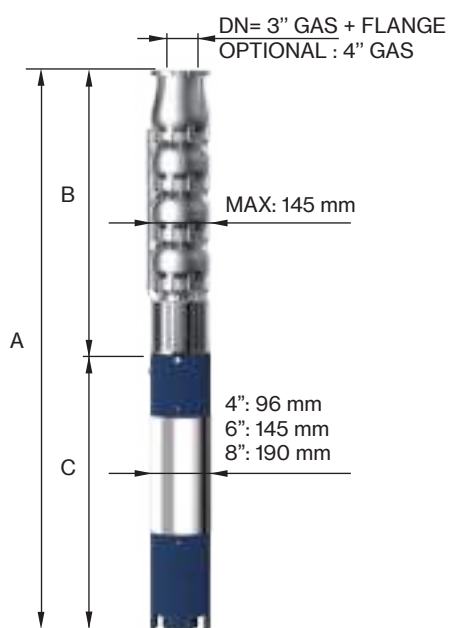


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 60/17	3363	2112	1251	108	69
6LM 60/18	3470	2219	1251	108	73
6LM 60/19	3667	2326	1341	118	77
6LM 60/20	3774	2433	1341	118	81
6LM 60/21	3881	2540	1341	118	84
6LM 60/22	3988	2647	1341	118	88
6LM 60/23	3944	2821	1123	178	96
6LM 60/24	4051	2928	1123	178	100
6LM 60/25	4158	3035	1123	178	103
6LM 60/26	4265	3142	1123	178	107
6LM 60/27	4372	3249	1123	178	111
6LM 60/28	4589	3356	1233	200	115
6LM 60/29	4696	3463	1233	200	119
6LM 60/30	4803	3570	1233	200	122
6LM 60/31	4910	3677	1233	200	126
6LM 60/32	5017	3784	1233	200	130
6LM 60/33	5124	3891	1233	200	134

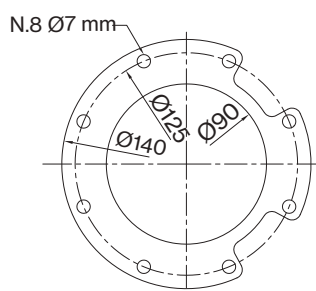

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 60

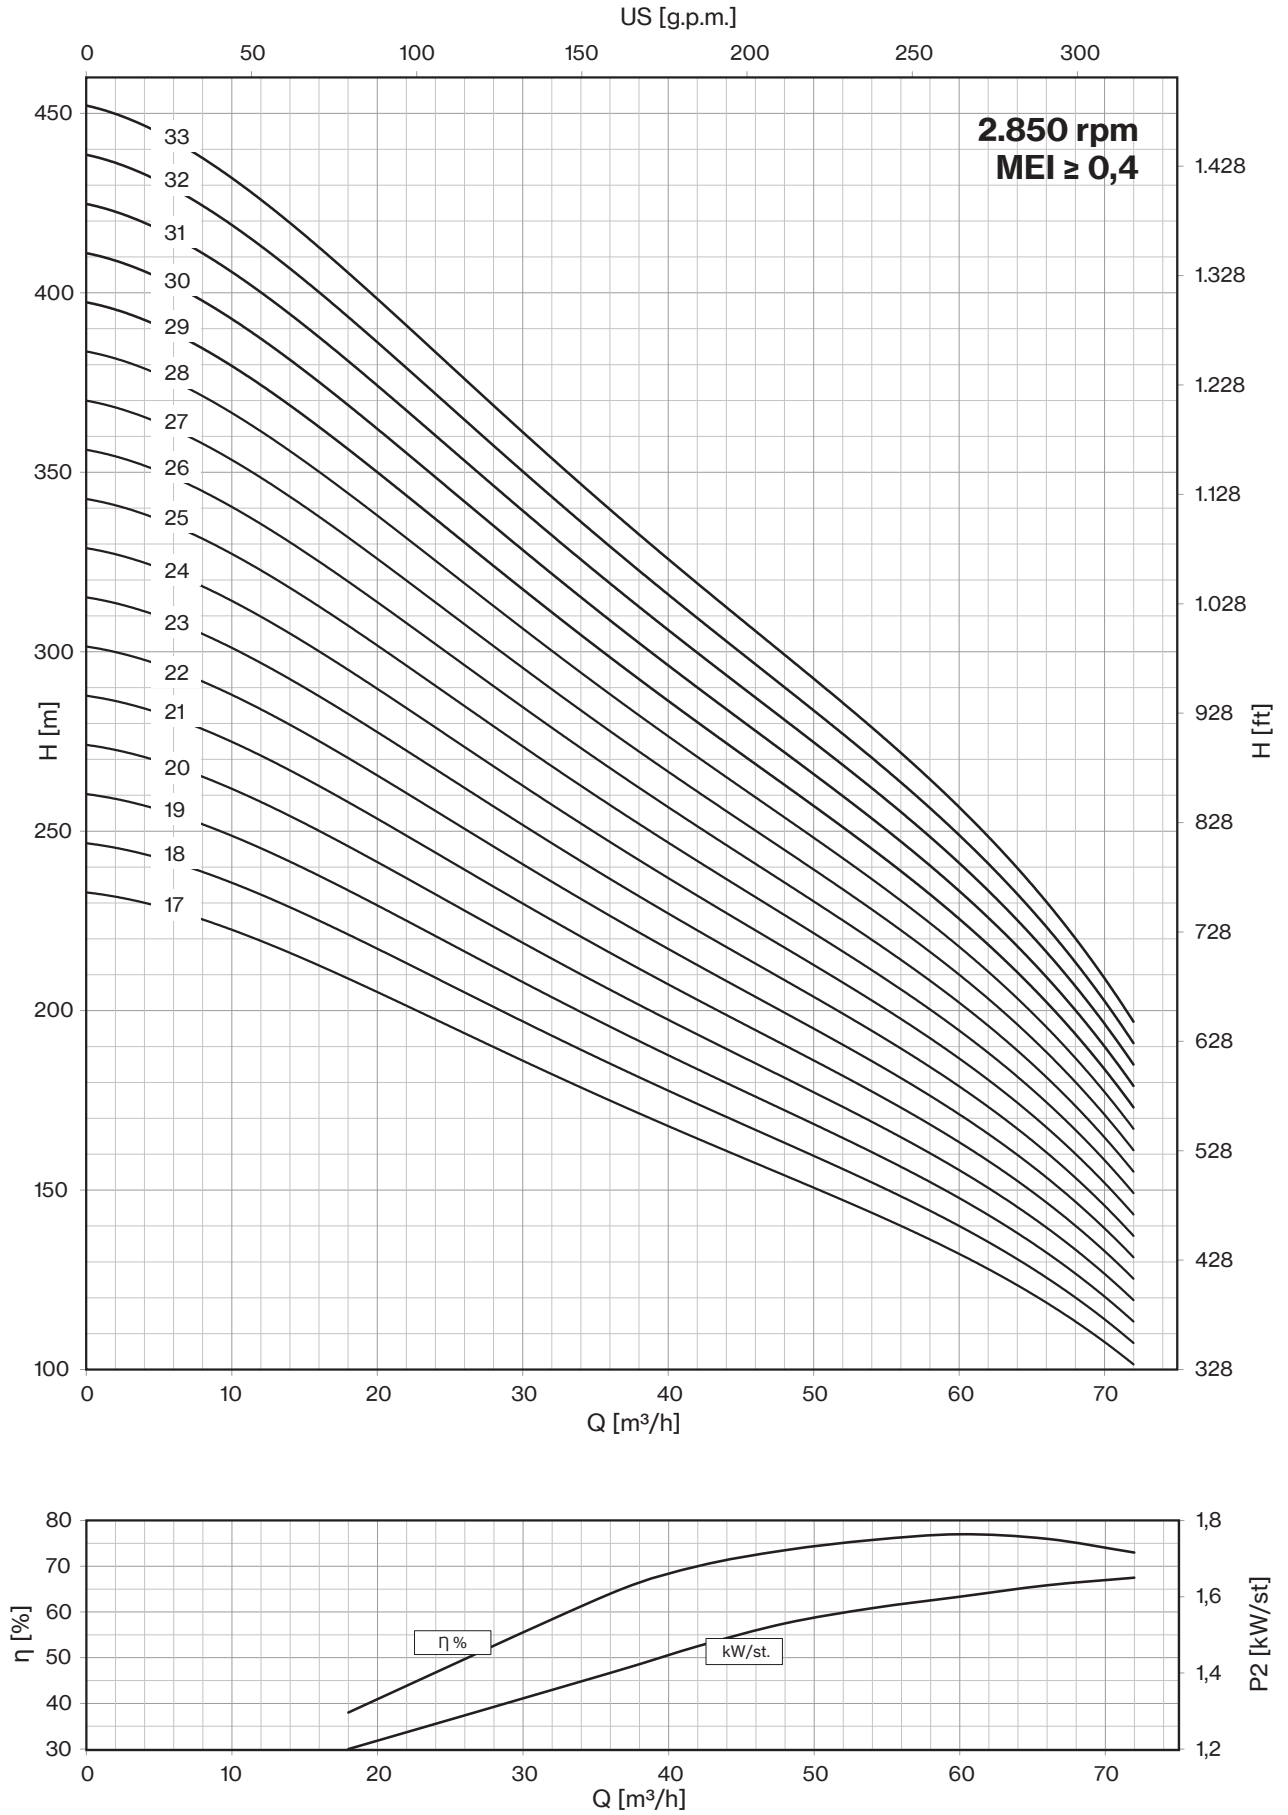


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	900	1000	1100	1200	1300	1400	1500
	HP	kW	A	l/sec	0	5,0	15,0	16,7	18,3	20,0	21,7	23,3	25,0
				m ³ /h	0	18	54	60	66	72	78	84	90
6LM 70/01	3	2,2	5,5	H (m)	13	12	10	9	9	9	8	7	6
6LM 70/02	7,5	5,5	12,5		26	24	19	19	18	17	15	13	11
6LM 70/03	10	7,5	16,3		39	36	29	28	27	26	23	20	17
6LM 70/04	12,5	9,2	19,9		52	48	38	38	36	34	30	26	22
6LM 70/05	15	11	23,4		66	61	48	47	46	43	38	33	28
6LM 70/06	20	15	31,5		79	73	57	56	55	51	46	40	34
6LM 70/07	25	18,5	38,3		92	85	67	66	64	60	53	46	39
6LM 70/08	25	18,5	38,3		105	97	76	75	73	68	61	53	45
6LM 70/09	30	22	45,1		118	109	86	85	82	77	68	59	50
6LM 70/10	30	22	45,1		131	121	96	94	91	85	76	66	56
6LM 70/11	35	26	52,9		144	133	105	103	100	94	84	73	62
6LM 70/12	40	30	61,1		157	145	115	113	109	102	91	79	67
6LM 70/13	40	30	61,1		170	157	124	122	118	111	99	86	73

Max Eff. % =	76
Max kW / St. =	2,18

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

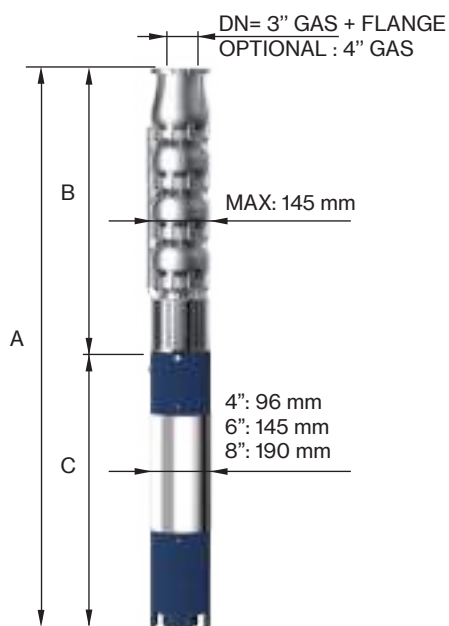



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 70/01	812	360	452	15	8
6LM 70/02	1165	467	698	27	12
6LM 70/03	1315	614	701	55	16
6LM 70/04	1472	721	751	60	20
6LM 70/05	1639	828	811	65	24
6LM 70/06	1866	935	931	75	27
6LM 70/07	2033	1042	991	83	31
6LM 70/08	2140	1149	991	83	35
6LM 70/09	2327	1256	1071	92	39
6LM 70/10	2434	1363	1071	92	43
6LM 70/11	2651	1470	1181	100	46
6LM 70/12	2828	1577	1251	108	50
6LM 70/13	2935	1684	1251	108	54

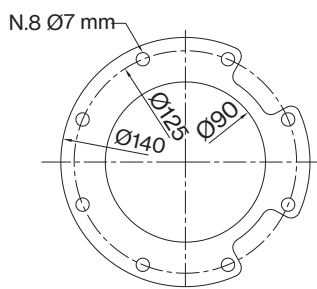

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm




6LM 70

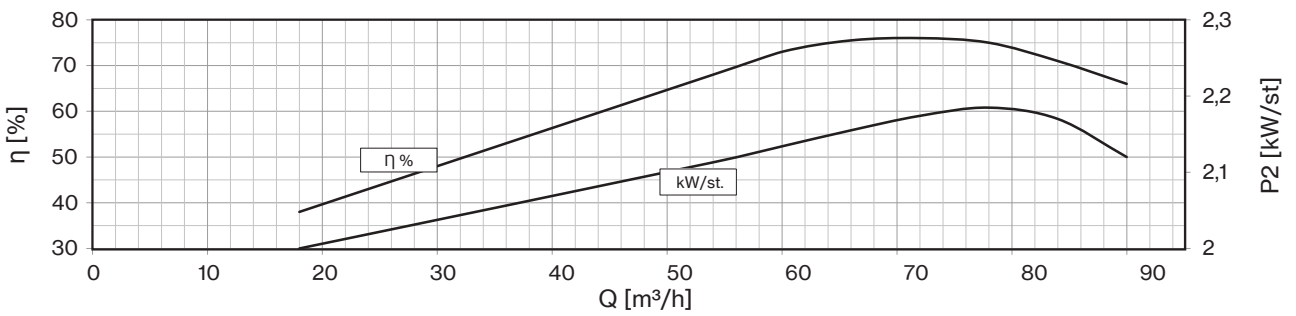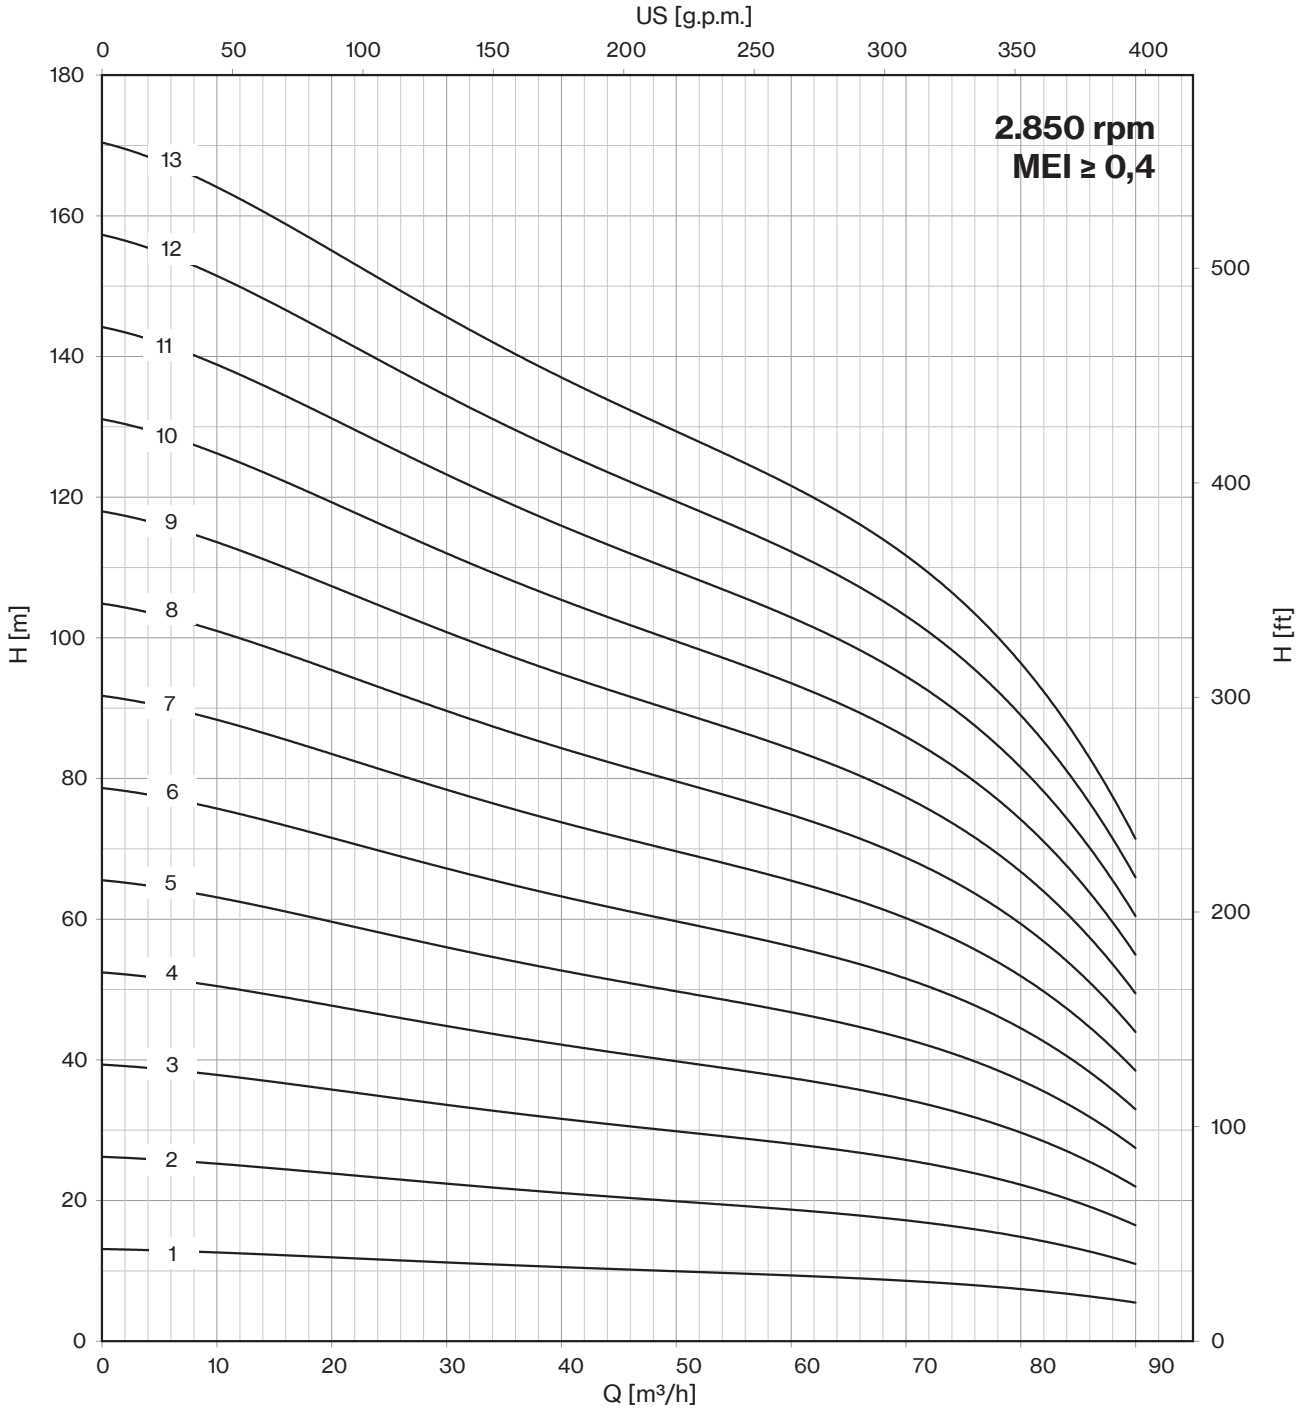


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	900	1000	1100	1200	1300	1400	1500
	HP	kW	A	l/sec	0	5,0	15,0	16,7	18,3	20,0	21,7	23,3	25,0
				m ³ /h	0	18	54	60	66	72	78	84	90
6LM 70/14	50	37	75,8	H (m)	183	169	134	132	127	119	106	92	78
6LM 70/15	50	37	75,8		197	182	143	141	137	128	114	99	84
6LM 70/16	50	37	75,8		210	194	153	150	146	136	122	106	90
6LM 70/17	60	45	86,3		223	206	162	160	155	145	129	112	95
6LM 70/18	60	45	86,3		236	218	172	169	164	153	137	119	101
6LM 70/19	60	45	86,3		249	230	181	179	173	162	144	125	106
6LM 70/20	60	45	86,3		262	242	191	188	182	170	152	132	112
6LM 70/21	75	55	106,2		275	254	201	197	191	179	160	139	118
6LM 70/22	75	55	106,2		288	266	210	207	200	187	167	145	123
6LM 70/23	75	55	106,2		301	278	220	216	209	196	175	152	129
6LM 70/24	75	55	106,2		314	290	229	226	218	204	182	158	134
6LM 70/25	75	55	106,2		328	303	239	235	228	213	190	165	140

Max Eff. % =	76
Max kW / St. =	2,18

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,8	3,8	5,1	7,1

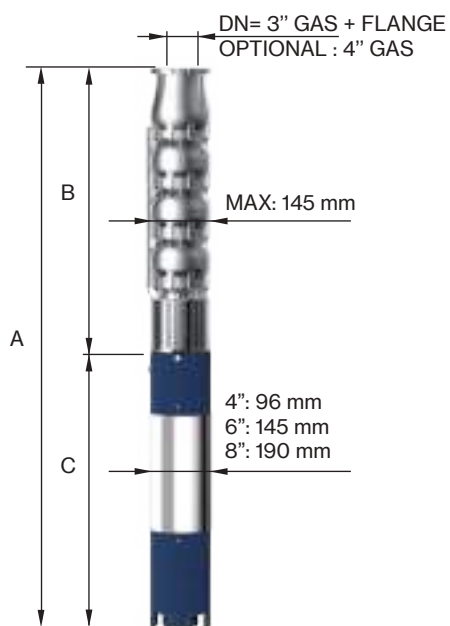



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
6LM 70/14	3132	1791	1341	118	58
6LM 70/15	3239	1898	1341	118	62
6LM 70/16	3346	2005	1341	118	65
6LM 70/17	3235	2112	1123	178	69
6LM 70/18	3342	2219	1123	178	73
6LM 70/19	3516	2393	1123	178	81
6LM 70/20	3623	2500	1123	178	84
6LM 70/21	3840	2607	1233	200	88
6LM 70/22	3947	2714	1233	200	92
6LM 70/23	4054	2821	1233	200	96
6LM 70/24	4161	2928	1233	200	100
6LM 70/25	4268	3035	1233	200	103

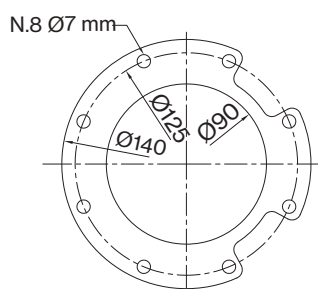

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 88,9 mm



6LM 70

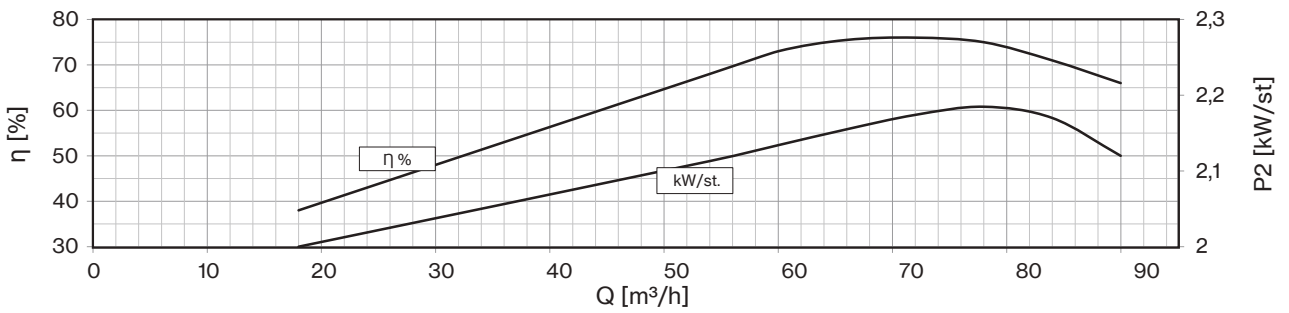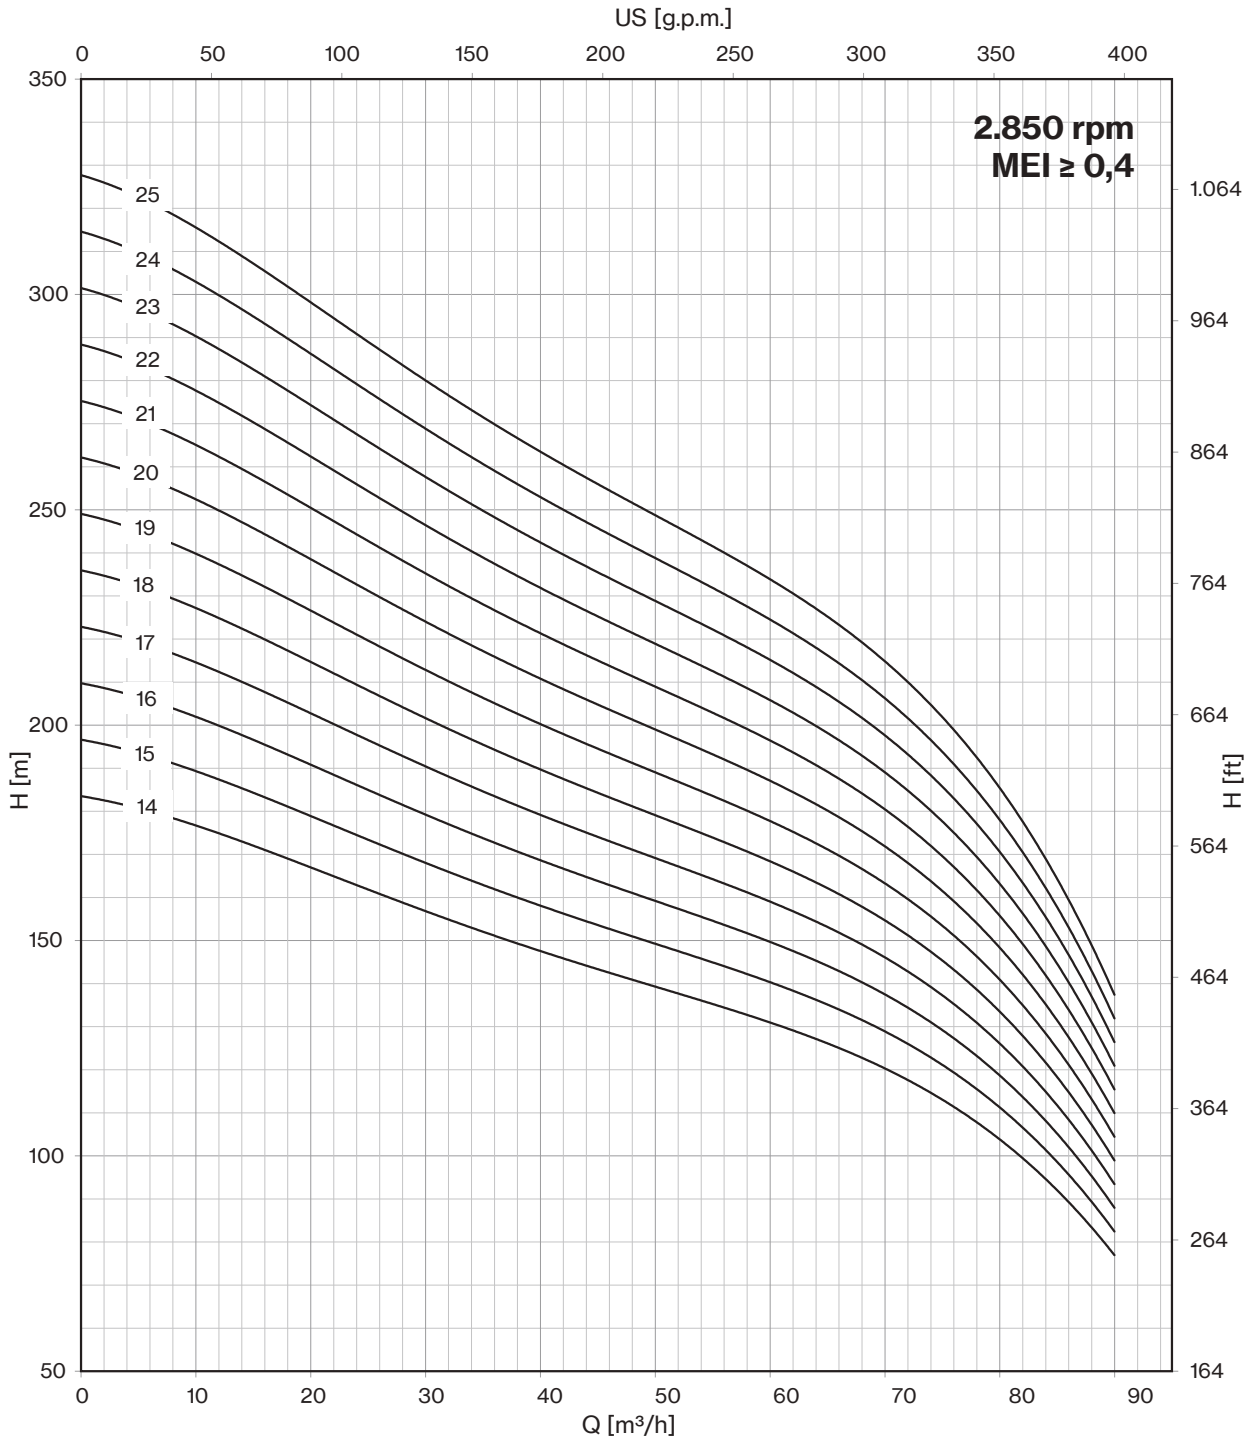

8LR & 8LM lines

Deepwell Borehole

Submersible multistage centrifugal pumps for 8" wells. Check valve built into the delivery outlet. Pump flange for coupling with motors are made according to NEMA standards. Most common applications are civil and agricultural. All components are made of stainless steel with lost wax Microfusion technology. The standard material is AISI 304 stainless steel, alternatively the following materials are available on request: AISI 316 Steel, Duplex steel. Bushing bearings and wear-rings made of sand abrasion-resistant rubber, reverse-Thrust ring in PTFE/Graphite.

General operating data:

- Capacity up to 192 m³/h
- Pressure up to 768 m
- Hydraulic efficiency 8", up to 78,5%
- Pressure up to 80 bar
- Powers up to 185 kW
- Rotation speed up to 2.900 rpm
- Maximum depth: 350 m
- Maximum quantity of permitted sand: 100 gr/m³
- Drinking water compatibility according to DM174 MEI >= 0,4 (EU directive No.547/2012)
- Performance tolerance: ISO9906-3B.

Construction features

Suction and delivery outlet	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Valve	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Impellers and diffusers	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Upper bushings	NBR rubber
Shaft pump side	stainless steel AISI 304 (LRS-LMS) stainless steel AISI 316 (LRX-LMX) Duplex (LRD-LMD)
Quantity of sand in the water	max 100 gr/m ³

Motor

Asynchronous 2 pole	rewindable water cooled
Insulation class	Y (max 30 °C) - PPC winding type F (max 50 °C) - PE2+PA or LPE winding type
Protection degree	IP68
Liquid temperature	max 30 °C (max 50 °C on request)
Depth of immersion	max 350 m



8LR line



8LM line




8LR 34

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	150	200	300	400	500	600	700	750
	HP	kW	A	l/sec	0	2,5	3,3	5,0	6,7	8,3	10,0	11,7	12,5
				m ³ /h	0	9	12	18	24	30	36	42	45
8LR 34/01	4	3	7,5	H (m)	23	22	21	20	20	18	17	14	13
8LR 34/02	7,5	5,5	12,5		46	45	42	41	39	37	33	28	25
8LR 34/03	10	7,5	16,3		69	67	64	61	59	55	50	41	38
8LR 34/04	15	11	23,4		92	90	85	82	78	73	66	55	51
8LR 34/05	17,5	13	27,3		115	112	106	102	98	92	83	69	64
8LR 34/06	20	15	31,5		138	134	127	122	117	110	99	83	76
8LR 34/07	25	18,5	38,3		161	157	148	143	137	128	116	97	89
8LR 34/08	30	22	45,1		184	179	170	163	156	146	132	110	102
8LR 34/09	30	22	45,1		207	202	191	184	176	165	149	124	114
8LR 34/10	35	26	52,9		230	224	212	204	195	183	165	138	127
8LR 34/11	40	30	61,1		253	246	233	224	215	201	182	152	140
8LR 34/12	40	30	61,1		276	269	254	245	234	220	198	166	152
8LR 34/13	50	37	75,8		299	291	276	265	254	238	215	179	165
8LR 34/14	50	37	75,8		322	314	297	286	273	256	231	193	178
8LR 34/15	50	37	75,8		345	336	318	306	293	275	248	207	191
8LR 34/16	60	45	86,3		368	358	339	326	312	293	264	221	203
8LR 34/17	60	45	86,3		391	381	360	347	332	311	281	235	216
8LR 34/18	60	45	86,3		414	403	382	367	351	329	297	248	229
8LR 34/19	75	55	106,2		437	426	403	388	371	348	314	262	241



Max Eff. % =	73,5
Max kW / St. =	2,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4,5	6,7

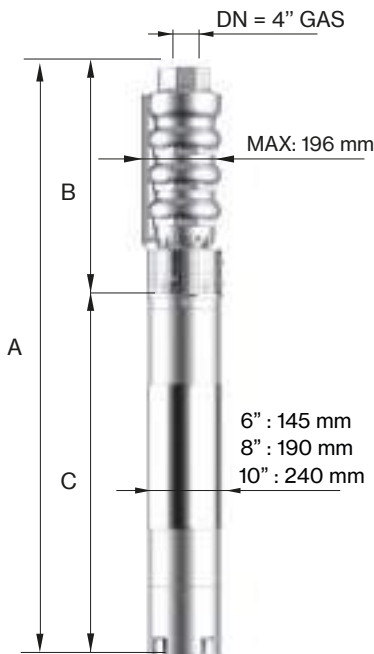

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 34/01	917	360	557	19	15
8LR 34/02	1138	440	698	27	21
8LR 34/03	1221	520	701	55	27
8LR 34/04	1411	600	811	65	33
8LR 34/05	1521	680	841	70	40
8LR 34/06	1691	760	931	75	46
8LR 34/07	1831	840	991	83	52
8LR 34/08	1991	920	1071	92	58
8LR 34/09	2071	1000	1071	92	64
8LR 34/10	2261	1080	1181	100	70
8LR 34/11	2411	1160	1251	108	76
8LR 34/12	2491	1240	1251	108	82
8LR 34/13	2661	1320	1341	118	88
8LR 34/14	2771	1430	1341	118	95
8LR 34/15	2851	1510	1341	118	101
8LR 34/16	2713	1590	1123	178	107
8LR 34/17	2793	1670	1123	178	113
8LR 34/18	2873	1750	1123	178	119
8LR 34/19	3063	1830	1233	200	125



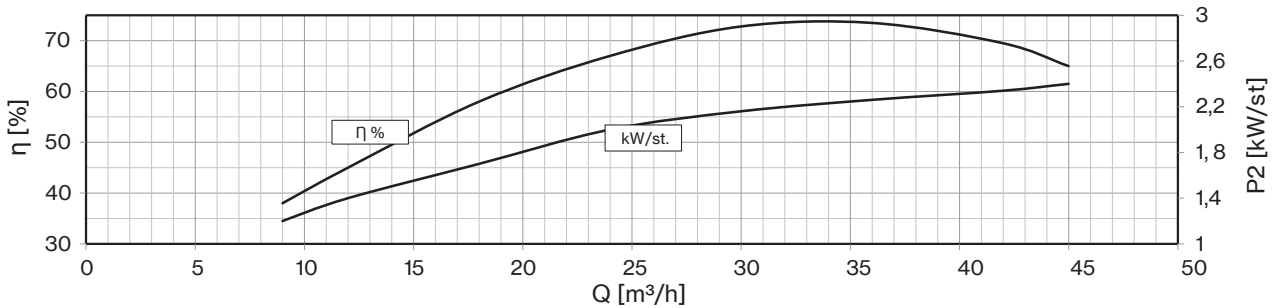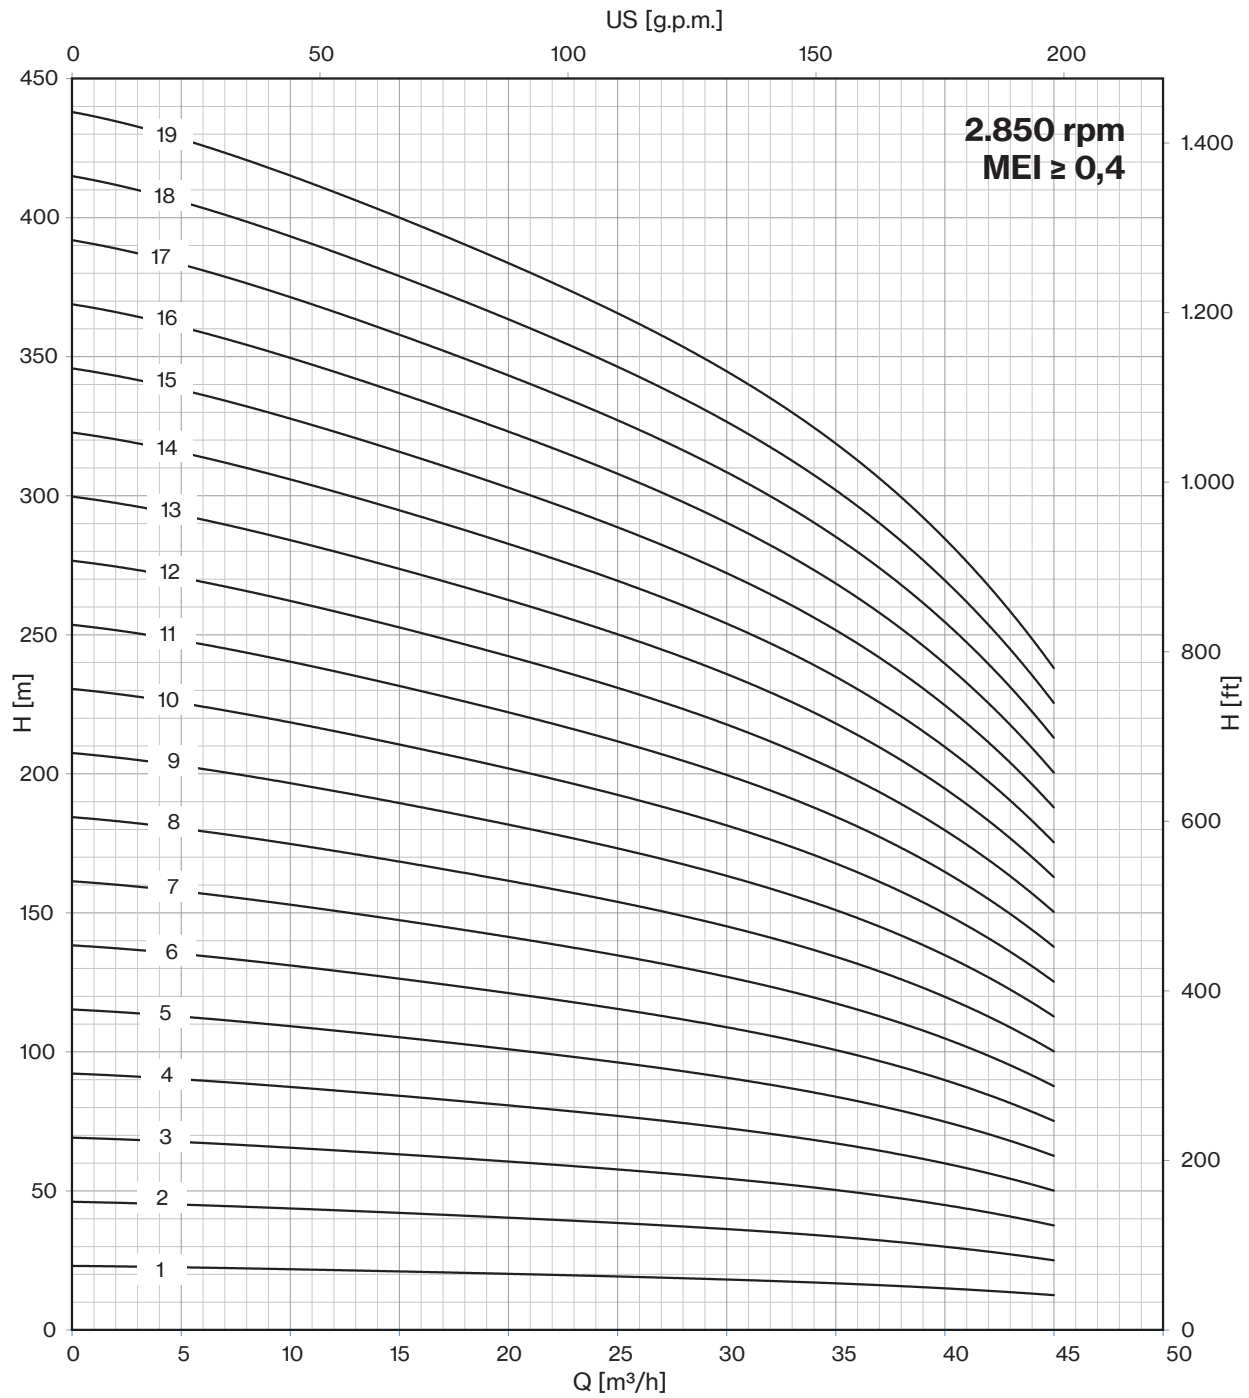

8LR 34

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	150	200	300	400	500	600	700	750
	HP	kW	A	l/sec	0	2,5	3,3	5,0	6,7	8,3	10,0	11,7	12,5
				m ³ /h	0	9	12	18	24	30	36	42	45
8LR 34/20*	75	55	106,2	H (m)	460	448	424	408	390	366	330	276	254
8LR 34/21*	75	55	106,2		483	470	445	428	410	384	347	290	267
8LR 34/22*	75	55	106,2		506	493	466	449	429	403	363	304	279
8LR 34/23*	90	66	126,0		529	515	488	469	449	421	380	317	292
8LR 34/24*	90	66	126,0		552	538	509	490	468	439	396	331	305
8LR 34/25*	90	66	126,0		575	560	530	510	488	458	413	345	318
8LR 34/26*	90	66	126,0		598	582	551	530	507	476	429	359	330
8LR 34/27*	90	66	126,0		621	605	572	551	527	494	446	373	343
8LR 34/28*	100	75	143,2		644	627	594	571	546	512	462	386	356
8LR 34/29*	100	75	143,2		667	650	615	592	566	531	479	400	368
8LR 34/30*	100	75	143,2		690	672	636	612	585	549	495	414	381
8LR 34/31*	100	75	143,2		713	694	657	632	605	567	512	428	394
8LR 34/32*	125	92	175,1		736	717	678	653	624	586	528	442	406
8LR 34/33*	125	92	175,1		759	739	700	673	644	604	545	455	419

Max Eff. % =	73,5
Max kW / St. =	2,4



Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	4,5	6,7



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	8LR 34/20*	3143	1910	1233	200	132
	8LR 34/21*	3223	1990	1233	200	138
	8LR 34/22*	3303	2070	1233	200	144
	8LR 34/23*	3582	2280	1302	214	155
	8LR 34/24*	3662	2360	1302	214	161
	8LR 34/25*	3742	2440	1302	214	167
	8LR 34/26*	3822	2520	1302	214	173
	8LR 34/27*	3902	2600	1302	214	179
	8LR 34/28*	4063	2680	1383	230	185
	8LR 34/29*	4143	2760	1383	230	191
	8LR 34/30*	4223	2840	1383	230	198
	8LR 34/31*	4303	2920	1383	230	204
	8LR 34/32*	4583	3000	1583	270	210
	8LR 34/33*	4663	3080	1583	270	216

* Coupled pump shaft



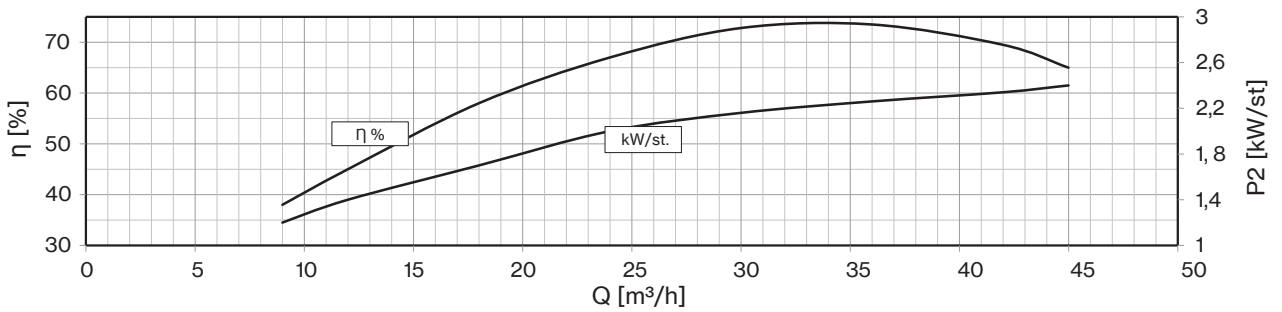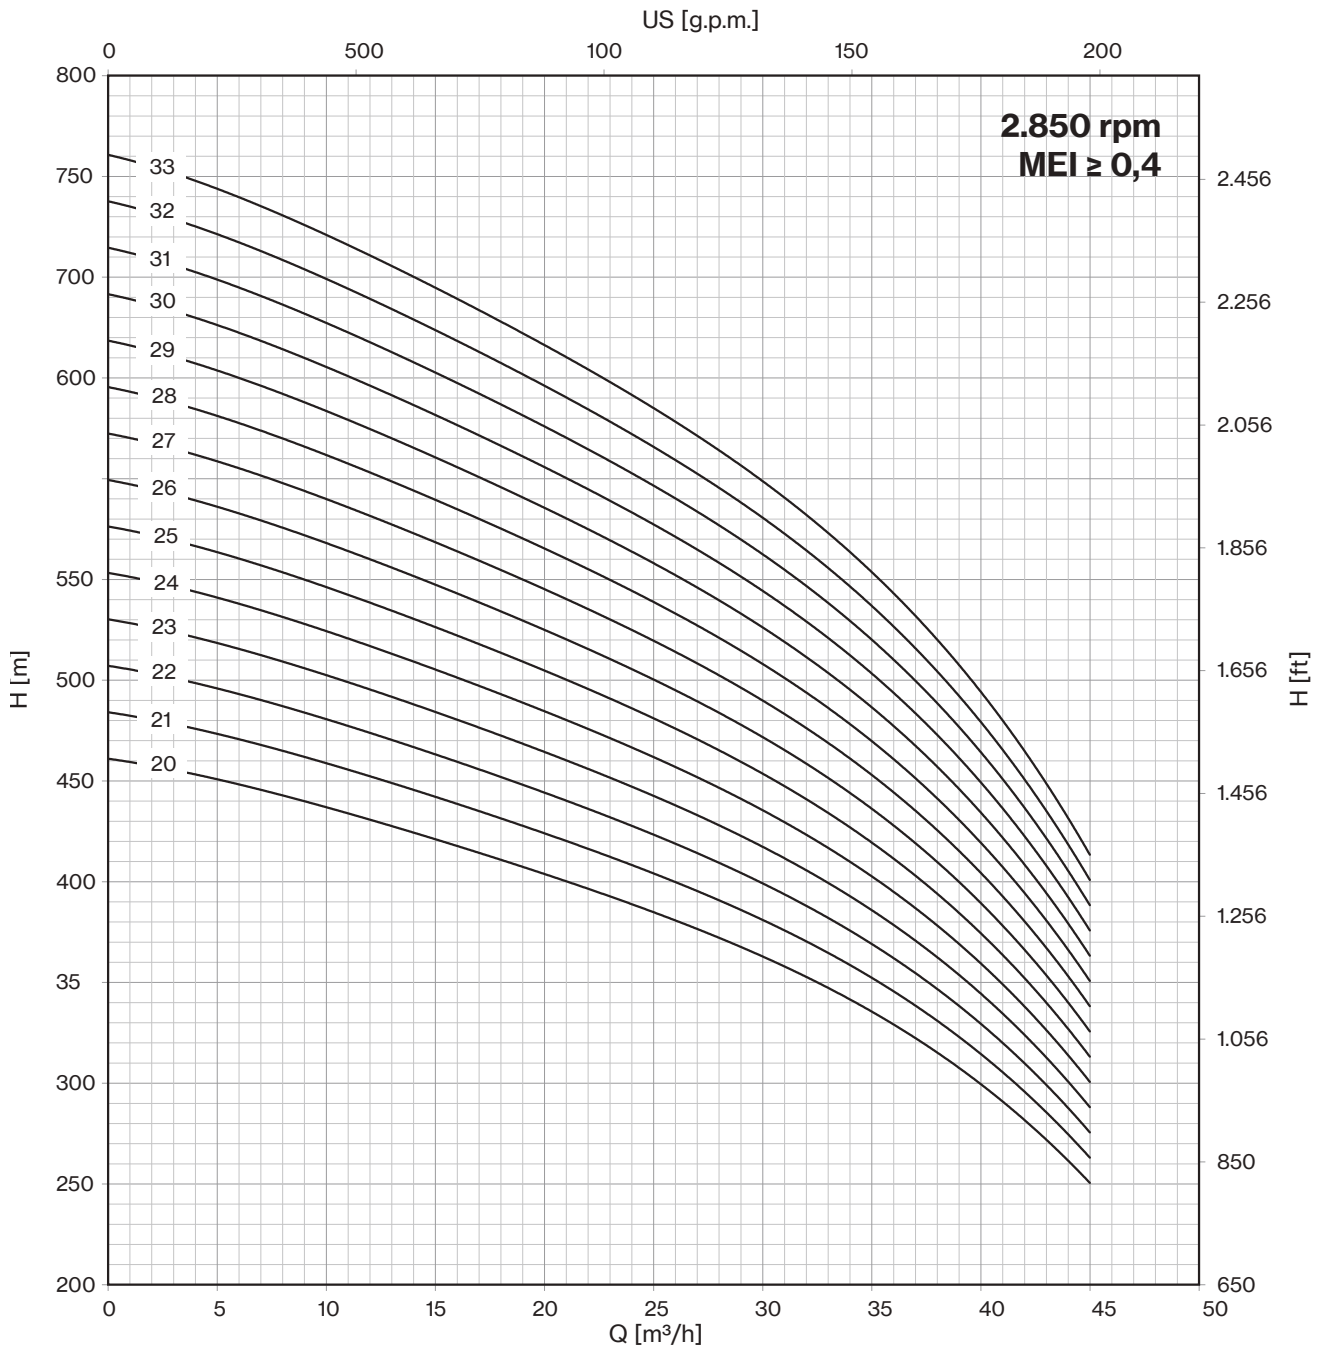


8LR 42

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	200	300	400	500	600	700	800	900
	HP	kW	A	l/sec	0	3,3	5,0	6,7	8,3	10,0	11,7	13,3	15,0
				m ³ /h	0	12	18	24	30	36	42	48	54
8LR 42/01	4	3	7,5	H (m)	24	23	22	21	20	18	16	14	11
8LR 42/02	10	7,5	16,3		48	46	43	42	39	36	32	28	21
8LR 42/03	12,5	9,2	19,9		72	68	65	62	59	55	49	41	32
8LR 42/04	17,5	13	27,3		96	91	86	83	78	73	65	55	42
8LR 42/05	20	15	31,5		120	114	108	104	98	91	81	69	53
8LR 42/06	25	18,5	38,3		144	137	130	125	118	109	97	83	64
8LR 42/07	30	22	45,1		168	160	151	146	137	127	113	97	74
8LR 42/08	35	26	52,9		192	182	173	166	157	146	130	110	85
8LR 42/09	35	26	52,9		216	205	194	187	176	164	146	124	95
8LR 42/10	40	30	61,1		240	228	216	208	196	182	162	138	106
8LR 42/11	50	37	75,8		264	251	238	229	216	200	178	152	117
8LR 42/12	50	37	75,8		288	274	259	250	235	218	194	166	127
8LR 42/13	50	37	75,8		312	296	281	270	255	237	211	179	138
8LR 42/14	60	45	86,3		336	319	302	291	274	255	227	193	148
8LR 42/15	60	45	86,3		360	342	324	312	294	273	243	207	159
8LR 42/16	60	45	86,3		384	365	346	333	314	291	259	221	170



Max Eff. % =	73
Max kW / St. =	2,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

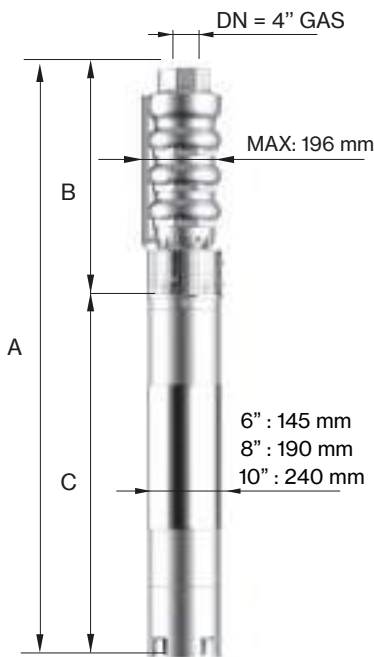

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 42/01	917	360	557	19	15
8LR 42/02	1141	440	701	55	21
8LR 42/03	1271	520	751	60	27
8LR 42/04	1441	600	841	70	33
8LR 42/05	1611	680	931	75	40
8LR 42/06	1751	760	991	83	46
8LR 42/07	1911	840	1071	92	52
8LR 42/08	2101	920	1181	100	58
8LR 42/09	2181	1000	1181	100	64
8LR 42/10	2331	1080	1251	108	70
8LR 42/11	2501	1160	1341	118	76
8LR 42/12	2581	1240	1341	118	82
8LR 42/13	2661	1320	1341	118	88
8LR 42/14	2553	1430	1123	178	95
8LR 42/15	2633	1510	1123	178	101
8LR 42/16	2713	1590	1123	178	107



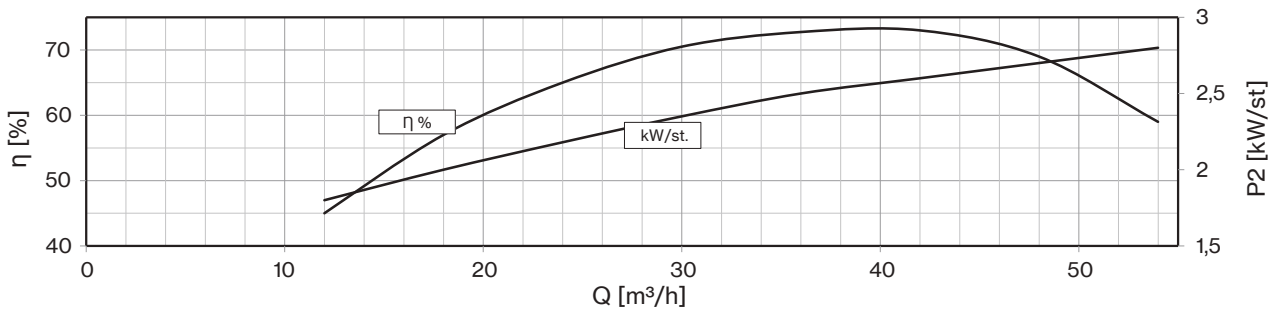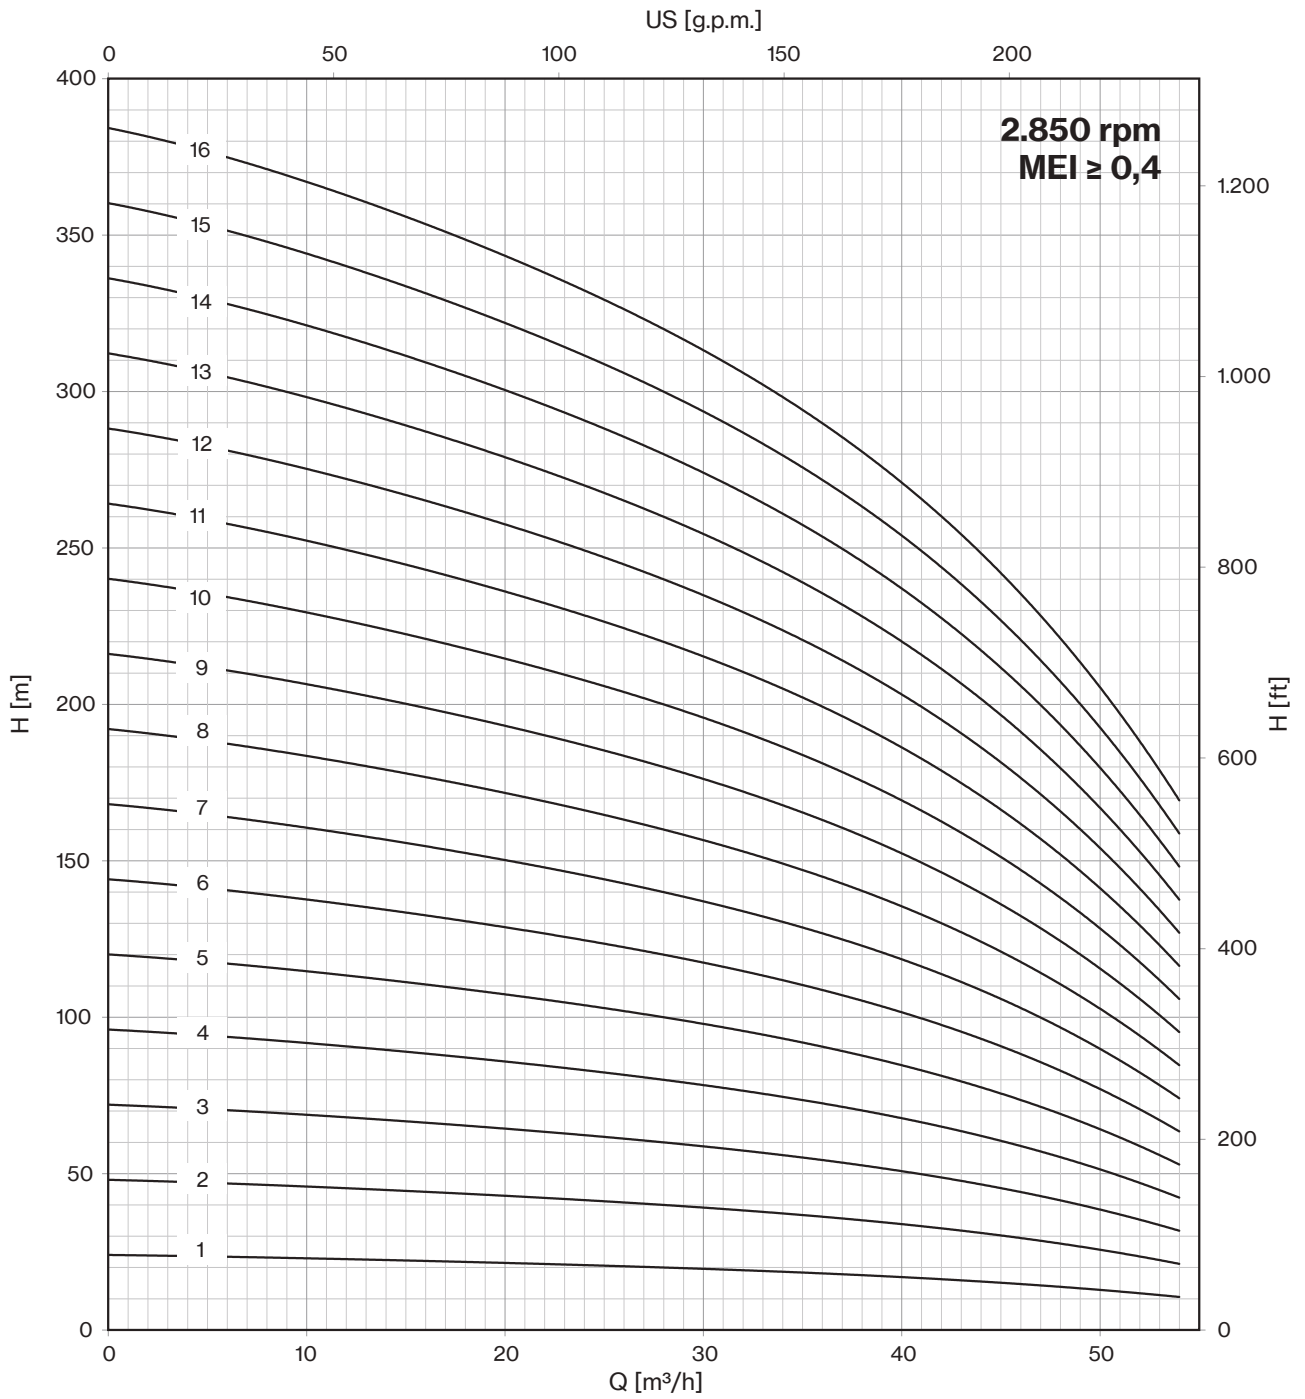


8LR 42

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	200	300	400	500	600	700	800	900
	HP	kW	A	l/sec	0	3,3	5,0	6,7	8,3	10,0	11,7	13,3	15,0
				m ³ /h	0	12	18	24	30	36	42	48	54
8LR 42/17	75	55	106,2	H(m)	408	388	367	354	333	309	275	235	180
8LR 42/18	75	55	106,2		432	410	389	374	353	328	292	248	191
8LR 42/19	75	55	106,2		456	433	410	395	372	346	308	262	201
8LR 42/20*	90	66	126,0		480	456	432	416	392	364	324	276	212
8LR 42/21*	90	66	126,0		504	479	454	437	412	382	340	290	223
8LR 42/22*	90	66	126,0		528	502	475	458	431	400	356	304	233
8LR 42/23*	90	66	126,0		552	524	497	478	451	419	373	317	244
8LR 42/24*	100	75	143,2		576	547	518	499	470	437	389	331	254
8LR 42/25*	100	75	143,2		600	570	540	520	490	455	405	345	265
8LR 42/26*	100	75	143,2		624	593	562	541	510	473	421	359	276
8LR 42/27*	125	92	175,1		648	616	583	562	529	491	437	373	286
8LR 42/28*	125	92	175,1		672	638	605	582	549	510	454	386	297
8LR 42/29*	125	92	175,1		696	661	626	603	568	528	470	400	307
8LR 42/30*	125	92	175,1		720	684	648	624	588	546	486	414	318
8LR 42/31*	125	92	175,1		744	707	670	645	608	564	502	428	329
8LR 42/32*	125	92	175,1		768	730	691	666	627	582	518	442	339

Max Eff. % =	73
Max kW / St. =	2,8



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	3,8	8

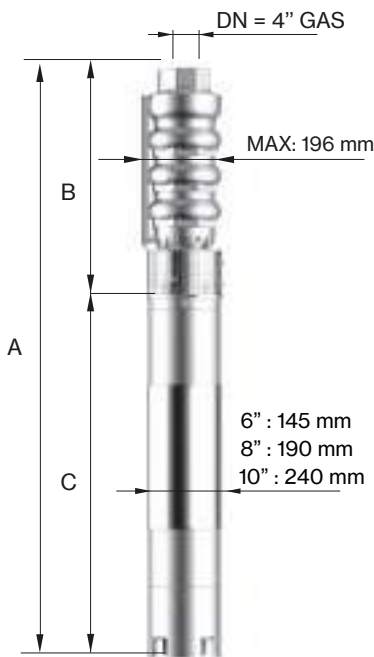

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 42/17	2903	1670	1233	200	113
8LR 42/18	2983	1750	1233	200	119
8LR 42/19	3063	1830	1233	200	125
8LR 42/20*	3342	2040	1302	214	137
8LR 42/21*	3422	2120	1302	214	143
8LR 42/22*	3502	2200	1302	214	149
8LR 42/23*	3582	2280	1302	214	155
8LR 42/24*	3743	2360	1383	230	161
8LR 42/25*	3823	2440	1383	230	167
8LR 42/26*	3903	2520	1383	230	173
8LR 42/27*	4183	2600	1583	270	179
8LR 42/28*	4263	2680	1583	270	185
8LR 42/29*	4343	2760	1583	270	191
8LR 42/30*	4423	2840	1583	270	198
8LR 42/31*	4503	2920	1583	270	204
8LR 42/32*	4583	3000	1583	270	210

* Coupled pump shaft



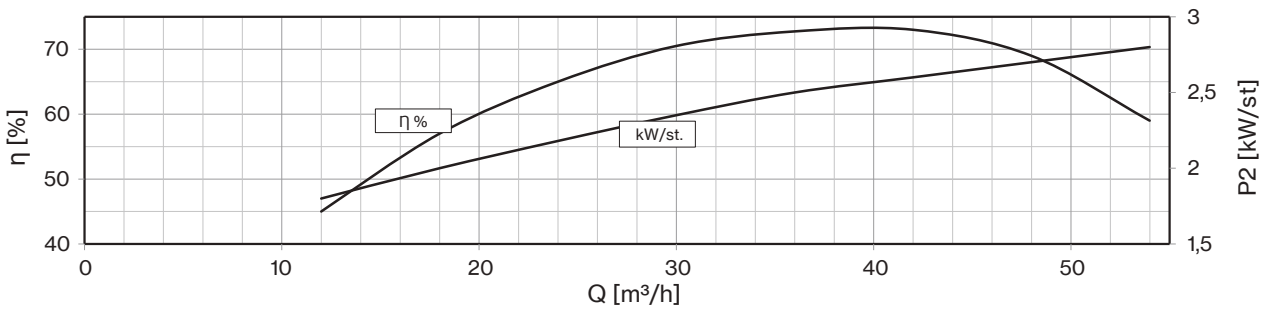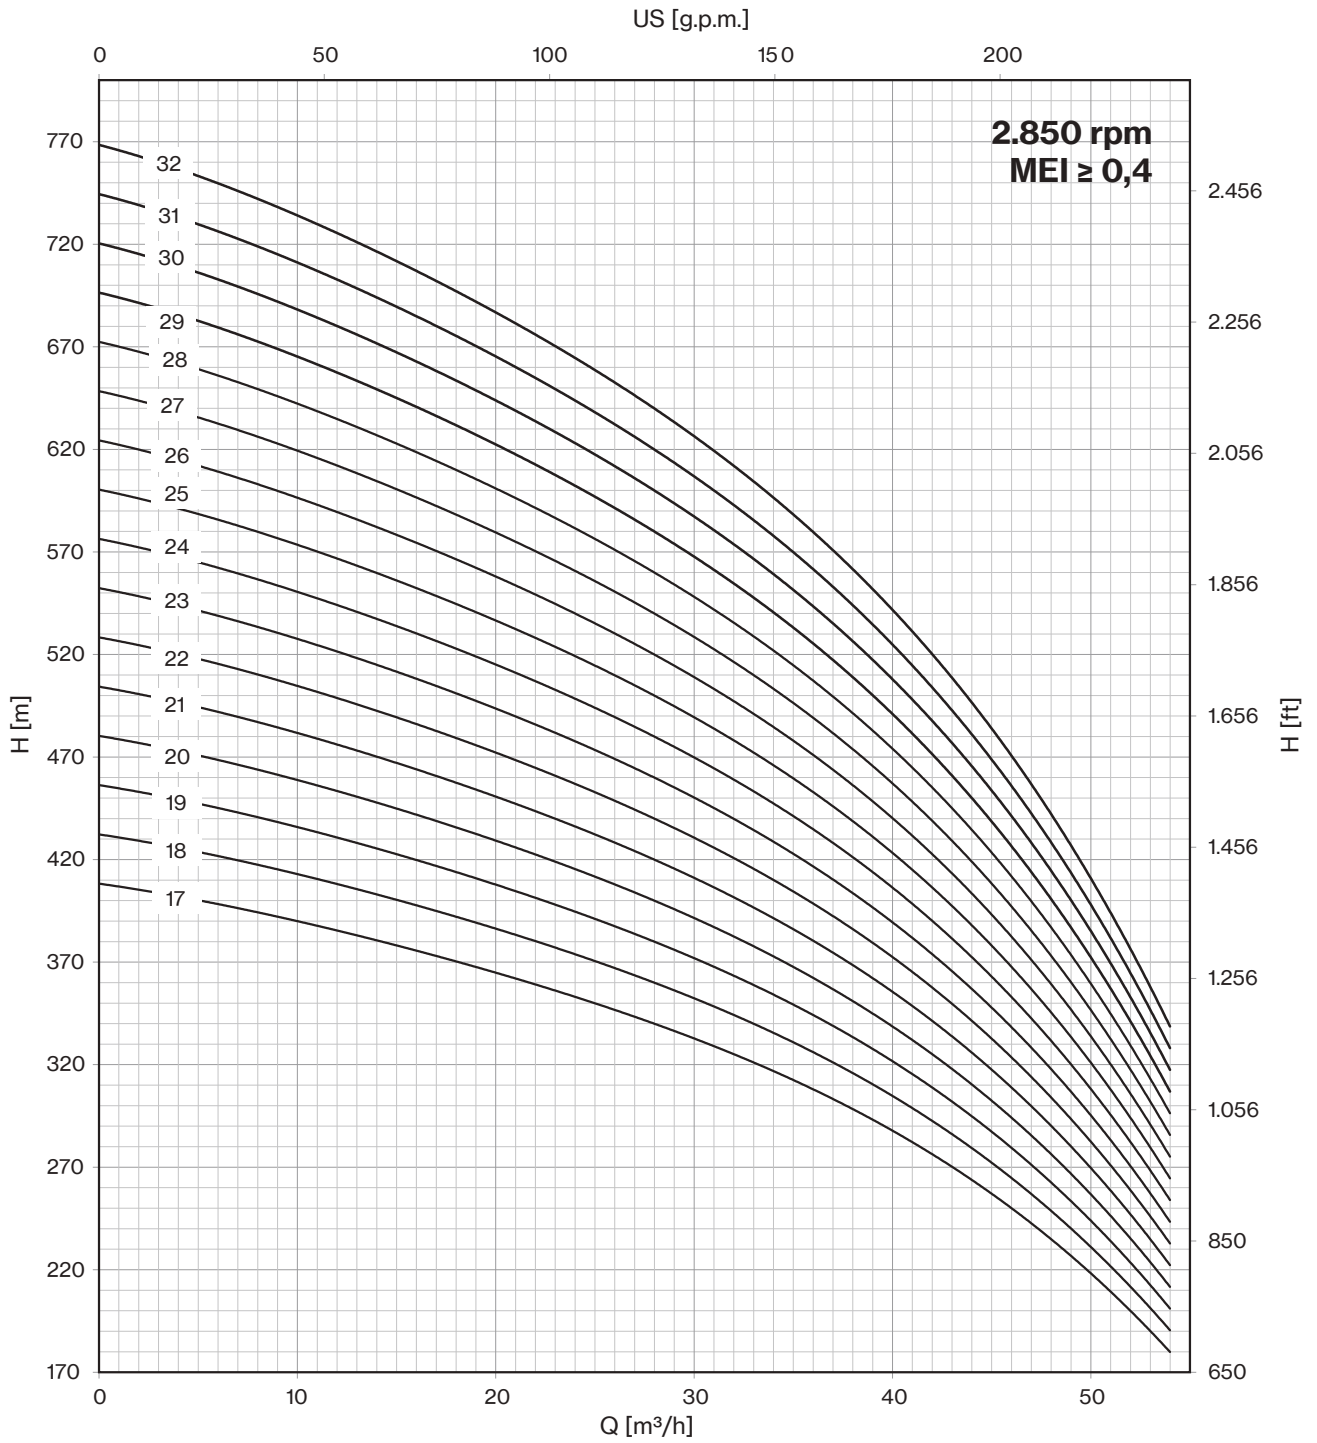


8LR 52

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	500	600	700	800	900	1000	1100
	HP	kW	A	l/sec	0	5,0	8,3	10,0	11,7	13,3	15,0	16,7	18,3
				m ³ /h	0	18	30	36	42	48	54	60	66
8LR 52/01	5,5	4	10,0	H (m)	24	23	22	20	19	18	16	15	13
8LR 52/02	10	7,5	16,3		48	46	43	41	39	36	33	29	26
8LR 52/03	15	11	23,4		72	68	65	61	58	53	49	44	38
8LR 52/04	20	15	31,5		96	91	86	81	77	71	65	58	51
8LR 52/05	25	18,5	38,3		120	114	108	102	97	89	82	73	64
8LR 52/06	30	22	45,1		144	137	129	122	116	107	98	87	77
8LR 52/07	35	26	52,9		168	159	151	142	135	125	114	102	90
8LR 52/08	40	30	61,1		192	182	172	162	154	142	130	116	102
8LR 52/09	50	37	75,8		216	205	194	183	174	160	147	131	115
8LR 52/10	50	37	75,8		240	228	215	203	193	178	163	145	128
8LR 52/11	60	45	86,3		264	251	237	223	212	196	179	160	141
8LR 52/12	60	45	86,3		288	273	258	244	232	214	196	174	154
8LR 52/13	60	45	86,3		312	296	280	264	251	231	212	189	166
8LR 52/14	75	55	106,2		336	319	301	284	270	249	228	203	179
8LR 52/15	75	55	106,2		360	342	323	305	290	267	245	218	192
8LR 52/16	75	55	106,2		384	364	344	325	309	285	261	232	205



Max Eff. % =	73
Max kW / St. =	3,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,5	3,5	6	8

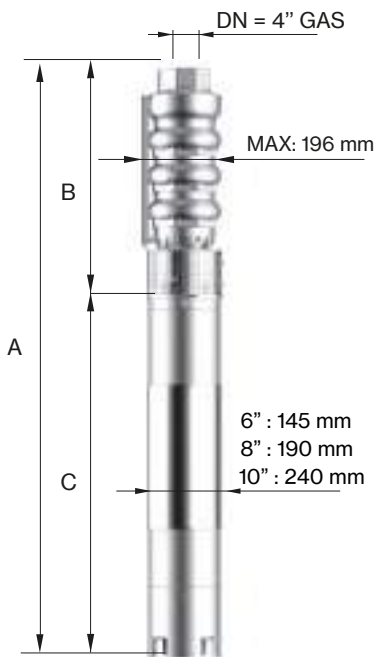

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 52/01	965	368	597	22	16
8LR 52/02	1157	456	701	55	22
8LR 52/03	1355	544	811	65	29
8LR 52/04	1563	632	931	75	35
8LR 52/05	1711	720	991	83	42
8LR 52/06	1879	808	1071	92	48
8LR 52/07	2077	896	1181	100	55
8LR 52/08	2235	984	1251	108	61
8LR 52/09	2413	1072	1341	118	68
8LR 52/10	2501	1160	1341	118	74
8LR 52/11	2401	1278	1123	178	81
8LR 52/12	2489	1366	1123	178	88
8LR 52/13	2577	1454	1123	178	94
8LR 52/14	2775	1542	1233	200	101
8LR 52/15	2863	1630	1233	200	107
8LR 52/16	2951	1718	1233	200	114



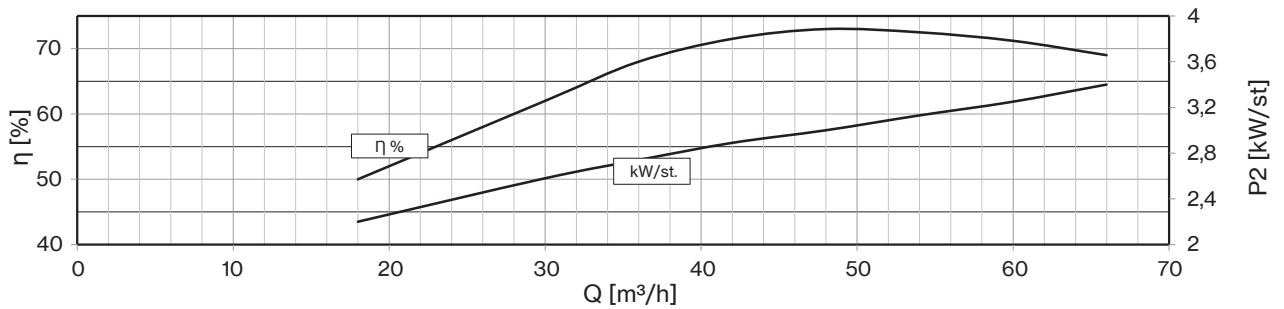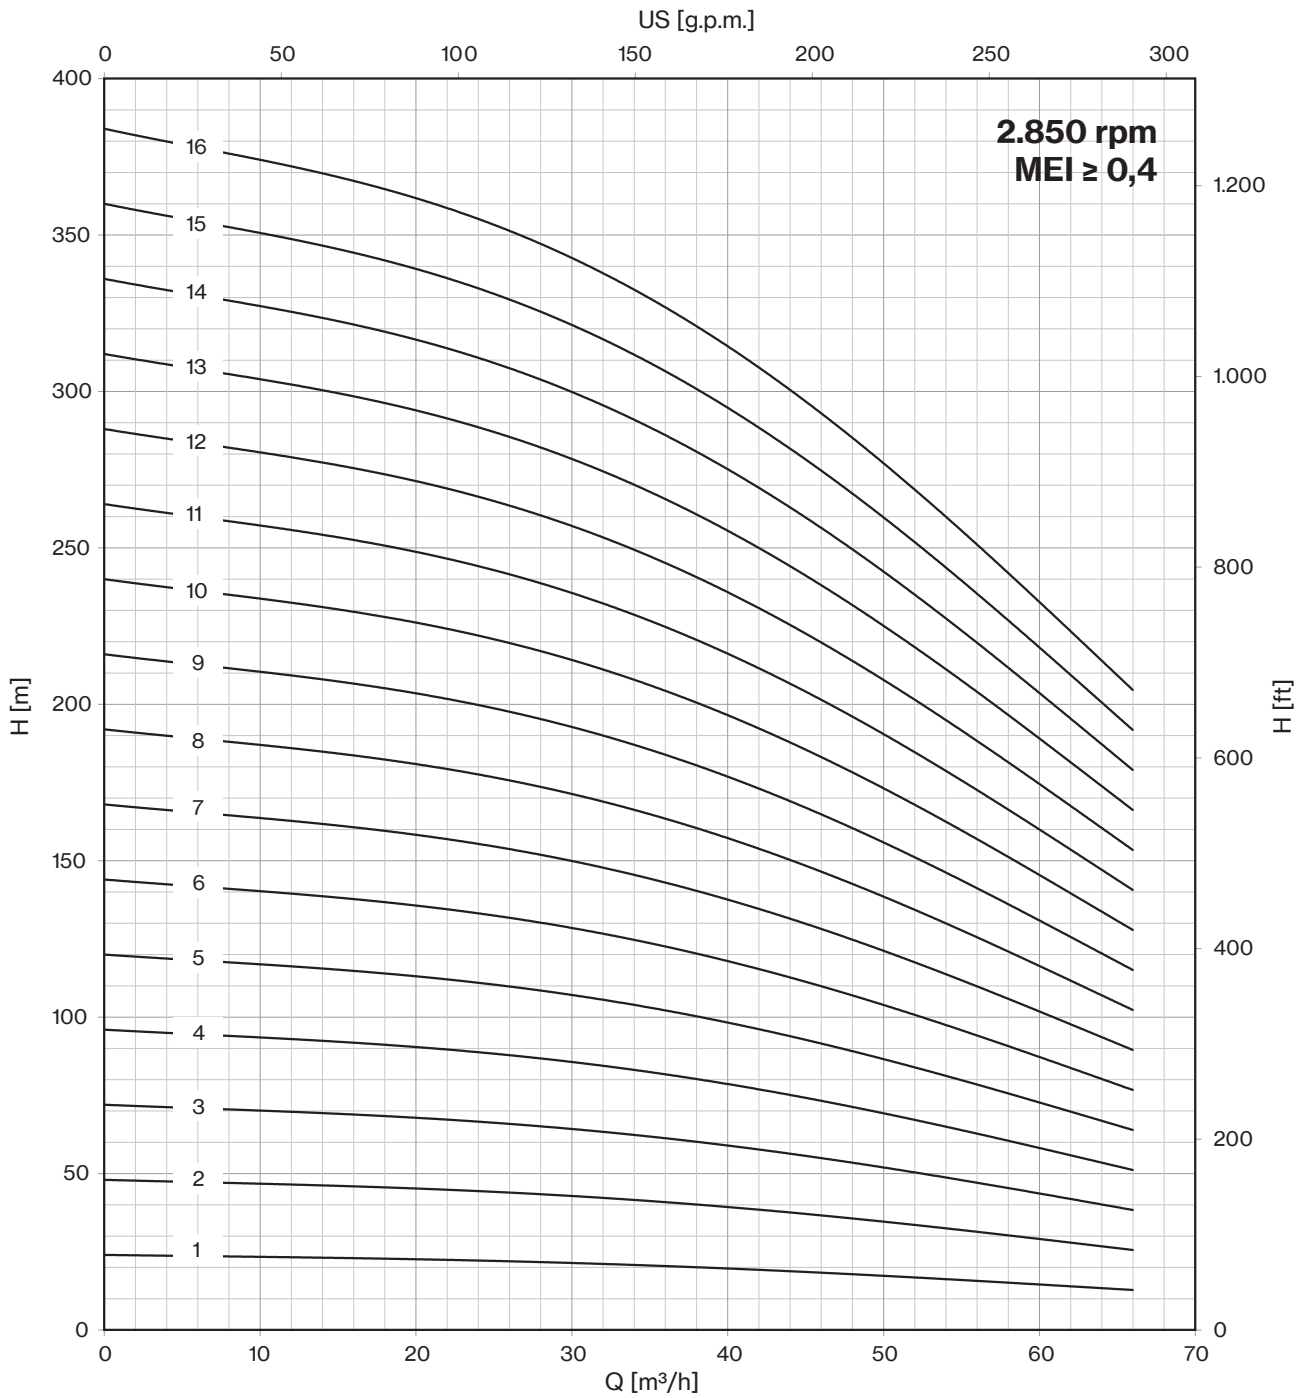


8LR 52

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	500	600	700	800	900	1000	1100
	HP	kW	A	l/sec	0	5,0	8,3	10,0	11,7	13,3	15,0	16,7	18,3
				m3/h	0	18	30	36	42	48	54	60	66
8LR 52/17	90	66	126,0	H (m)	408	387	366	345	328	303	277	247	218
8LR 52/18	90	66	126,0		432	410	387	365	347	320	293	261	230
8LR 52/19	90	66	126,0		456	433	409	386	367	338	310	276	243
8LR 52/20*	100	75	143,2		480	456	430	406	386	356	326	290	256
8LR 52/21*	100	75	143,2		504	478	452	426	405	374	342	305	269
8LR 52/22*	100	75	143,2		528	501	473	447	425	392	359	319	282
8LR 52/23*	125	92	175,1		552	524	495	467	444	409	375	334	294
8LR 52/24*	125	92	175,1		576	547	516	487	463	427	391	348	307
8LR 52/25*	125	92	175,1		600	570	538	508	483	445	408	363	320
8LR 52/26*	125	92	175,1		624	592	559	528	502	463	424	377	333
8LR 52/27*	125	92	175,1		648	615	581	548	521	481	440	392	346
8LR 52/28 D*	150	110	219,0		672	638	602	568	540	498	456	406	358
8LR 52/29 D*	150	110	211,0		696	661	624	589	560	516	473	421	371
8LR 52/30 D*	150	110	211,0		720	683	645	609	579	534	489	435	384
8LR 52/31 D*	150	110	211,0		744	706	667	629	598	552	505	450	397
8LR 52/32 D*	150	110	211,0		768	729	688	650	618	570	522	464	410

Max Eff. % =	73
Max kW / St. =	3,4



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,5	3,5	6	8

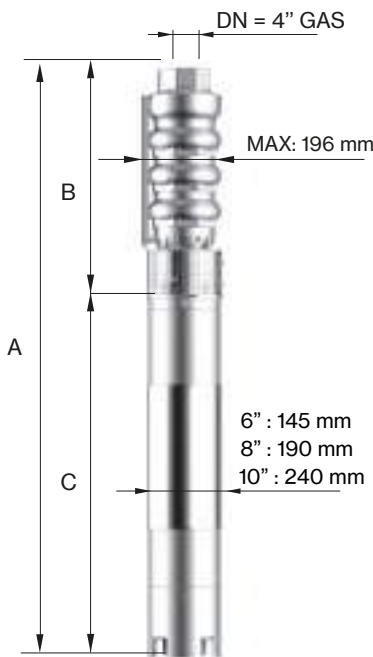

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 52/17	3108	1806	1302	214	120
8LR 52/18	3196	1894	1302	214	127
8LR 52/19	3284	1982	1302	214	133
8LR 52/20*	3583	2200	1383	230	145
8LR 52/21*	3671	2288	1383	230	151
8LR 52/22*	3759	2376	1383	230	158
8LR 52/23*	4047	2464	1583	270	164
8LR 52/24*	4135	2552	1583	270	171
8LR 52/25*	4223	2640	1583	270	177
8LR 52/26*	4311	2728	1583	270	184
8LR 52/27*	4399	2816	1583	270	190
8LR 52/28 D*	4824	2904	1920	350	197
8LR 52/29 D*	4725	2992	1733	300	203
8LR 52/30 D*	4813	3080	1733	300	210
8LR 52/31 D*	4901	3168	1733	300	216
8LR 52/32 D*	4989	3256	1733	300	223

* Coupled pump shaft
"D" Pump shaft in Duplex



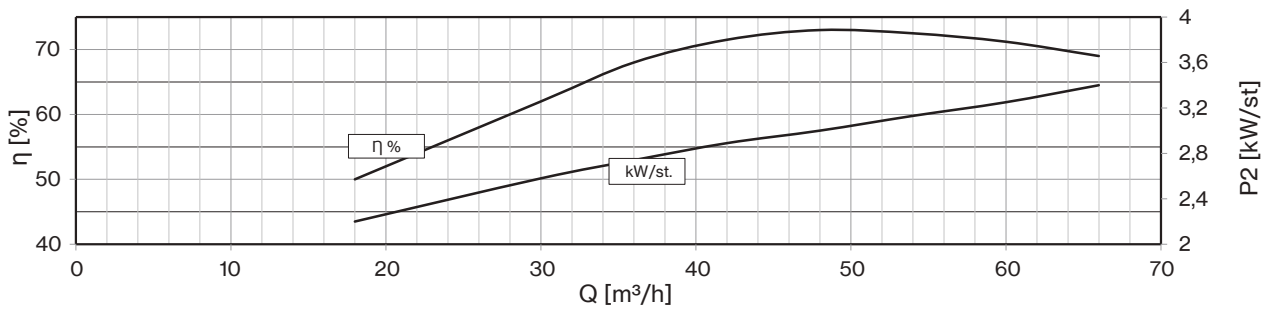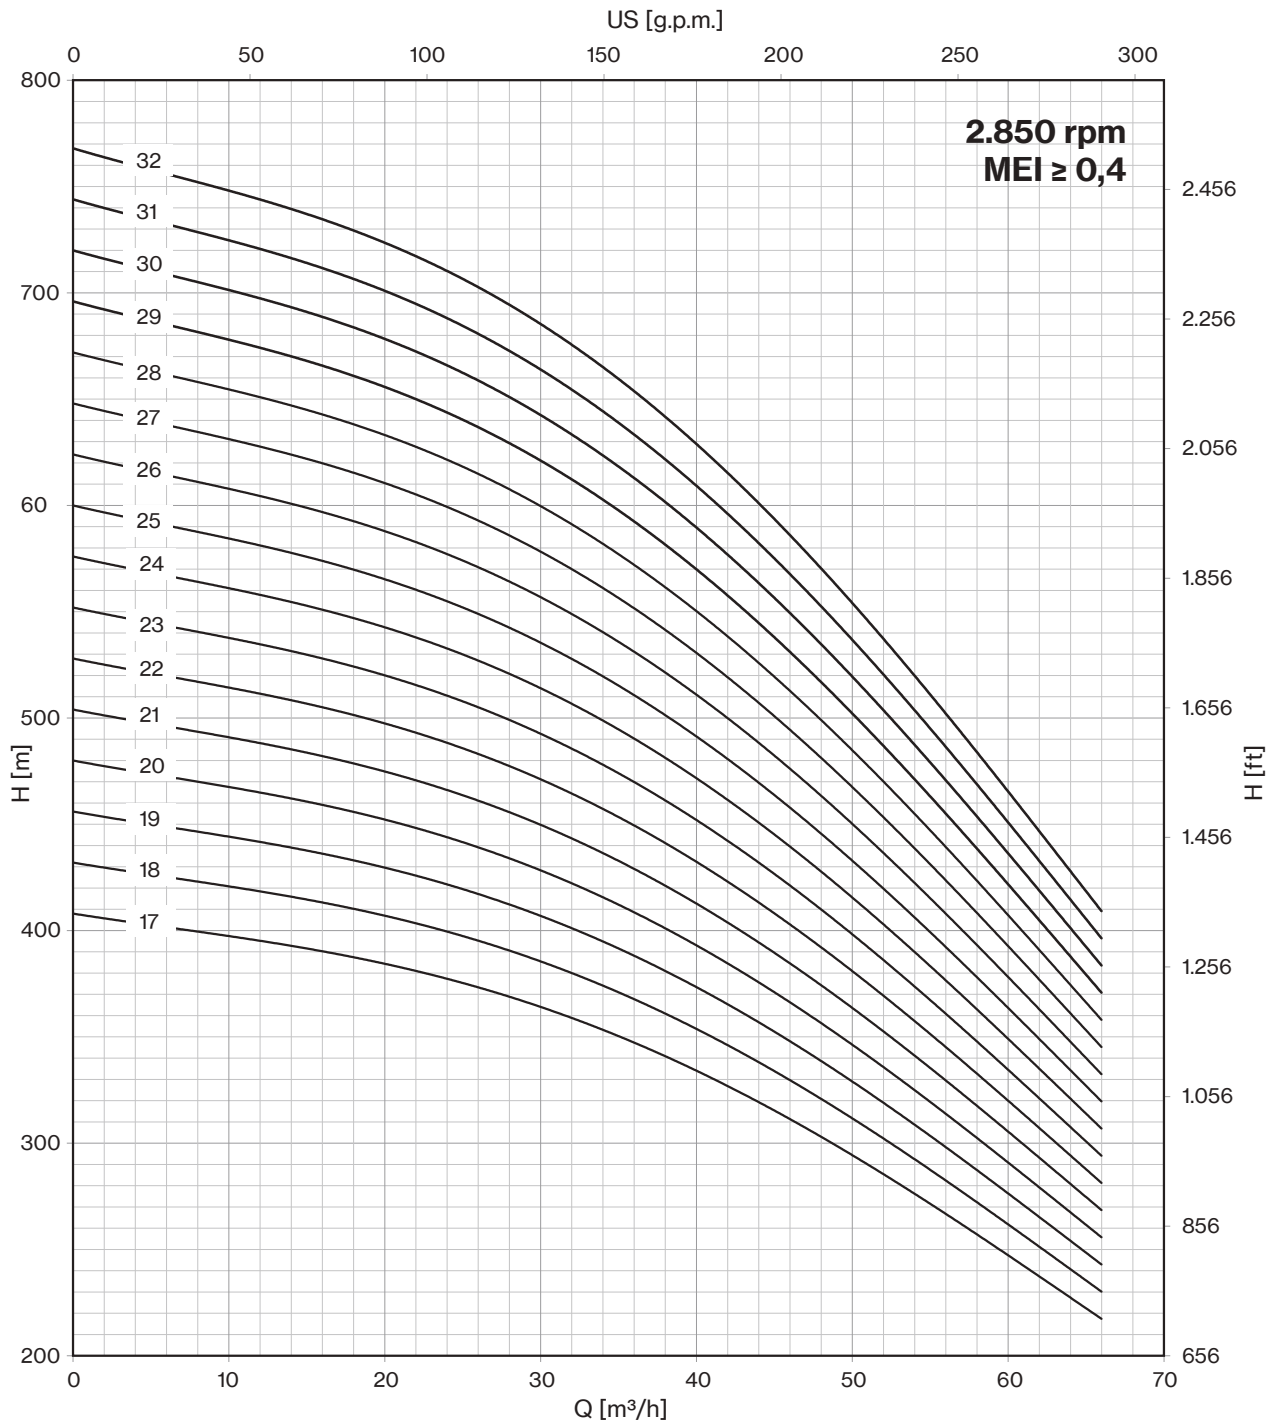


8LR 62

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	600	800	900	1000	1100	1200	1300
	HP	kW	A	l/sec	0	5,0	10,0	13,3	15,0	16,7	18,3	20,0	21,7
				m ³ /h	0	18	36	48	54	60	66	72	78
8LR 62/01	5,5	4	10,0	H (m)	23	22	20	18	17	15	14	12	11
8LR 62/02	12,5	9,2	19,9		46	43	40	36	33	30	27	24	21
8LR 62/03	17,5	13	27,3		69	65	60	54	50	45	41	36	32
8LR 62/04	25	18,5	38,3		92	86	80	72	66	60	54	48	42
8LR 62/05	30	22	45,1		115	108	100	90	83	75	68	60	53
8LR 62/06	35	26	52,9		138	129	120	108	99	90	81	72	63
8LR 62/07	40	30	61,1		161	151	140	126	116	105	95	84	74
8LR 62/08	50	37	75,8		184	172	160	144	132	120	108	96	84
8LR 62/09	50	37	75,8		207	194	180	162	149	135	122	108	95
8LR 62/10	60	45	86,3		230	215	200	180	165	150	135	120	105
8LR 62/11	60	45	86,3		253	237	220	198	182	165	149	132	116
8LR 62/12	75	55	106,2		276	258	240	216	198	180	162	144	126
8LR 62/13	75	55	106,2		299	280	260	234	215	195	176	156	137
8LR 62/14	75	55	106,2		322	301	280	252	231	210	189	168	147
8LR 62/15	90	66	126,0		345	323	300	270	248	225	203	180	158



Max Eff. % =	74,5
Max kW / St. =	3,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	6	8

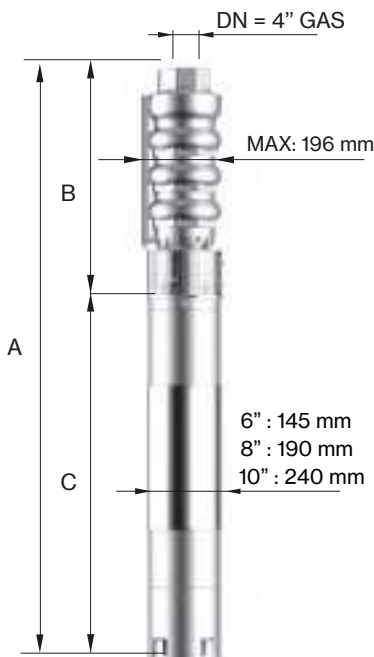

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 62/01	965	368	597	22	16
8LR 62/02	1207	456	751	60	22
8LR 62/03	1385	544	841	70	29
8LR 62/04	1623	632	991	83	35
8LR 62/05	1791	720	1071	92	42
8LR 62/06	1989	808	1181	100	48
8LR 62/07	2147	896	1251	108	55
8LR 62/08	2325	984	1341	118	61
8LR 62/09	2413	1072	1341	118	68
8LR 62/10	2283	1160	1123	178	74
8LR 62/11	2401	1278	1123	178	81
8LR 62/12	2599	1366	1233	200	88
8LR 62/13	2687	1454	1233	200	94
8LR 62/14	2775	1542	1233	200	101
8LR 62/15	2932	1630	1302	214	107



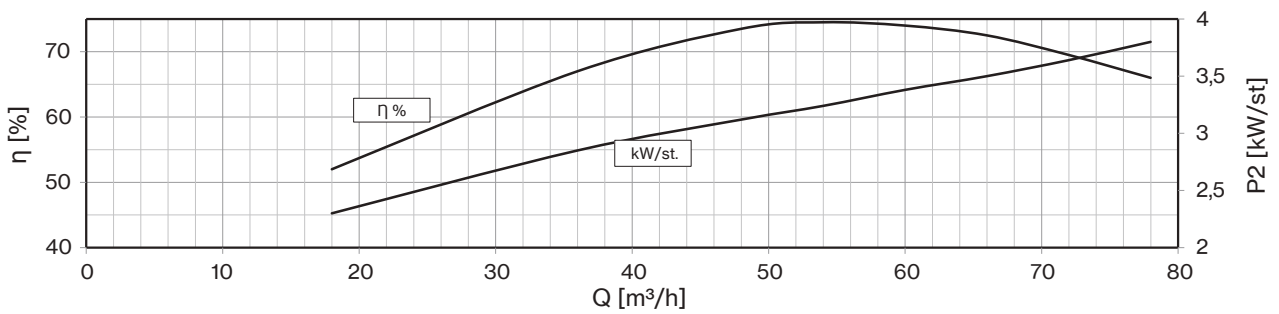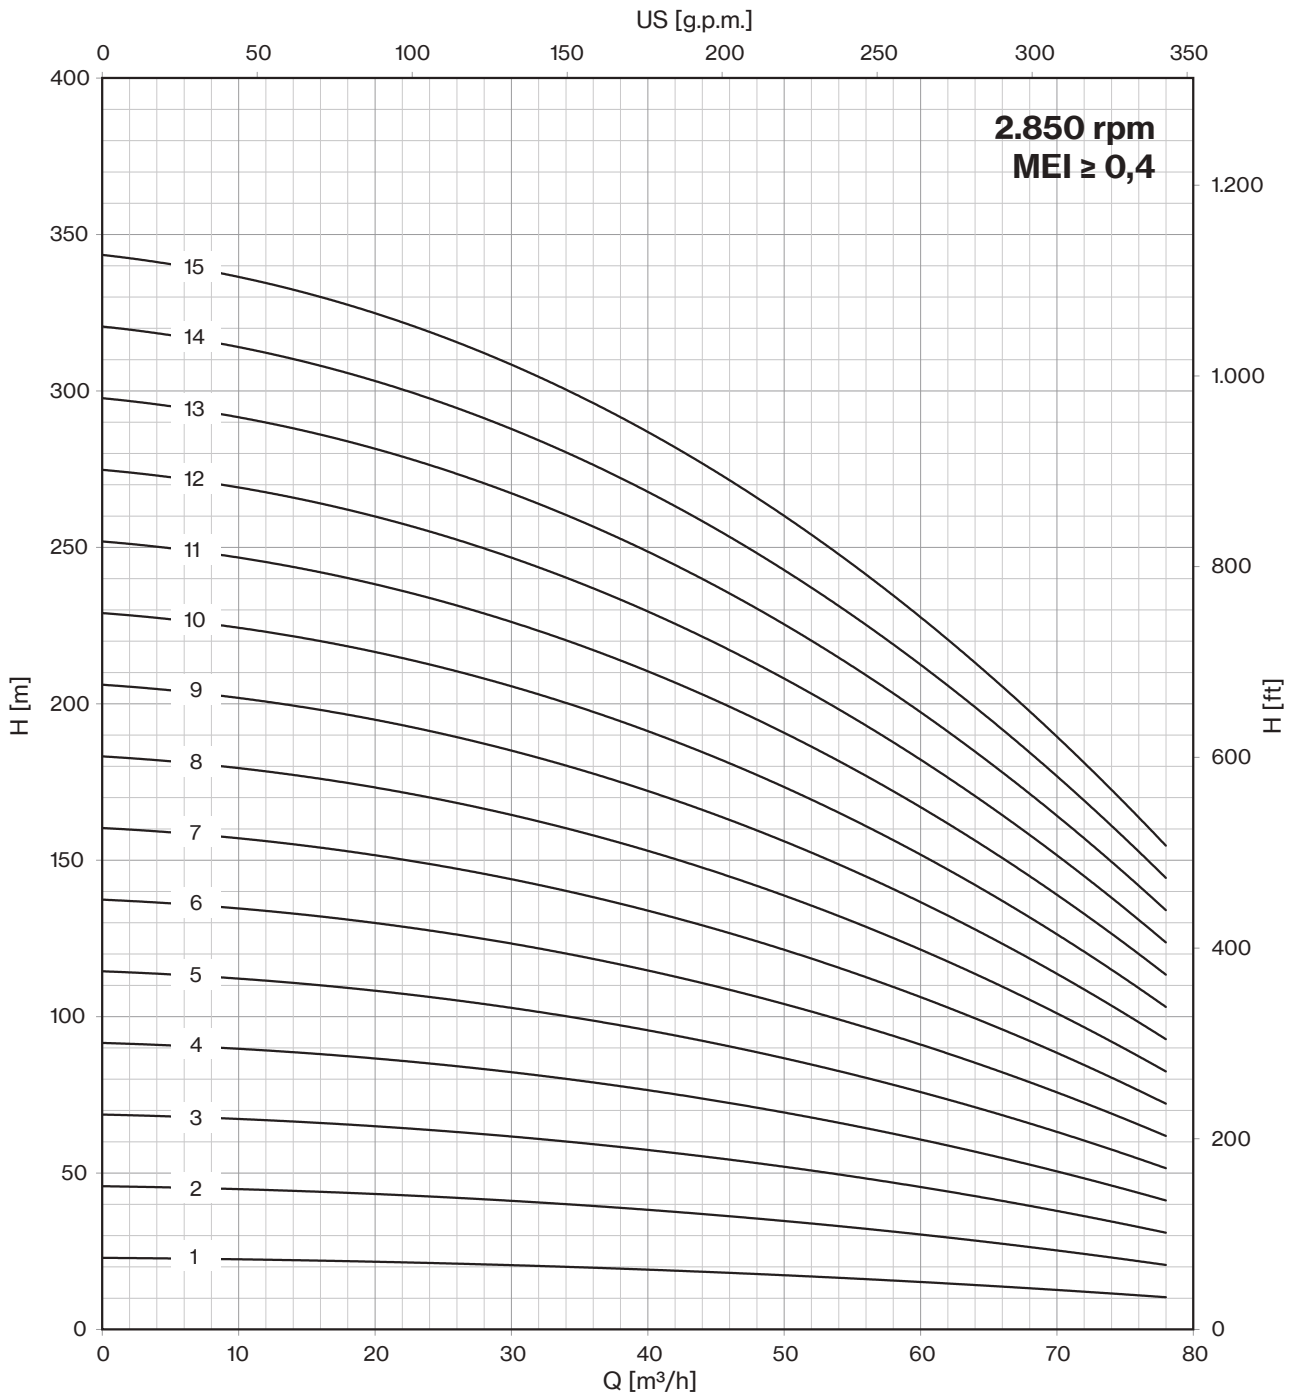


8LR 62

50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	600	800	900	1000	1100	1200	1300
	HP	kW	A	l/sec	0	5,0	10,0	13,3	15,0	16,7	18,3	20,0	21,7
				m ³ /h	0	18	36	48	54	60	66	72	78
8LR 62/16	90	66	126,0	H (m)	368	344	320	288	264	240	216	192	168
8LR 62/17	90	66	126,0		391	366	340	306	281	255	230	204	179
8LR 62/18	100	75	143,2		414	387	360	324	297	270	243	216	189
8LR 62/19	100	75	143,2		437	409	380	342	314	285	257	228	200
8LR 62/20*	125	92	175,1		460	430	400	360	330	300	270	240	210
8LR 62/21*	125	92	175,1		483	452	420	378	347	315	284	252	221
8LR 62/22*	125	92	175,1		506	473	440	396	363	330	297	264	231
8LR 62/23*	125	92	175,1		529	495	460	414	380	345	311	276	242
8LR 62/24*	125	92	175,1		552	516	480	432	396	360	324	288	252
8LR 62/25 D*	150	110	211,0		575	538	500	450	413	375	338	300	263
8LR 62/26 D*	150	110	211,0		598	559	520	468	429	390	351	312	273
8LR 62/27 D*	150	110	211,0		621	581	540	486	446	405	365	324	284
8LR 62/28 D*	150	110	211,0		644	602	560	504	462	420	378	336	294
8LR 62/29 D*	150	110	211,0		667	624	580	522	479	435	392	348	305
8LR 62/30 D*	175	130	245,3		690	645	600	540	495	450	405	360	315

Max Eff. % =	74,5
Max kW / St. =	3,8



Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	3,4	6	8

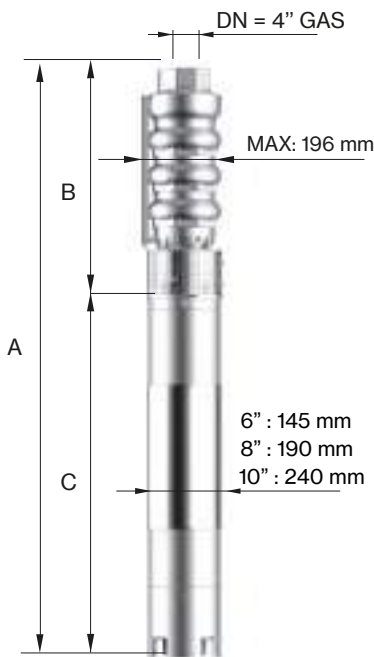

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LR 62/16	3020	1718	1302	214	114
8LR 62/17	3108	1806	1302	214	120
8LR 62/18	3277	1894	1383	230	127
8LR 62/19	3365	1982	1383	230	133
8LR 62/20*	3783	2200	1583	270	145
8LR 62/21*	3871	2288	1583	270	151
8LR 62/22*	3959	2376	1583	270	158
8LR 62/23*	4047	2464	1583	270	164
8LR 62/24*	4135	2552	1583	270	171
8LR 62/25 D*	4373	2640	1733	300	177
8LR 62/26 D*	4461	2728	1733	300	184
8LR 62/27 D*	4549	2816	1733	300	190
8LR 62/28 D*	4637	2904	1733	300	197
8LR 62/29 D*	4725	2992	1733	300	203
8LR 62/30 D*	4714	3080	1634	385	210

* Coupled pump shaft
"D" Pump shaft in Duplex



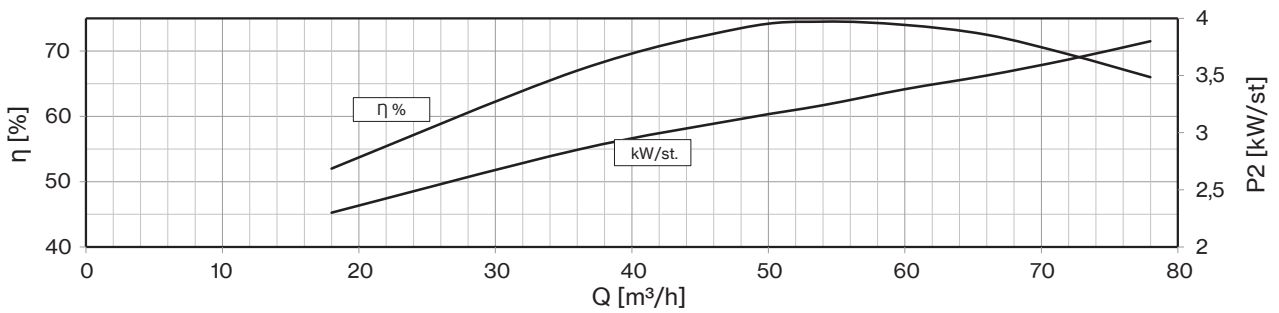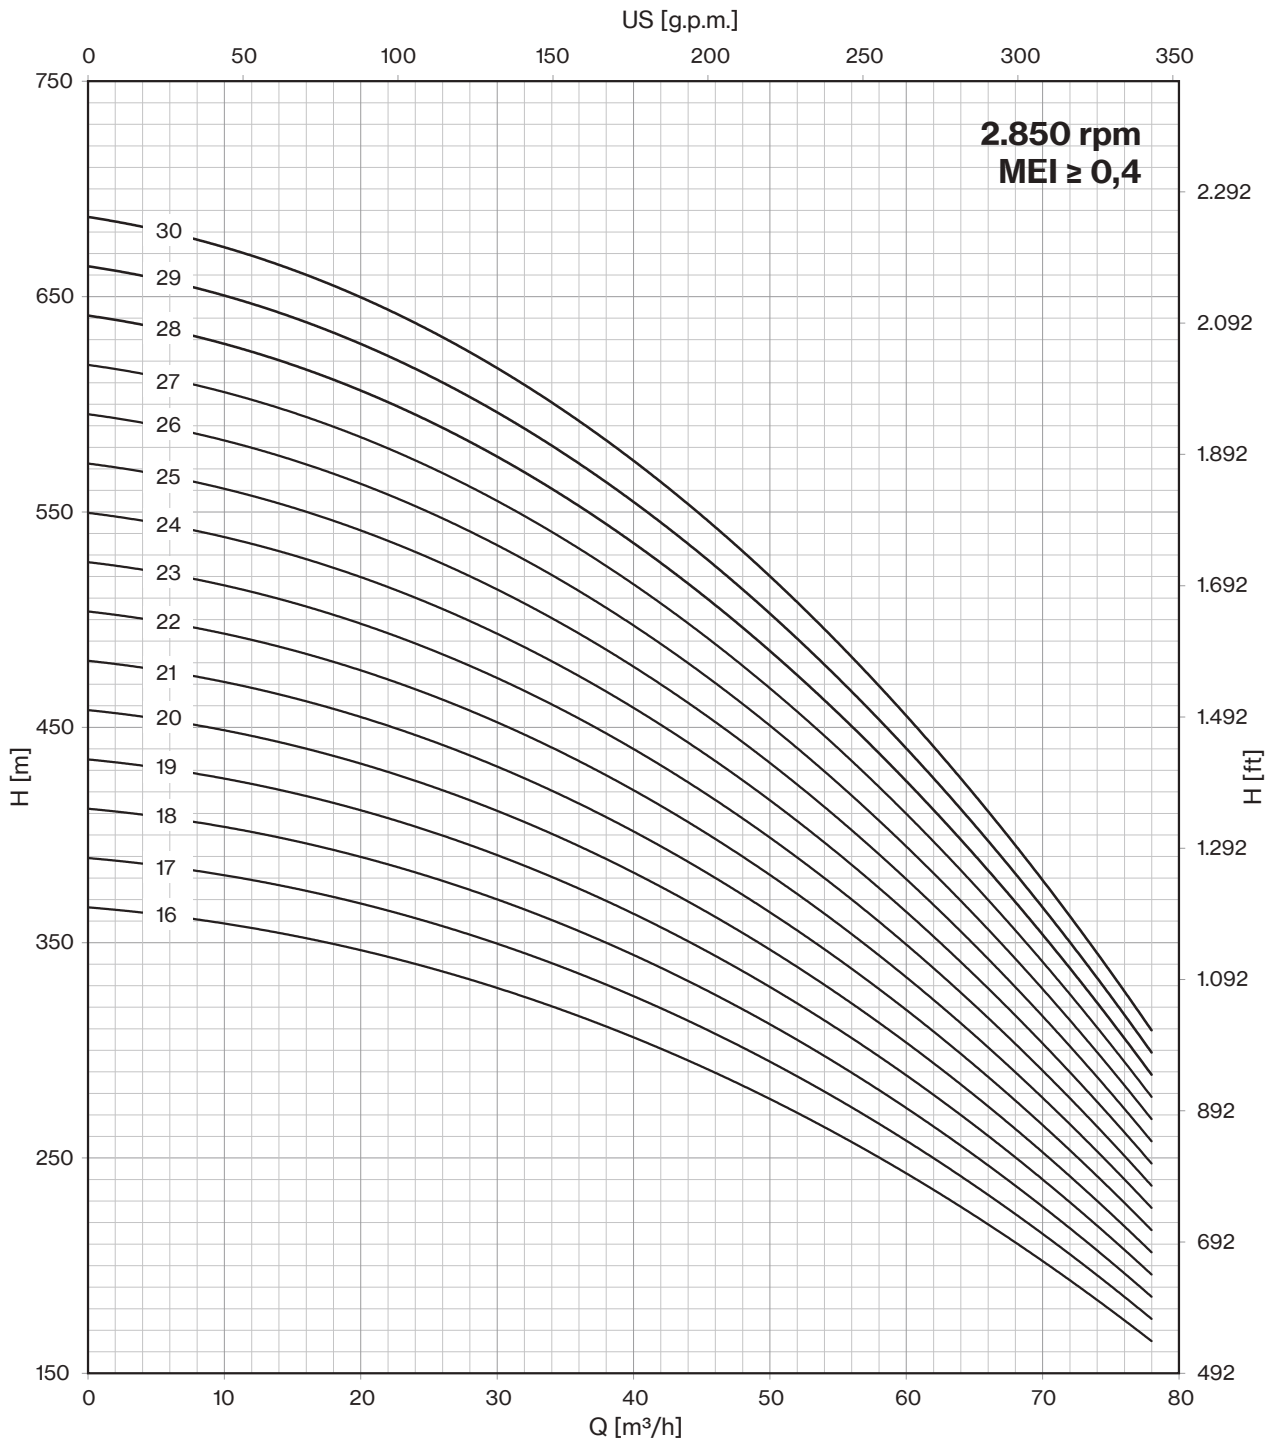


8LM 80


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	400	600	800	1000	1200	1400	1600
	HP	kW	A	l/sec	0	5,0	6,7	10,0	13,3	16,7	20,0	23,3	26,7
				m ³ /h	0	18	24	36	48	60	72	84	96
8LM 80/01	10	7,5	16,3	H (m)	27	26	26	24	23	22	20	18	15
8LM 80/02	17,5	13	27,3		54	53	51	49	47	44	40	35	30
8LM 80/03	25	18,5	38,3		81	79	77	73	70	65	60	53	44
8LM 80/04	35	26	52,9		108	105	103	97	93	87	80	70	59
8LM 80/05	40	30	61,1		135	132	129	122	117	109	100	88	74
8LM 80/06	50	37	75,8		162	158	154	146	140	131	120	105	89
8LM 80/07	60	45	86,3		189	184	180	170	163	153	140	123	104
8LM 80/08	75	55	106,2		216	210	206	194	186	174	160	140	118
8LM 80/09	75	55	106,2		243	237	231	219	210	196	180	158	133
8LM 80/10	90	66	126,0		270	263	257	243	233	218	200	175	148

Max Eff. % =	74
Max kW / St. =	5,75

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	3,5	4,5


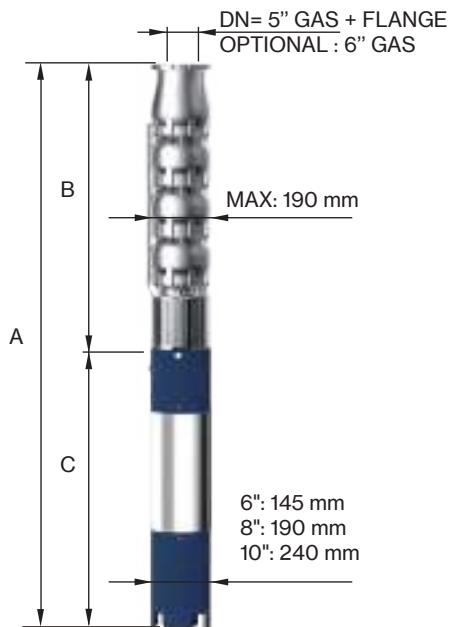


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 80/01	1164	463	701	55	19
8LM 80/02	1429	588	841	70	25
8LM 80/03	1704	713	991	83	32
8LM 80/04	2019	838	1181	100	38
8LM 80/05	2214	963	1251	108	45
8LM 80/06	2429	1088	1341	118	51
8LM 80/07	2336	1213	1123	178	58
8LM 80/08	2633	1400	1233	200	65
8LM 80/09	2758	1525	1233	200	71
8LM 80/10	2952	1650	1302	214	78

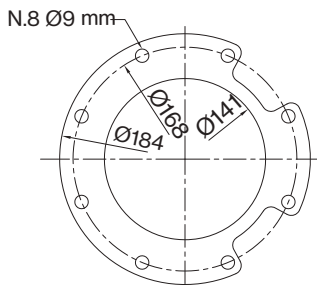

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm



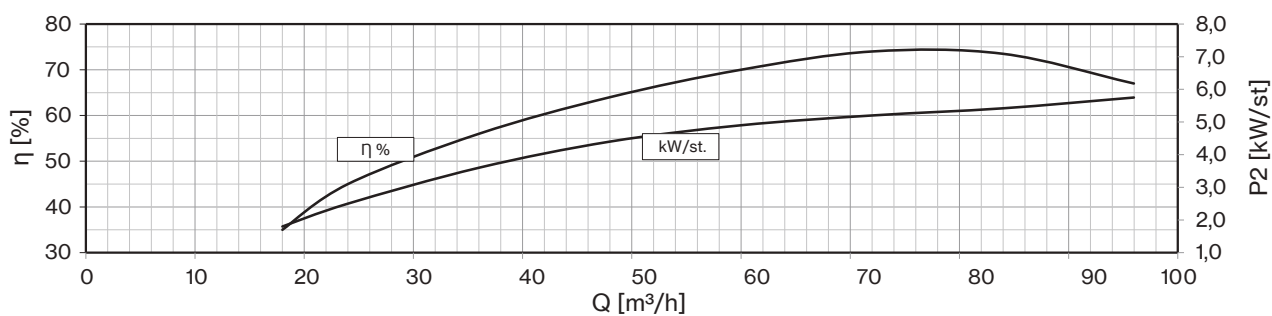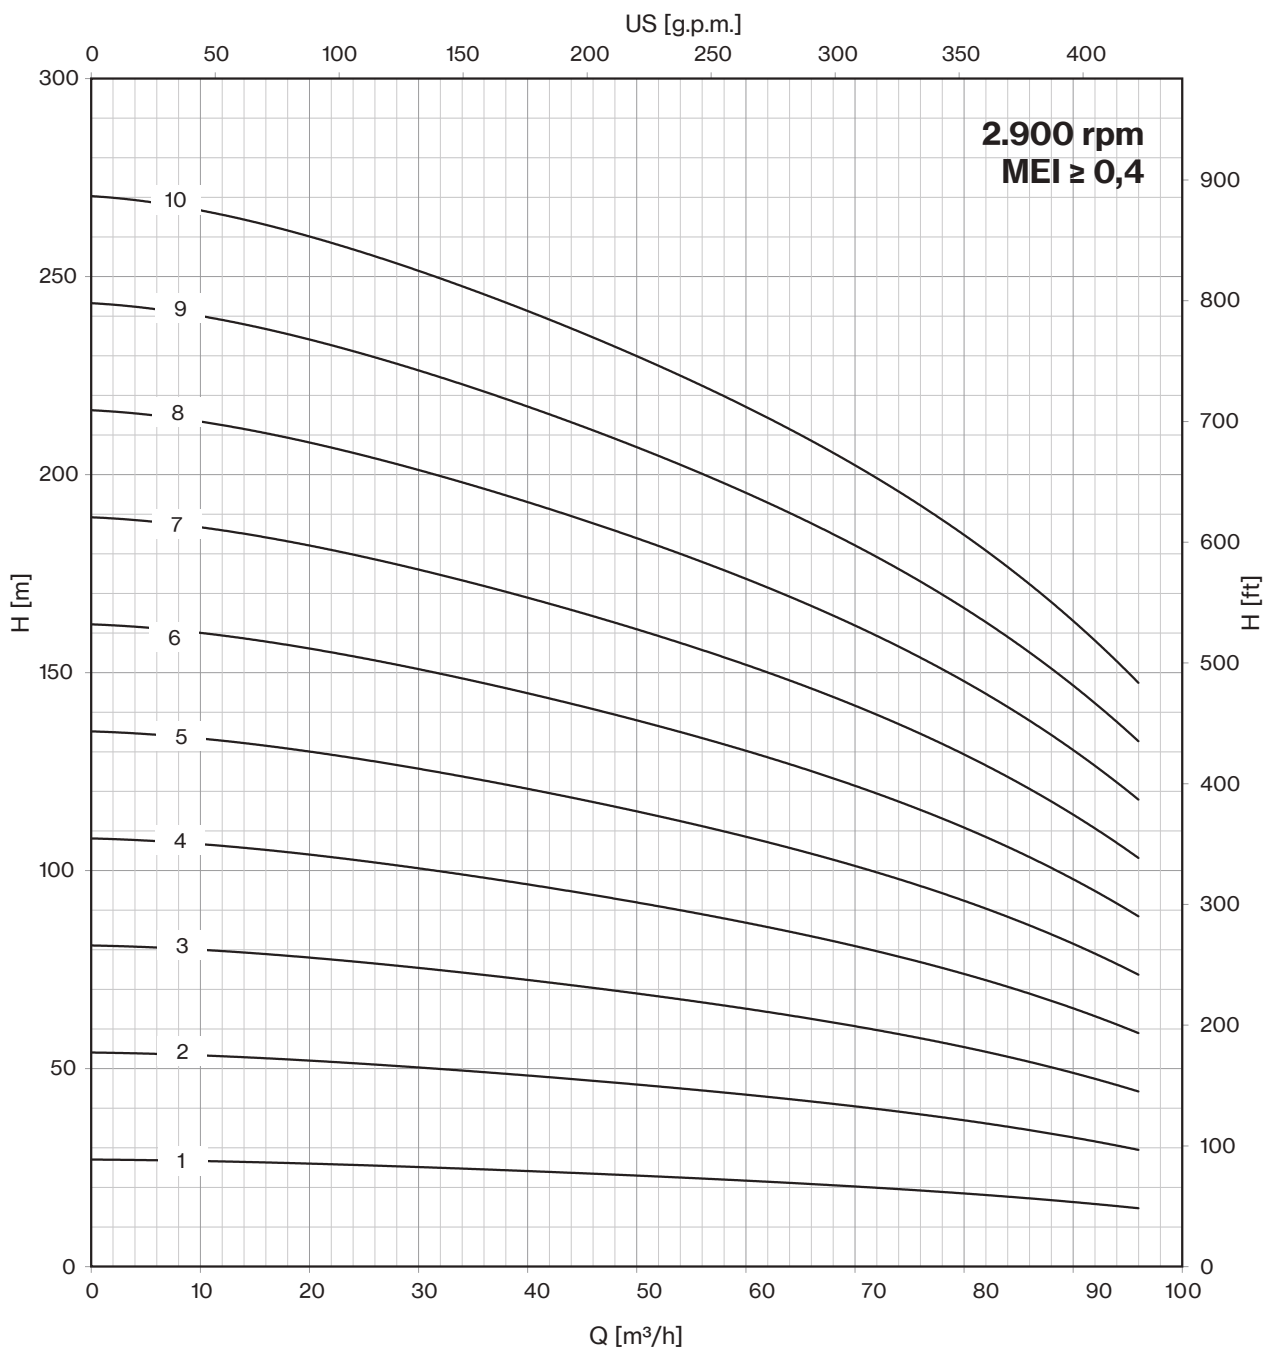


8LM 80


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	400	600	800	1000	1200	1400	1600
	HP	kW	A	l/sec	0	5,0	6,7	10,0	13,3	16,7	20,0	23,3	26,7
				m ³ /h	0	18	24	36	48	60	72	84	96
8LM 80/11	90	66	126,0	H (m)	297	289	283	267	256	240	220	193	163
8LM 80/12	100	75	143,2		324	316	308	292	280	262	240	210	178
8LM 80/13	100	75	143,2		351	342	334	316	303	283	260	228	192
8LM 80/14	125	92	175,1		378	368	360	340	326	305	280	245	207
8LM 80/15	125	92	175,1		405	395	386	365	350	327	300	263	222
8LM 80/16	125	92	175,1		432	421	411	389	373	349	320	280	237
8LM 80/17 D	150	110	211,0		459	447	437	413	396	371	340	298	252
8LM 80/18 D	150	110	211,0		486	473	463	437	419	392	360	315	266
8LM 80/19 D	150	110	211,0		513	500	488	462	443	414	380	333	281
8LM 80/20 D	175	130	245,3		540	526	514	486	466	436	400	350	296

Max Eff. % =	74
Max kW / St. =	5,75

Q (flow)	25%	50%	75%	100%
NPSH (m)	3	3	3,5	4,5

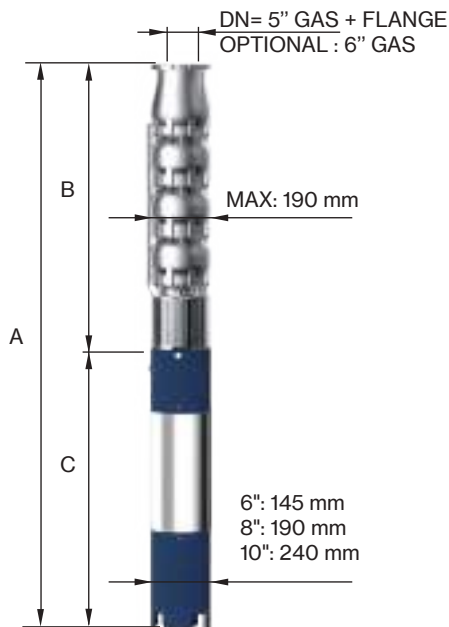



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 80/11	3077	1775	1302	214	84
8LM 80/12	3283	1900	1383	230	90
8LM 80/13	3408	2025	1383	230	97
8LM 80/14	3733	2150	1583	270	103
8LM 80/15	3858	2275	1583	270	110
8LM 80/16	3983	2400	1583	270	116
8LM 80/17 D	4258	2525	1733	300	123
8LM 80/18 D	4383	2650	1733	300	129
8LM 80/19 D	4508	2775	1733	300	136
8LM 80/20 D	4534	2900	1634	385	142

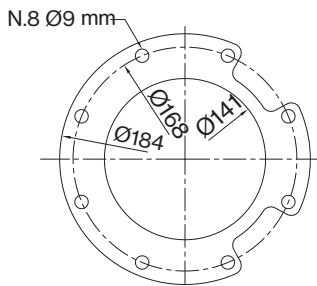

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

"D" Pump shaft in Duplex



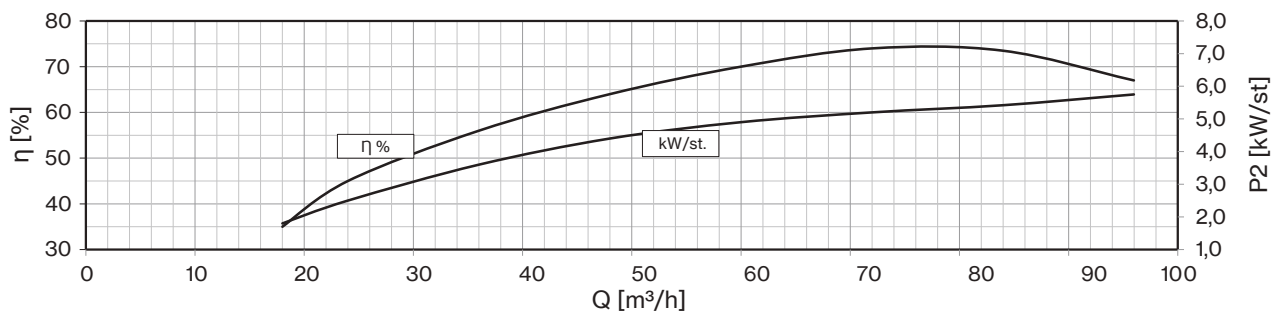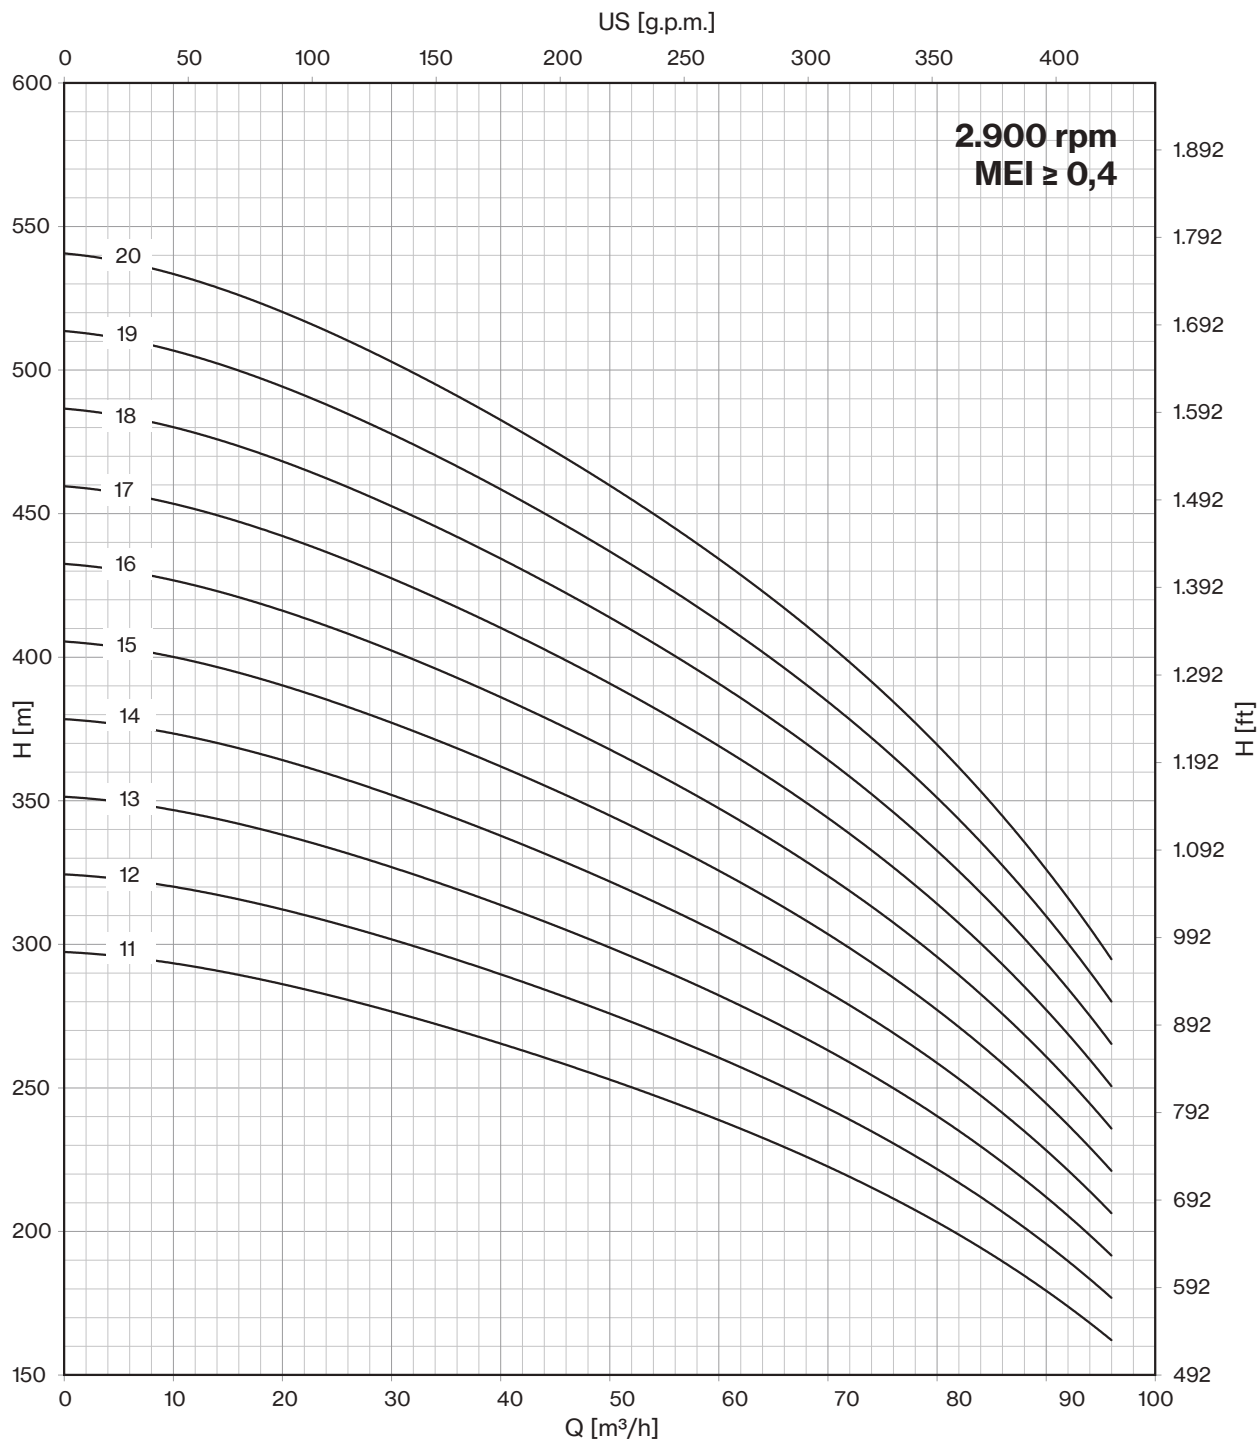


8LM 92


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	800	1000	1200	1400	1600	1800	2000
	HP	kW	A	l/sec	0	5,0	13,3	16,7	20,0	23,3	26,7	30,0	33,3
				m ³ /h	0	18	48	60	72	84	96	108	120
8LM 92/01	10	7,5	16,3	H (m)	27	26	24	23	22	20	18	16	13
8LM 92/02	17,5	13	27,3		54	53	49	47	44	40	36	31	25
8LM 92/03	30	22	45,1		81	79	73	70	65	60	54	47	38
8LM 92/04	35	26	52,9		108	105	97	93	87	80	72	62	50
8LM 92/05	50	37	75,8		135	132	122	117	109	101	90	78	63
8LM 92/06	60	45	86,3		162	158	146	140	131	121	107	93	76
8LM 92/07	75	55	106,2		189	184	170	163	153	141	125	109	88
8LM 92/08	75	55	106,2		216	210	194	186	174	161	143	124	101
8LM 92/09	90	66	126,0		243	237	219	210	196	181	161	140	113
8LM 92/10	90	66	126,0		270	263	243	233	218	201	179	155	126

Max Eff. % =	75
Max kW / St. =	6,47

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	2,9	3,9	7,8


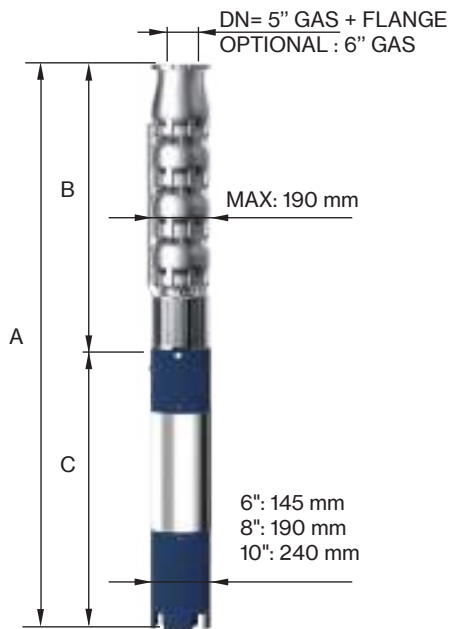


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 92/01	1164	463	701	55	19
8LM 92/02	1429	588	841	70	26
8LM 92/03	1784	713	1071	92	32
8LM 92/04	2019	838	1181	100	39
8LM 92/05	2304	963	1341	118	46
8LM 92/06	2211	1088	1123	178	53
8LM 92/07	2508	1275	1233	200	60
8LM 92/08	2633	1400	1233	200	67
8LM 92/09	2827	1525	1302	214	74
8LM 92/10	2952	1650	1302	214	81

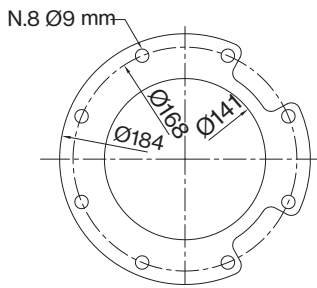

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm



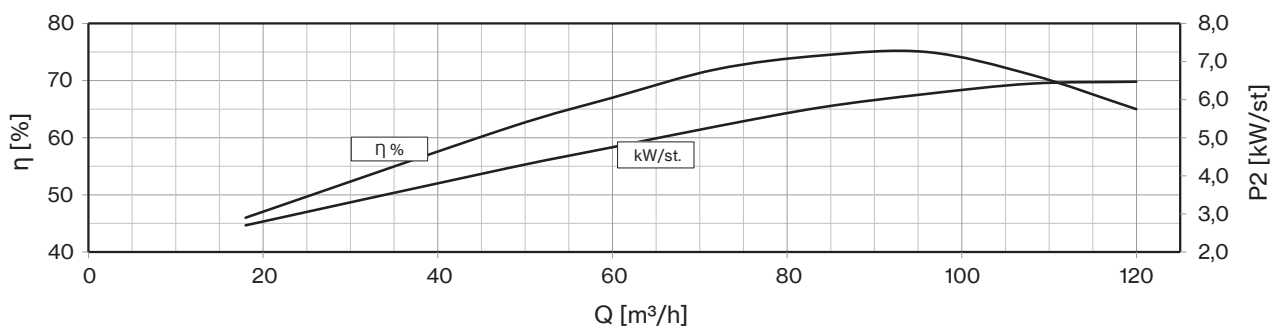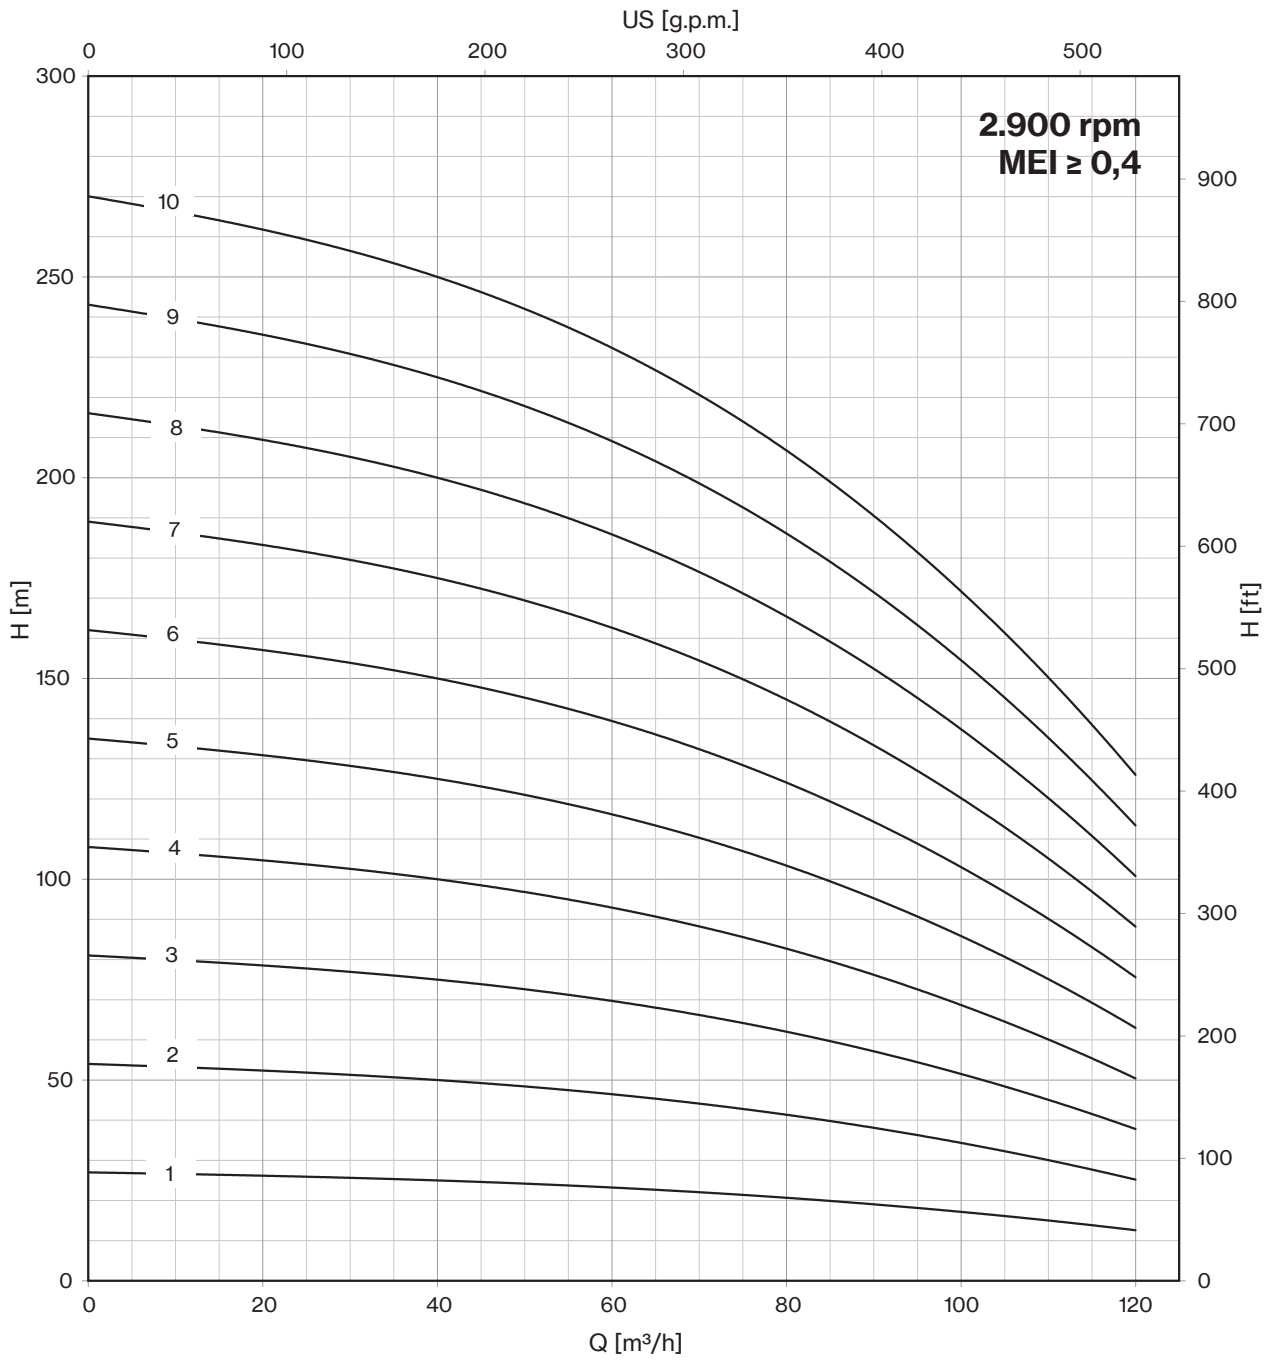


8LM 92


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	300	800	1000	1200	1400	1600	1800	2000
	HP	kW	A	l/sec	0	5,0	13,3	16,7	20,0	23,3	26,7	30,0	33,3
				m ³ /h	0	18	48	60	72	84	96	108	120
8LM 92/11	100	75	143,2	H (m)	297	289	267	256	240	221	197	171	139
8LM 92/12	125	92	175,1		324	316	292	280	262	241	215	186	151
8LM 92/13	125	92	175,1		351	342	316	303	283	261	233	202	164
8LM 92/14	125	92	175,1		378	368	340	326	305	281	251	217	176
8LM 92/15 D	150	110	211,0		405	395	365	350	327	302	269	233	189
8LM 92/16 D	150	110	211,0		432	421	389	373	349	322	286	248	202
8LM 92/17 D	150	110	211,0		459	447	413	396	371	342	304	264	214
8LM 92/18 D	175	130	245,3		486	473	437	419	392	362	322	279	227
8LM 92/19 D	175	130	245,3		513	500	462	443	414	382	340	295	239
8LM 92/20 D	175	130	245,3		540	526	486	466	436	402	358	310	252

Max Eff. % =	75
Max kW / St. =	6,5

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	2,9	3,9	7,8

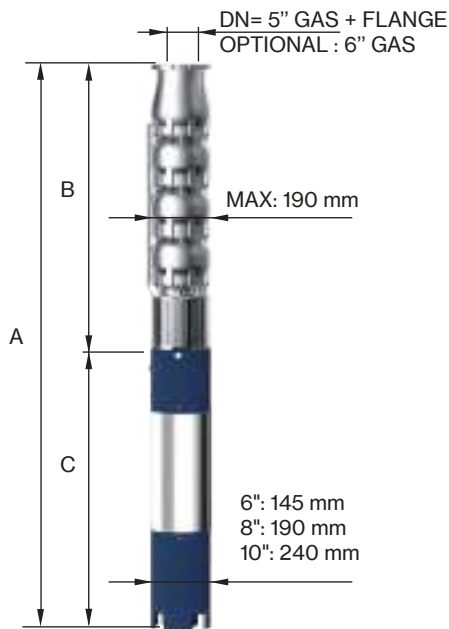



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 92/11	3158	1775	1383	230	88
8LM 92/12	3483	1900	1583	270	94
8LM 92/13	3608	2025	1583	270	101
8LM 92/14	3733	2150	1583	270	108
8LM 92/15 D	4008	2275	1733	300	115
8LM 92/16 D	4133	2400	1733	300	122
8LM 92/17 D	4258	2525	1733	300	128
8LM 92/18 D	4284	2650	1634	385	138
8LM 92/19 D	4409	2775	1634	385	145
8LM 92/20 D	4534	2900	1634	385	152

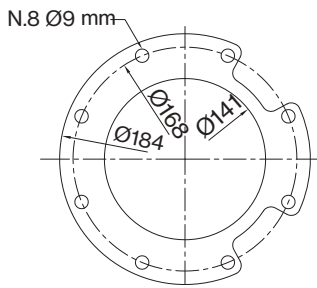

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

"D" Pump shaft in Duplex



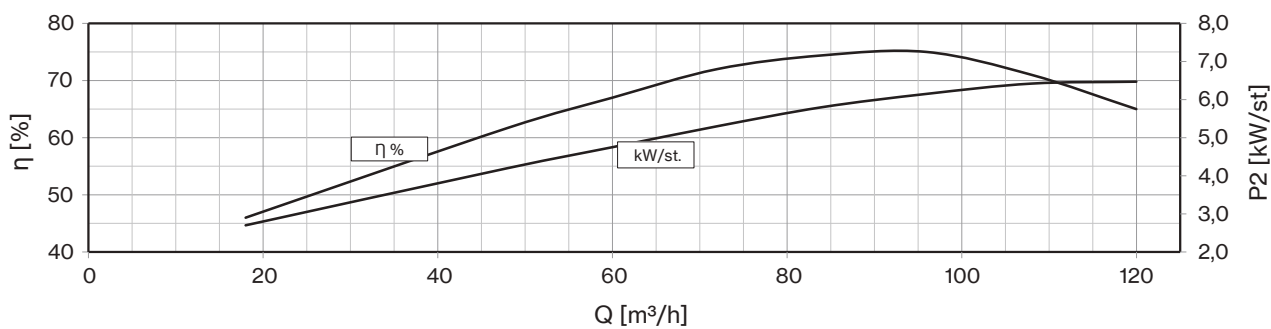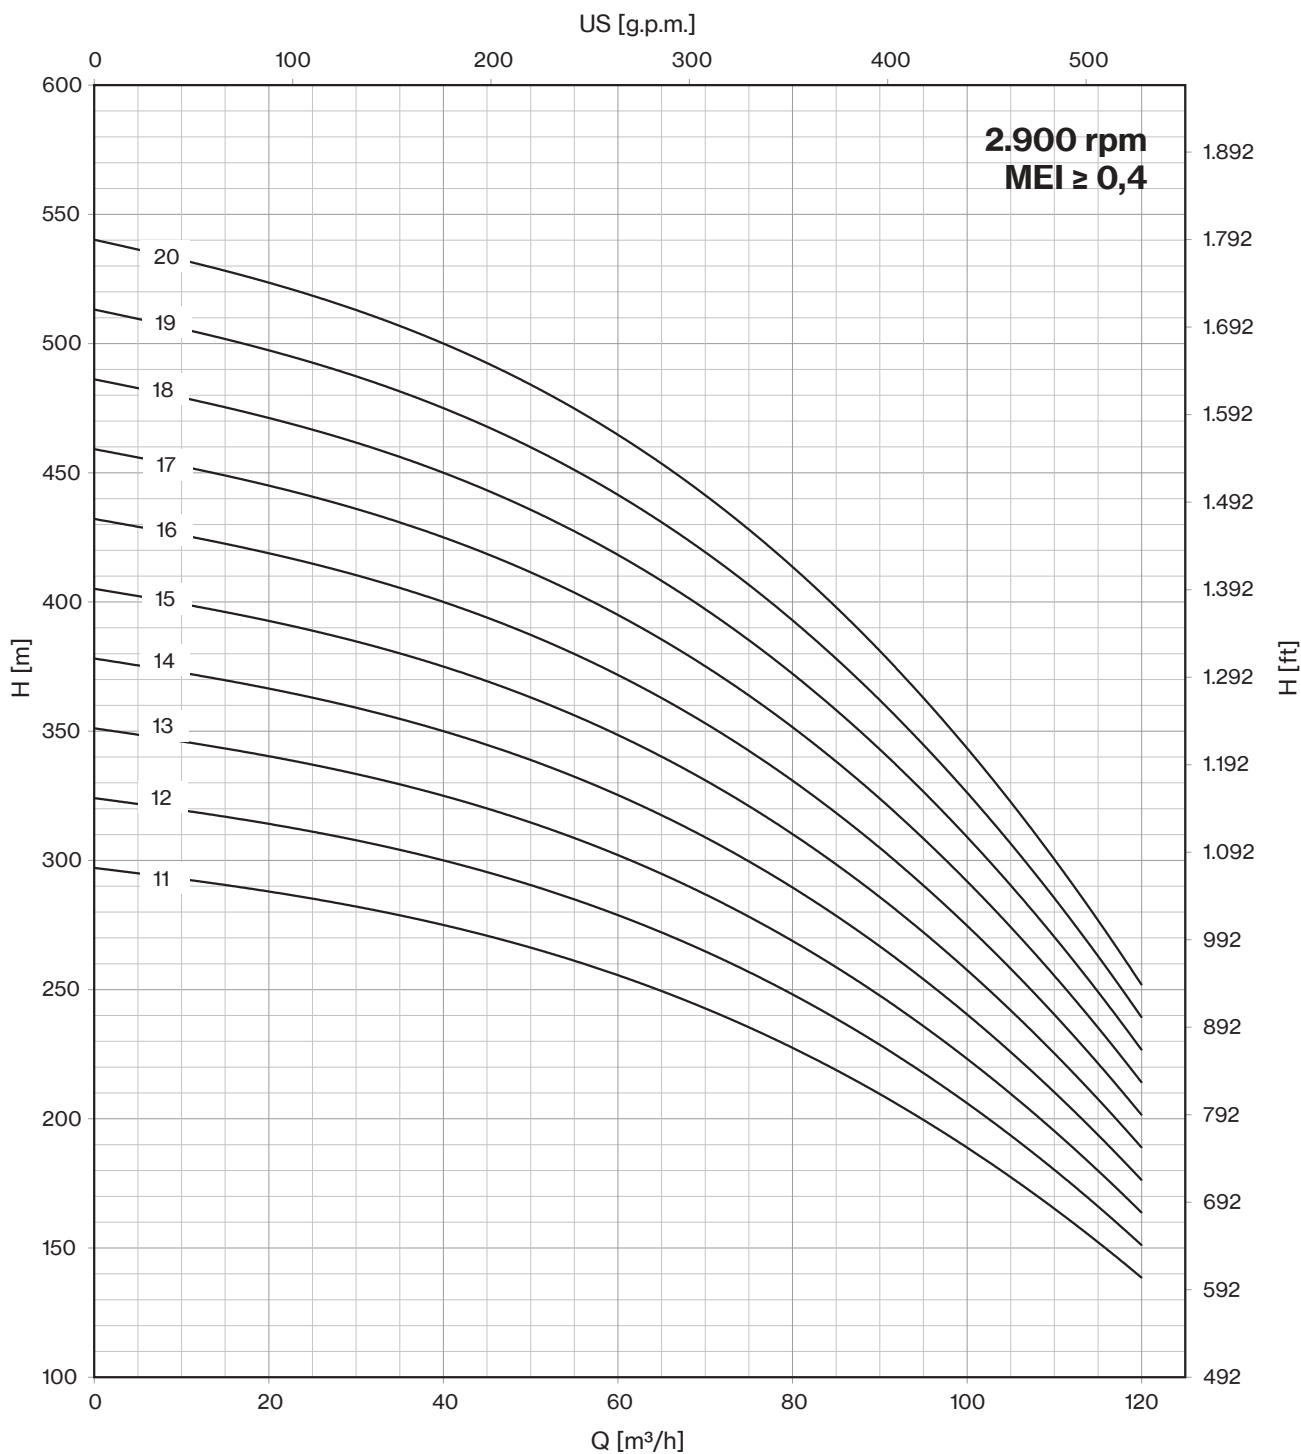


8LM 110


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	1200	1400	1600	1800	2000	2200	2400
	HP	kW	A	l/sec	0	10,0	20,0	23,3	26,7	30,0	33,3	36,7	40,0
				m ³ /h	0	36	72	84	96	108	120	132	144
8LM 110/01	10	7,5	16,3	H (m)	28	25	22	21	20	19	17	15	13
8LM 110/02	20	15	31,5		55	51	44	42	41	38	35	31	26
8LM 110/03	30	22	45,1		83	76	65	63	61	57	52	46	38
8LM 110/04	40	30	61,1		110	101	87	84	82	76	69	62	51
8LM 110/05	50	37	75,8		138	127	109	106	102	96	87	77	64
8LM 110/06	60	45	86,3		165	152	131	127	122	115	104	92	77
8LM 110/07	75	55	106,2		193	177	153	148	143	134	121	108	90

Max Eff. % =	77
Max kW / St. =	7,2

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	2,9	3,9	7,8


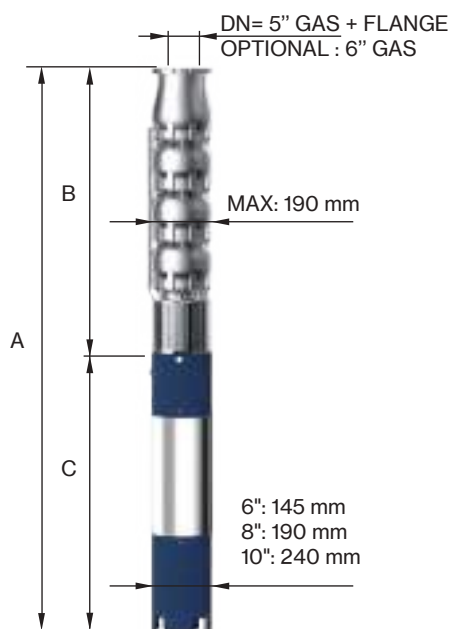


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 110/01	1164	463	701	55	19
8LM 110/02	1519	588	931	75	26
8LM 110/03	1784	713	1071	92	32
8LM 110/04	2089	838	1251	108	39
8LM 110/05	2304	963	1341	118	46
8LM 110/06	2273	1150	1123	178	54
8LM 110/07	2508	1275	1233	200	60

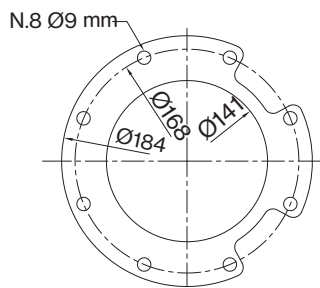

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm



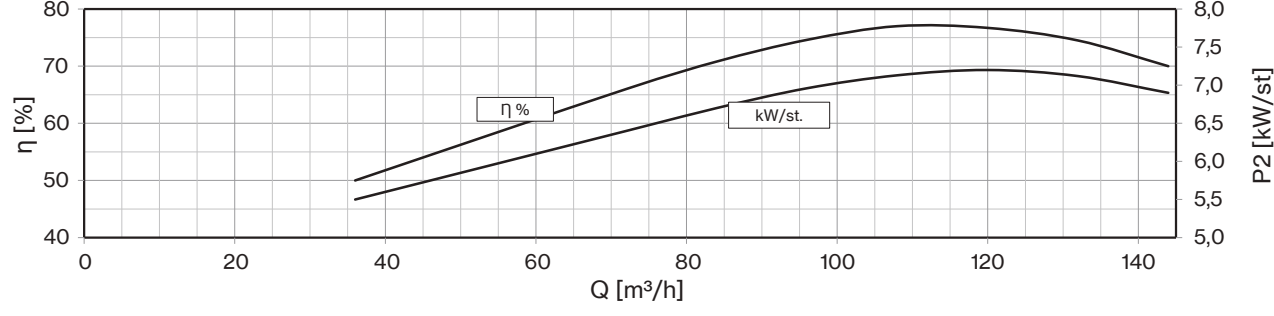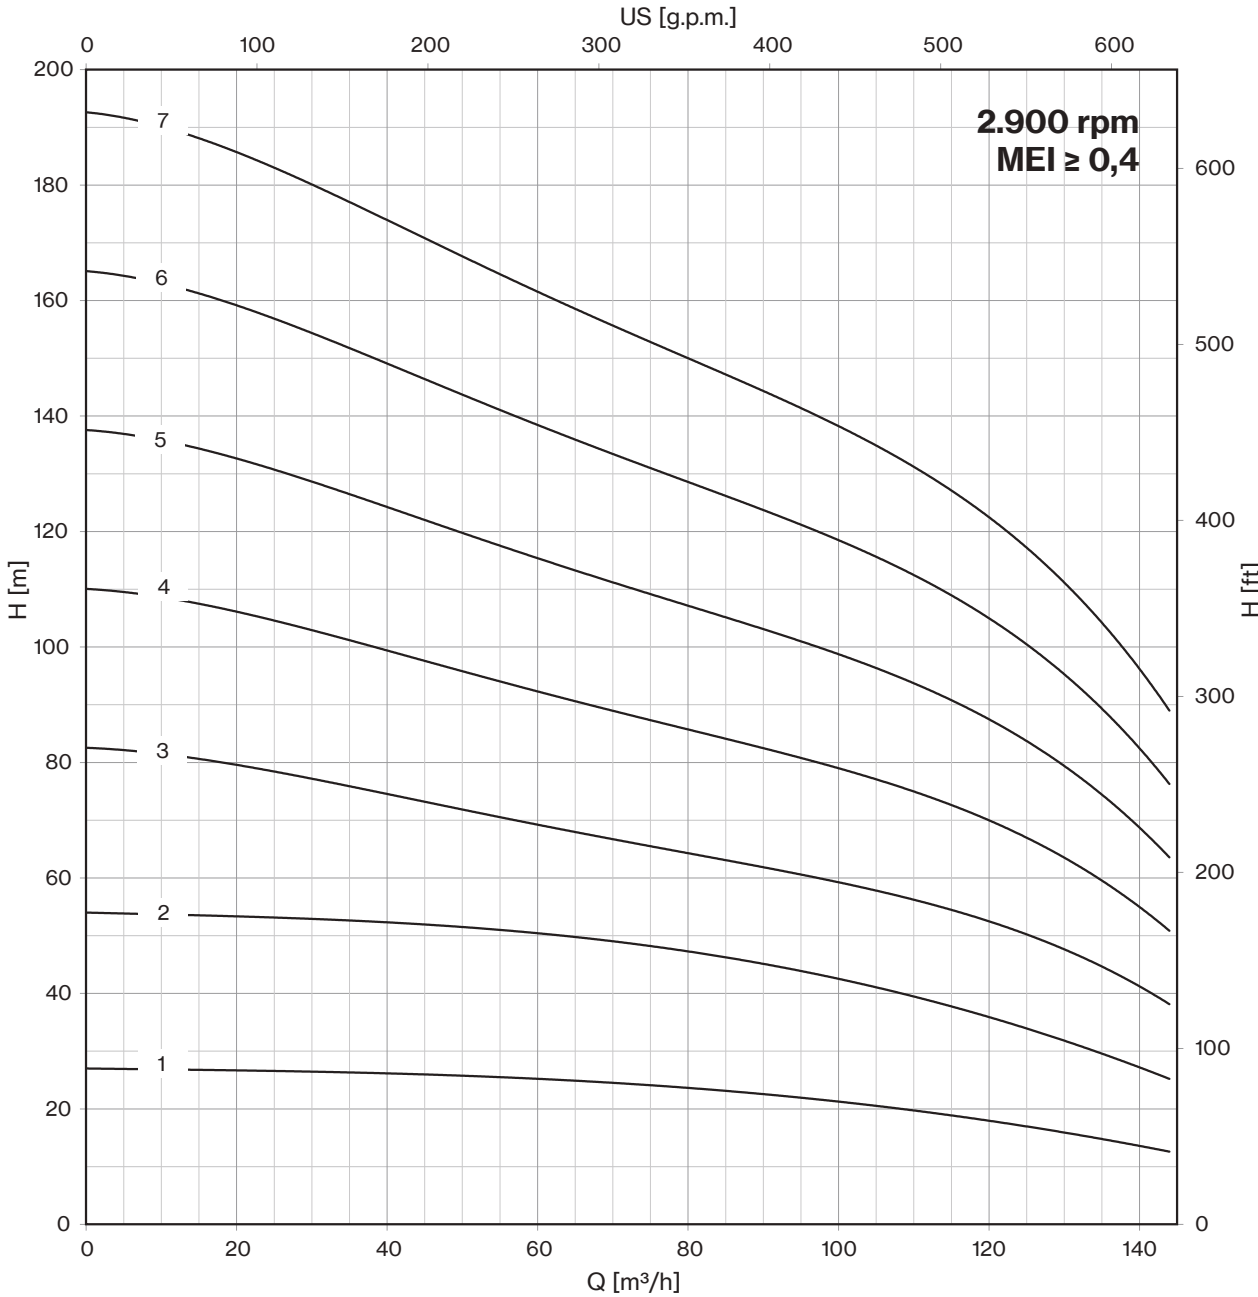


8LM 110


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	1200	1400	1600	1800	2000	2200	2400
	HP	kW	A	l/sec	0	10,0	20,0	23,3	26,7	30,0	33,3	36,7	40,0
				m ³ /h	0	36	72	84	96	108	120	132	144
8LM 110/08	90	66	126,0	H (m)	220	202	174	169	163	153	138	123	102
8LM 110/09	90	66	126,0		248	228	196	190	184	172	156	139	115
8LM 110/10	100	75	143,2		275	253	218	211	204	191	173	154	128
8LM 110/11	125	92	175,1		303	278	240	232	224	210	190	169	141
8LM 110/12	125	92	175,1		330	304	262	253	245	229	208	185	154
8LM 110/13 D	150	110	211,0		358	329	283	274	265	248	225	200	166
8LM 110/14 D	150	110	211,0		385	354	305	295	286	267	242	216	179
8LM 110/15 D	150	110	211,0		413	380	327	317	306	287	260	231	192
8LM 110/16 D	175	130	245,3		440	405	349	338	326	306	277	246	205
8LM 110/17 D	175	130	245,3		468	430	371	359	347	325	294	262	218
8LM 110/18 D	175	130	245,3	495	455	392	380	367	344	311	277	230	

Max Eff. % =	77
Max kW / St. =	7,2

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	2,9	3,9	7,8

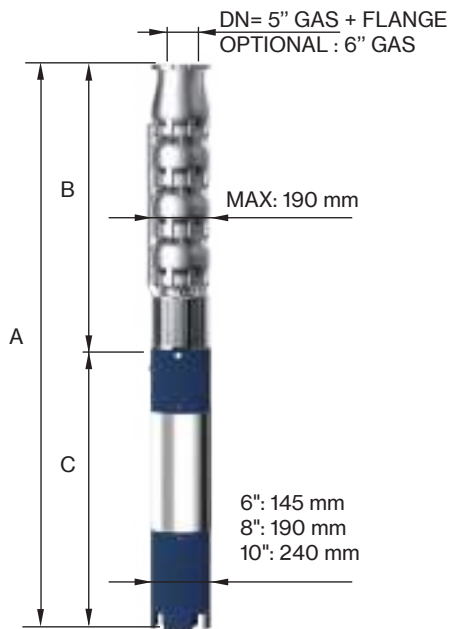



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 110/08	2702	1400	1302	214	67
8LM 110/09	2827	1525	1302	214	74
8LM 110/10	3033	1650	1383	230	81
8LM 110/11	3358	1775	1583	270	88
8LM 110/12	3483	1900	1583	270	94
8LM 110/13 D	3758	2025	1733	300	101
8LM 110/14 D	3883	2150	1733	300	108
8LM 110/15 D	4008	2275	1733	300	115
8LM 110/16 D	4034	2400	1634	385	125
8LM 110/17 D	4159	2525	1634	385	132
8LM 110/18 D	4284	2650	1634	385	138

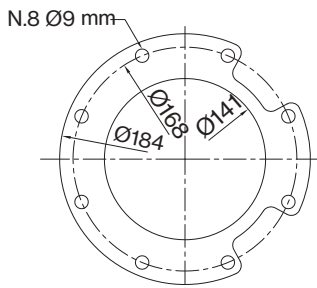

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

"D" Pump shaft in Duplex



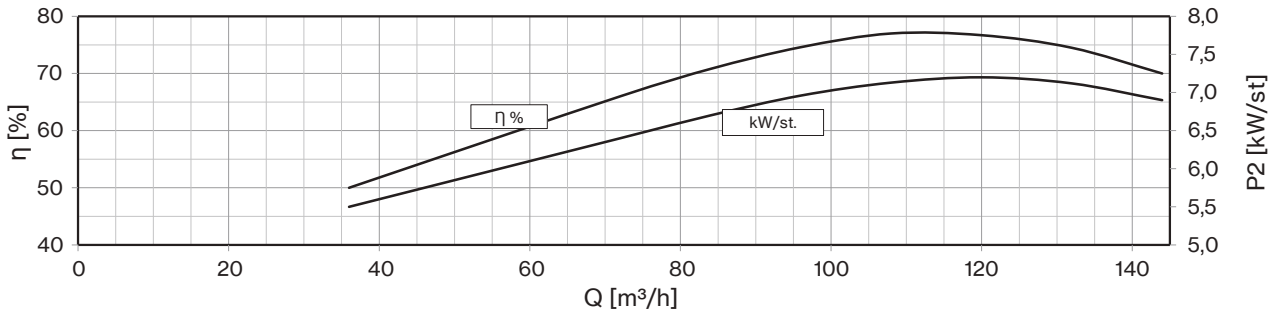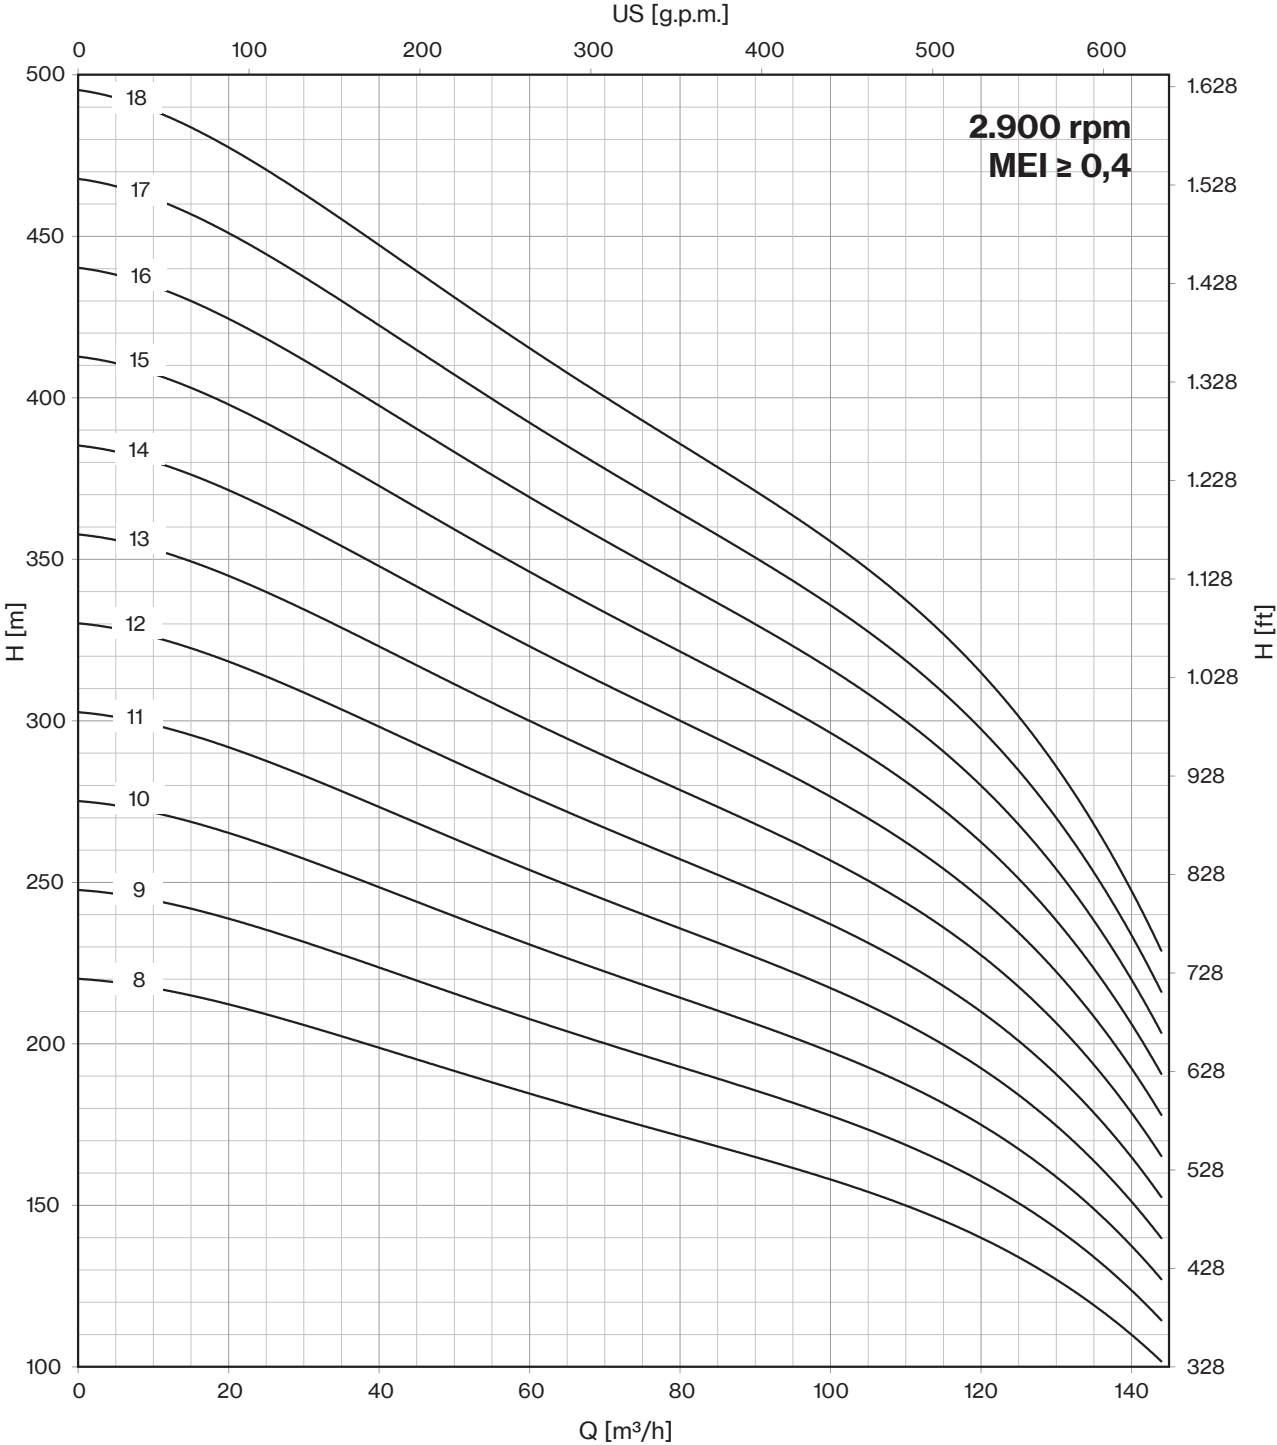


8LM 130


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	1600	1800	2000	2200	2400	2600	2800
	HP	kW	A	l/sec	0	10,0	26,7	30,0	33,3	36,7	40,0	43,3	46,7
				m ³ /h	0	36	96	108	120	132	144	156	168
8LM 130/01	12,5	9,2	19,9	H (m)	27	25	21	20	19	18	16	15	12
8LM 130/02	25	18,5	38,3		54	49	41	40	38	36	33	29	24
8LM 130/03	35	26	52,9		81	74	62	59	57	54	49	44	36
8LM 130/04	50	37	75,8		108	98	83	79	76	72	66	58	48
8LM 130/05	60	45	86,3		135	123	104	99	95	90	82	73	60
8LM 130/06	75	55	106,2		162	147	124	119	114	108	98	87	72
8LM 130/07	90	66	126,0		189	172	145	139	133	126	115	102	84
8LM 130/08	100	75	143,2		216	196	166	158	152	144	131	116	96

Max Eff. % =	78
Max kW / St. =	8,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	3	3,5	8,7


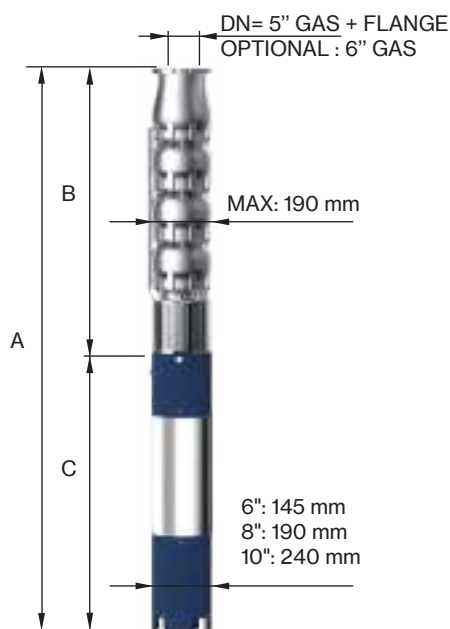


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	8LM 130/01	1214	463	751	60	19
	8LM 130/02	1579	588	991	83	26
	8LM 130/03	1894	713	1181	100	33
	8LM 130/04	2179	838	1341	118	40
	8LM 130/05	2148	1025	1123	178	48
	8LM 130/06	2383	1150	1233	200	55
	8LM 130/07	2577	1275	1302	214	62
	8LM 130/08	2783	1400	1383	230	69

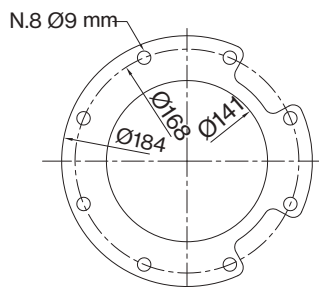

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm



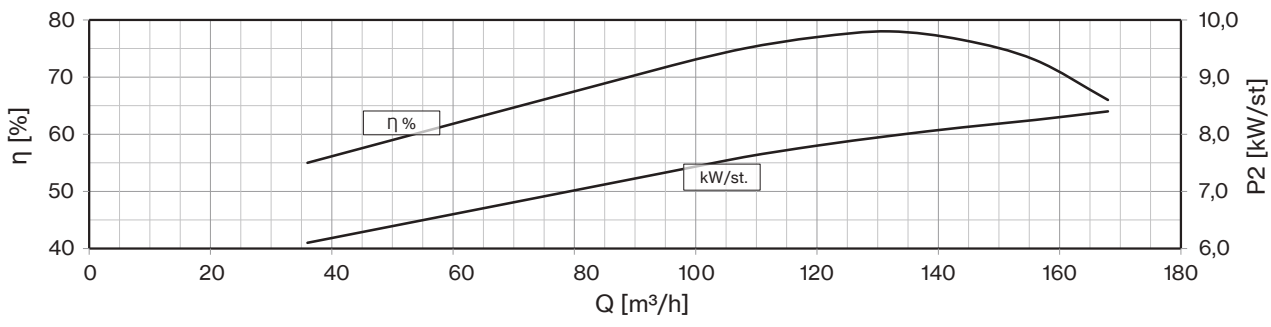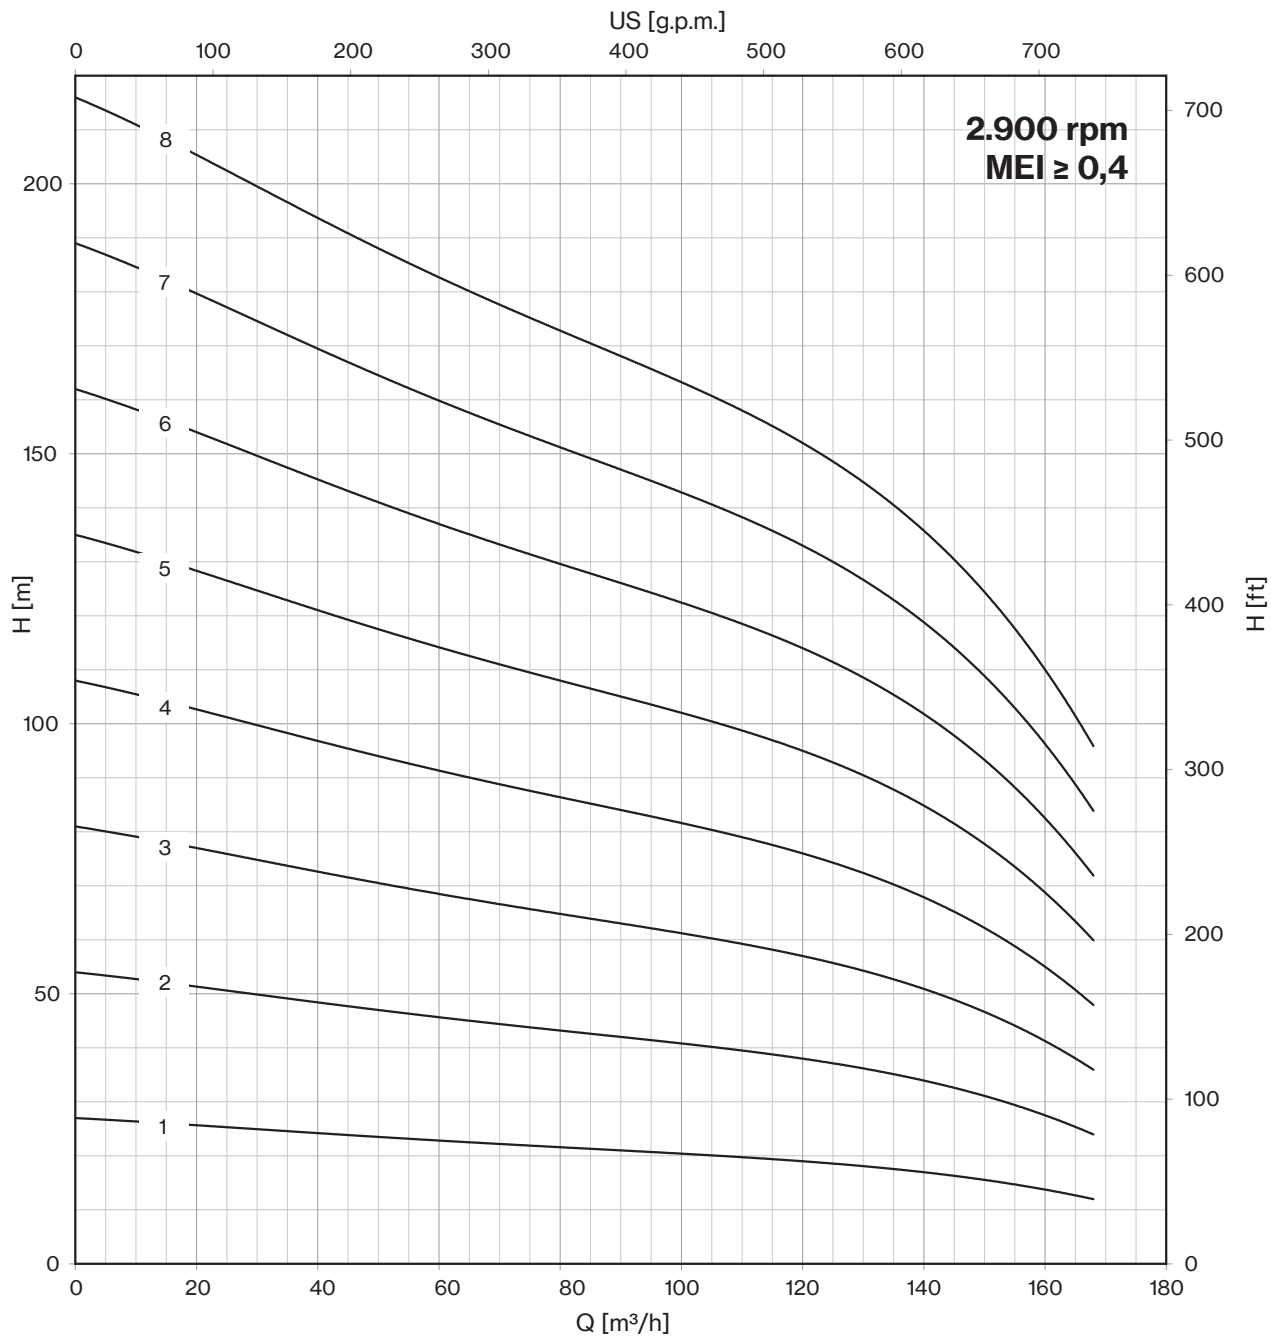


8LM 130


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	1600	1800	2000	2200	2400	2600	2800
	HP	kW	A	l/sec	0	10,0	26,7	30,0	33,3	36,7	40,0	43,3	46,7
				m ³ /h	0	36	96	108	120	132	144	156	168
8LM 130/09	125	92	175,1	H (m)	243	221	186	178	171	162	148	131	108
8LM 130/10	125	92	175,1		270	245	207	198	190	180	164	145	120
8LM 130/11	150	110	211,0		297	270	228	218	209	198	180	160	132
8LM 130/12 D	150	110	211,0		324	294	248	238	228	216	197	174	144
8LM 130/13 D	150	110	211,0		351	319	269	257	247	234	213	189	156
8LM 130/14 D	175	130	245,3		378	343	290	277	266	252	230	203	168
8LM 130/15 D	175	130	245,3		405	368	311	297	285	270	246	218	180
8LM 130/16 D	200	150	277,2		432	392	331	317	304	288	262	232	192
8LM 130/17 D	200	150	277,2		459	417	352	337	323	306	279	247	204
8LM 130/18 D	225	165	313,3		486	441	373	356	342	324	295	261	216

Max Eff. % =	78
Max kW / St. =	8,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	2,5	3	3,5	8,7

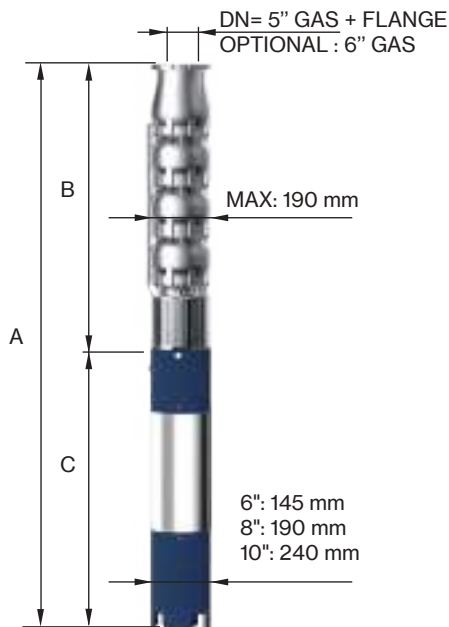



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 130/09	3108	1525	1583	270	76
8LM 130/10	3233	1650	1583	270	83
8LM 130/11	3508	1775	1733	300	90
8LM 130/12 D	3633	1900	1733	300	97
8LM 130/13 D	3758	2025	1733	300	104
8LM 130/14 D	3784	2150	1634	385	114
8LM 130/15 D	3909	2275	1634	385	121
8LM 130/16 D	4134	2400	1734	415	128
8LM 130/17 D	4259	2525	1734	415	135
8LM 130/18 D	4504	2650	1854	444	142

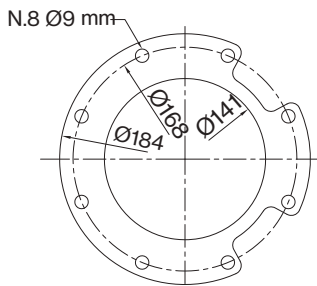

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

"D" Pump shaft in Duplex



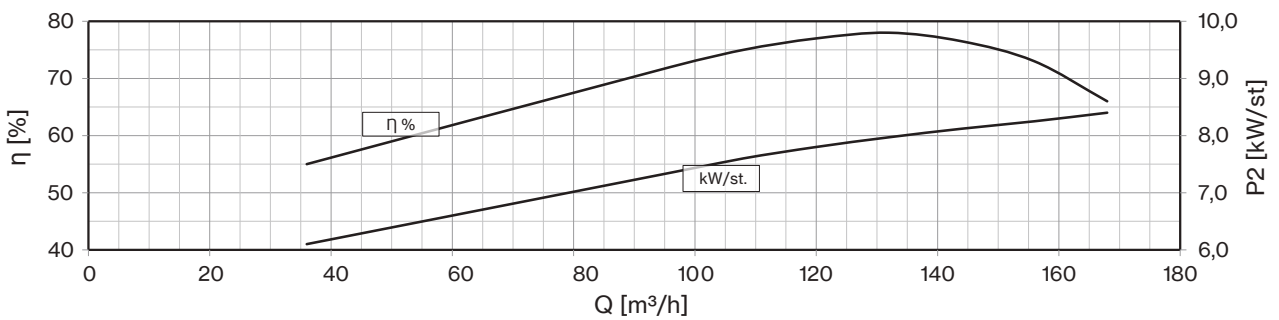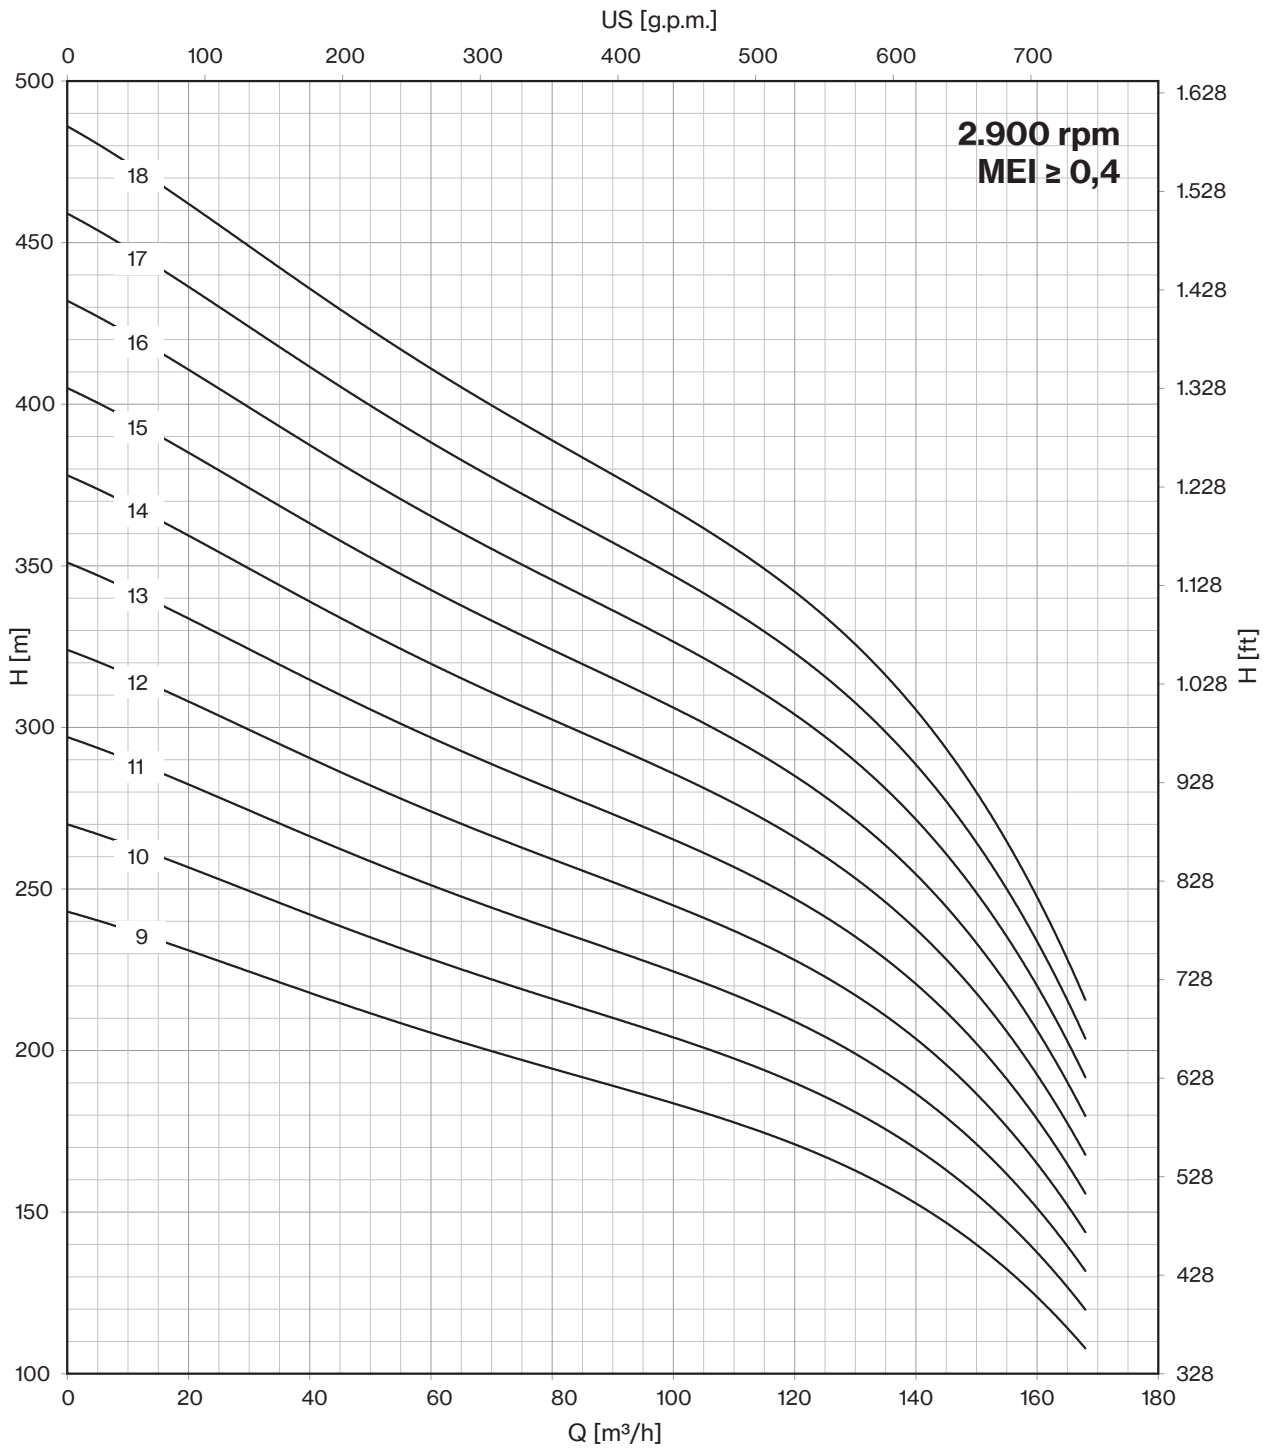


8LM 160


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	2000	2200	2400	2600	2800	3000	3200
	HP	kW	A	l/sec	0	10,0	33,3	36,7	40,0	43,3	46,7	50,0	53,3
				m ³ /h	0	36	120	132	144	156	168	180	192
8LM 160/01	15	11	23,4	H (m)	25	24	19	18	17	17	16	14	12
8LM 160/02	30	22	45,1		50	48	38	36	35	33	31	28	24
8LM 160/03	40	30	61,1		75	71	56	54	52	50	47	41	36
8LM 160/04	60	45	86,3		100	95	75	72	70	66	62	55	48
8LM 160/05	75	55	106,2		125	119	94	91	87	83	78	69	60
8LM 160/06	90	66	126,0		150	143	113	109	104	100	93	83	72
8LM 160/07	90	66	126,0		175	167	132	127	122	116	109	97	84
8LM 160/08	125	92	175,1		200	190	150	145	139	133	124	110	96

Max Eff. % =	78,5
Max kW / St. =	9,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	4	4,5	7	13


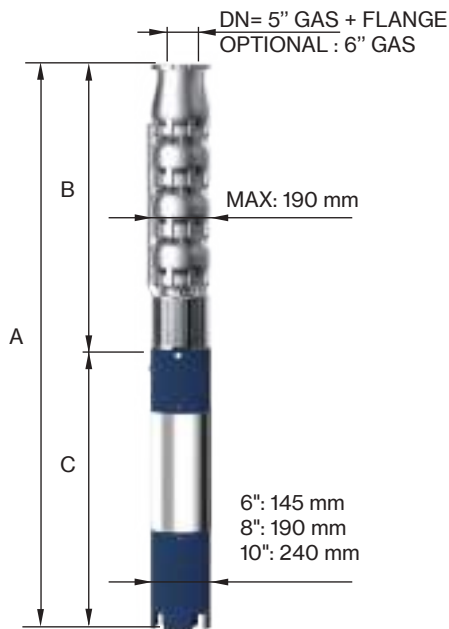


50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 160/01	1299	488	811	65	20
8LM 160/02	1709	638	1071	92	27
8LM 160/03	2039	788	1251	108	35
8LM 160/04	2061	938	1123	178	42
8LM 160/05	2383	1150	1233	200	50
8LM 160/06	2602	1300	1302	214	58
8LM 160/07	2752	1450	1302	214	65
8LM 160/08	3183	1600	1583	270	73

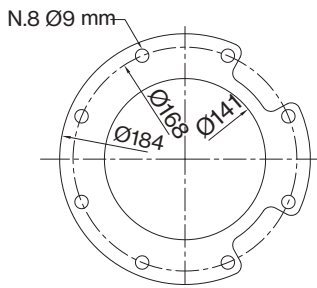

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm



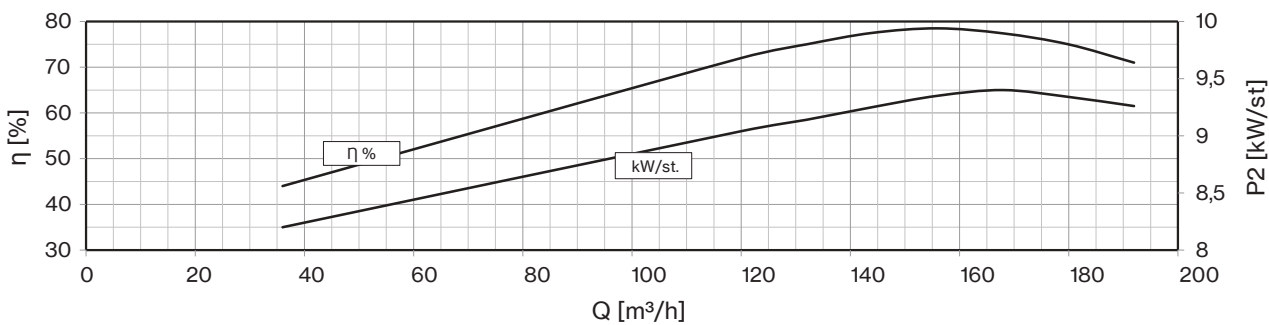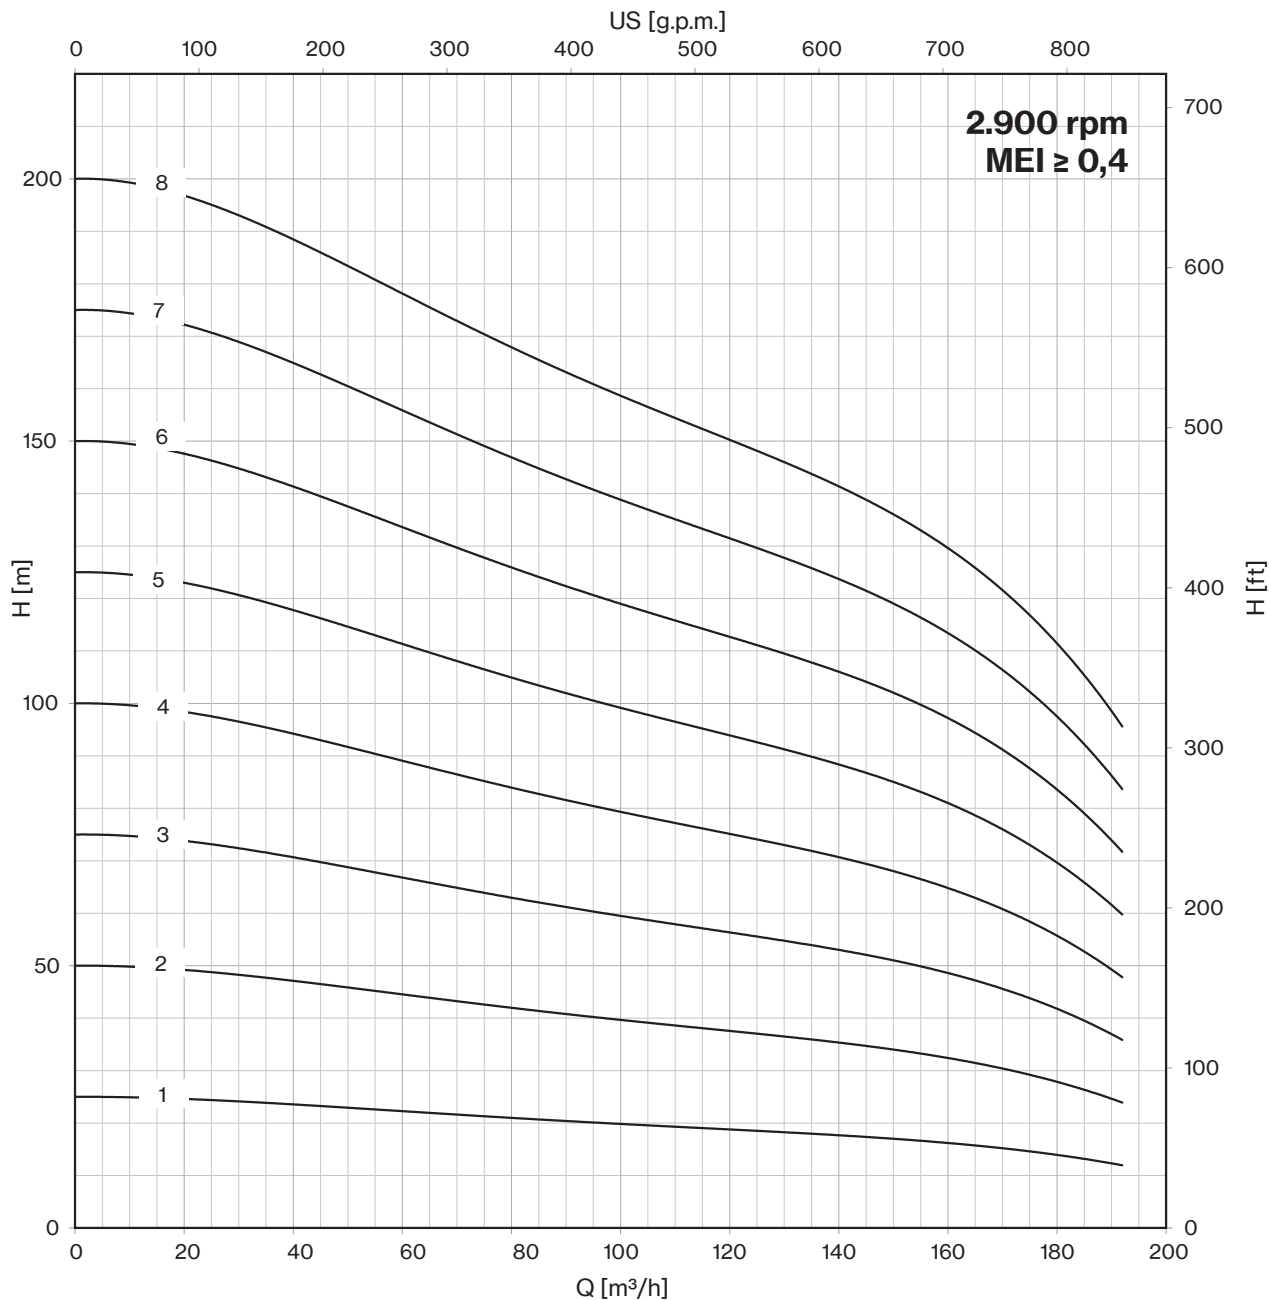


8LM 160


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	600	2000	2200	2400	2600	2800	3000	3200
	HP	kW	A	l/sec	0	10,0	33,3	36,7	40,0	43,3	46,7	50,0	53,3
				m ³ /h	0	36	120	132	144	156	168	180	192
8LM 160/09	125	92	175,1	H (m)	225	214	169	163	157	149	140	124	108
8LM 160/10 D	150	110	211,0		250	238	188	181	174	166	155	138	120
8LM 160/11 D	150	110	211,0		275	262	207	199	191	183	171	152	132
8LM 160/12 D	175	130	245,3		300	286	226	217	209	199	186	166	144
8LM 160/13 D	175	130	245,3		325	309	244	235	226	216	202	179	156
8LM 160/14 D	200	150	277,2		350	333	263	253	244	232	217	193	168
8LM 160/15 D	200	150	277,2		375	357	282	272	261	249	233	207	180
8LM 160/16 D	225	165	313,3		400	381	301	290	278	266	248	221	192
8LM 160/17 D	225	165	313,3		425	405	320	308	296	282	264	235	204
8LM 160/18 D	250	185	342,2		450	428	338	326	313	299	279	248	216

Max Eff. % =	78,5
Max kW / St. =	9,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	4	4,5	7	13

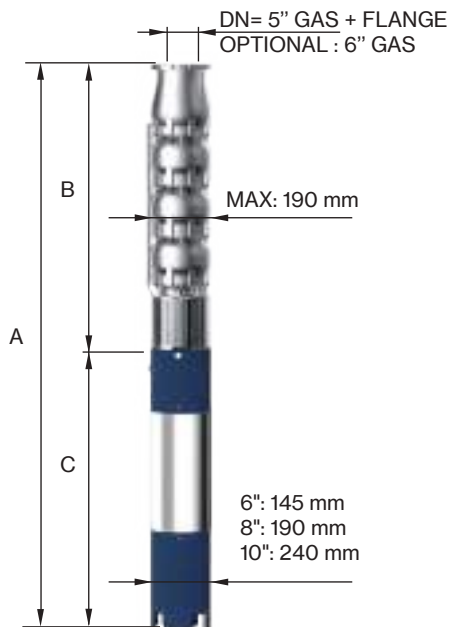



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
8LM 160/09	3333	1750	1583	270	80
8LM 160/10 D	3633	1900	1733	300	88
8LM 160/11 D	3783	2050	1733	300	95
8LM 160/12 D	3834	2200	1634	385	103
8LM 160/13 D	3984	2350	1634	385	114
8LM 160/14 D	4234	2500	1734	415	121
8LM 160/15 D	4384	2650	1734	415	129
8LM 160/16 D	4654	2800	1854	444	136
8LM 160/17 D	4804	2950	1854	444	144
8LM 160/18 D	5084	3100	1984	480	151

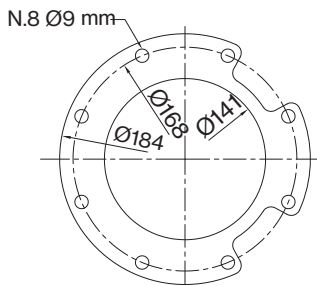

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 139,7 mm

"D" Pump shaft in Duplex



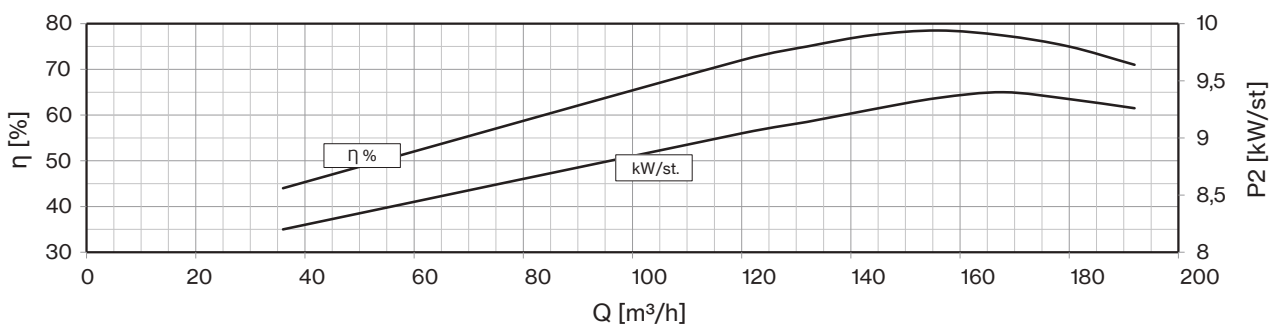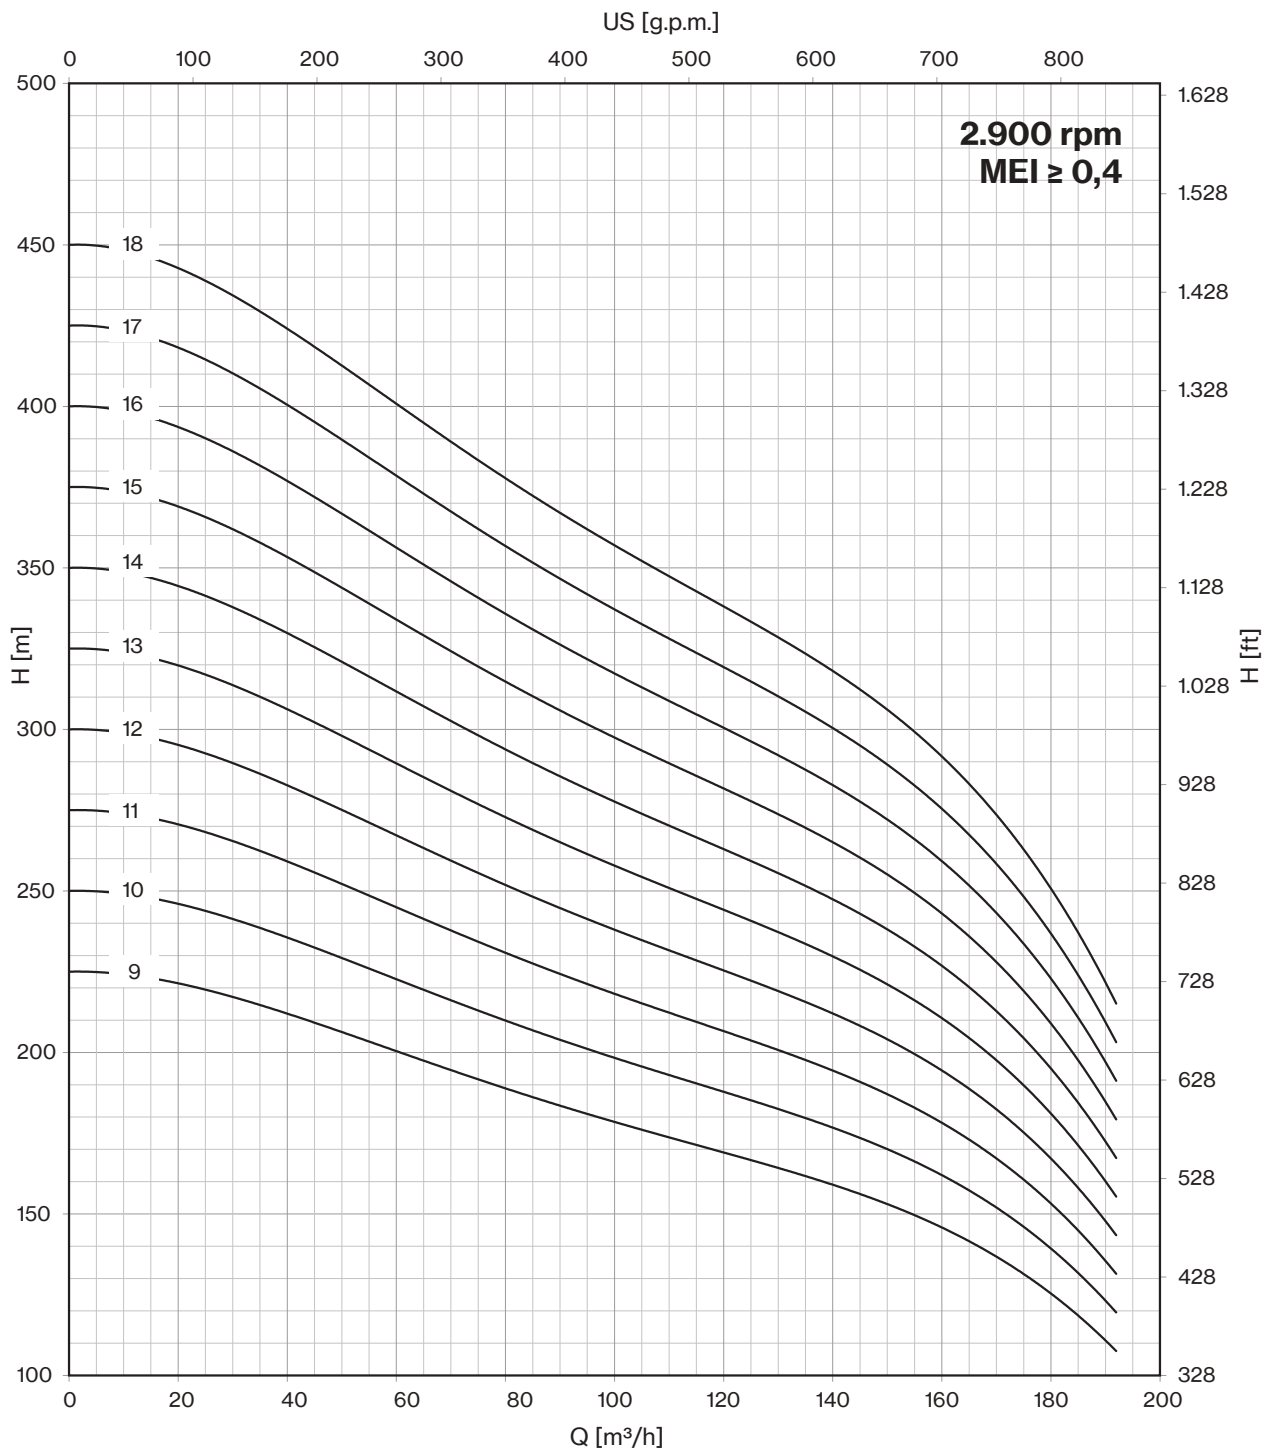

10-12LM & E14 lines

Deepwell Borehole



10LM line



12LM line



E14

Submersible multistage centrifugal pumps for 10", 12" and 14" wells. Check valve built into the delivery outlet. Pump flange for coupling with motors are made according to NEMA standards. Most common applications are civil and agricultural. All components are made of stainless steel with lost wax Microfusion technology. The standard material is AISI 304 stainless steel, alternatively the following materials are available on request: AISI 316 Steel, Duplex steel, AISI 904L Steel. Bushing bearings and wear-rings made of sand abrasion-resistant rubber, reverse-Thrust ring in PTFE/Graphite.

General operating data:

- Capacity up to 860 m³/h
- Pressure up to 540 m
- Hydraulic efficiency 10", up to 79,3%
- Hydraulic efficiency 12", up to 82,5%
- Hydraulic efficiency 14", up to 85,7%
- Pressure up to 54 bar
- Powers up to 400 kW
- Rotation speed up to 2.900 rpm
- Maximum depth: 350 m
- Maximum quantity of permitted sand: 100 gr/m³
- Drinking water compatibility according to DM174 MEI >= 0,4 (EU directive No.547/2012)
- Performance tolerance: ISO9906-3B.

Construction features

Suction and delivery outlet and NRV valve	stainless steel AISI 304 (LMS) stainless steel AISI 316 (LMX - EX) Duplex (LMD - ED) Cast iron (E)
Impellers and diffusers	stainless steel AISI 304 (LMS) stainless steel AISI 316 (LMX - EX) Duplex (LMD - ED) Cast iron (E)
Upper bushings	NBR rubber
Shaft pump side	stainless steel AISI 304 (LMS) stainless steel AISI 316 (LMX) Duplex (LMD) stainless steel AISI 431 (E - EX - ED)
Quantity of sand in the water	max 100 g/m ³

Motor


Asynchronous 2 pole	rewindable water cooled
Insulation class	Y (max 30 °C) - PPC winding type F (max 50 °C) - PE2+PA or LPE winding type
Protection degree	IP68
Liquid temperature	max 30 °C (max 50 °C on request)
Depth of immersion	max 350 m




50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	700	1800	2200	2600	3000	3400	3800	4000
	HP	kW	A	l/sec	0	11,7	30,0	36,7	43,3	50,0	56,7	63,3	66,7
				m ³ /h	0	42	108	132	156	180	204	228	240
10LM 190/01 DR20	25	18,5	38,3	H (m)	35	34	32	30	27	24	21	16	14
10LM 190/01	30	22	45,1		42	41	38	36	34	31	28	23	21
10LM 190/02 DR10	50	37	75,8		76	75	70	66	61	55	48	40	35
10LM 190/02	60	45	86,3		83	82	77	73	68	62	55	47	41
10LM 190/03 DR20	75	55	106,2		104	102	95	89	82	73	62	49	42
10LM 190/03	90	66	126,0		125	124	115	109	102	93	83	70	62
10LM 190/04 DR10	100	75	143,2		152	150	140	132	122	110	96	79	70
10LM 190/04	125	92	175,1		166	165	154	146	136	124	110	94	82
10LM 190/05 DR10	150	110	211,0		190	188	175	165	153	138	120	99	87
10LM 190/05 D	150	110	211,0		208	206	192	182	170	155	138	117	103
10LM 190/06 DR10 D	175	130	245,3		228	225	210	198	184	166	144	119	104
10LM 190/06 D	175	130	245,3		250	247	230	218	204	186	166	140	124

Max Eff. % DR20 =	76,5
Max Eff. % DR10 =	77,5
Max Eff. % =	77
Max kW / St. DR20 =	16
Max kW / St. DR10 =	18,5
Max kW / St. =	20,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

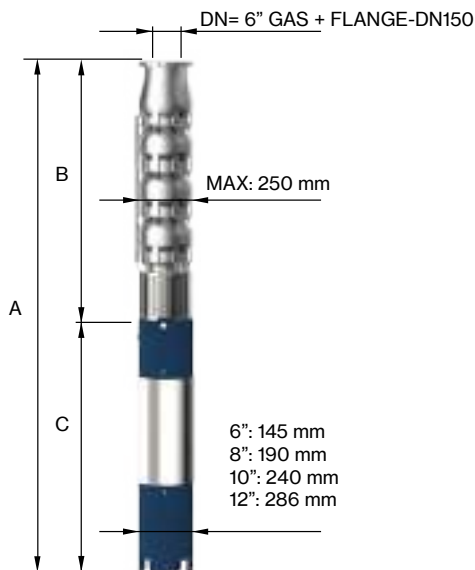

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 190/01 DR20	1616	625	991	83	41
10LM 190/01	1696	625	1071	92	41
10LM 190/02 DR10	2146	805	1341	118	56
10LM 190/02	1928	805	1123	178	56
10LM 190/03 DR20	2218	985	1233	200	72
10LM 190/03	2287	985	1302	214	72
10LM 190/04 DR10	2548	1165	1383	230	87
10LM 190/04	2748	1165	1583	270	87
10LM 190/05 DR10	2898	1165	1733	300	87
10LM 190/05 D	2898	1165	1733	300	87
10LM 190/06 DR10 D	2799	1165	1634	385	87
10LM 190/06 D	2799	1165	1634	385	87


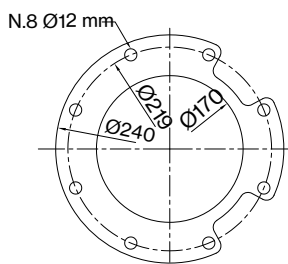


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 190

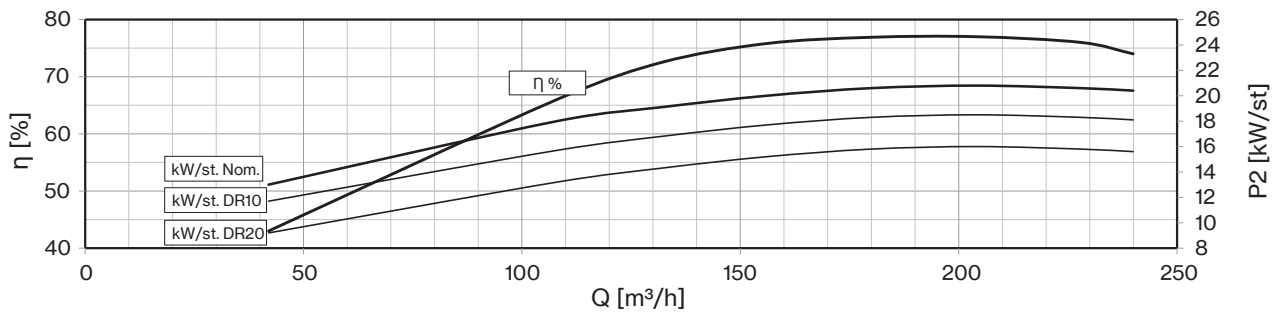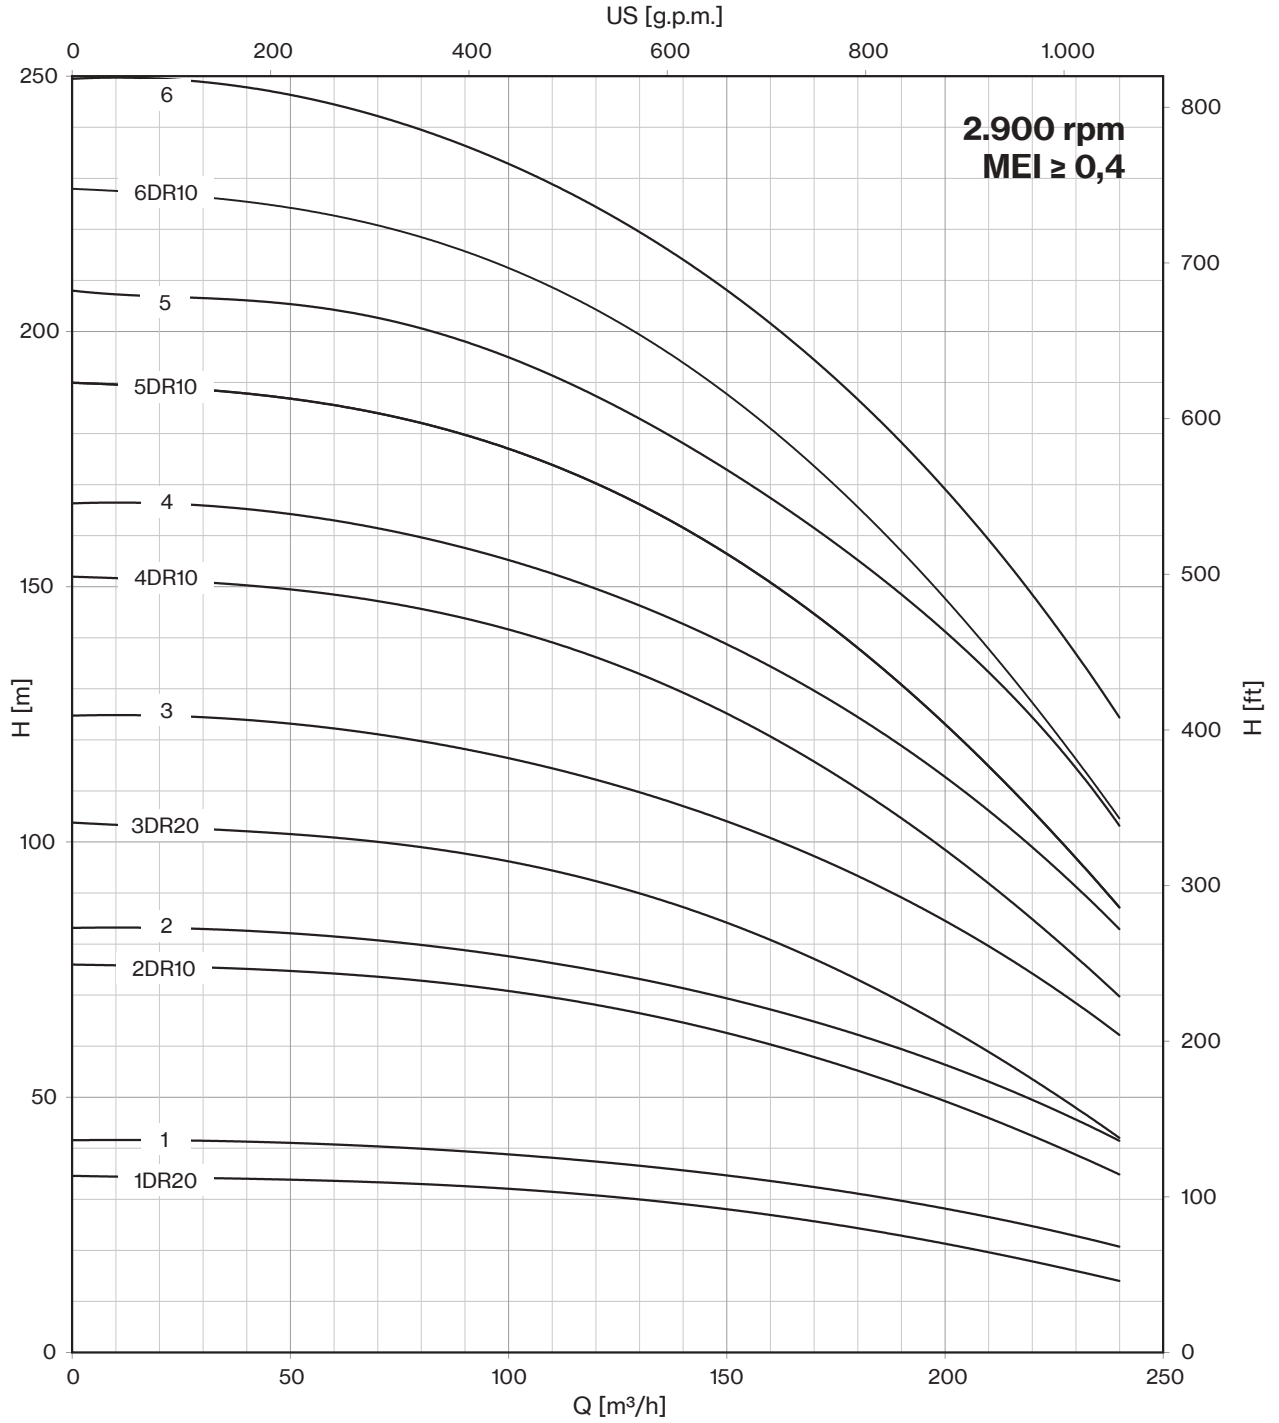


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	700	1800	2200	2600	3000	3400	3800	4000
	HP	kW	A	l/sec	0	11,7	30,0	36,7	43,3	50,0	56,7	63,3	66,7
				m ³ /h	0	42	108	132	156	180	204	228	240
10LM 190/07 DR10 D	175	130	245,3	H (m)	266	263	245	231	214	193	168	139	122
10LM 190/07 D	200	150	277,2		291	288	269	255	238	217	193	164	144
10LM 190/08 DR10 D	200	150	277,2		304	300	280	264	245	221	192	158	139
10LM 190/08 D	250	185	342,2		333	330	307	291	272	248	221	187	165
10LM 190/09 D	300	220	430,0		374	371	346	328	306	279	248	211	185
10LM 190/10 D	300	220	430,0		416	412	384	364	340	310	276	234	206
10LM 190/11 D	340	250	481,0		458	453	422	400	374	341	304	257	227

Max Eff. % DR20 =	76,5
Max Eff. % DR10 =	77,5
Max Eff. % =	77
Max kW / St. DR20 =	16
Max kW / St. DR10 =	18,5
Max kW / St. =	20,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

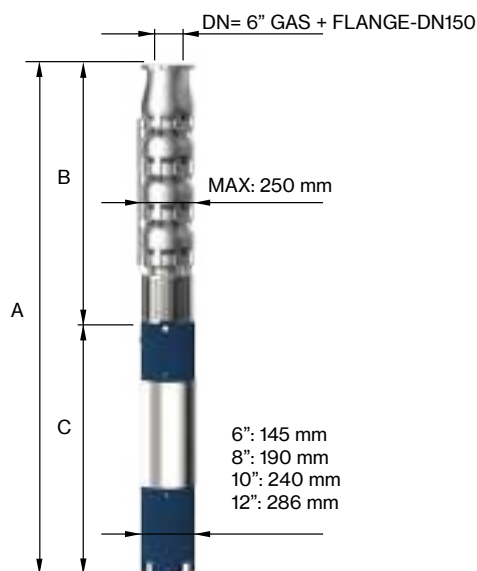



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	10LM 190/07 DR10 D	3339	1705	1634	385	134
	10LM 190/07 D	3439	1705	1734	415	134
	10LM 190/08 DR10 D	3619	1885	1734	415	149
	10LM 190/08 D	3869	1885	1984	480	149
	10LM 190/09 D	4175	2065	2110	700	165
	10LM 190/10 D	4355	2245	2110	700	180
	10LM 190/11 D	4705	2425	2280	775	196

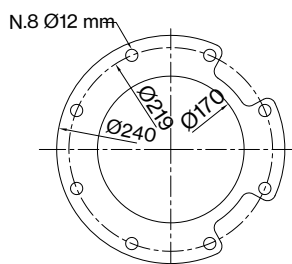

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm




10LM 190

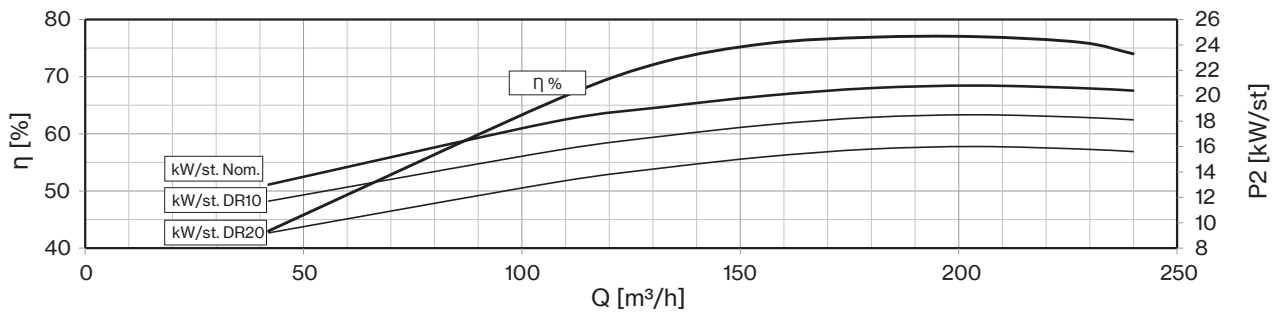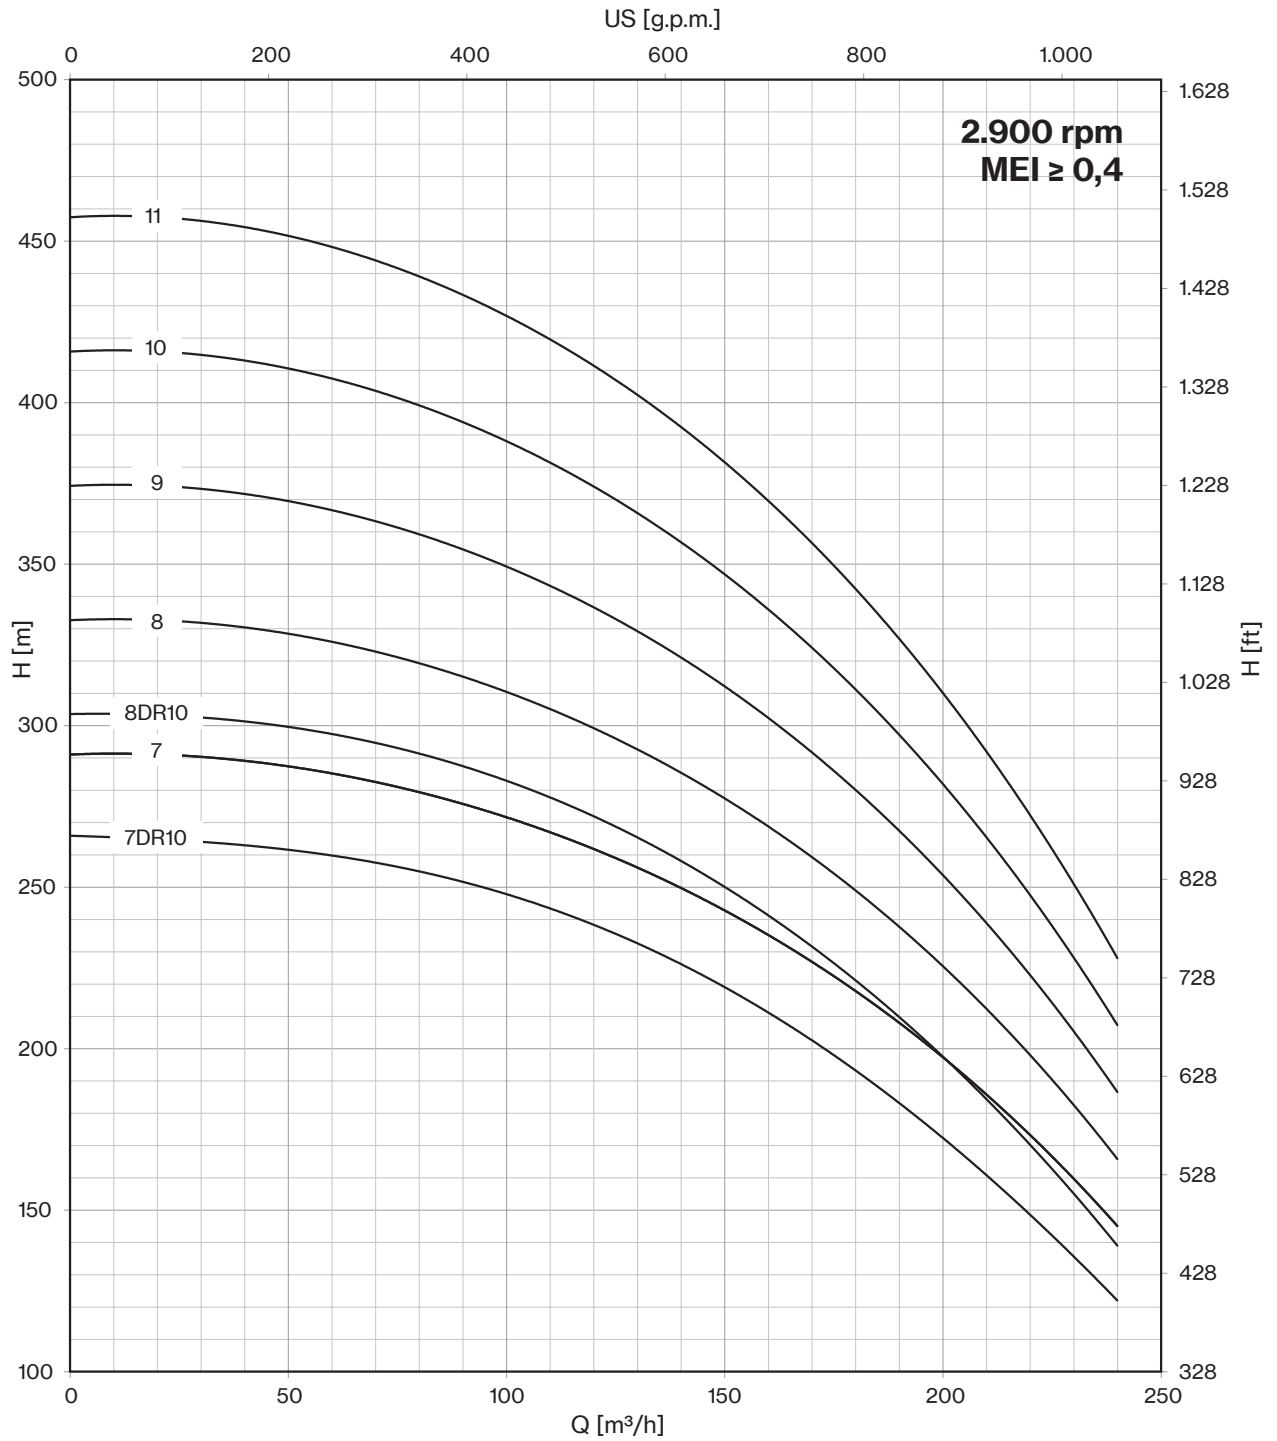


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	800	2200	2600	3000	3400	3800	4200	4600
	HP	kW	A	l/sec	0	13,3	36,7	43,3	50,0	56,7	63,3	70,0	76,7
				m3/h	0	48	132	156	180	204	228	252	276
10LM 230/01 DR20	25	18,5	38,3	H (m)	37	36	31	29	27	25	23	19	16
10LM 230/01	35	26	52,9		44	43	38	36	34	32	30	26	23
10LM 230/02 DR20	50	37	75,8		74	71	62	58	54	50	45	38	32
10LM 230/02	75	55	106,2		88	85	75	72	68	64	59	53	46
10LM 230/03 DR20	75	55	106,2		110	107	93	87	81	75	68	57	48
10LM 230/03 DR10	90	66	126,0		121	116	102	98	92	86	78	68	59
10LM 230/03	100	75	143,2		131	128	113	108	102	96	89	79	69
10LM 230/04 DR10	125	92	175,1		162	154	136	130	122	114	104	91	78
10LM 230/04	125	92	175,1		175	170	150	144	136	128	118	106	92
10LM 230/05 DR10 D	150	110	211,0		202	193	170	163	153	143	130	114	98
10LM 230/05 D	175	130	245,3		219	213	188	180	170	160	148	132	115
10LM 230/06 DR10 D	175	130	245,3		242	231	204	195	183	171	156	137	117
10LM 230/06 D	200	150	277,2		263	255	225	216	204	192	178	159	138

Max Eff. % DR20 =	78,4
Max Eff. % DR10 =	79,5
Max Eff. % =	79,2
Max kW / St. DR20 =	17,5
Max kW / St. DR10 =	19,5
Max kW / St. =	22,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

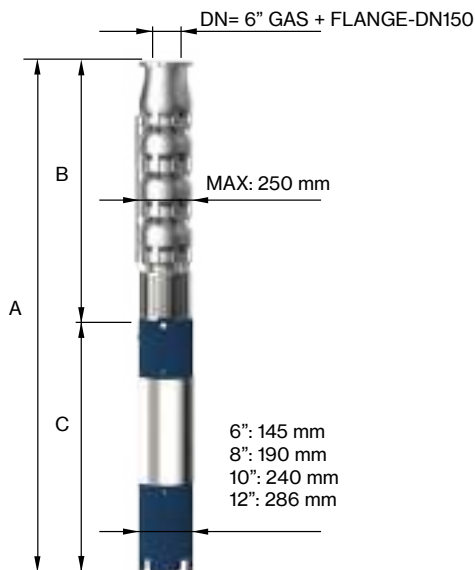

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 230/01 DR20	1616	625	991	83	41
10LM 230/01	1806	625	1181	100	41
10LM 230/02 DR20	2146	805	1341	118	56
10LM 230/02	2038	805	1233	200	56
10LM 230/03 DR20	2218	985	1233	200	72
10LM 230/03 DR10	2287	985	1302	214	72
10LM 230/03	2368	985	1383	230	72
10LM 230/04 DR10	2748	1165	1583	270	87
10LM 230/04	2748	1165	1583	270	87
10LM 230/05 DR10 D	3078	1345	1733	300	103
10LM 230/05 D	3078	1345	1733	300	103
10LM 230/06 DR10 D	3159	1525	1634	385	118
10LM 230/06 D	3159	1525	1634	385	118


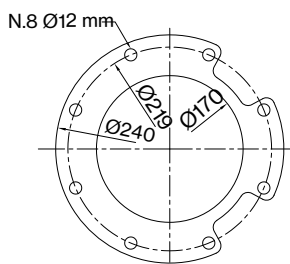


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 230

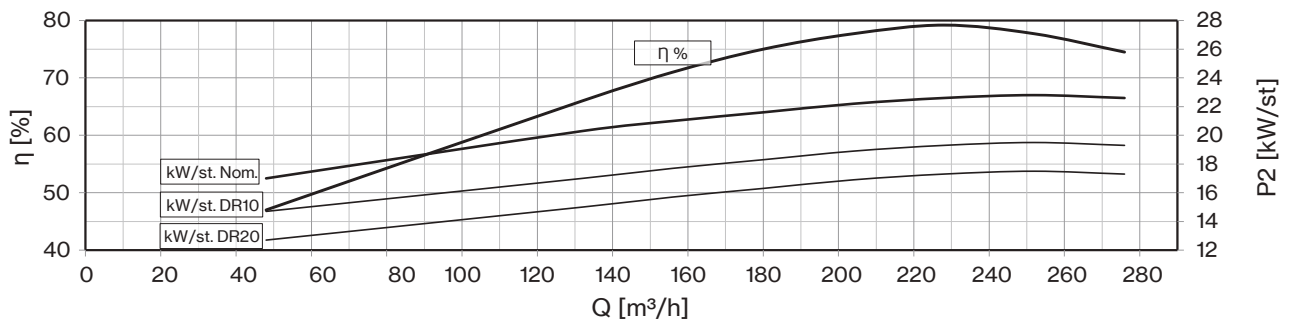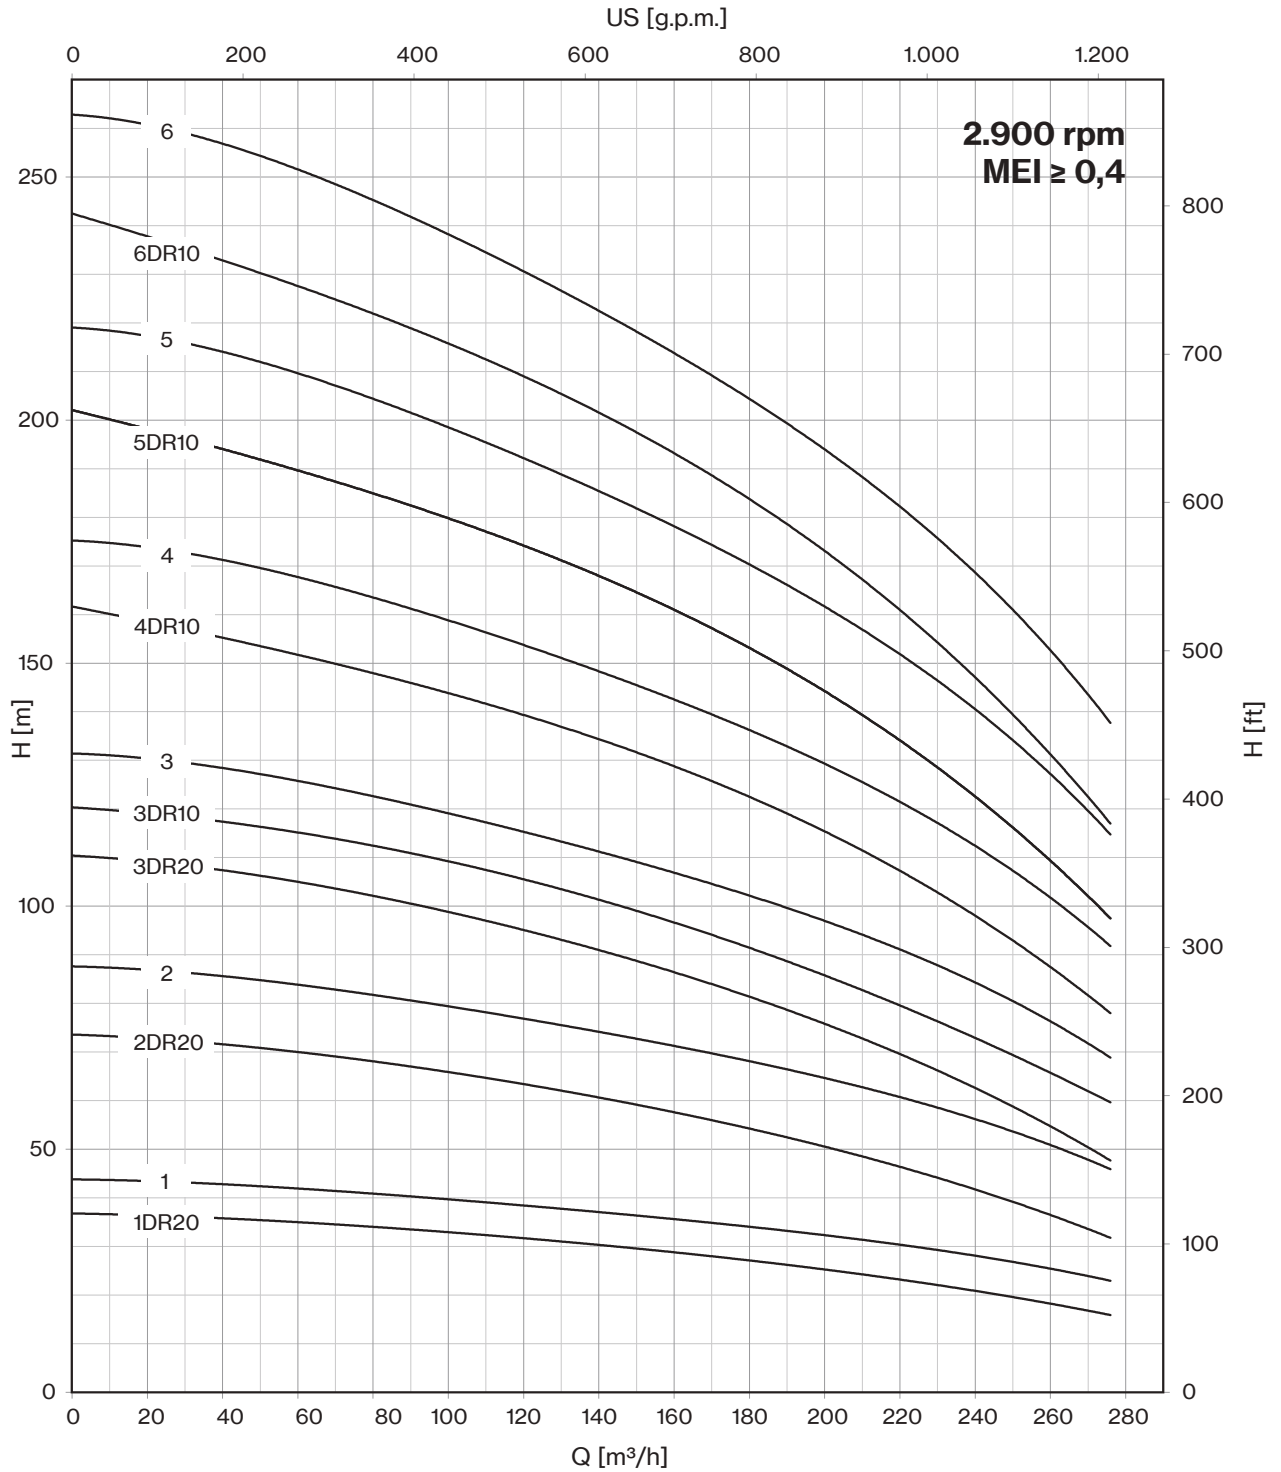


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	800	2200	2600	3000	3400	3800	4200	4600
	HP	kW	A	l/sec	0	13,3	36,7	43,3	50,0	56,7	63,3	70,0	76,7
				m ³ /h	0	48	132	156	180	204	228	252	276
10LM 230/07 DR10 D	200	150	277,2	H (m)	283	270	238	228	214	200	182	160	137
10LM 230/07 D	225	165	313,3		307	298	263	252	238	224	207	185	161
10LM 230/08 DR10 D	225	165	313,3		323	308	272	261	245	229	208	182	157
10LM 230/08 D	250	185	342,2		350	340	301	288	272	256	237	211	184
10LM 230/09 D	300	220	430,0		394	383	338	324	306	288	266	238	207
10LM 230/10 D	340	250	481,0		438	425	376	360	340	320	296	264	230
10LM 230/11 D	340	250	481,0		482	468	413	396	374	352	326	291	253

Max Eff. % DR20 =	78,4
Max Eff. % DR10 =	79,5
Max Eff. % =	79,2
Max kW / St. DR20 =	17,5
Max kW / St. DR10 =	19,5
Max kW / St. =	22,8

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

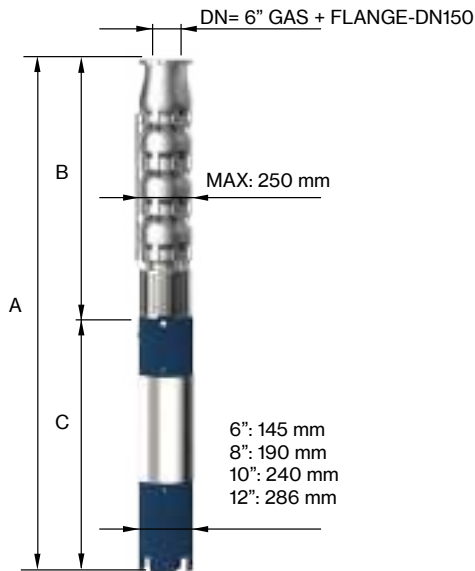

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 230/07 DR10 D	3439	1705	1734	415	134
10LM 230/07 D	3559	1705	1854	444	134
10LM 230/08 DR10 D	3739	1885	1854	444	149
10LM 230/08 D	3869	1885	1984	480	149
10LM 230/09 D	4175	2065	2110	700	165
10LM 230/10 D	4355	2245	2110	700	180
10LM 230/11 D	4705	2425	2280	775	196


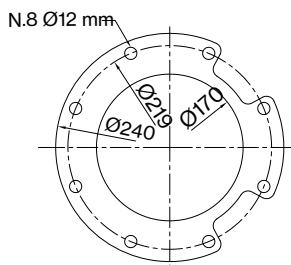


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 230

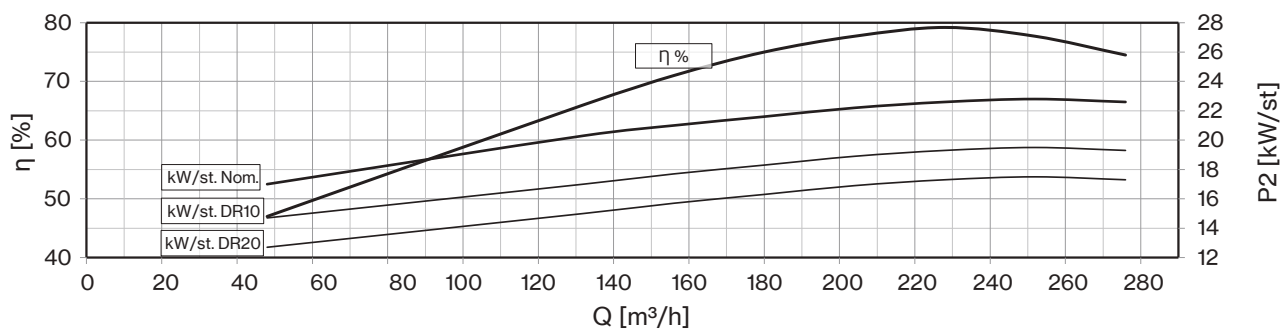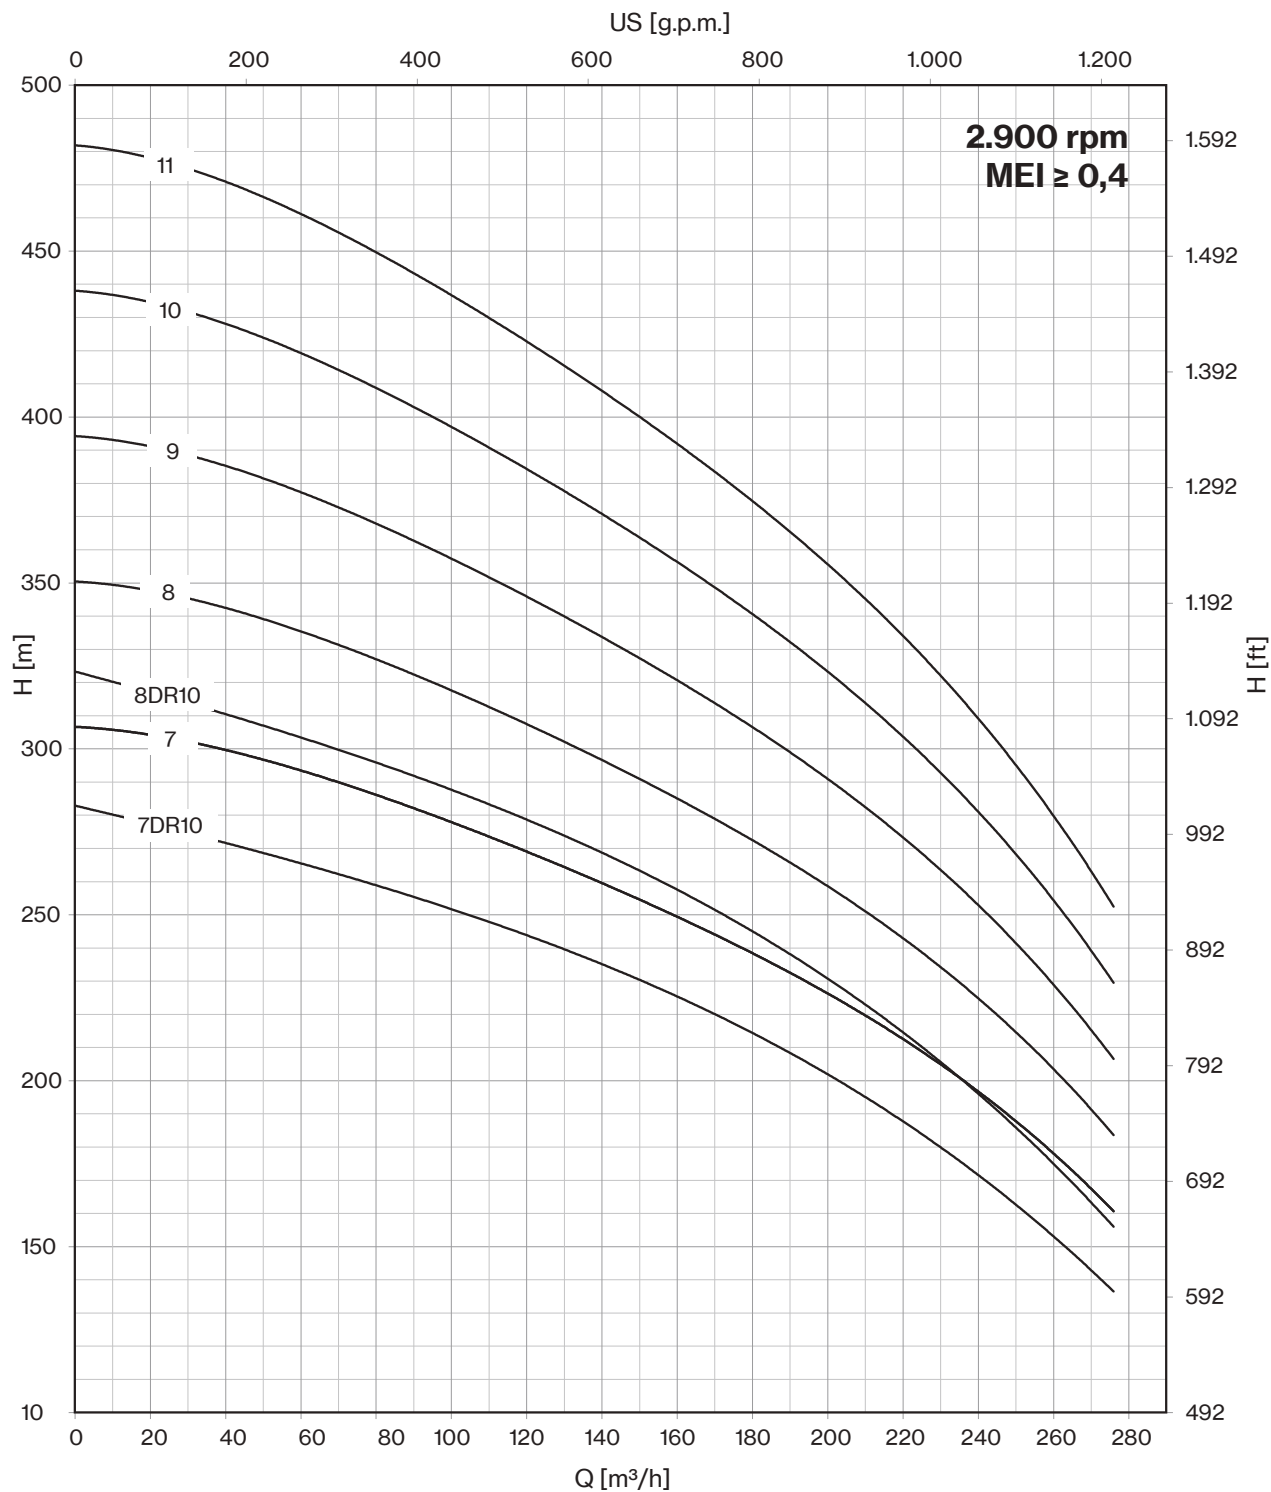


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1000	3200	3600	4000	4400	4800	5000	5200
	HP	kW	A	l/sec	0	16,7	53,3	60,0	66,7	73,3	80,0	83,3	86,7
				m ³ /h	0	60	192	216	240	264	288	300	312
10LM 250/01 DR20	25	18,5	38,3	H (m)	31	31	27	25	23	21	18	17	14
10LM 250/01	40	30	61,1		44	42	34	32	30	28	26	25	24
10LM 250/02 DR20	50	37	75,8		63	62	54	50	46	42	36	33	27
10LM 250/02	75	55	106,2		88	84	67	64	59	56	52	50	48
10LM 250/03 DR10	100	75	143,2		107	107	93	86	80	73	65	59	53
10LM 250/03	125	92	175,1		132	126	101	96	89	83	78	75	72
10LM 250/04 DR10	125	92	175,1		143	142	124	115	107	97	87	79	70
10LM 250/04 D	150	110	211,0		176	168	134	128	118	111	104	100	96
10LM 250/05 DR10 D	175	130	245,3		179	178	155	144	134	121	109	99	88
10LM 250/05 D	200	150	277,2		220	210	168	160	148	139	130	125	120
10LM 250/06 D	225	165	313,3		264	252	202	192	178	167	156	150	144

Max Eff. % DR20 =	79
Max Eff. % DR10 =	79,5
Max Eff. % =	79,3
Max kW / St. DR20 =	18
Max kW / St. DR10 =	22,5
Max kW / St. =	27,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

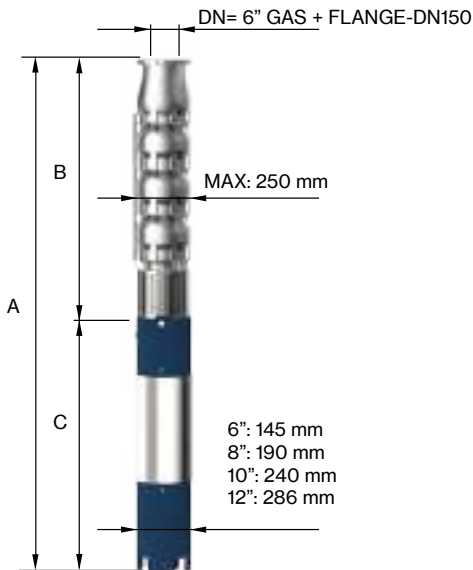

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 250/01 DR20	1616	625	991	83	41
10LM 250/01	1876	625	1251	108	41
10LM 250/02 DR20	2146	805	1341	118	57
10LM 250/02	2038	805	1233	200	57
10LM 250/03 DR10	2368	985	1383	230	72
10LM 250/03	2568	985	1583	270	72
10LM 250/04 DR10	2748	1165	1583	270	88
10LM 250/04 D	2898	1165	1733	300	88
10LM 250/05 DR10 D	2979	1345	1634	385	103
10LM 250/05 D	2979	1345	1634	385	103
10LM 250/06 D	3379	1525	1854	444	119


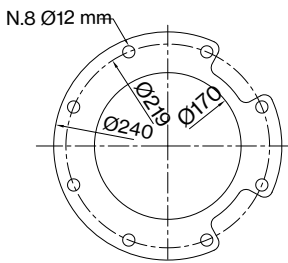


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 250

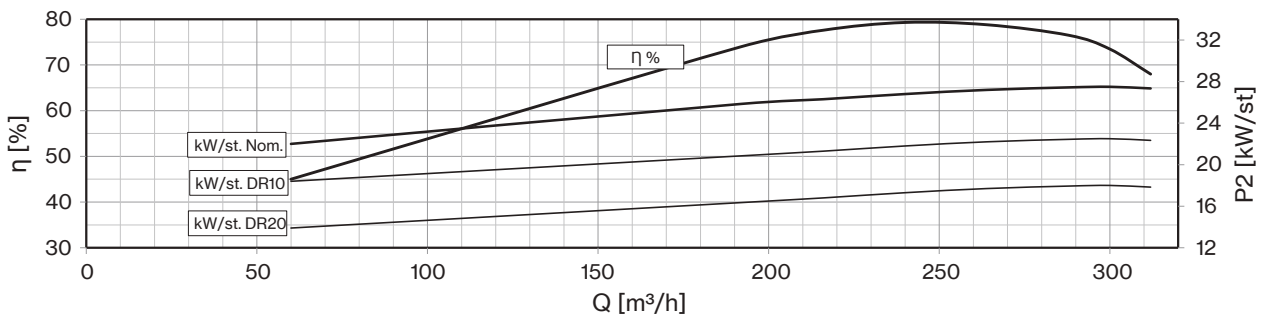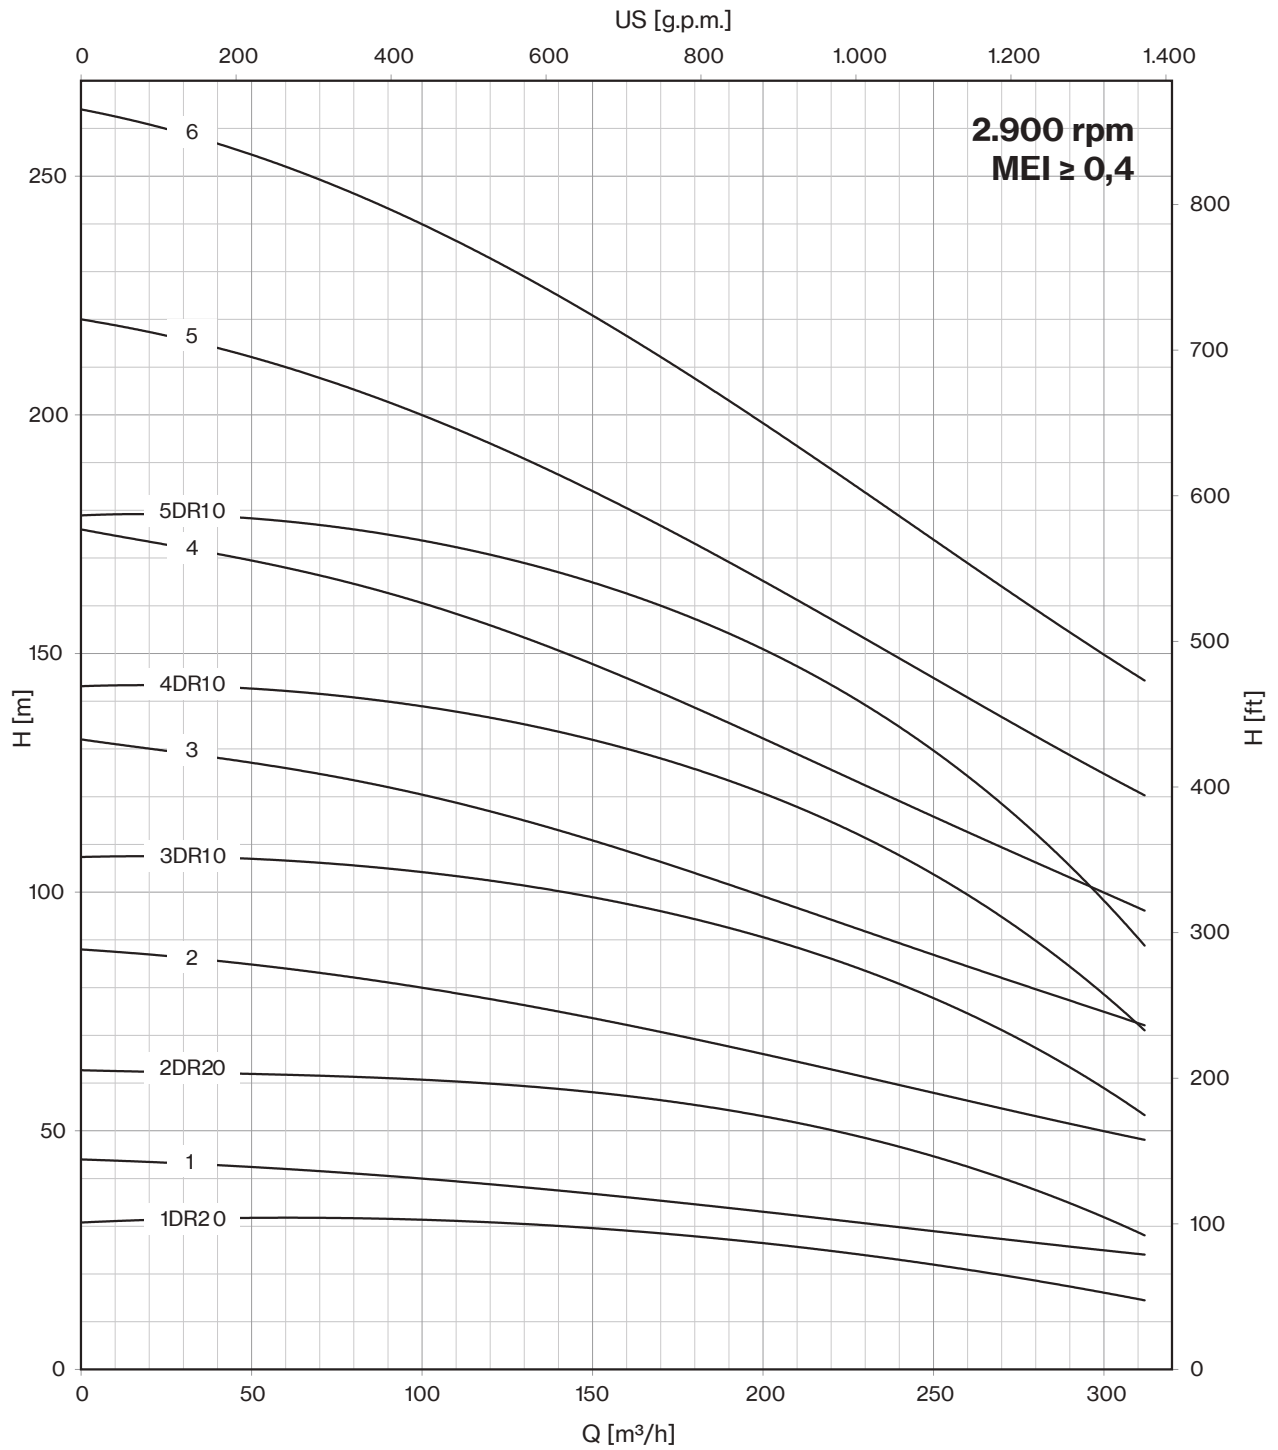


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1000	3200	3600	4000	4400	4800	5000	5200
	HP	kW	A	l/sec	0	16,7	53,3	60,0	66,7	73,3	80,0	83,3	86,7
				m ³ /h	0	60	192	216	240	264	288	300	312
10LM 250/07 DR10 D	225	165	313,3	H (m)	251	249	217	202	188	169	153	139	123
10LM 250/07 D	300	220	430,0		308	294	235	224	207	195	182	175	168
10LM 250/08 D	300	220	430,0		352	336	269	256	237	222	208	200	192
10LM 250/09 D	340	250	481,0		396	378	302	288	266	250	234	225	216
10LM 250/10 D	400	300	551,0		440	420	336	320	296	278	260	250	240
10LM 250/11 D	450	330	620,0		484	462	370	352	326	306	286	275	264
10LM 250/12 D	450	330	620,0		528	504	403	384	355	334	312	300	288

Max Eff. % DR20 =	79
Max Eff. % DR10 =	79,5
Max Eff. % =	79,3
Max kW / St. DR20 =	18
Max kW / St. DR10 =	22,5
Max kW / St. =	27,4

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

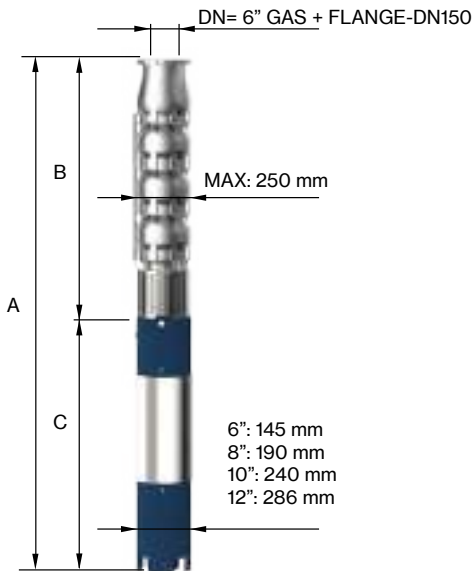

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	10LM 250/07 DR10 D	3559	1705	1854	444	134
	10LM 250/07 D	3815	1705	2110	700	134
	10LM 250/08 D	3995	1885	2110	700	150
	10LM 250/09 D	4345	2065	2280	775	165
	10LM 250/10 D	4525	2245	2280	775	181
	10LM 250/11 D	4705	2425	2280	775	196
	10LM 250/12 D	4765	2605	2160	906	212


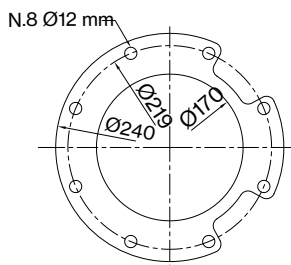


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 250

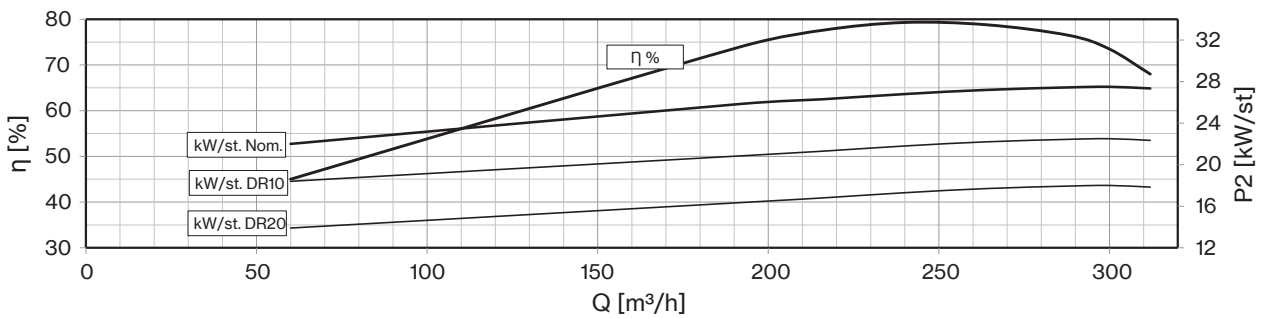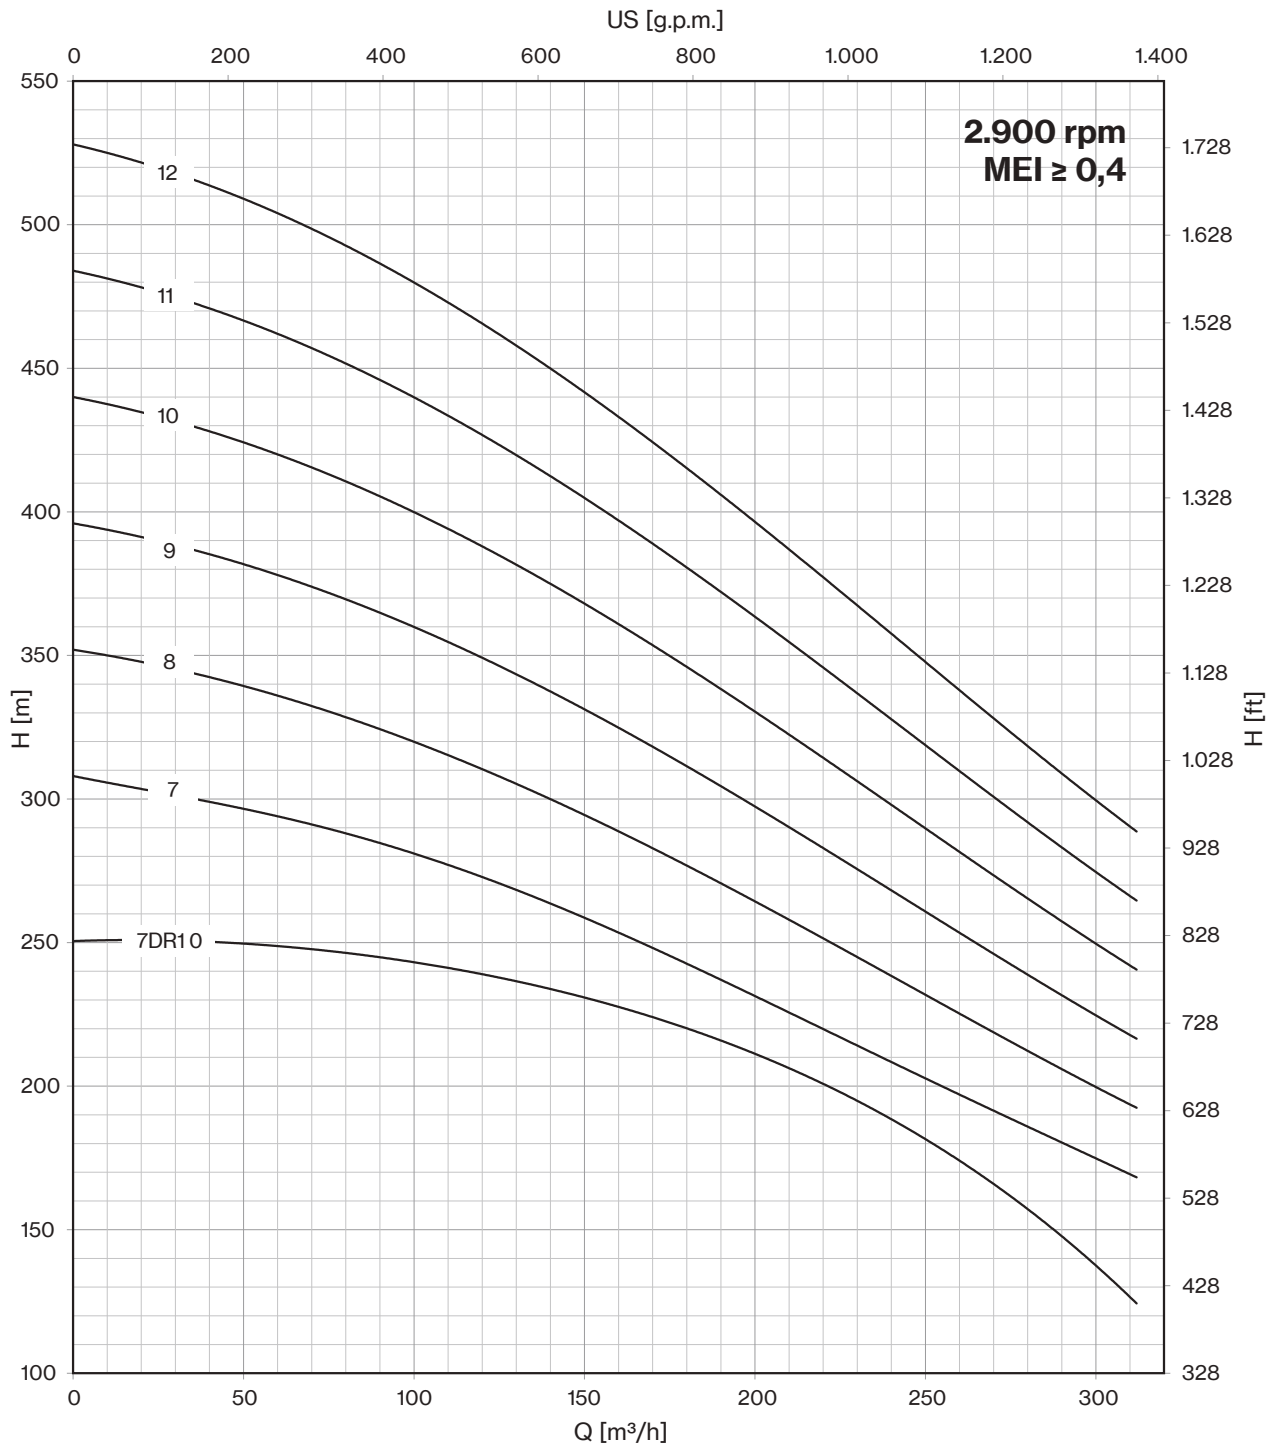


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1000	3400	3800	4200	4600	5000	5400	5800
	HP	kW	A	l/sec	0	16,7	56,7	63,3	70,0	76,7	83,3	90,0	96,7
				m ³ /h	0	60	204	228	252	276	300	324	348
10LM 275/01 DR20	35	26	52,9	H (m)	36	36	28	26	25	23	21	19	16
10LM 275/01	50	37	75,8		45	44	37	35	34	32	30	28	25
10LM 275/02 DR20	75	55	106,2		72	71	56	52	50	46	42	39	32
10LM 275/02	90	66	126,0		90	87	73	70	67	63	60	56	50
10LM 275/03 DR10	125	92	175,1		122	121	97	92	88	82	77	72	62
10LM 275/03 D	150	110	211,0		135	131	110	105	101	95	90	85	75
10LM 275/04 DR10 D	175	130	245,3		163	161	130	123	118	110	103	96	83
10LM 275/04 D	200	150	277,2		180	175	146	140	134	126	120	113	100
10LM 275/05 DR10 D	200	150	277,2		204	202	162	154	147	137	129	120	104
10LM 275/05 D	225	165	313,3		225	219	183	175	168	158	150	141	125
10LM 275/06 DR10 D	250	185	342,2		245	242	194	185	176	164	155	144	125
10LM 275/06 D	300	220	430,0		270	262	220	210	202	190	180	169	150

Max Eff. % DR20 =	76,1
Max Eff. % DR10 =	77,2
Max Eff. % =	76,5
Max kW / St. DR20 =	25
Max kW / St. DR10 =	29
Max kW / St. =	33

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

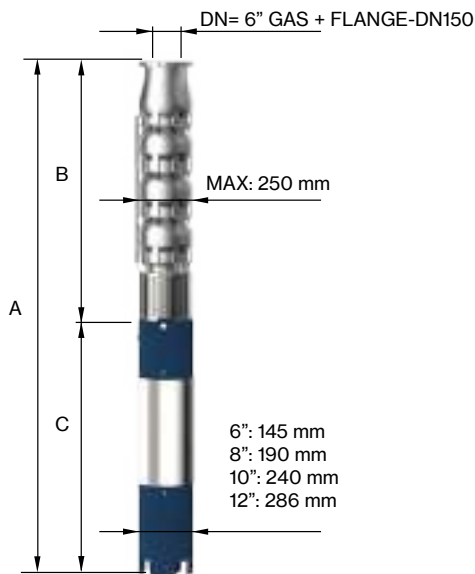

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 275/01 DR20	1806	625	1181	100	41
10LM 275/01	1966	625	1341	118	41
10LM 275/02 DR20	2038	805	1233	200	56
10LM 275/02	2107	805	1302	214	56
10LM 275/03 DR10	2568	985	1583	270	72
10LM 275/03 D	2718	985	1733	300	72
10LM 275/04 DR10 D	2799	1165	1634	385	87
10LM 275/04 D	2899	1165	1734	415	87
10LM 275/05 DR10 D	3079	1345	1734	415	103
10LM 275/05 D	3199	1345	1854	444	103
10LM 275/06 DR10 D	3509	1525	1984	480	118
10LM 275/06 D	3635	1525	2110	700	118


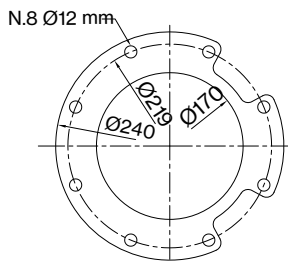


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 275

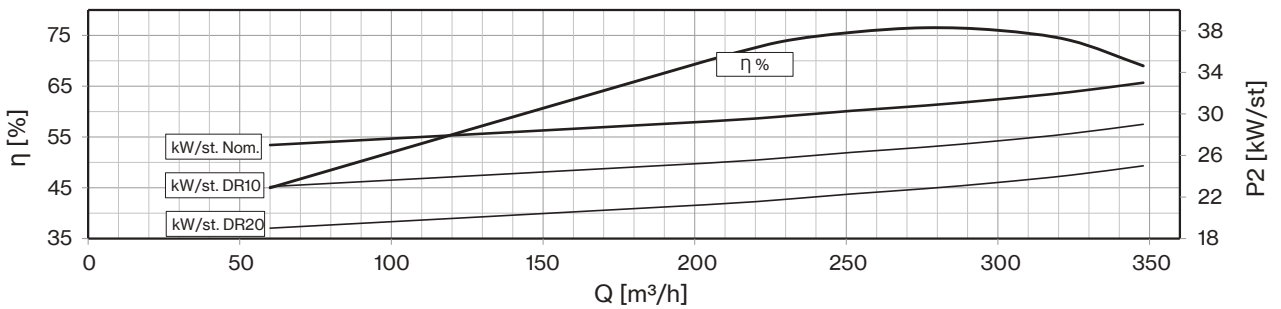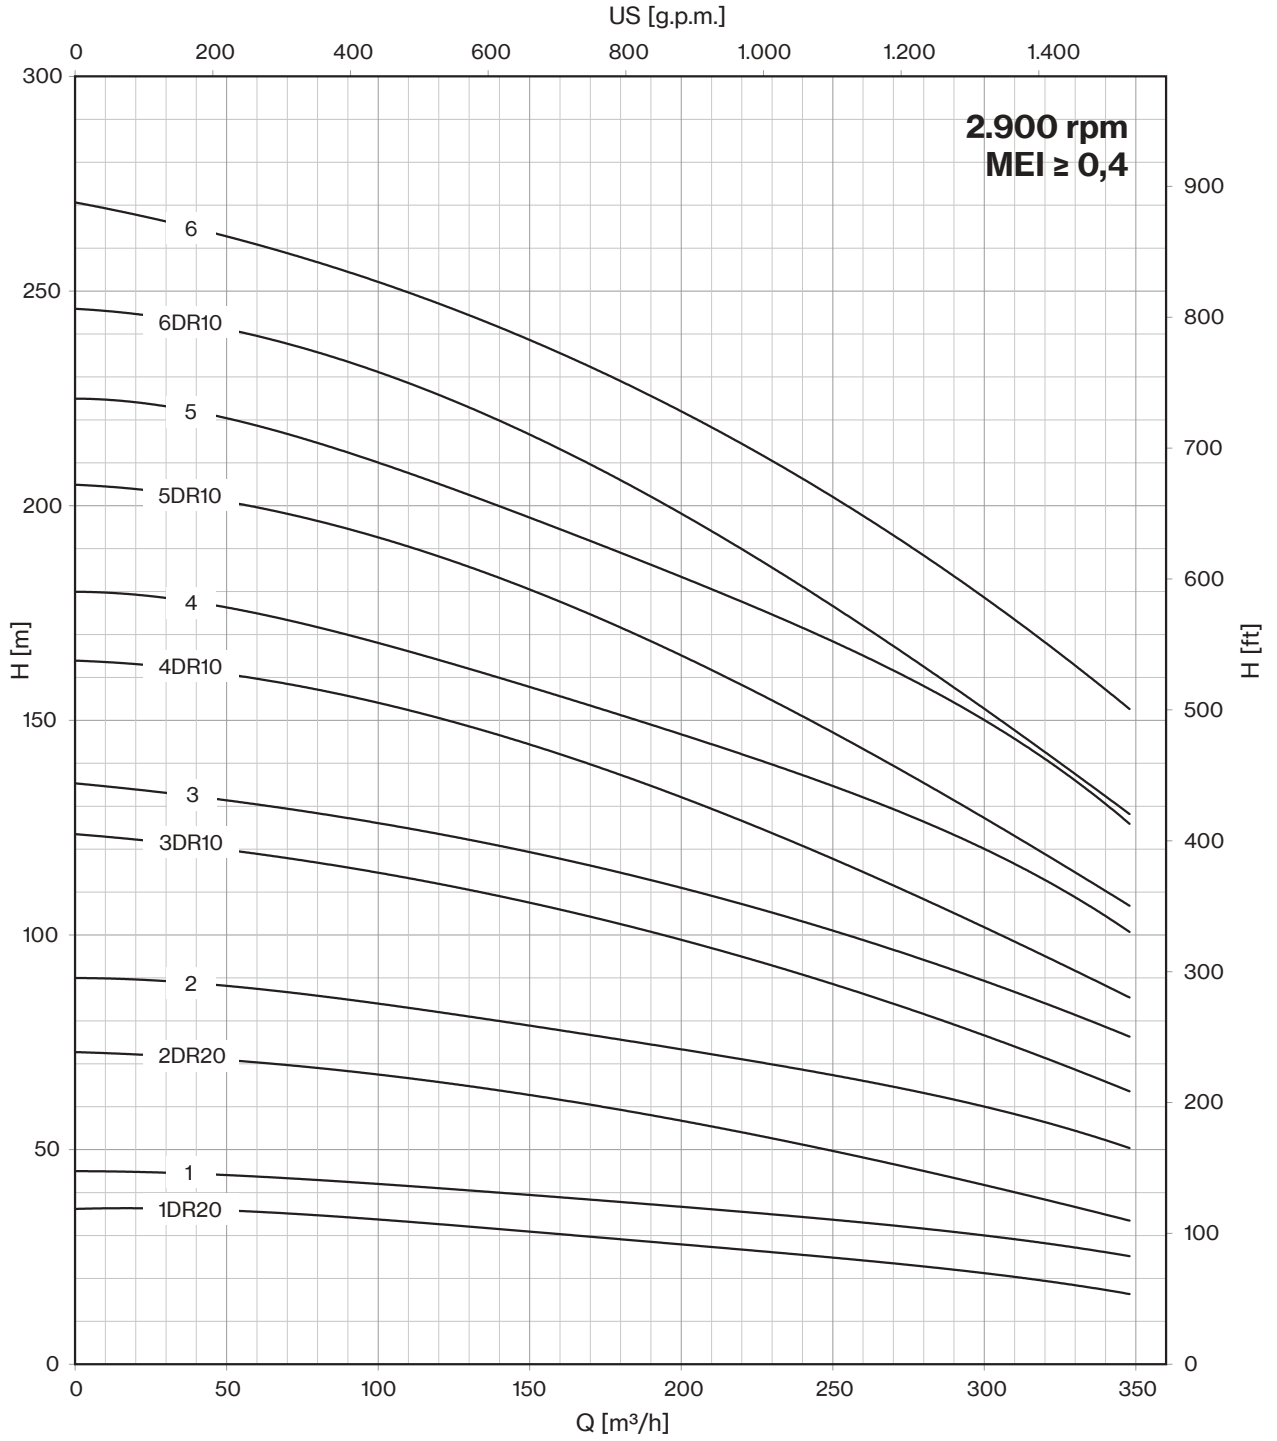


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1000	3400	3800	4200	4600	5000	5400	5800
	HP	kW	A	l/sec	0	16,7	56,7	63,3	70,0	76,7	83,3	90,0	96,7
				m ³ /h	0	60	204	228	252	276	300	324	348
10LM 275/07 DR10 D	300	220	430,0	H (m)	286	282	227	216	206	192	181	168	146
10LM 275/07 D	340	250	481,0		315	306	256	245	235	221	210	197	175
10LM 275/08 D	400	300	551,0		360	350	293	280	269	253	240	226	200
10LM 275/09 D	400	300	551,0		405	393	329	315	302	284	270	254	225
10LM 275/10 D	450	330	620,0		450	437	366	350	336	316	300	282	250
10LM 275/11 D	500	370	693,0		495	481	403	385	370	348	330	310	275
10LM 275/12 D	550	400	798,0		540	524	439	420	403	379	360	338	300

Max Eff. % DR20 =	76,1
Max Eff. % DR10 =	77,2
Max Eff. % =	76,5
Max kW / St. DR20 =	25
Max kW / St. DR10 =	29
Max kW / St. =	33

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

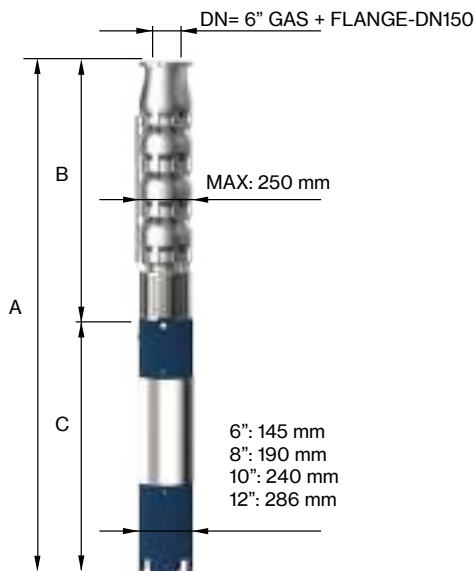

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
10LM 275/07 DR10 D	3815	1705	2110	700	134
10LM 275/07 D	3985	1705	2280	775	134
10LM 275/08 D	4165	1885	2280	775	149
10LM 275/09 D	4345	2065	2280	775	165
10LM 275/10 D	4405	2245	2160	906	180
10LM 275/11 D	4585	2425	2160	906	196
10LM 275/12 D	4925	2605	2320	1010	211


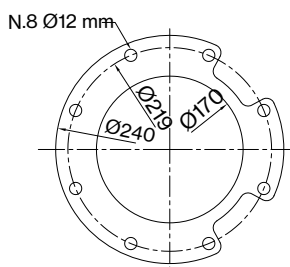


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 168,3 mm

"D" Pump shaft in Duplex




10LM 275

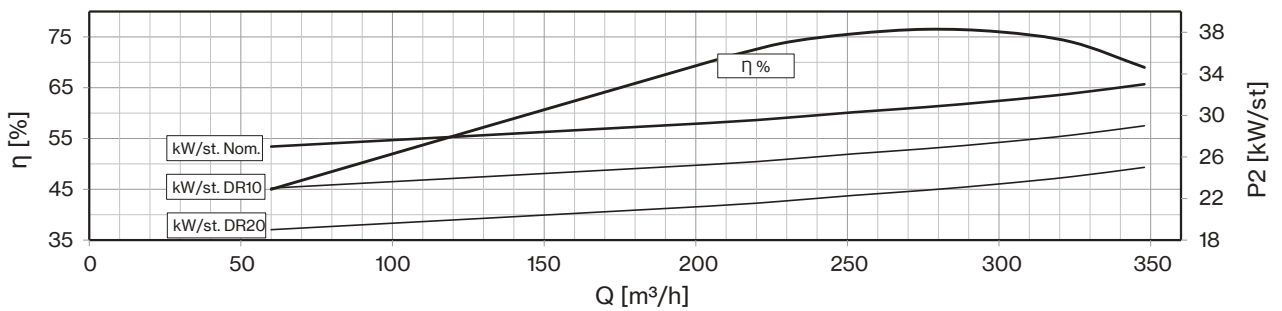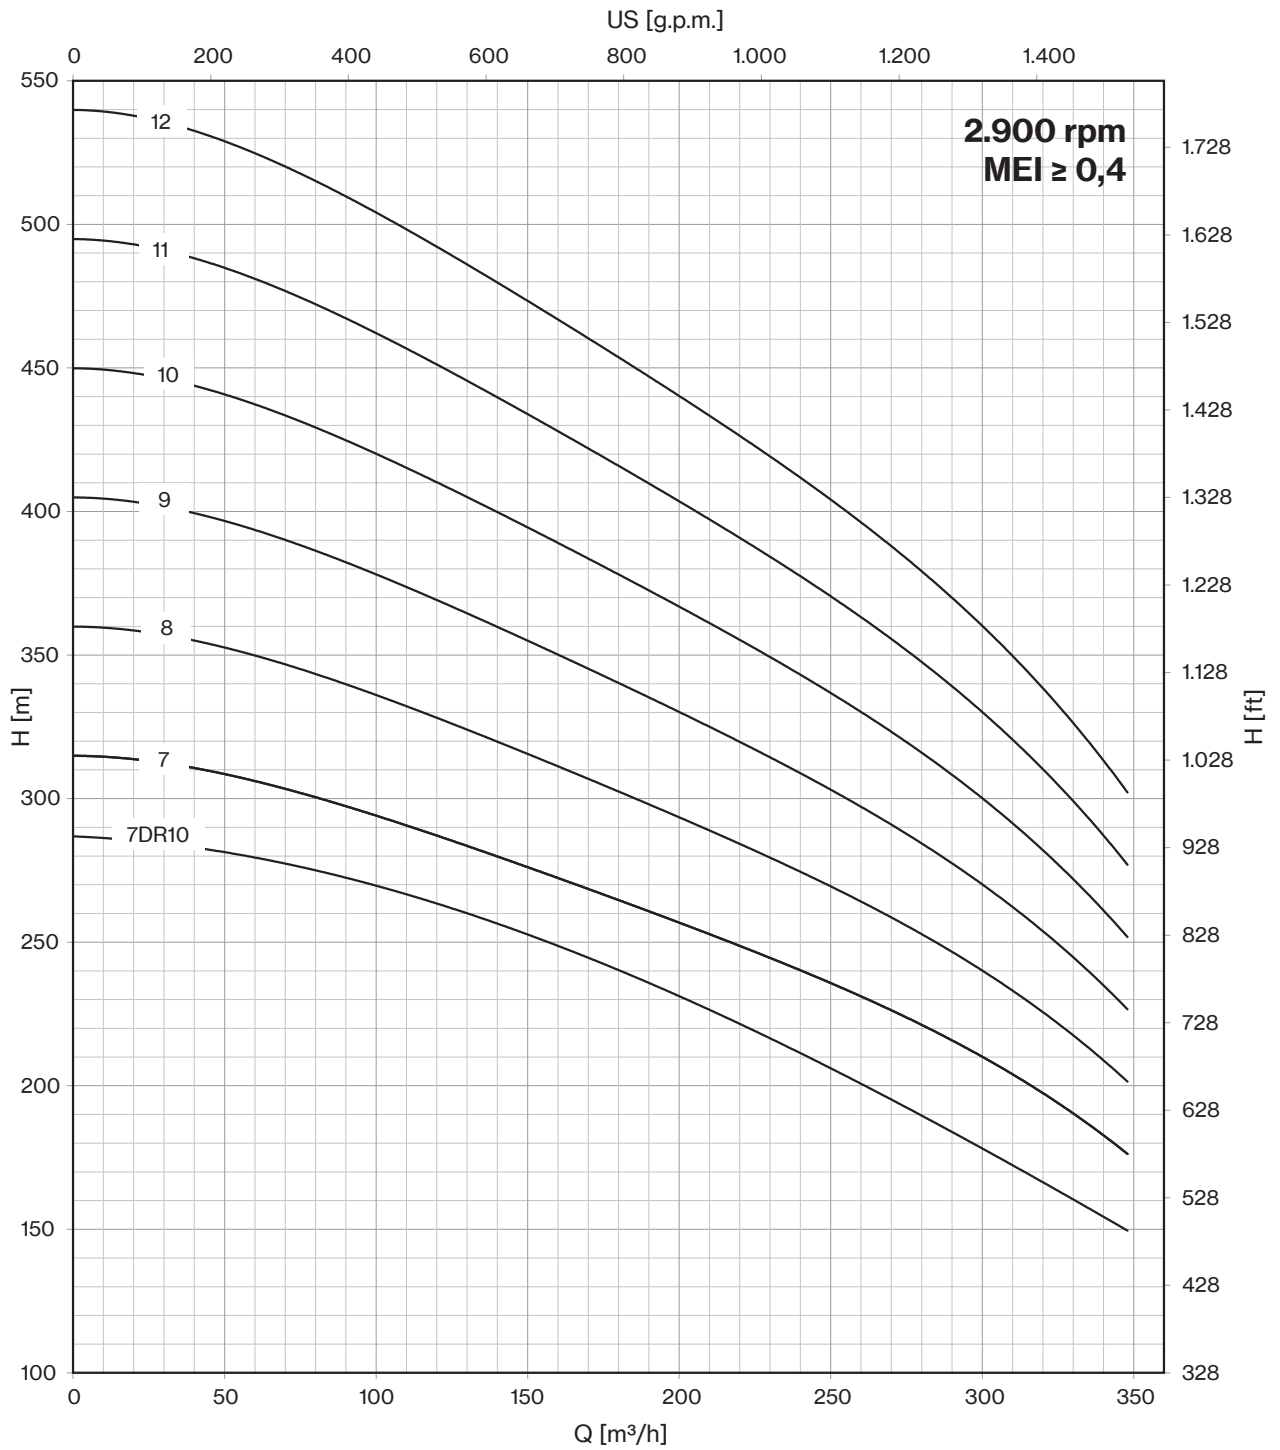


50 Hz - 2900 rpm					Q								
TYPE	P2		400 V	I/min	0	1500	4000	4500	5000	5500	6000	6500	7000
	HP	kW		A	I/sec	0	25,0	66,7	75,0	83,3	91,7	100,0	108,3
			m ³ /h		0	90	240	270	300	330	360	390	420
12LM 360/01 DR35	50	37	75,8	H (m)	41	40	37	35	33	32	29		
12LM 360/01 DR20	75	55	106,2		49	48	47	45	44	42	40	38	34
12LM 360/01	90	66	126,0		62	61	55	53	52	52	50	47	42
12LM 360/02 DR35	100	75	143,2		82	80	73	70	66	63	57		
12LM 360/02 DR20 D	150	110	211,0		98	96	93	90	87	84	80	75	68
12LM 360/02 D	175	130	245,3		124	122	109	106	104	103	100	93	84
12LM 360/03 DR20 D	200	150	277,2		147	144	140	135	131	126	120	113	102
12LM 360/03 DR10 D	250	185	342,2		165	162	152	149	144	140	132	126	120
12LM 360/03 D	300	220	430,0		186	183	164	159	156	155	150	140	126
12LM 360/04 DR20 D	300	220	430,0		196	192	186	180	174	168	160	150	136
12LM 360/04 DR10 D	340	250	481,0		220	216	202	198	192	186	176	168	160
12LM 360/04 D	400	300	551,0		248	244	218	212	208	206	200	186	168

Max Eff. % DR35 =	77,5
Max Eff. % DR20 =	80
Max Eff. % DR10 =	80,5
Max Eff. % =	81
Max kW / St. DR35 =	36,80
Max kW / St. DR20 =	49,5
Max kW / St. DR10 =	55,2
Max kW / St. =	64,2

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

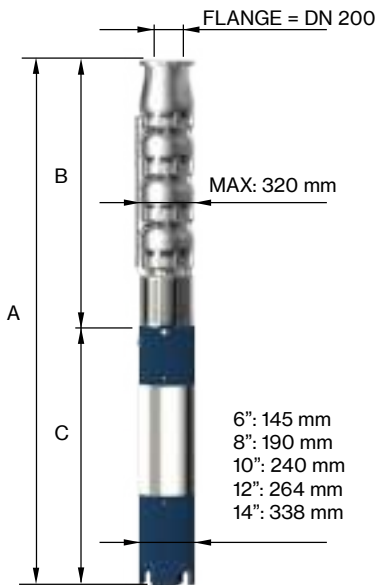

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
12LM 360/01 DR35	2111	770	1341	118	79
12LM 360/01 DR20	2003	770	1233	200	79
12LM 360/01	2072	770	1302	214	79
12LM 360/02 DR35	2383	1000	1383	230	104
12LM 360/02 DR20 D	2733	1000	1733	300	104
12LM 360/02 D	2634	1000	1634	385	104
12LM 360/03 DR20 D	2964	1230	1734	415	129
12LM 360/03 DR10 D	3214	1230	1984	480	129
12LM 360/03 D	3340	1230	2110	700	129
12LM 360/04 DR20 D	3570	1460	2110	700	154
12LM 360/04 DR10 D	3740	1460	2280	775	154
12LM 360/04 D	3740	1460	2280	775	154


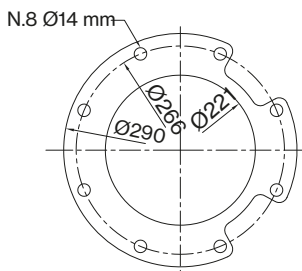


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 219,1 mm

"D" Pump shaft in Duplex




12LM 360

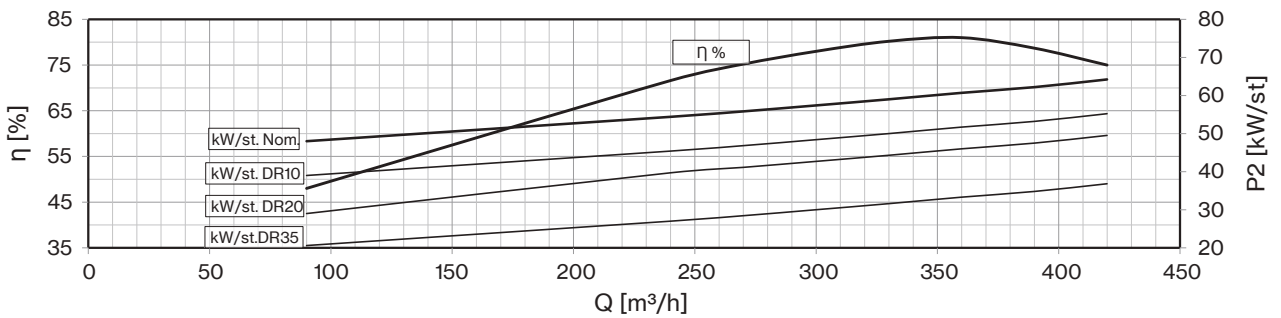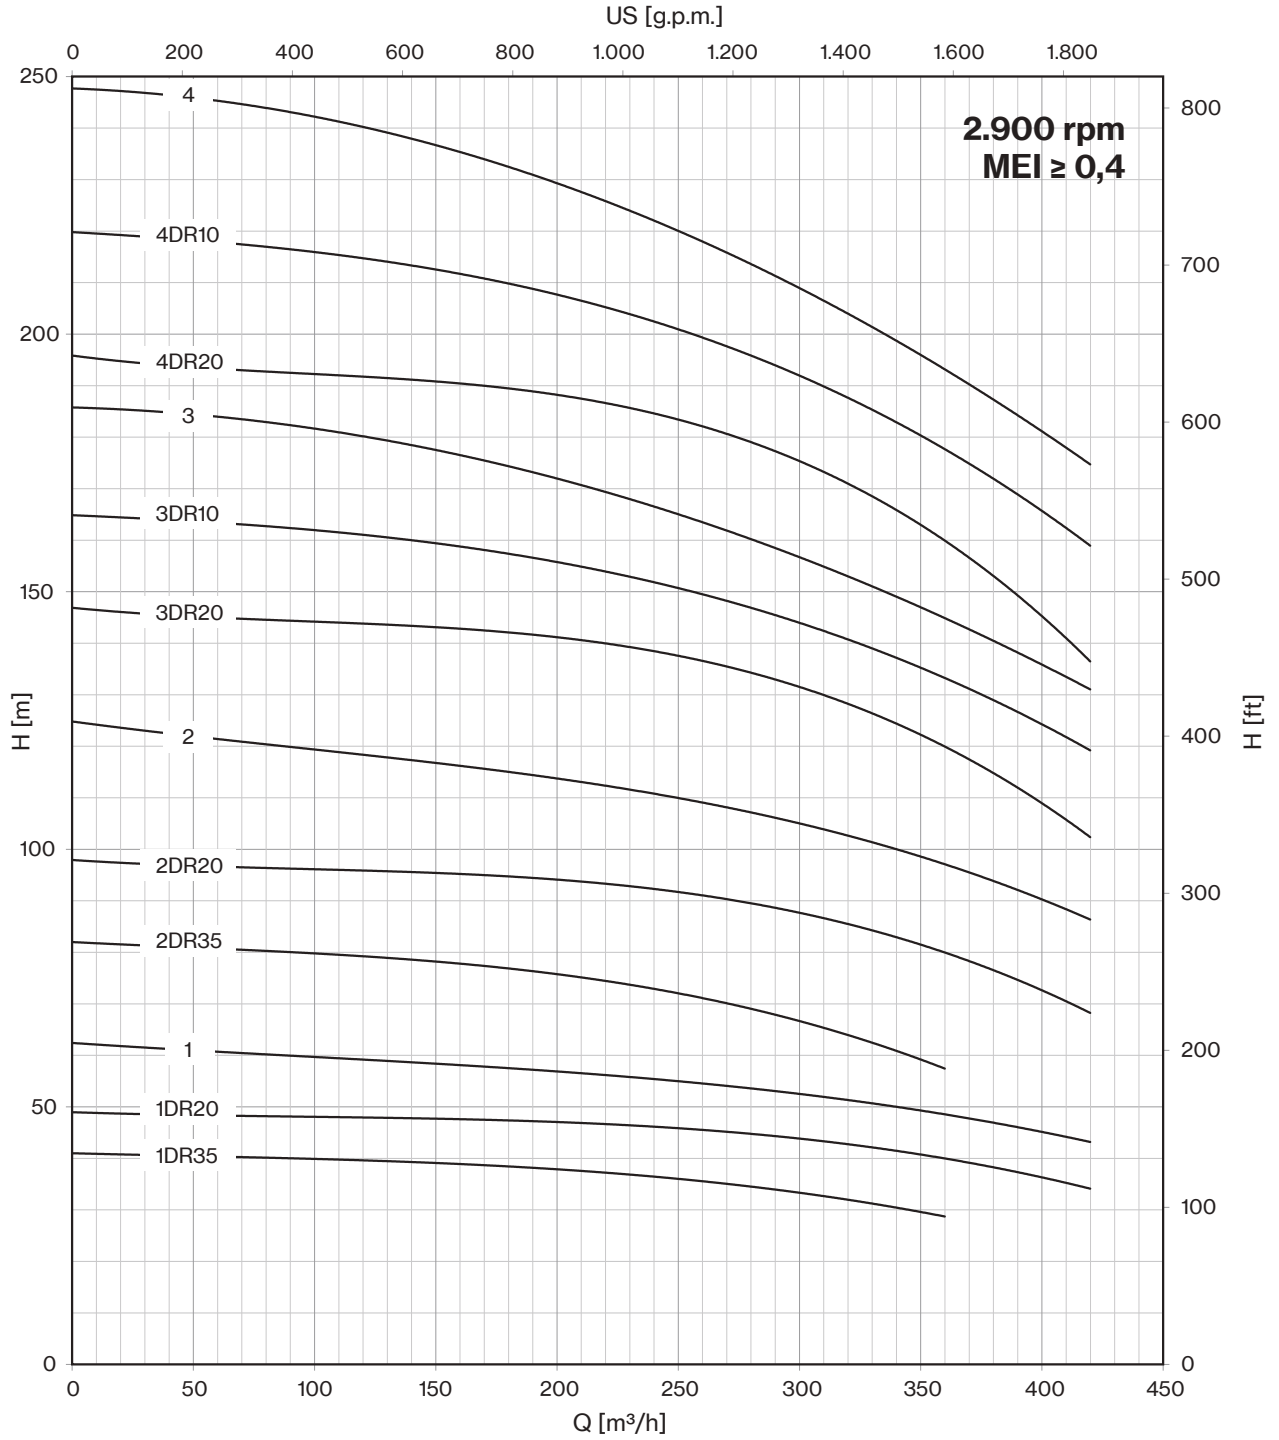


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1500	4000	4500	5000	5500	6000	6500	7000
	HP	kW	A	l/sec	0	25,0	66,7	75,0	83,3	91,7	100,0	108,3	116,7
				m ³ /h	0	90	240	270	300	330	360	390	420
12LM 360/05 DR20 D	340	250	481,0	H (m)	245	240	233	225	218	210	200	188	170
12LM 360/05 DR10 D	400	300	551,0		275	270	253	248	240	233	220	210	200
12LM 360/05 D	450	330	620,0		310	305	273	265	260	258	250	233	210
12LM 360/06 DR10 D	500	370	693,0		330	324	304	298	288	280	264	252	240
12LM 360/06 D	550	400	798,0		372	366	328	318	312	310	300	280	252
12LM 360/07 DR10 D	550	400	798,0		385	378	354	347	336	326	308	294	280

Max Eff. % DR35 =	77,5
Max Eff. % DR20 =	80
Max Eff. % DR10 =	80,5
Max Eff. % =	81
Max kW / St. DR35 =	36,80
Max kW / St. DR20 =	49,5
Max kW / St. DR10 =	55,2
Max kW / St. =	64,2

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

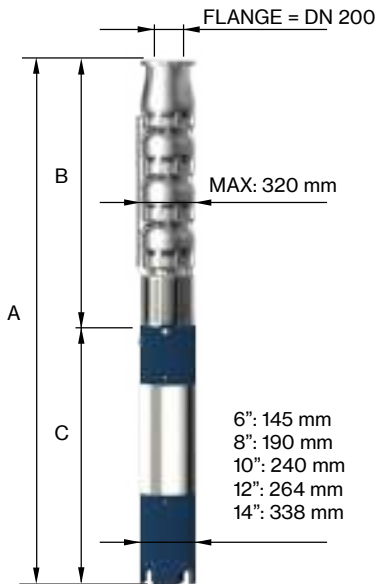



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	12LM 360/05 DR20 D	3970	1690	2280	775	179
	12LM 360/05 DR10 D	3970	1690	2280	775	179
	12LM 360/05 D	3850	1690	2160	906	179
	12LM 360/06 DR10 D	4240	1920	2320	1010	204
	12LM 360/06 D	4380	1920	2460	1105	204
	12LM 360/07 DR10 D	4610	2150	2460	1105	229

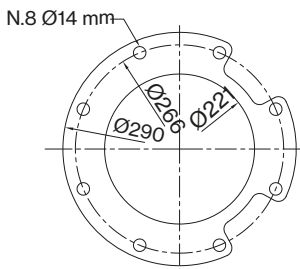

FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 219,1 mm




12LM 360

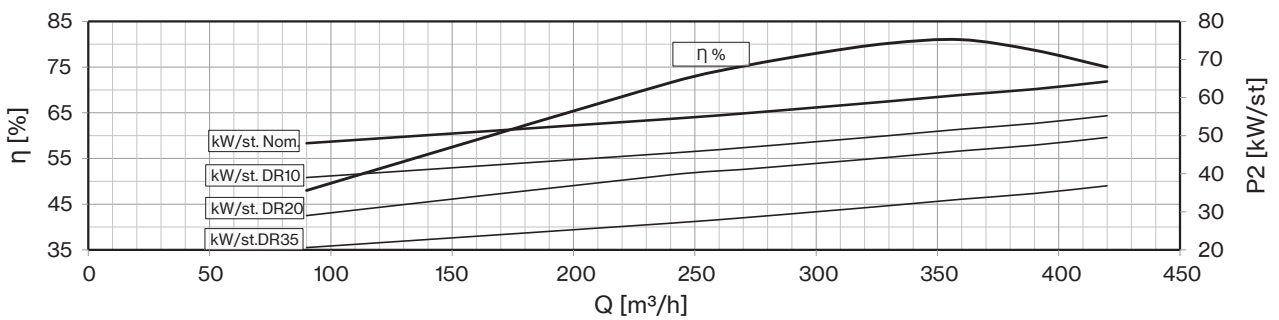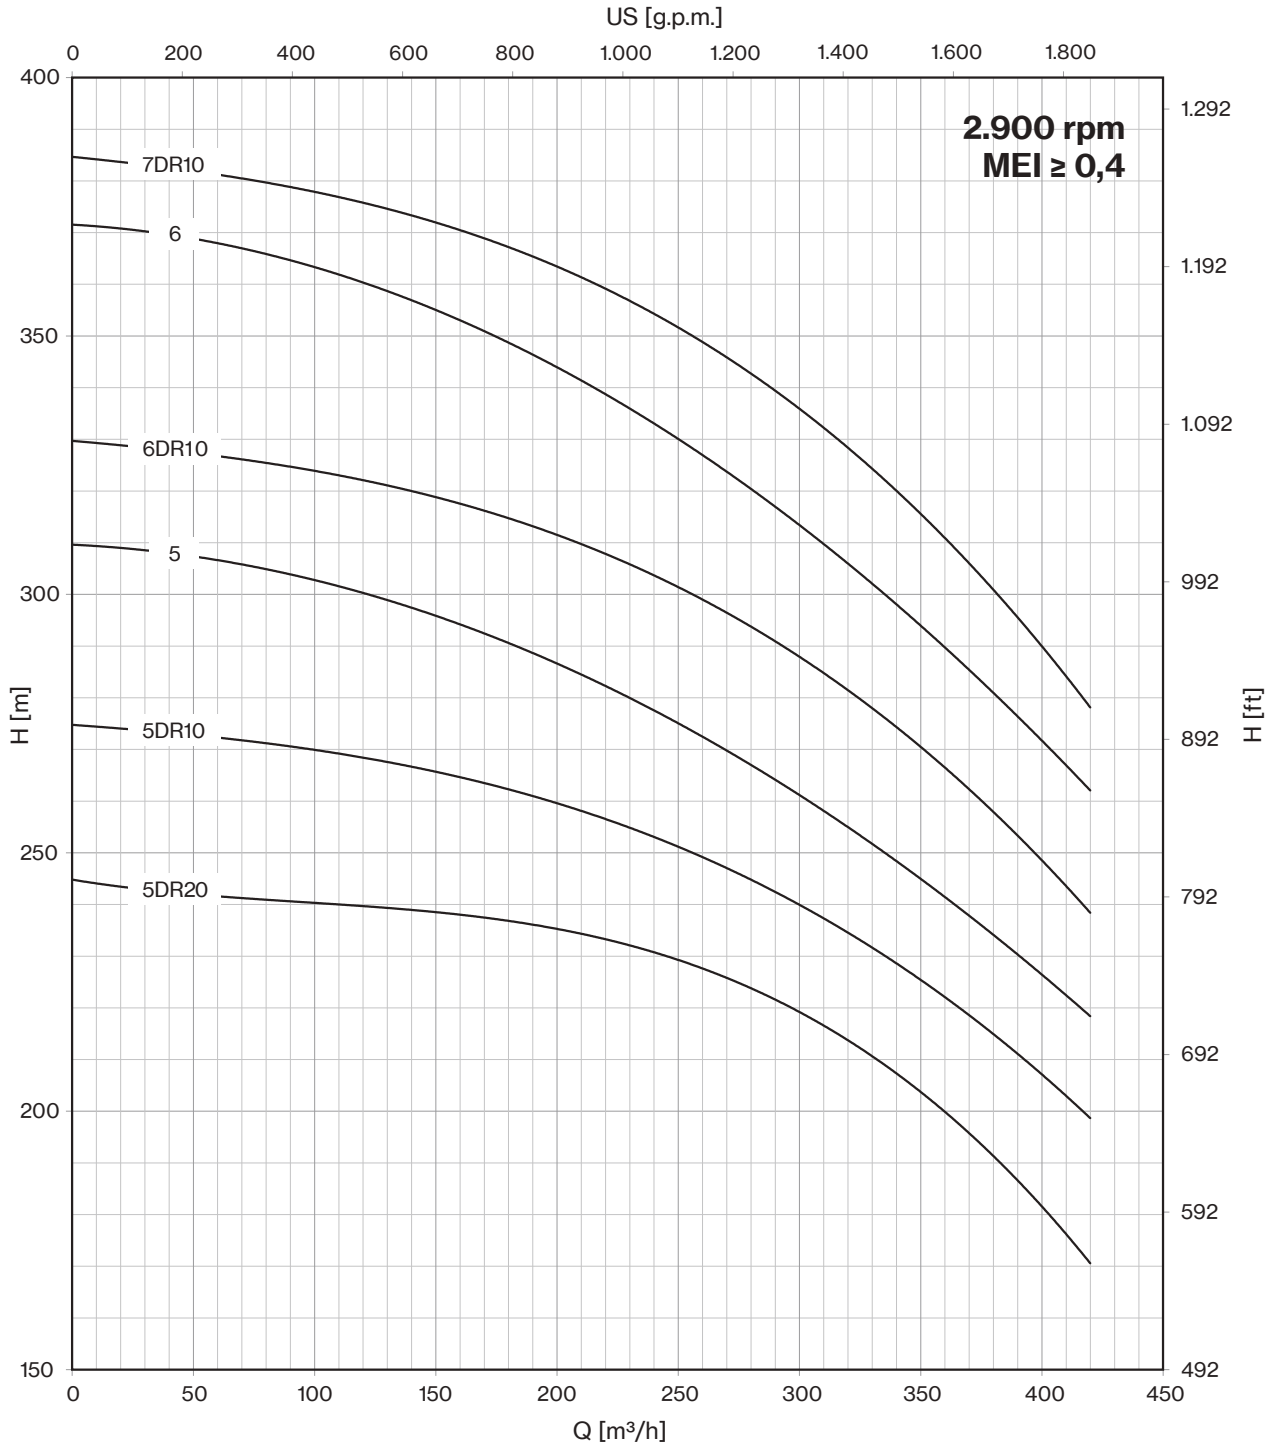


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	2000	6000	6500	7000	7500	8000	8500	9000
	HP	kW	A	l/sec	0	33,3	100,0	108,3	116,7	125,0	133,3	141,7	150,0
				m ³ /h	0	120	360	390	420	450	480	510	540
12LM 400/01 DR30	50	37	75,8	H (m)	43	42	32	30	27	24			
12LM 400/01 DR20	75	55	106,2		47	45	37	35	33	30	26	22	
12LM 400/01 DR10	75	55	106,2		53	52	42	40	38	36	32	28	
12LM 400/01	90	66	126,0		58	57	46	44	42	40	37	31	27
12LM 400/02 DR30	100	75	143,2		86	84	64	59	54	48			
12LM 400/02 DR20	125	92	175,1		94	90	73	69	65	59	52	44	
12LM 400/02 DR10 D	150	110	211,0		106	104	84	80	76	71	64	56	
12LM 400/02 D	175	130	245,3		116	114	92	88	84	80	73	62	54
12LM 400/03 DR20 D	200	150	277,2		141	135	110	104	98	89	78	66	
12LM 400/03 DR10 D	225	165	313,3		159	156	126	120	114	107	96	84	
12LM 400/03 D	250	185	342,2		174	171	138	132	126	120	110	93	81

Max Eff. % DR30 =	81,2
Max Eff. % DR20 =	81,8
Max Eff. % DR10 =	82,7
Max Eff. % =	81,6
Max Eff. % A =	82,5
Max kW / St. DR30 =	37
Max kW / St. DR20 =	45,6
Max kW / St. DR10 =	53
Max kW / St. =	60,4
Max kW / St. A =	67

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

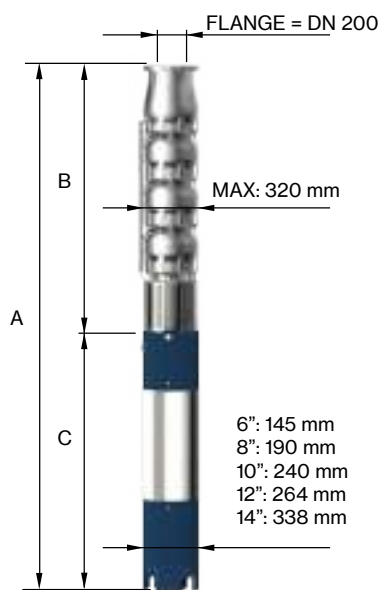

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
12LM 400/01 DR30	2111	770	1341	118	79
12LM 400/01 DR20	2003	770	1233	200	79
12LM 400/01 DR10	2003	770	1233	200	79
12LM 400/01	2072	770	1302	214	79
12LM 400/02 DR30	2383	1000	1383	230	104
12LM 400/02 DR20	2583	1000	1583	270	104
12LM 400/02 DR10 D	2733	1000	1733	300	104
12LM 400/02 D	2634	1000	1634	385	104
12LM 400/03 DR20 D	2964	1230	1734	415	129
12LM 400/03 DR10 D	3084	1230	1854	444	129
12LM 400/03 D	3214	1230	1984	480	129


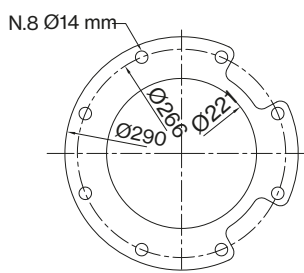


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 219,1 mm

"D" Pump shaft in Duplex




12LM 400

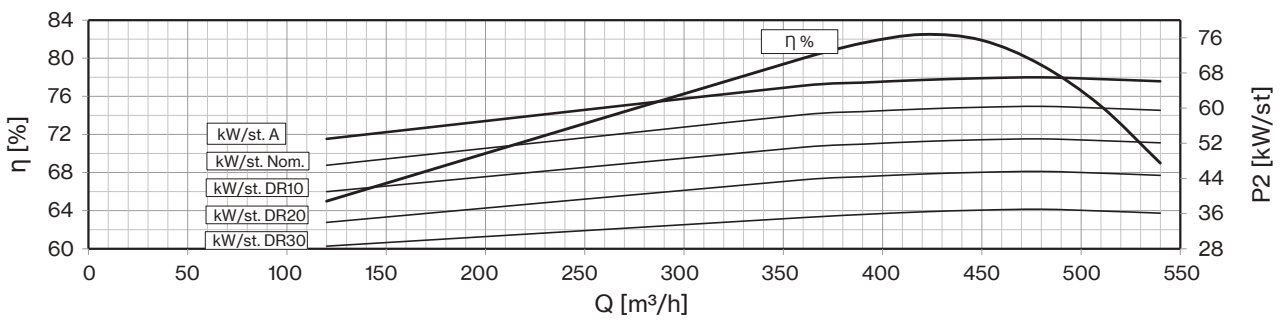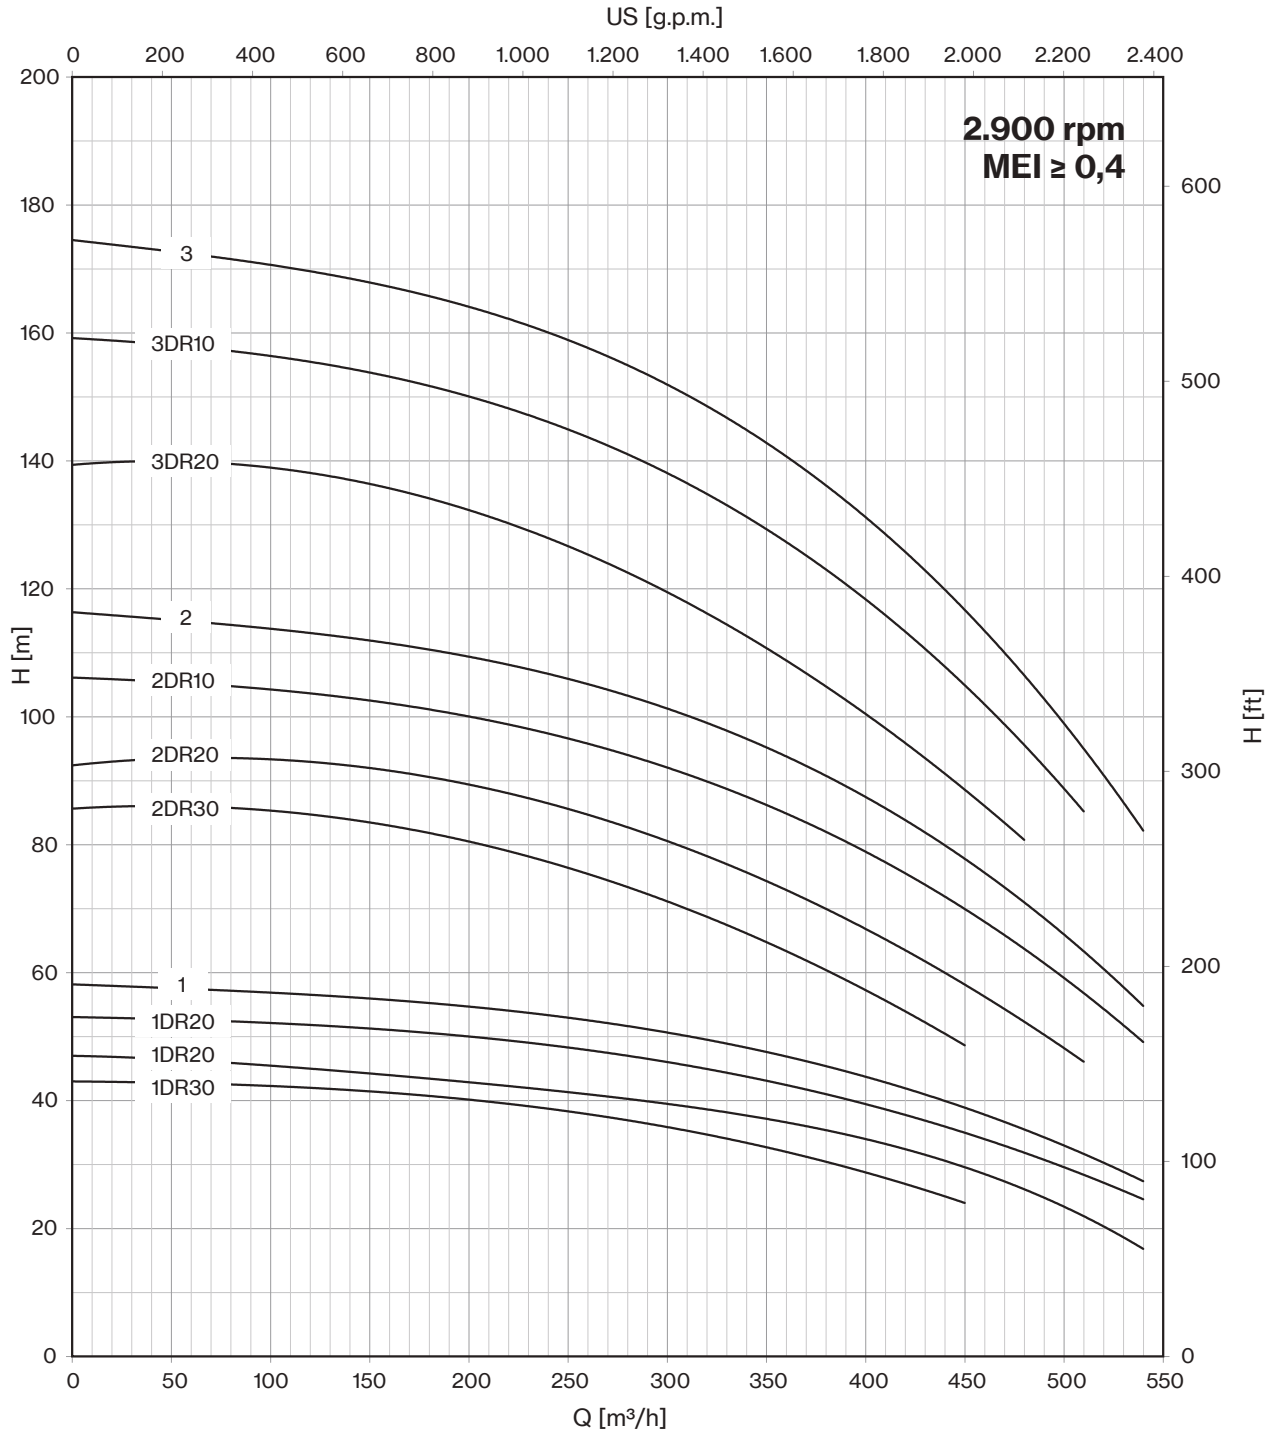


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	2000	6000	6500	7000	7500	8000	8500	9000
	HP	kW	A	l/sec	0	33,3	100,0	108,3	116,7	125,0	133,3	141,7	150,0
				m ³ /h	0	120	360	390	420	450	480	510	540
12LM 400/04 DR20 D	250	185	342,2	H (m)	188	180	146	138	130	118	104	88	
12LM 400/04 DR10 D	300	220	430,0		212	208	168	160	152	142	128	112	
12LM 400/04 D	340	250	481,0		232	228	184	176	168	160	146	124	108
12LM 400/05 DR10 D	400	300	551,0		265	260	210	200	190	178	160	140	
12LM 400/05 D	450	330	620,0		290	285	230	220	210	200	183	155	135
12LM 400/05 A D	500	370	693,0		305	300	250	240	230	223	205	195	160
12LM 400/06 D	500	370	693,0		348	342	276	264	252	240	220	186	162

Max Eff. % DR30 =	81,2
Max Eff. % DR20 =	81,8
Max Eff. % DR10 =	82,7
Max Eff. % =	81,6
Max Eff. % A =	82,5
Max kW / St. DR30 =	37
Max kW / St. DR20 =	45,6
Max kW / St. DR10 =	53
Max kW / St. =	60,4
Max kW / St. A =	67

Q (flow)	25%	50%	75%	100%
NPSH (m)	3,4	5	7,8	11,8

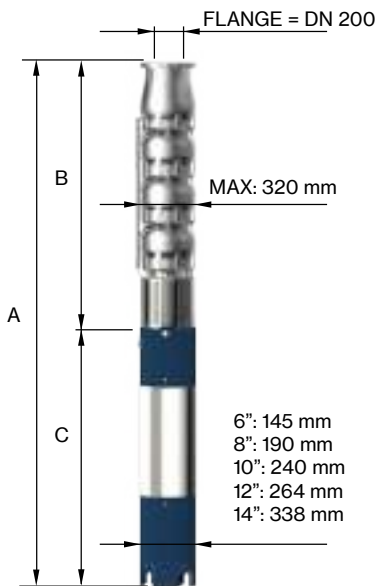

50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)		
	TYPE	A	B	C	MOTOR	PUMP
	12LM 400/04 DR20 D	3444	1460	1984	480	154
	12LM 400/04 DR10 D	3570	1460	2110	700	154
	12LM 400/04 D	3740	1460	2280	775	154
	12LM 400/05 DR10 D	3970	1690	2280	775	179
	12LM 400/05 D	3850	1690	2160	906	179
	12LM 400/05 A D	4010	1690	2320	1010	179
	12LM 400/06 D	4240	1920	2320	1010	204


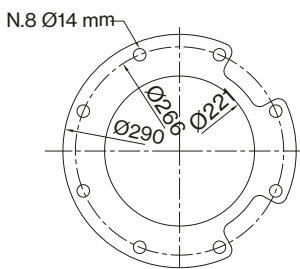


FOR COMMERCIAL TUBE
EXTERNAL DIAMETER: 219,1 mm

"D" Pump shaft in Duplex




12LM 400

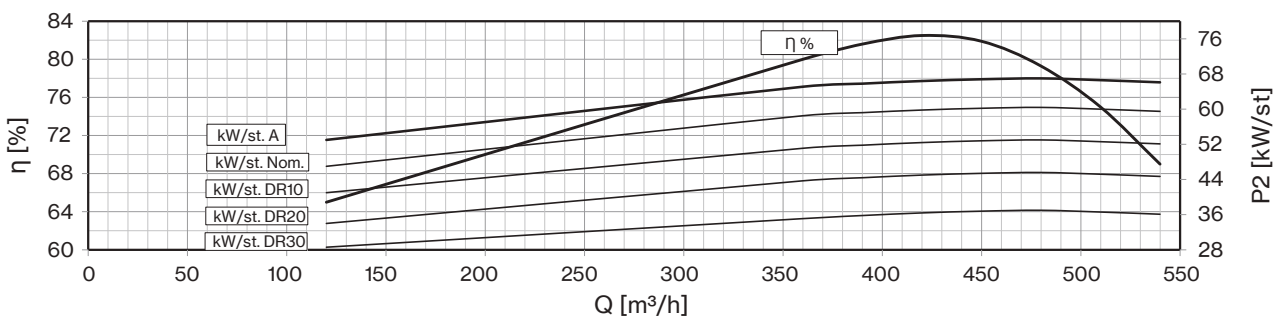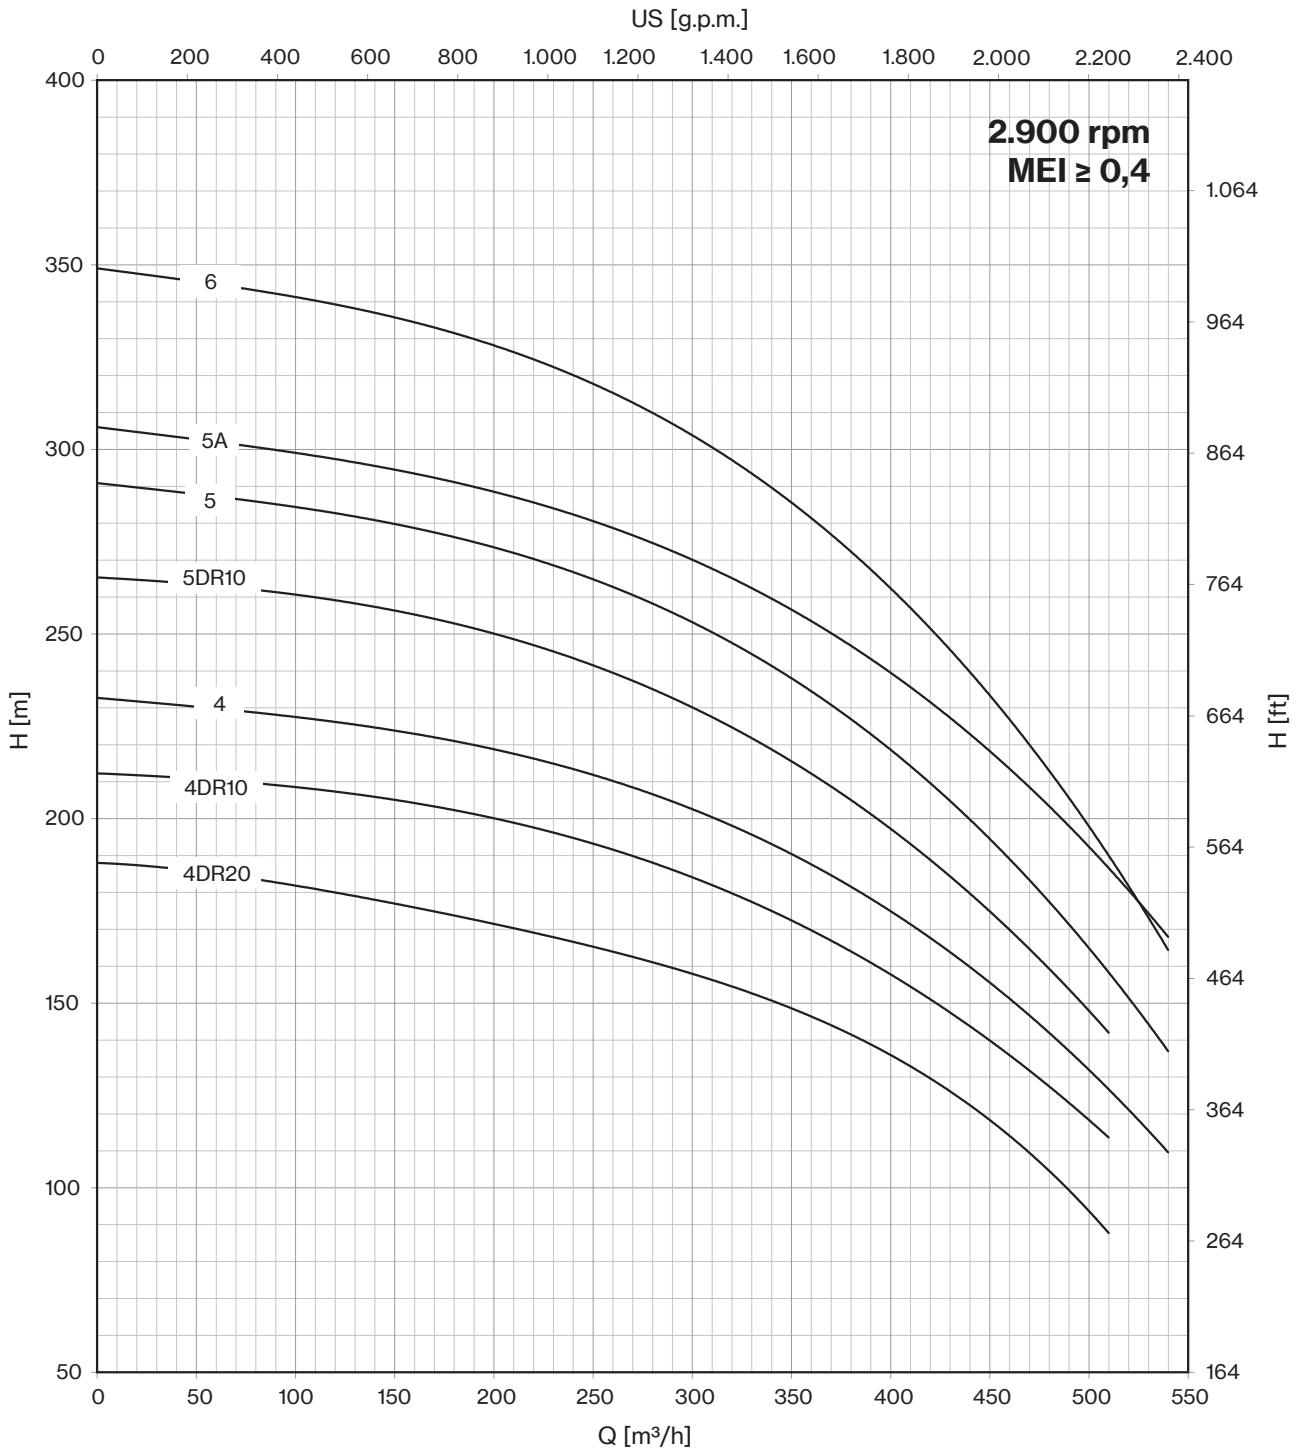


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1333	2667	4000	5333	6667	8000	8500	9667
	HP	kW	A	l/sec	0	22,2	44,5	66,7	88,9	111,1	133,3	141,8	161,2
				m ³ /h	0	80	160	240	320	400	480	510	580
E 14 A/1 D	90	66	126,0	H (m)	71,8	66,5	62,5	58,7	54,4	49,0	41,6	38,2	
E 14 A/1 C	100	75	143,2		76,8	71,7	67,5	63,8	59,6	54,6	47,9	45,0	39,0
E 14 A/1 B	125	92	175,1		85,1	79,9	75,6	71,8	67,8	63,3	57,7	55,1	48,2
E 14 A/1 A	150	110	211,0		97,1	90,8	85,5	80,4	75,6	70,7	65,4	63,0	57,6
E 14 A/1	175	130	245,3		108,6	99,3	92,3	87,0	82,5	78,0	73,0	70,8	64,1
E 14 A/2 D	175	130	245,3		143,5	133,0	125,0	117,4	108,8	98,0	83,2	76,4	
E 14 A/2 C	200	150	277,2		153,6	143,4	135,0	127,6	119,1	109,1	95,8	90,0	78,0
E 14 A/2 B	250	185	342,2		170,2	159,8	151,2	143,6	135,6	126,5	115,4	110,2	96,4
E 14 A/2 A	300	220	430,0		194,3	181,6	171,0	160,8	151,2	141,4	130,8	126,0	115,2
E 14 A/2	340	250	481,0		217,3	198,6	184,6	174,0	165,0	156,0	146,0	141,6	128,2

Max Eff. % =	82,3
Max KW / St.: D = - D.230mm =	64,9
Max KW / St.: C = - D.238mm =	74,0
Max KW / St.: B = - D.251mm =	90,8
Max KW / St.: A = - D.268mm =	109,1
Max KW / St. - D.276mm =	119,3

Q (flow)	25%	50%	75%	100%
NPSH (m)	5,8	6,4	9,4	15,3

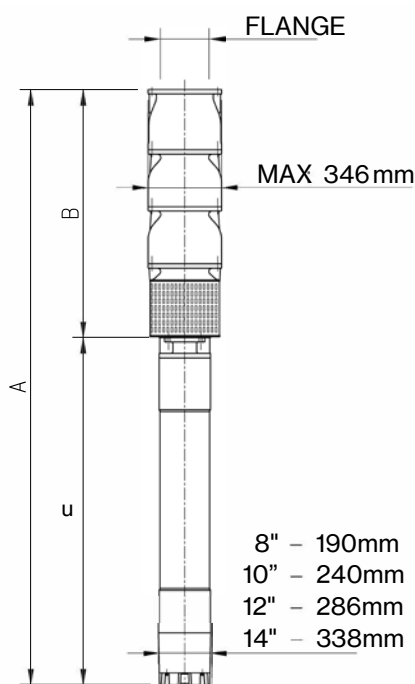



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
E 14 A/1 D	2237	935	1302	214	184
E 14 A/1 C	2318	935	1383	230	184
E 14 A/1 B	2518	935	1583	270	184
E 14 A/1 A	2668	935	1733	300	184
E 14 A/1	2569	935	1634	385	184
E 14 A/2 D	2809	1175	1634	385	260
E 14 A/2 C	2909	1175	1734	415	260
E 14 A/2 B	3159	1175	1984	480	260
E 14 A/2 A	3285	1175	2110	700	260
E 14 A/2	3455	1175	2280	775	260

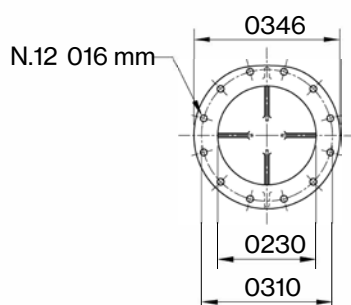

"D" Pump shaft in Duplex




E14 A

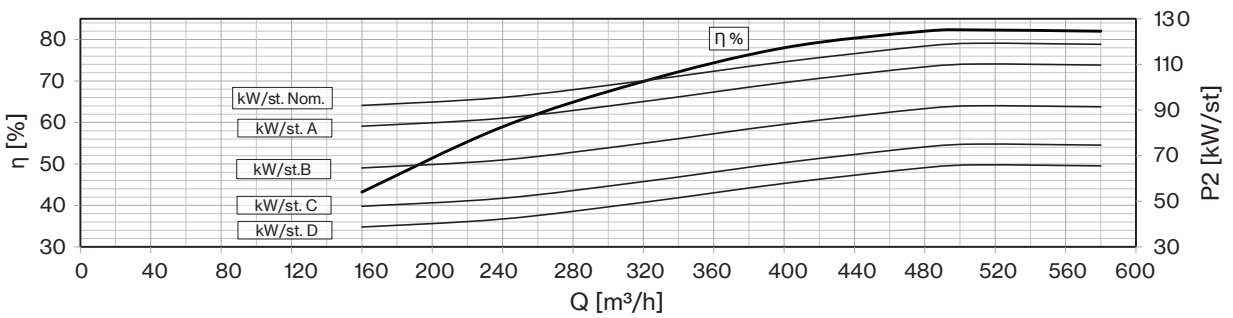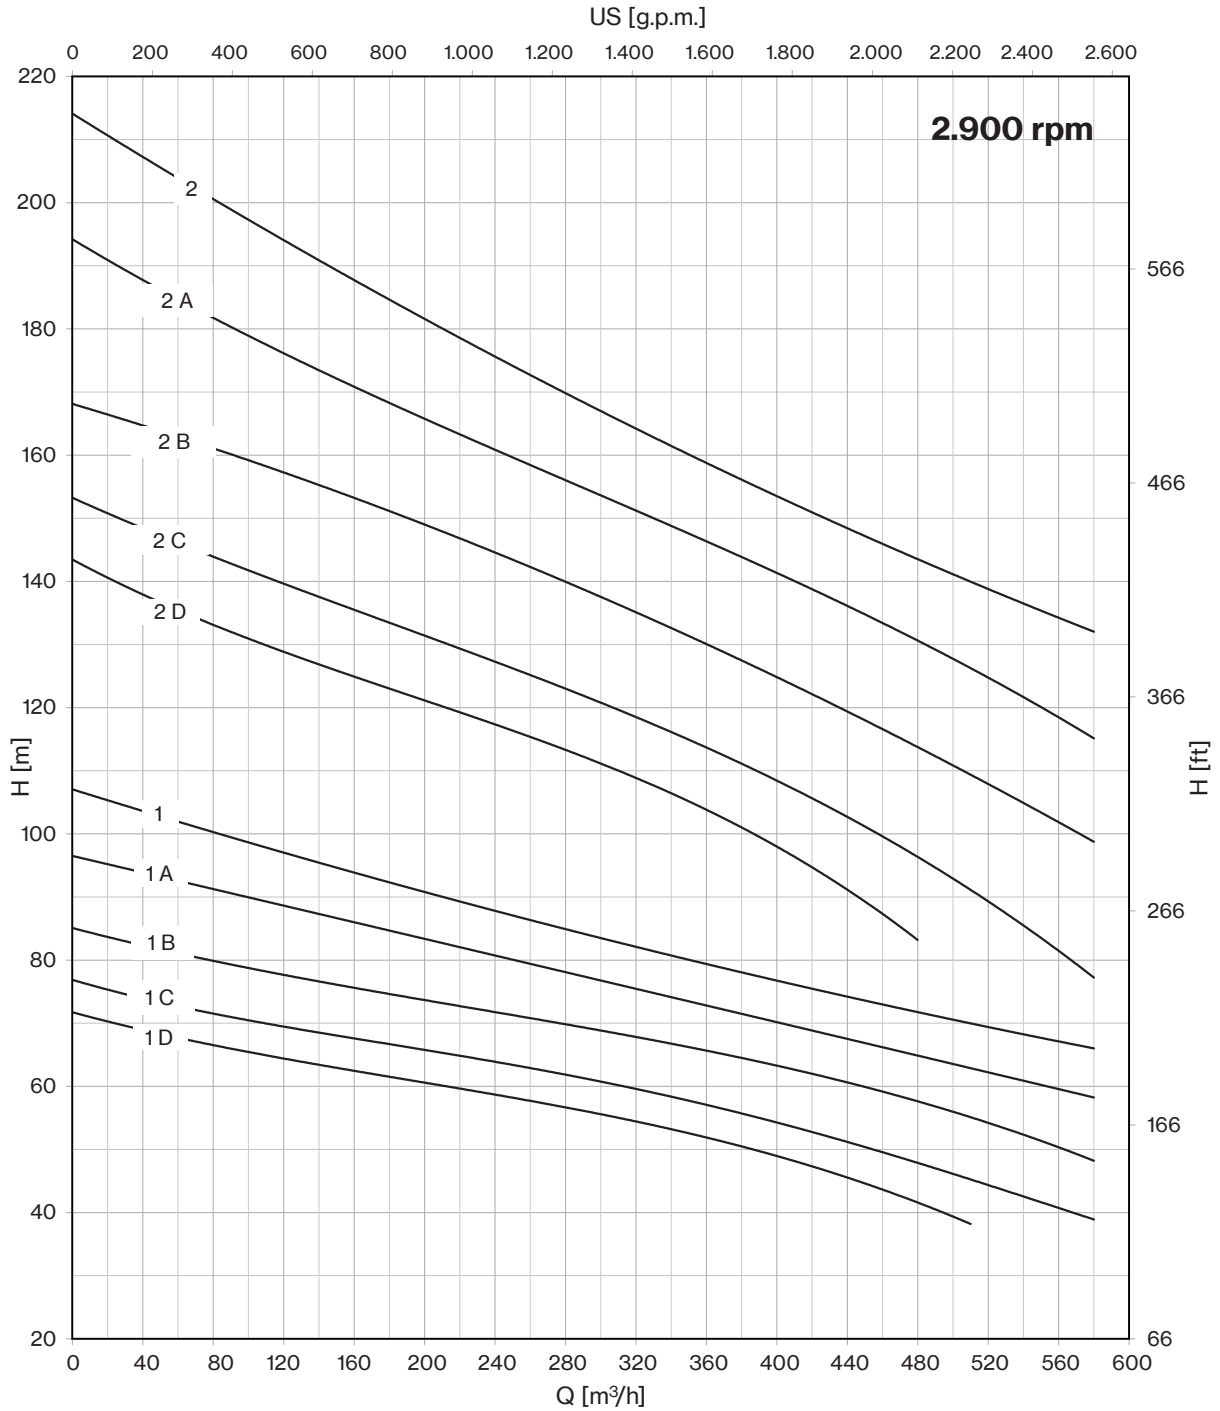


50 Hz - 2900 rpm				Q									
TYPE	P2		400 V	l/min	0	1333	4000	5333	6667	9000	10000	12500	14333
	HP	kW	A	l/sec	0	22,2	66,7	88,9	111,1	150,0	166,7	208,3	238,9
				m ³ /h	0	80	240	320	400	540	600	750	860
E 14 B/1 C	125	92	175,1	H (m)	73,5	72,5	68,0	63,5	57,8	44,0	36,5	14,0	
E 14 B/1 B	150	110	211,0		80,4	79,5	75,0	71,5	66,0	53,5	46,7	26,5	
E 14 B/1 A	175	130	245,3		87,0	84,0	79,0	77,0	73,8	66,0	61,5	45,5	29,0
E 14 B/1	200	150	277,2		100,8	97,4	90,4	86,9	82,9	74,2	69,0	53,9	38,4
E 14 B/2 C	250	185	342,2		147,0	145,0	136,0	127,0	115,6	88,0	73,0	28,0	
E 14 B/2 B	300	220	430,0		160,7	159,0	150,0	143,0	132,0	107,0	93,4	53,0	
E 14 B/2 A	400	300	551,0		174,0	168,0	158,0	154,0	147,6	132,0	123,0	91,0	58,0
E 14 B/2	400	300	551,0		201,6	194,8	180,8	173,8	165,8	148,4	138,0	107,8	76,8

Max Eff. % =	78,6
Max KW / St.: C - D.240mm =	91,8
Max KW / St.: B - D.250mm =	109,7
Max KW / St. A. - D.259mm =	129,6
Max KW / St. - D.274mm =	149,6

Q (flow)	25%	50%	75%	100%
NPSH (m)	6	6,4	8,6	16,3

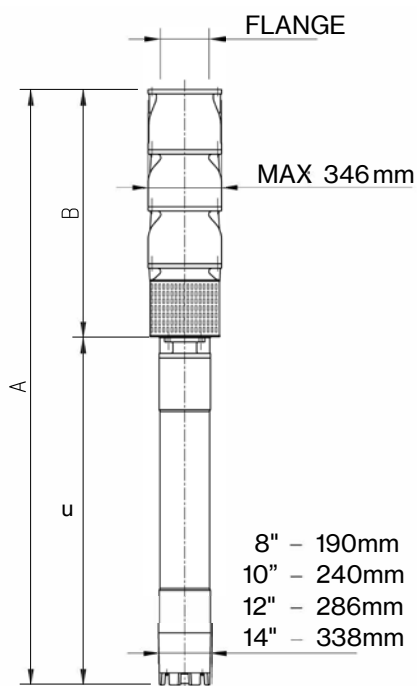



50 Hz 2900 rpm	DIMENSIONS (mm)			WEIGHT (kg)	
	TYPE	A	B	C	MOTOR
E 14 B/1 C	2488	905	1583	270	184
E 14 B/1 B	2638	905	1733	300	184
E 14 B/1 A	2539	905	1634	385	184
E 14 B/1	2639	905	1734	415	184
E 14 B/2 C	3159	1175	1984	480	260
E 14 B/2 B	3285	1175	2110	700	260
E 14 B/2 A	3455	1175	2280	775	260
E 14 B/2	3455	1175	2280	775	260

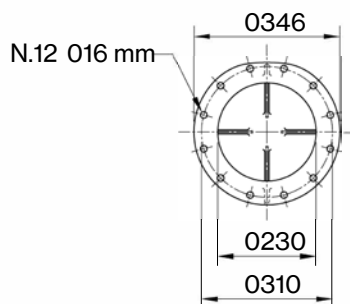


"D" Pump shaft in Duplex



E14 B

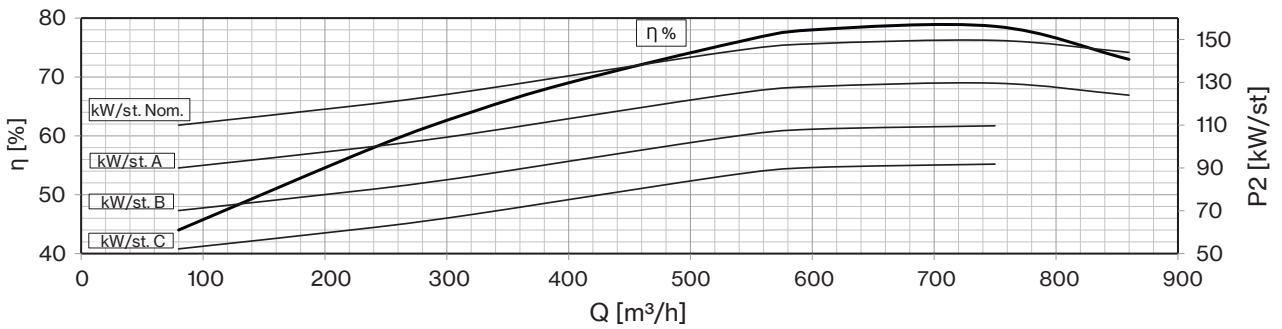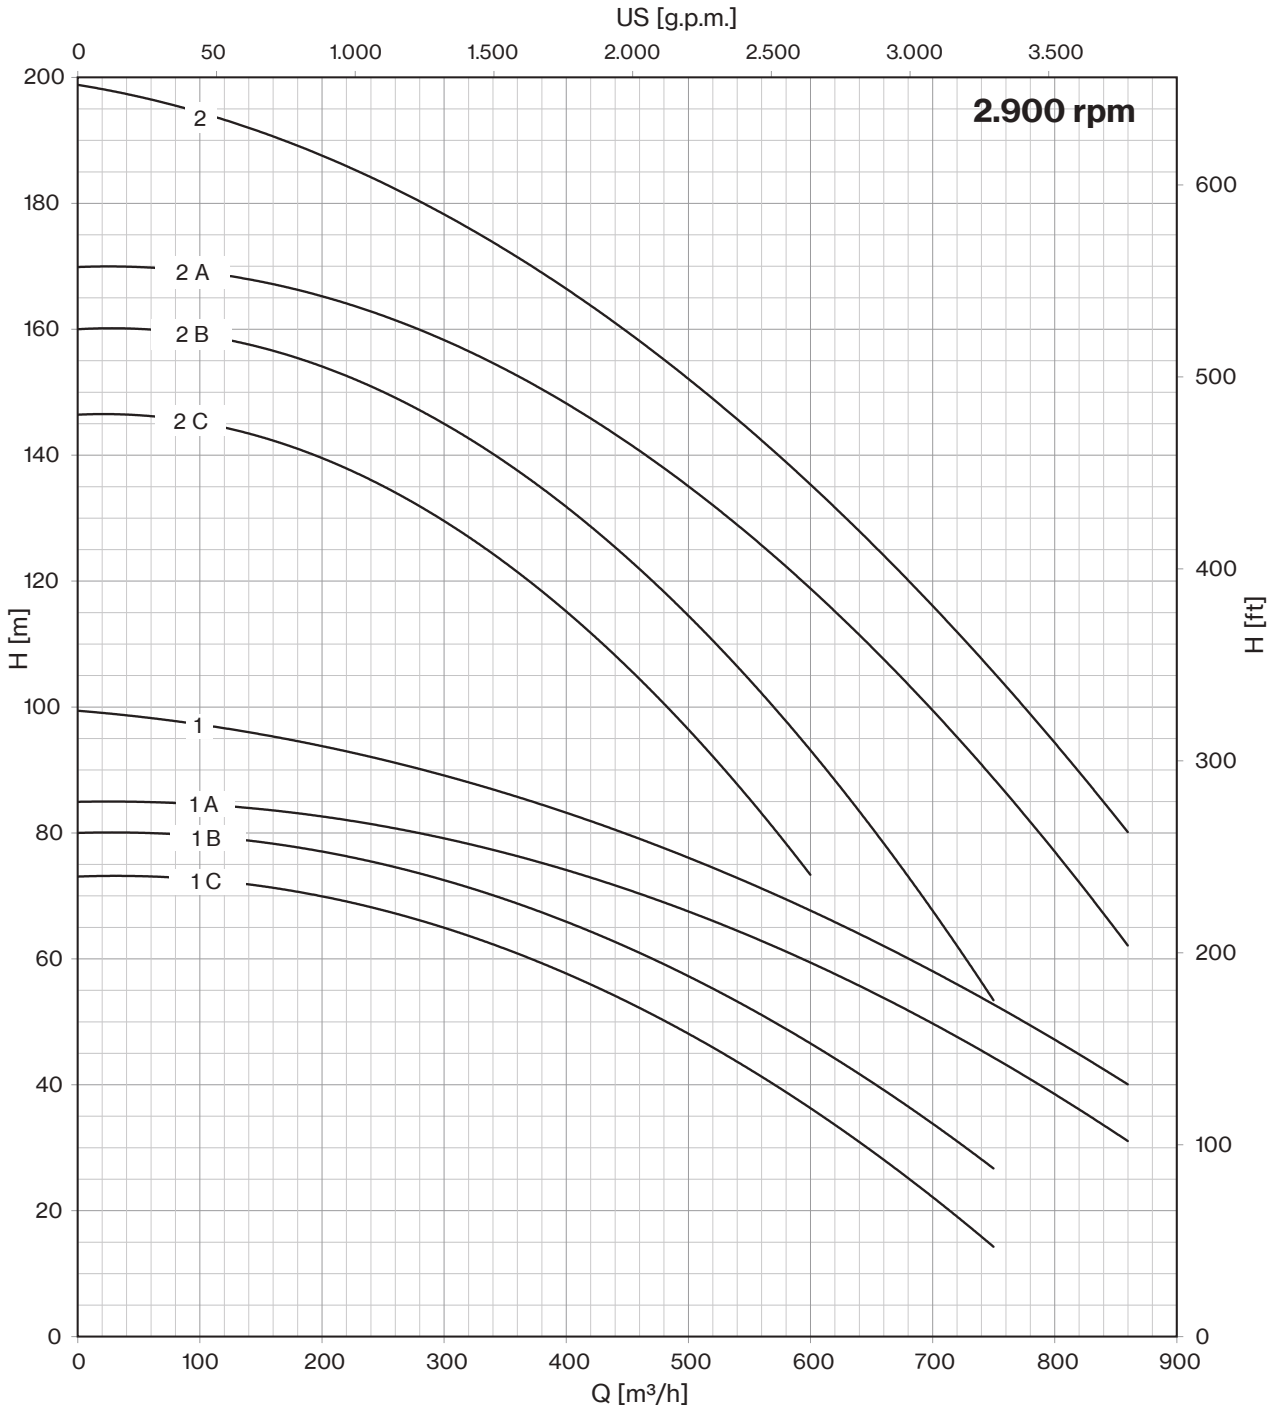

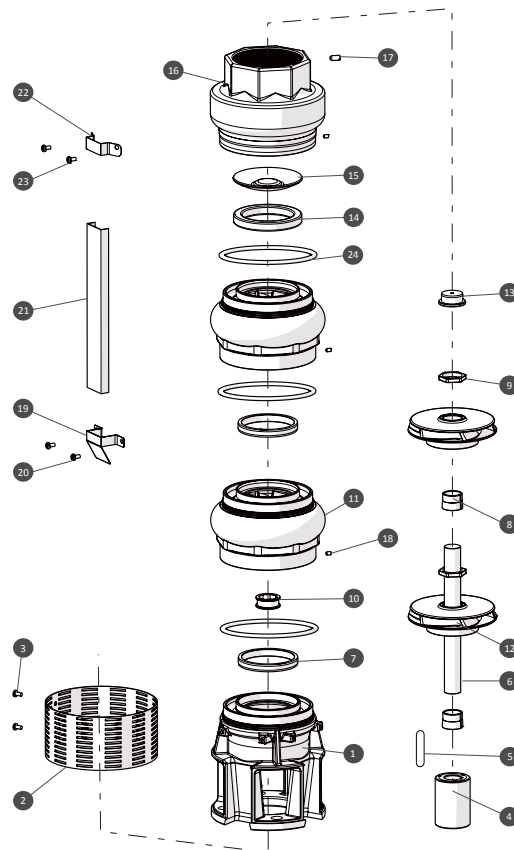


N. CODE	DESCRIPTION	LRS EXECUTION	LRX EXECUTION	LRD EXECUTION	(*) Q.TY
1	MOTOR BRACKET	AISI 304	AISI 316	Duplex	-
2	SUCTION STRAINER	AISI 304	AISI 316	Duplex	-
3	M4X8 SCREWS FOR STRAINER	AISI 304	AISI 316	Duplex	-
4	COUPLING	AISI 304	AISI 316	Duplex	1
5	KEY	AISI 304	AISI 316	Duplex	1
6	PUMP SHAFT	AISI 304	AISI 316	Duplex	1
7	IMPELLER WEAR RING	NBR	NBR	NBR	N° of St.
8	CONIC COLLAR	AISI 304	AISI 316	Duplex	N° of St.
9	CONIC COLLAR NUT	AISI 304	AISI 316	Duplex	N° of St.
10	DIFFUSER BUSH BEARING	NBR	NBR	NBR	N° of St.
11	DIFFUSER	AISI 304	AISI 316	Duplex	-
12	IMPELLER	AISI 304	AISI 316	Duplex	N° of St.
13	REVERSE THRUST RING	PTFE+25% CARBONE / Graphite	PTFE+25% CARBONE / Graphite	PTFE+25% CARBONE / Graphite	1
14	NRV GASKET	NBR	NBR	NBR	1
15	VALVE PLATE	AISI 304	AISI 316	Duplex	-
16	DELIVERY PUMP BODY	AISI 304	AISI 316	Duplex	-
17	DELIVERY BODY LOCKING SCREW	AISI 304	AISI 316	Duplex	1
18	DIFFUSER LOCKING SCREW	AISI 304	AISI 316	Duplex	N° of St.
19	BOTTOM CABLE GUARD CLAMP	AISI 304	AISI 316	Duplex	-
20	BOTTOM CABLE GUARD SCREWS M4X8	AISI 304	AISI 316	Duplex	-
21	CABLE GUARD	AISI 304	AISI 316	Duplex	-
22	UPPER CABLE GUARD CLAMP	AISI 304	AISI 316	Duplex	-
23	UPPER CABLE GUARD SCREWS M4X8	AISI 304	AISI 316	Duplex	-
24	O-RING	NBR	NBR	NBR	N° of St.

* Recommended spare parts quantity




6LM-8LM-10LM-12LM

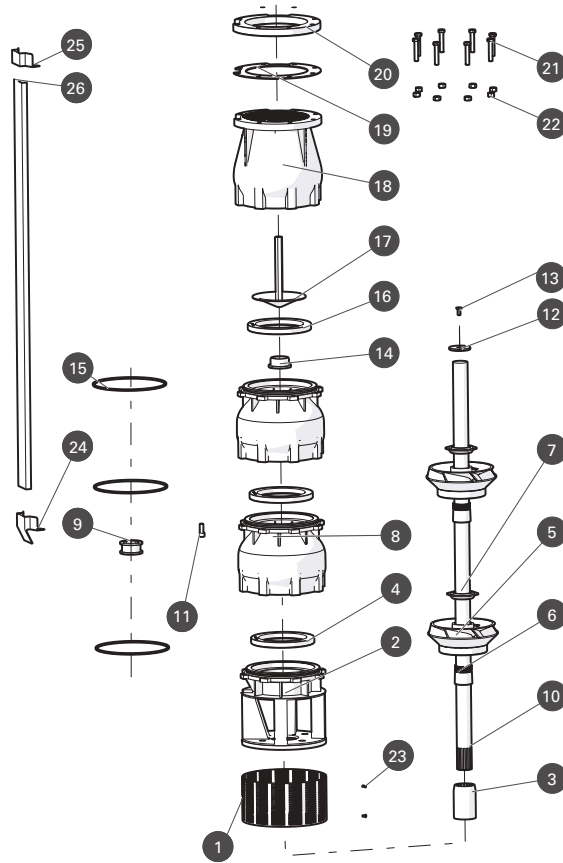

N. CODE	DESCRIPTION	LMS EXECUTION	LMX EXECUTION	LMD EXECUTION	(*) Q.TY
1	SUCTION STRAINER	AISI 304	AISI 316	Duplex	-
2	SUCTION CAGE	AISI 304	AISI 316	Duplex	-
3	JOINT	AISI 304	AISI 316	Duplex	1
4	USURY RING	NBR	NBR	NBR	N° of St.
5	IMPELLER	AISI 304	AISI 316	Duplex	-
6	CONE	AISI 304	AISI 316	Duplex	N° of St.
7	HEXAGONAL RING	AISI 304	AISI 316	Duplex	N° of St.
8	DIFFUSEUR	AISI 304	AISI 316	Duplex	-
9	BEARING BUSH	NBR	NBR	NBR	N° of St.
10	PUMP SHAFT	AISI 304	AISI 316	Duplex	1
11	N.8 SCREW FOR DIFFUSEUR	AISI 304	AISI 316	Duplex	-
12	RING	AISI 304	AISI 316	Duplex	1
13	SCREW FOR DISK	AISI 304	AISI 316	Duplex	1
14	COUNTERTHRUST	PTFE + 25% CARBON	PTFE + 25% CARBON	PTFE + 25% CARBON	1
15	O-RING	NBR	NBR	NBR	N° of St.
16	GASKET VALVE	NBR	NBR	NBR	1
17	CAP VALVE	AISI 304	AISI 316	Duplex	-
18	BODY VALVE	AISI 304	AISI 316	Duplex	-
19	SEAL COUNTERFLANGE	NBR	NBR	NBR	1
20	COUNTERFLANGE	AISI 304	AISI 316	Duplex	-
21	N.8 SCREW FOR COUNTERFLANGE	AISI 304	AISI 316	Duplex	-
22	N.8 NUT FOR COUNTERFLANGE	AISI 304	AISI 316	Duplex	-
23	N.2 SCREW FOR SUCTION STRAINER	AISI 304	AISI 316	Duplex	-
24	LOWER CLAMP	AISI 304	AISI 316	Duplex	-
25	UPPER CLAMP	AISI 304	AISI 316	Duplex	-
26	COVER CABLE	AISI 304	AISI 316	Duplex	-

* Recommended spare parts quantity



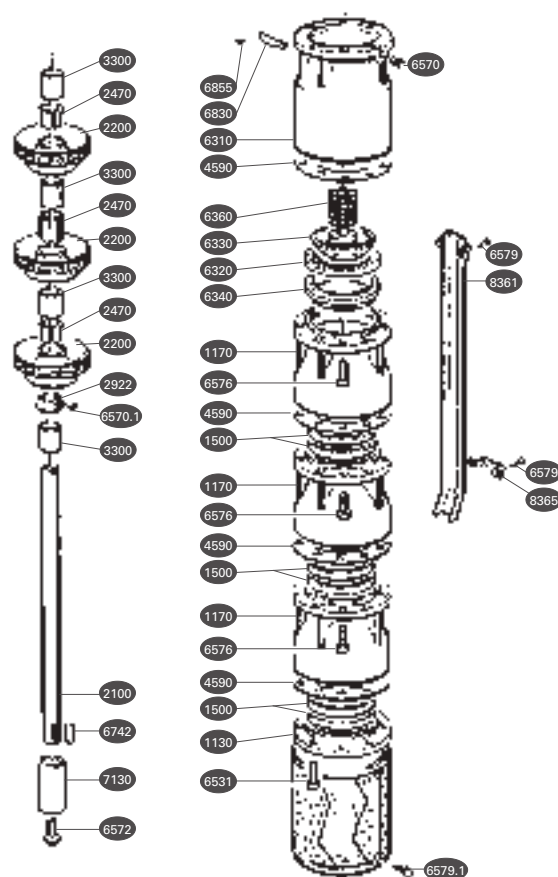

N. CODE	DESCRIPTION	MATERIAL	(*) Q.TY
1130	SUPPORT	Cast iron	
1170	DIFFUSER	Cast iron	
1170.1	LAT DIFFUSER	Cast iron	
1500	WEAR RING	Rubber	1 x stage
2100	SHAFT	Stainless steel	
2200	IMPELLER	Cast iron	1 x stage
2470	BUSHING	Steel	1 x stage
2922	SANDGUARD	Brass	
3300	BEARING	Steel - rubber	1 x stage
4590	GLAND	Guarnital	1 x stage
6310	VALVE BODY	Valve body / Cast Iron	
6320	VALVE HOUSING	Rubber	
6330	WASHER	Stainless steel	
6340	HOUSING RING	Cast iron	
6360	SPRING	Stainless steel	
6531	STRAINER	Stainless steel	
6570	SCREW	Stainless steel	
6570.1	SCREW	Stainless steel	
6572	SCREW	Stainless steel	
6576	SCREW	Stainless steel	
6579	SCREW	Stainless steel	
6579.1	SCREW	Stainless steel	
6742	KEY	Stainless steel	
6830	LABEL	Stainless steel	
6855	PIN	Stainless steel	
7130	JOINT	Stainless steel	
8361	SHEAT	Stainless steel	
8365	CABLE GUARD CLAMP	Stainless steel	

* Recommended spare parts quantity







DEEPPWELL BOREHOLE MOTORS

DEEPWELL BOREHOLE MOTORS

4MPE/6MPE



4MPC/6MPC



6R/8R/10R



PTR12/PTR14


Line of motors for submersible electric pumps, available with different construction technologies and available in sizes 4", 6", 8", 10", 12" and 14".

4MPE/6MPE

4" and 6" rewindable oil filled submersible motors characterized by high torque, strong mechanical structure, high reliability. Suitable for vertical and horizontal operations.

Construction features

Upper support	nickel plated cast iron
External jacket, shaft and cup	stainless steel AISI 304
Mechanical seal	ceramic-graphite
Ball bearings	axial and radial oil lubricated
Number of startups/hr	max 30
Coolant	non-toxic dielectric lubricant
Cable	1,75 to 4 m according to motor size (3 wires + ground)
Shaft extension and coupling	NEMA standard
Voltage	1~ 220/230V - 50Hz 3~ 380/415V - 50Hz
Insulation class	F
Protection degree	IP68
Max liquid temperature	35° C
Max depth immersion	150 m

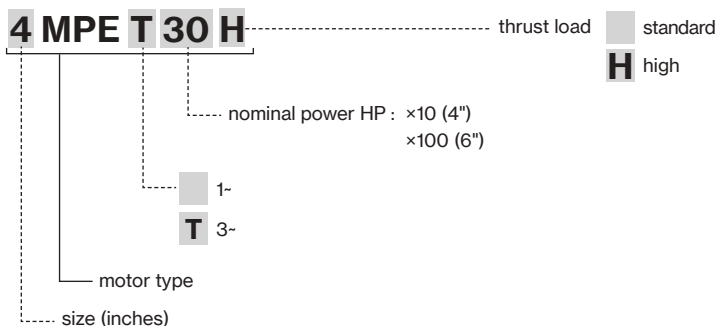


4MPE



6MPE



4MPE/6MPE

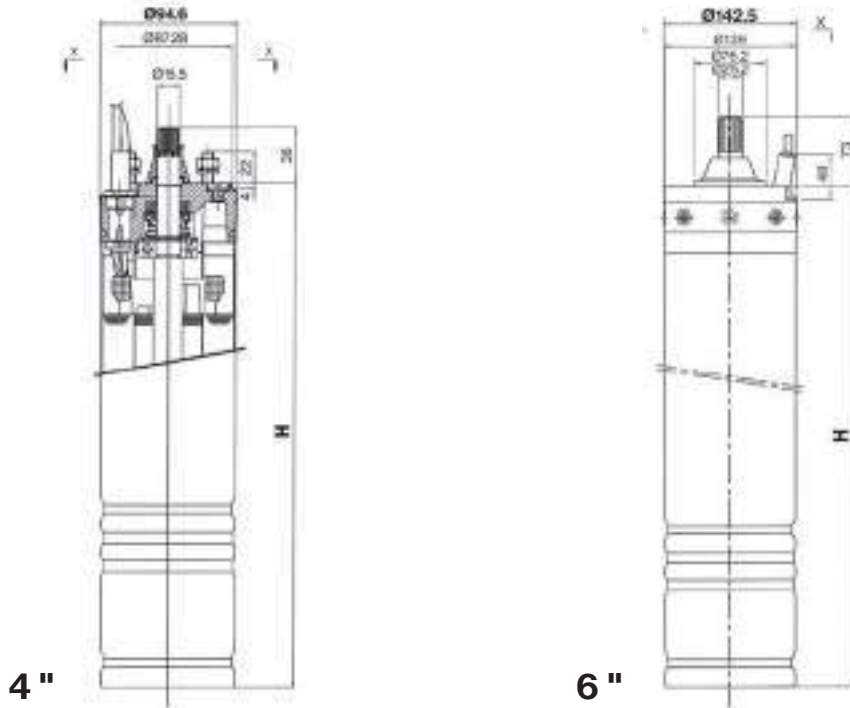


4 "

6 "

TYPE 1- 230V	HP	kW	Axial load	I _N	I _{START}	C	Efficiency	Cos φ	T _s / T _N	H	Kg	CABLE	
												Lenght	Size
			N	A	μF	%	mm	m	mm ²				
4MPE 5	0,5	0,37	1500	3,4/3,6	10,8	20	53	0,94	1	325	7	1,75	1,5
4MPE 7	0,75	0,55		4,2/4,5	13,9	25	60	0,92	0,87	325	7,6		
4MPE10	1	0,75		5,6/6	18,5	35	62	0,92	0,7	350	8,7		
4MPE15	1,5	1,1		7,8/8,2	23	40	66	0,92	0,5	385	10,3		
4MPE20	2	1,5		10,8/11	38,7	50	68	0,88	0,55	420	12		
4MPE30	3	2,2		14,6/14,8	43,5	70	69	0,94	0,48	470	14,2		
4MPE30H	3	2,2	7500	14,6/14,8	43,5	70	69	0,94	0,48	520	15,5	2,5	

TYPE 3- 400V	HP	kW	Axial load	I _N	I _{START}	Efficiency	Cos φ	T _s / T _N	H	Kg	CABLE	
											Lenght	Size
			N	A	%	mm	m	mm ²				
4MPET 5	0,5	0,37	1500	1,3/1,6	6,2	60	0,72	2,9	325	6,5	1,75	1,5
4MPET 7	0,75	0,55		1,9/2	8,5	62	0,71	3,1	325	7		
4MPET 10	1	0,75		2,4/2,6	10,9	66	0,71	3,1	325	7,6		
4MPET 15	1,5	1,1		3,2/3,4	14	73	0,7	3,2	350	8,7		
4MPET 20	2	1,5		4,4/4,6	17	73	0,7	3,1	385	10,4		
4MPET 30	3	2,2		5,8/6,2	25	75	0,78	3,1	420	12		
4MPET 30H	3	2,2	7500	5,8/6,2	25	75	0,78	3,1	470	14,2	2,5	1,5
4MPET 40	4	3	2500	7,6/7,8	35	74	0,81	2,8	418	12,8		
4MPET 42	4	3	5000	7,6/7,8	34	74	0,81	2,8	418	13,1		
4MPET 42H	4	3	7500	7,9/8	34	77	0,75	3	550	19		
4MPET 55	5,5	4	2500	9,8/9,9	49	76	0,82	3	468	15,3		
4MPET 57	5,5	4	5000	9,8/9,9	49	76	0,82	3	468	15,6		
4MPET 57H	5,5	4	7500	10/10,2	51	76	0,79	3,2	580	20,5	3	1,5
4MPET 75	7,5	5,5	2500	13,5/13,8	57	78	0,85	3	538	18,6		
4MPET 77	7,5	5,5	5000	13,5/13,8	57	78	0,85	3	538	18,9		
4MPET 77H	7,5	5,5	7500	14,5/14,7	58	76	0,72	3,1	650	22,4	4	2
4MPET 100H	10	7,5		19/19,5	77	79	0,8	3,2	810	27		



TYPE 3- 400V	HP	kW	Axial load	I _N	I _{START}	Efficiency	Cos φ	T _s / T _N	H		CABLE	
											N	A
			m	mm ²								
6MPET 55	5,5	4	10000	8,8	45	76	0,82	2,4	540	32	2,8	4
6MPET 75	7,5	5,5		12,5	64	78	0,82	3	570	40		
6MPET 100	10	7,5		16,9	78	77	0,82	2,5	600	42		
6MPET 125	12,5	9,2		21,5	95	80	0,81	2,4	600	45		
6MPET 150	15	11		23,7	121	83	0,83	2,4	700	48		
6MPET 175	17,5	12,8		27,8	145	82	0,84	2,4	700	50		
6MPET 200	20	15		30,4	160	82	0,85	2,5	760	54		
6MPET 250	25	18,5		38,3	225	82	0,85	2,1	830	65		
6MPET 300	30	22		44	250	83	0,86	2	890	70		
6MPET 400	40	30	20000	62	330	86	0,86	2	1030	90	8	
6MPET 500	50	37		72	400	86	0,87	2	1170	101		

TYPE 1-	HP	kW	PROTECTION	CONTROL PANEL
4MPE 5	0,5	0,37	PML 5/20-4	EQSM + 20µF
4MPE 7	0,75	0,55	PML 7/25-6	EQSM + 25µF
4MPE 10	1	0,75	PML 10/35-7	EQSM + 35µF
4MPE 15	1,5	1	PML 15/40-10	EQSM + 40µF
4MPE 20	2	1,5	PML 20/50-13	EQSM + 50µF
4MPE 30	3	2,2	PML 30/80-18	EQSM + 80µF

TYPE 3-	HP	kW	PROTECTION	CONTROL PANEL
4MPET 5	0,5	0,37	PT 7/1,3-2,1	EQSMT 10
4MPET 7	0,75	0,55	PT 7/1,3-2,1	EQSMT 10
4MPET 10	1	0,75	PT 10/1,9-3	EQSMT 10
4MPET 15	1,5	1	PT 15-20/2,9-4,5	EQSMT 10
4MPET 20	2	1,5	PT 20/30-40/4,3-6,8	EQSMT 10
4MPET 30	3	2,2	PT 20/30-40/4,3-6,8	EQSMT 10
4MPET 40	4	3	PT 40-50/5,7-9,1	EQSMT 10
4MPET 55	5,5	4	PT 55-75/8,6-13,5	EQSMT 10
4MPET 75	7,5	5,5	PT 100/12,5-16,5	EQSMT 10
4MPET 100	10	7,5	PT 125-150/16-21	EQSMT 15

TYPE	HP	kW	PROTECTION	CONTROL PANEL	CONTROL PANEL star-delta starting 400/690 V
6MPET 55	5,4	4	PT 55-75/8.6-13.5	EQSMT 10	QST 5
6MPET 75	7,5	5,5	PT 100/12.5-16.5	EQSMT 10	QST 7
6MPET 100	10	7,5	PT 125-150/16-21	EQSMT 10	QST 10
6MPET 125	12,5	9,2	PT 200/22-29	EQSMT 15	QST 15
6MPET 150	15	11	PT 200/22-29	EQSMT 15	QST 15
6MPET 175	17,5	13	-	EQSMT 20	QST 20
6MPET 200	20	15	-	EQSMT 20	QST 20
6MPET 250	25	18,5	-	-	QST 30
6MPET 300	30	22	-	-	QST 30
6MPET 400	40	30	-	-	QST 50
6MPET 500	50	37	-	-	QST 60



4MPC/6MPC

Deepwell Motors

4" and 6" rewindable oil filled submersible motors characterized by high torque, strong mechanical structure, high reliability. Suitable for vertical and horizontal operations.



4MPC




6MPC



Construction features

Upper support	cast iron and stainless steel
External jacket, shaft and cup	stainless steel
Mechanical seal	ceramic-graphite
Ball bearings	axial and radial oil lubricated
Number of startups/hr	4": max 30 6": max 20
Coolant	non-toxic dielectric lubricant
Cable	1,5 m (4" 0,37-2,2 kW) 2,5 m (4" 3,0-5,5 kW) 3,5 m (4" 7,5 kW) 4m (6" 4-30 kW)
Shaft extension and coupling	NEMA standard
Voltage	1- 220/230V - 50Hz 3- 380/415V - 50Hz
Insulation class	F
Protection degree	IP68
Max liquid temperature	30° C
Max depth immersion	4": 250m 6": 350m

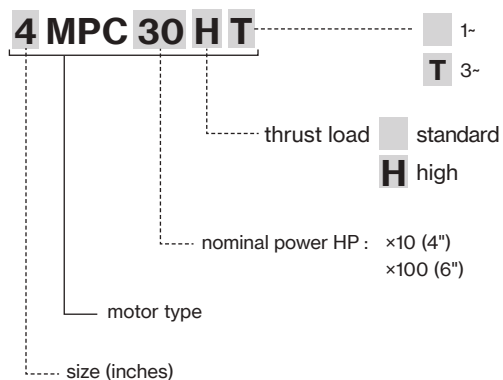

TYPE 1- 230V	V	HP	kW	I _N	rpm	Efficiency %			Cos φ			C μF
				A		50%	75%	100%	50%	75%	100%	
4MPC 5	220	0,50	0,37	3,2	2835	37	48	55	0,88	0,94	0,97	20
	230			3,3	2850	34	45	53	0,82	0,89	0,94	
4MPC 7	220	0,75	0,55	4,5	2811	41	52	59	0,87	0,94	0,97	25
	230			4,6	2822	37	48	56	0,81	0,89	0,95	
4MPC 10	220	1,0	0,75	5,8	2855	44	55	61	0,81	0,90	0,96	36
	230			6,2	2865	42	52	59	0,74	0,84	0,91	
4MPC 15	220	1,5	1,1	8,1	2815	47	59	65	0,86	0,93	0,98	40
	230			8,3	2826	43	55	62	0,78	0,87	0,94	
4MPC 20	220	2,0	1,5	10,5	2815	51	61	65	0,93	0,98	0,99	50
	230			10,5	2833	47	58	64	0,85	0,93	0,97	
4MPC 30	220	3,0	2,2	15,1	2816	53	63	68	0,90	0,96	0,99	76
	230			15,4	2831	48	60	66	0,80	0,90	0,96	
4MPC 30H	220	3,0	2,2	14,8	2810	57	67	71	0,91	0,96	0,98	76
	230			14,5	2830	54	64	70	0,82	0,91	0,96	
4MPC 50	220	5,0	3,7	24,6	2900	62	72	76	0,85	0,93	0,97	130+178
	230			25,1	2910	55	67	74	0,75	0,87	0,94	

TYPE 3- 400V	V	HP	kW	I _N	rpm	Efficiency %			Cos φ		
				A		50%	75%	100%	50%	75%	100%
4MPC 5T	380	0,50	0,37	1,3	2845	50	57	61	0,59	0,69	0,76
	400			1,3	2865	49	57	61	0,54	0,64	0,72
	415			1,3	2880	48	56	61	0,50	0,60	0,68
4MPC 7T	380	0,75	0,55	1,8	2840	54	61	64	0,57	0,68	0,77
	400			1,9	2860	51	59	63	0,51	0,62	0,71
	415			1,9	2870	49	58	63	0,47	0,57	0,66
4MPC 10T	380	1,0	0,75	2,2	2835	60	66	69	0,57	0,69	0,78
	400			2,3	2855	57	65	68	0,50	0,62	0,71
	415			2,4	2865	55	63	67	0,45	0,56	0,66
4MPC 15T	380	1,5	1,1	3,1	2835	66	71	73	0,57	0,70	0,79
	400			3,2	2855	63	69	72	0,50	0,62	0,72
	415			3,4	2865	61	68	71	0,44	0,57	0,67
4MPC 20T	380	2,0	1,5	3,8	2825	70	74	74	0,63	0,76	0,83
	400			3,9	2845	67	72	74	0,55	0,68	0,77
	415			4,1	2860	64	71	73	0,48	0,62	0,72
4MPC 30T	380	3,0	2,2	5,7	2810	73	76	76	0,55	0,70	0,80
	400			6,1	2830	69	74	75	0,48	0,62	0,73
	415			6,4	2845	66	72	75	0,43	0,56	0,67
4MPC 30HT	380	3,0	2,2	5,5	2800	70	73	74	0,63	0,76	0,83
	400			5,6	2825	68	73	74	0,56	0,69	0,78
	415			5,7	2840	66	72	73	0,50	0,64	0,73
4MPC 40T	380	4,0	3	7,4	2780	73	74	75	0,59	0,73	0,83
	400			7,5	2810	69	73	74	0,51	0,66	0,78
	415			7,9	2825	66	72	73	0,47	0,60	0,72
4MPC 40HT	380	4,0	3	7,4	2780	73	74	75	0,59	0,73	0,83
	400			7,5	2810	69	73	74	0,51	0,66	0,78
	415			7,9	2825	66	72	73	0,47	0,60	0,72
4MPC 55T	380	5,5	4	9,6	2800	77	79	79	0,57	0,72	0,82
	400			9,8	2820	74	78	78	0,50	0,64	0,77
	415			10,3	2835	70	76	77	0,45	0,59	0,71
4MPC 55HT	380	5,5	4	9,6	2800	77	79	79	0,57	0,72	0,82
	400			9,8	2820	74	78	78	0,50	0,64	0,77
	415			10,3	2835	70	76	77	0,45	0,59	0,71
4MPC 75T	380	7,5	5,5	12,6	2825	79	80	80	0,63	0,77	0,86
	400			12,5	2845	77	80	80	0,55	0,71	0,82
	415			12,8	2860	74	79	79	0,50	0,65	0,78
4MPC 75HT	380	7,5	5,5	12,6	2825	79	80	80	0,63	0,77	0,86
	400			12,5	2845	77	80	80	0,55	0,71	0,82
	415			12,8	2860	74	79	79	0,50	0,65	0,78
4MPC 100T	380	10,0	7,5	16,9	2810	80	80	80	0,65	0,79	0,87
	400			16,9	2835	78	80	80	0,57	0,72	0,83
	415			17,3	2850	75	79	79	0,51	0,66	0,77




4MPC/6MPC

TYPE 3- 400V	V	HP	kW	I _N	I _{START}	rpm	Efficiency	Cos φ	T _N	T _s / T _N
				A			%		Nm	
6MPC 55T	380	5,5	4	9,6	37,5	2815	76	0,85	13,6	1,44
	400			9,5	38,0	2820	76	0,81	13,5	1,62
	415			9,6	38,5	2835	76	0,77	13,4	1,78
6MPC 75T	380	7,5	5,5	12,9	50,3	2800	79	0,84	18,7	1,43
	400			13,0	52,0	2830	79	0,79	18,5	1,58
	415			13,2	54,1	2850	79	0,75	18,4	1,75
6MPC 100T	380	10	7,5	17,1	63,3	2810	79	0,86	25,6	1,29
	400			16,8	67,2	2835	79	0,82	25,3	1,46
	415			17,1	73,5	2850	79	0,78	25,2	1,54
6MPC 125T	380	12,5	9,2	20,8	81,1	2800	81	0,84	31,3	1,41
	400			20,9	85,7	2830	81	0,80	31,0	1,59
	415			21,5	88,1	2845	81	0,75	30,9	1,73
6MPC 150T	380	15	11	24,5	129,9	2800	85	0,81	36,6	1,97
	400			25,3	136,6	2825	85	0,75	36,4	2,22
	415			26,6	143,6	2840	84	0,70	36,3	2,41
6MPC 200T	380	20	15	33,0	168,3	2800	84	0,84	50,2	2,50
	400			33,4	183,7	2825	84	0,79	49,9	2,74
	415			34,7	190,8	2840	84	0,73	49,7	2,97
6MPC 250T	380	25	18,5	40,1	180,4	2800	85	0,84	62,3	2,10
	400			40,7	187,2	2825	85	0,79	61,9	2,35
	415			42,1	193,7	2840	85	0,73	61,5	2,57
6MPC 300T	380	30	22	50,3	286,7	2780	86	0,79	73,1	2,25
	400			53,3	293,1	2810	85	0,71	72,7	2,52
	415			57,6	311,0	2825	84	0,64	72,5	2,73
6MPC 400T	380	40	30	63,2	297,0	2780	83	0,88	101,5	1,58
	400			61,9	309,5	2810	84	0,85	100,9	1,76
	415			62,2	317,2	2825	84	0,81	100,3	1,91



TYPE	DIMENSIONS			Kg	Oil
	Axial load	A	C		Kg
	N	mm			
4MPC 5	1500	364	402	8,1	0,71
4MPC 7	1500	389	427	9,2	0,72
4MPC 10	1500	411	449	10,3	0,76
4MPC 15	2500	434	472	11,4	0,79
4MPC 20	2500	467	505	12,8	0,76
4MPC 30	2500	565	603	17,4	0,86
4MPC 30H	4500	565	603	17,4	0,84
4MPC 50	2500	680	718	24,1	0,86
4MPC 5T	1500	350	388	7,4	0,70
4MPC 7T	1500	364	402	8,0	0,71
4MPC 10T	2500	384	422	8,8	0,72
4MPC 15T	2500	411	449	10,6	0,70
4MPC 20T	2500	428	466	10,8	0,74
4MPC 30T	2500	467	505	12,5	0,78
4MPC 30HT	4500	467	505	12,5	0,78
4MPC 40T	2500	522	560	15,0	0,80
4MPC 40HT	4500	522	560	15,0	0,80
4MPC 55T	2500	587	625	18,3	0,82
4MPC 55HT	4500	587	625	18,3	0,82
4MPC 75T	2500	687	725	24,3	0,86
4MPC 75HT	4500	687	725	24,3	0,86
4MPC 100T	4500	768	806	28,3	1,09
6MPC 55T	10000	633	706	34	2,50
6MPC 75T	10000	667	740	36	2,95
6MPC 100T	10000	698	771	39	3,15
6MPC 125T	10000	731	804	42	3,25
6MPC 150T	10000	826	899	50	3,30
6MPC 200T	10000	894	967	57	3,50
6MPC 250T	10000	959	1032	65	3,60
6MPC 300T	10000	1116	1189	78	3,80
6MPC 400T	10000	1243	1316	91	4,10

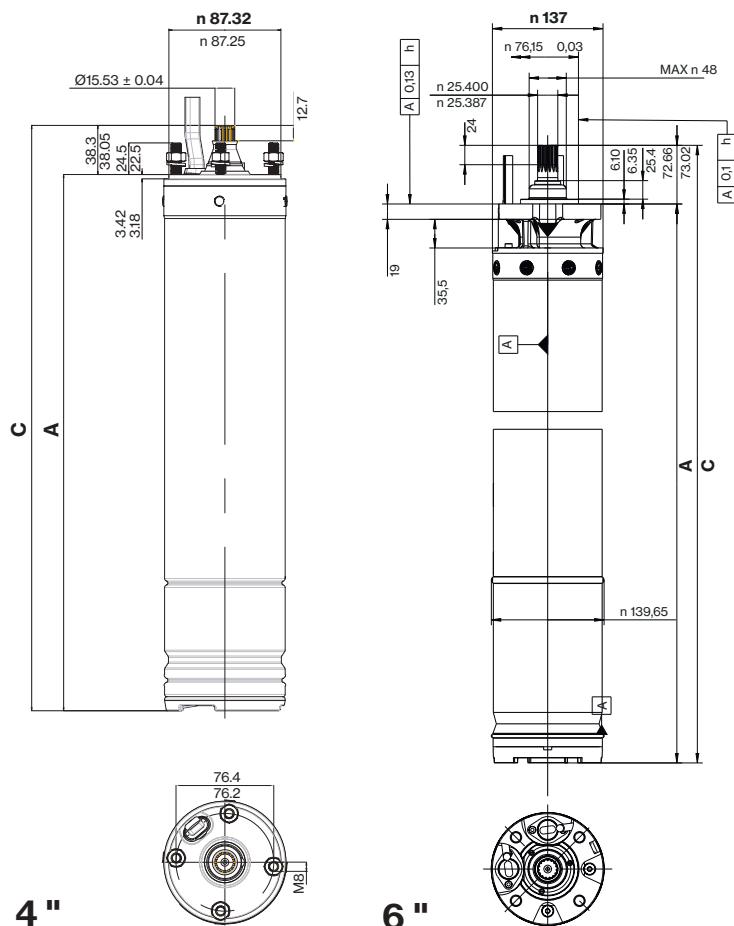

6MPC cables		
TYPE	DOL	λ / Δ
4 × 4 mm ²	4 - 18,5 kW	4 - 30 kW
3 × 8 mm ² + 8 mm ²	22 - 30 kW	-




6R/8R/10R

6", 8", 10" rewindable submersible water-filled motors with NEMA coupling flange. Power from 4 kW up to 185 kW. Available in PPC (standard), LPE and PE2+PA insulation class. The motor can be supplied in stainless steel AISI 304, AISI 316 or DUPLEX.



Construction features

Upper and bottom support	G25 (6R / 8R / 10R) stainless steel AISI 304 (6RS / 8RS / 10RS) stainless steel AISI 316 (6RX / 8RX / 10RX) DUPLEX (6RD / 8RD / 10RD)
Stator sleeve	stainless steel AISI 304 - (R) stainless steel AISI 304 - (RS) stainless steel AISI 316 - (RX) Duplex - (RD)
Shaft end	stainless steel AISI 431 - (R) stainless steel AISI 431 - (RS) stainless steel AISI 316 - (RX) Duplex - (RD)
Seal type	lip seal (standard); mechanical seal (on request)
Bearings	radial and axial, water lubricated
Thrust bearing	Michell
Voltage	3- 400V ± 10% - 50Hz 3- 400/690V ± 10% - 50Hz
Min. cooling flow	0,5 m/s
Insulation class	Y (max 30° C) for PPC F (max 50° C) for PE2+PA or LPE
Insulation	PPC (standard) PE2 + PA or LPE (on request)
Protection degree	IP68
Max depth immersion	350m
Available on demand	- PT 100 - Star/Delta starting - Cooling Sleeve - Cer./Carb./NBR Seal - SIC/SIC/NBR Seal

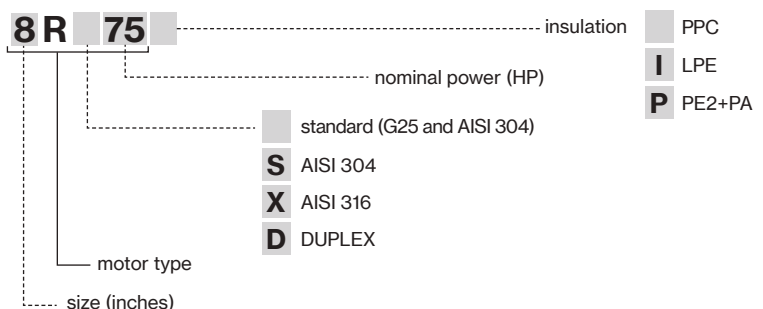


6R-6RS-6RX-6RD

TYPE	HP	kW	V	I _N	rpm	Efficiency %			Cos φ			Starting			Axial load N	Start/ hour (max)									
						50%	75%	100%	50%	75%	100%	Direct	Star-delta	Statoric											
				Cs/Cn								Is / In	Is / In	Is / In											
6R7	7,5	5,5	380	12,4	2846	77,0	82,0	81,0	0,67	0,78	0,83	1,60	5,60	1,90	3,40	1600	15								
			400	12,3	2859	76,0	81,0	80,0	0,65	0,76	0,81														
			415	12,3	2880	75,0	80,0	79,0	0,63	0,74	0,79														
6R10	10	7,5	380	16,6	2843	78,0	82,5	82,0	0,68	0,78	0,84	1,80	5,70	1,90	3,40			1600	15						
			400	16,3	2861	77,0	81,5	81,0	0,66	0,76	0,82														
			415	16,3	2882	76,0	80,5	80,0	0,64	0,74	0,80														
6R12	12,5	9,2	380	20,2	2846	79,0	83,0	82,0	0,68	0,79	0,85	1,80	5,70	1,90	3,40					1600	15				
			400	19,9	2864	78,0	82,0	81,0	0,66	0,77	0,83														
			415	19,9	2886	77,0	81,0	80,0	0,64	0,75	0,81														
6R15	15	11	380	23,7	2849	80,0	84,5	83,5	0,69	0,79	0,85	1,90	5,90	2,00	3,50							1600	15		
			400	23,4	2867	79,0	83,5	82,5	0,67	0,77	0,83														
			415	23,4	2882	78,0	82,5	81,5	0,65	0,75	0,81														
6R17	17,5	13	380	27,7	2851	81,0	84,5	84,0	0,69	0,79	0,85	1,80	6,00	2,00	3,60									1600	15
			400	27,3	2870	80,0	83,5	83,0	0,67	0,77	0,83														
			415	27,3	2887	79,0	82,5	82,0	0,65	0,75	0,81														
6R20	20	15	380	32	2852	82,0	85,0	84,0	0,69	0,79	0,85	1,70	5,90	2,00	3,50	1600	15								
			400	31,5	2871	81,0	84,0	83,0	0,67	0,77	0,83														
			415	31,5	2883	80,0	83,0	82,0	0,65	0,75	0,81														
6R25	25	18,5	380	38,9	2854	82,5	85,5	85,0	0,69	0,79	0,85	1,70	5,60	1,90	3,40			1600	15						
			400	38,3	2873	81,5	84,5	84,0	0,67	0,77	0,83														
			415	38,6	2889	80,0	83,0	82,5	0,65	0,75	0,81														
6R30	30	22	380	45,8	2857	82,5	85,5	85,0	0,70	0,80	0,86	1,70	5,90	2,00	3,50					1600	15				
			400	45,1	2877	81,5	84,5	84,0	0,68	0,78	0,84														
			415	45,3	2890	80,0	83,0	82,5	0,66	0,76	0,82														
6R35	35	26	380	53,8	2867	82,5	86,0	85,5	0,71	0,81	0,86	1,70	5,70	1,90	3,40							2500	15		
			400	52,9	2878	81,5	85,0	84,5	0,69	0,79	0,84														
			415	53,2	2891	80,0	83,5	83,0	0,67	0,77	0,82														
6R40	40	30	380	62,1	2861	82,5	86,0	85,5	0,72	0,81	0,86	1,70	5,60	1,90	3,40									2500	15
			400	61,1	2880	81,5	85,0	84,5	0,70	0,79	0,84														
			415	61,4	2892	80,0	83,5	83,0	0,68	0,77	0,82														
6R50	50	37	380	77	2863	83,0	86,5	85,0	0,72	0,81	0,86	1,60	5,60	1,90	3,40	2500	15								
			400	75,8	2882	82,0	85,5	84,0	0,70	0,79	0,84														
			415	76,2	2891	80,5	84,0	82,5	0,68	0,77	0,82														

Service factor: 50Hz=1 - Direction of rotation (view from shaft projection side: anti-clockwise)
Cs = Starting torque - Cn = Nominal couple - Is = Starting current - In = Nominal current

TYPE	HP	kW	Cables		Cable length m	Max water temperature by winding type	
			Starting			PPC	PE2-PA / LPE
			Direct	Star Delta			
			400 V ± 5%	400 / 690 V			
6R7	7,5	5,5	4G × 4 mm ²	2×(4G × 4 mm ²)	3	30 °C	50 °C
6R10	10	7,5	4G × 4 mm ²	2×(4G × 4 mm ²)			
6R12	12,5	9,2	4G × 4 mm ²	2×(4G × 4 mm ²)			
6R15	15	11	4G × 4 mm ²	2×(4G × 4 mm ²)			
6R17	17,5	13	4G × 6 mm ²	2×(4G × 4 mm ²)			
6R20	20	15	4G × 6 mm ²	2×(4G × 4 mm ²)			
6R25	25	18,5	4G × 6 mm ²	2×(4G × 4 mm ²)			
6R30	30	22	4G × 6 mm ²	2×(4G × 4 mm ²)			
6R35	35	26	4G × 10 mm ²	2×(4G × 6 mm ²)			
6R40	40	30	4G × 10 mm ²	2×(4G × 6 mm ²)			
6R50	50	37	4G × 10 mm ²	2×(4G × 10 mm ²)			

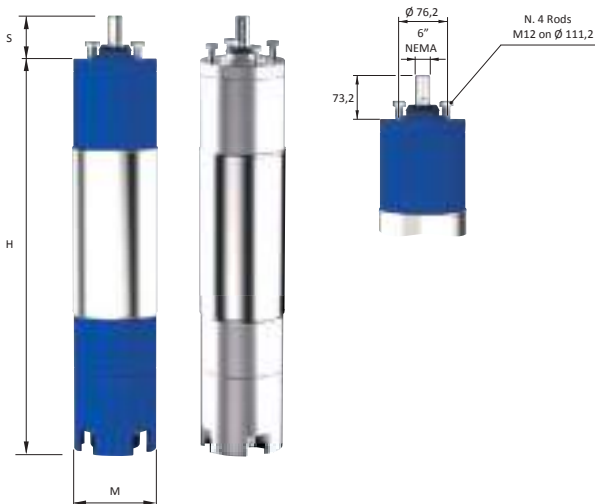

TYPE	DIMENSIONS			Kg
	H	S	M	
	mm			
6R7	671	73,2	145	45
6R10	701			55
6R12	751			60
6R15	811			65
6R17	841			70
6R20	931			75
6R25	991			83
6R30	1071			92
6R35	1181			100
6R40	1251			108
6R50	1341	118		




8R-8RS-8RX-8RD

TYPE	HP	kW	V	I _N	rpm	Efficiency %			Cos φ			Starting				Axial load N	Start/ hour (max)
						50%	75%	100%	50%	75%	100%	Direct		Star-delta	Statoric		
				A								Cs/Cn	Is / In	Is / In	Is / In		
8R40	40	30	380	64,4	2859	79,8	85,2	84,3	0,77	0,81	0,84	2,05	6,40	2,10	3,80	4500	10
			400	61,7	2875	80,1	85,0	84,7	0,76	0,80	0,83						
			415	60	2892	79,3	84,5	85,0	0,75	0,79	0,82						
8R50	50	37	380	75,4	2865	80,3	85,7	84,8	0,79	0,83	0,88	1,95	5,70	2,00	3,70		
			400	73	2888	80,6	85,5	85,2	0,77	0,81	0,86						
			415	71,8	2904	79,8	85,0	85,5	0,75	0,79	0,84						
8R60	60	45	380	90,2	2882	80,8	86,2	85,3	0,76	0,86	0,87	1,95	5,80	2,00	3,70		
			400	86,3	2893	81,1	86,0	85,7	0,74	0,81	0,86						
			415	84,8	2905	80,3	85,5	86,0	0,72	0,79	0,84						
8R75	75	55	380	110,2	2880	81,3	86,7	85,8	0,76	0,85	0,89	1,85	5,80	2,00	3,60		
			400	106,2	2889	81,6	86,5	86,2	0,74	0,81	0,87						
			415	105,4	2901	80,8	86,0	86,5	0,72	0,80	0,84						
8R90	90	66	380	130,7	2881	82,4	87,5	86,8	0,76	0,86	0,89	1,85	5,80	2,00	3,50		
			400	126	2892	82,6	87,4	87,2	0,74	0,82	0,87						
			415	125,1	2905	81,9	86,9	87,5	0,72	0,79	0,84						
8R100	100	75	380	148,5	2882	82,3	87,7	86,8	0,75	0,85	0,89	1,80	5,80	2,00	3,50		
			400	143,2	2893	82,6	87,5	87,2	0,73	0,81	0,87						
			415	142,1	2905	81,8	87,0	87,5	0,71	0,77	0,84						
8R125	125	92	380	183,5	2880	83,0	86,0	85,7	0,75	0,84	0,89	1,80	5,70	1,90	3,50		
			400	175,1	2891	83,5	86,5	86,3	0,74	0,83	0,88						
			415	172,7	2903	83,0	86,0	86,3	0,72	0,81	0,86						
8R150	150	110	380	218,6	2885	85,5	86,5	86,0	0,74	0,83	0,89	1,80	5,70	1,90	3,50		
			400	211	2898	86,1	87,0	86,6	0,73	0,82	0,87						
			415	212,1	2908	85,5	86,5	86,0	0,72	0,81	0,84						

Service factor: 50Hz=1 - Direction of rotation (view from shaft projection side: anti-clockwise)
Cs = Starting torque - Cn = Nominal couple - Is = Starting current - In = Nominal current

TYPE	HP	kW	Cables		Cable length m	Max water temperature by winding type	
			Starting			PPC	PE2-PA / LPE
			Direct	Star Delta			
			400 V ± 5%	400 / 690 V			
8R40	40	30	3×1×10 mm ²	6×1×10 mm ²	3	30 °C	50 °C
8R50	50	37	3×1×10 mm ²	6×1×10 mm ²			
8R60	60	45	3×1×16 mm ²	6×1×10 mm ²			
8R75	75	55	3×1×16 mm ²	6×1×10 mm ²			
8R90	90	66	3×1×25 mm ²	6×1×16 mm ²			
8R100	100	75	3×1×25 mm ²	6×1×16 mm ²			
8R125	125	92	3×1×25 mm ²	6×1×16 mm ²			
8R150	150	110	3×1×35 mm ²	6×1×25 mm ²			

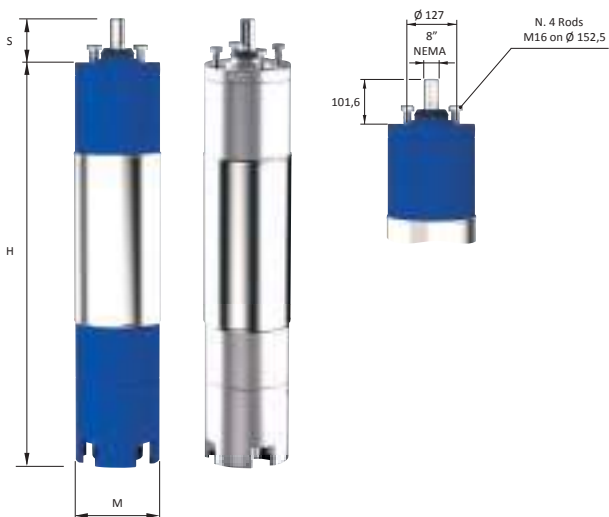

TYPE	DIMENSIONS			Kg
	H	S	M	
	mm			
8R40	993	101,6	194	150
8R50	1043			160
8R60	1123			178
8R75	1233			200
8R90	1302			214
8R100	1383			230
8R125	1583			270
8R150	1733			300




10R-10RS-10RX-10RD

TYPE	HP	kW	V		I _N	rpm	Efficiency %			Cos φ			Starting			Axial load N	Start/ hour (max)
							50%	75%	100%	50%	75%	100%	Direct		Star-delta		
			A	Cs/Cn	Is / In	Is / In							Is / In				
10R100	100	75	380	154,3	2884	86,9	87,0	88,0	0,73	0,80	0,84	1,80	6,40	1,90	3,40	6000	10
			400	142,7	2896	85,9	88,0	88,3	0,72	0,84	0,86						
			415	143,9	2909	86,4	88,3	88,5	0,64	0,77	0,82						
10R125	125	92	380	188,7	2890	87,2	87,3	88,3	0,74	0,83	0,84	1,60	6,30	1,80	3,40	6000	10
			400	174,5	2904	86,2	88,3	88,6	0,71	0,83	0,86						
			415	176	2914	86,7	88,6	88,8	0,63	0,75	0,82						
10R150	150	110	380	222,2	2930	87,9	88,0	89,0	0,71	0,81	0,85	1,55	6,70	1,80	3,30	6000	10
			400	207	2937	86,9	89,0	89,3	0,73	0,84	0,86						
			415	211,3	2943	87,4	89,3	89,5	0,63	0,77	0,81						
10R175	175	130	380	265,6	2895	87,5	88,2	89,0	0,73	0,81	0,83	1,85	5,80	2,00	3,60	6000	10
			400	245,3	2915	86,5	89,3	89,4	0,71	0,83	0,85						
			415	244,6	2928	87,1	89,5	89,6	0,62	0,75	0,82						
10R200	200	150	380	299,1	2898	87,1	88,2	89,0	0,72	0,82	0,84	1,55	6,50	1,80	3,30	6000	10
			400	277,2	2917	86,1	88,5	89,1	0,71	0,81	0,86						
			415	278,1	2931	86,5	88,1	88,7	0,65	0,75	0,83						
10R225	225	165	380	337,2	2901	86,5	87,5	88,6	0,72	0,82	0,84	1,55	6,50	1,80	3,30	6000	10
			400	313,3	2920	85,4	87,2	88,5	0,71	0,81	0,86						
			415	313,9	2930	86,0	87,3	88,2	0,65	0,75	0,83						
10R250	250	185	380	370	2904	87,4	88,0	89,0	0,73	0,83	0,85	1,50	6,50	1,80	3,30	6000	10
			400	342,2	2924	86,5	88,7	89,3	0,72	0,82	0,87						
			415	340,9	2936	87,3	89,3	89,5	0,65	0,77	0,84						


Service factor: 50Hz=1 - Direction of rotation (view from shaft projection side: anti-clockwise)
Cs = Starting torque - Cn = Nominal couple - Is = Starting current - In = Nominal current

TYPE	HP	kW	Cables		Cable length m	Max water temperature by winding type	
			Starting			PPC	PE2-PA / LPE
			Direct	Star Delta	400 V ± 5%		
10R100	100	75	3×1×25 mm ²	6×1×16 mm ²	3	30 °C	50 °C
10R125	125	92	3×1×25 mm ²	6×1×16 mm ²			
10R150	150	110	3×1×35 mm ²	6×1×16 mm ²			
10R175	175	130	3×1×35 mm ²	6×1×25 mm ²			
10R200	200	150	3×1×50 mm ²	6×1×25 mm ²			
10R225	225	165	3×1×50 mm ²	6×1×35 mm ²			
10R250	250	185	3×1×50 mm ²	6×1×35 mm ²			

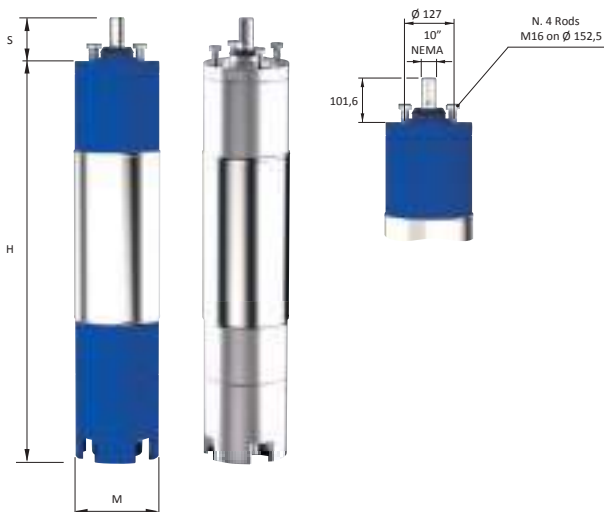

TYPE	DIMENSIONS			Kg
	H	S	M	
	mm			
10R100	1284	101,6	240	270
10R125	1354			310
10R150	1504			350
10R175	1634			385
10R200	1734			415
10R225	1854			444
10R250	1984			480



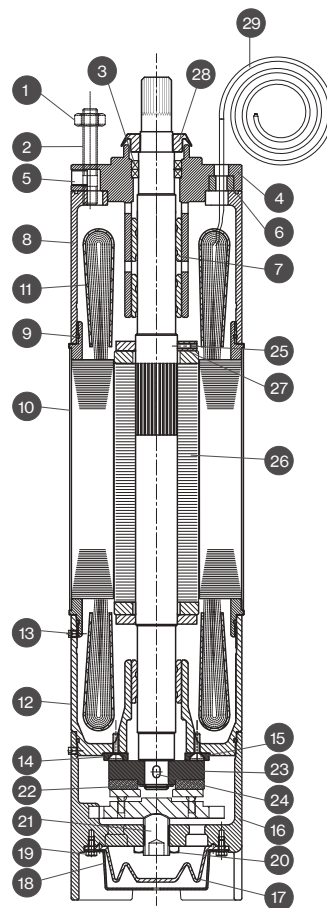


N. CODE	(*) N°	DESCRIPTION	MATERIAL STANDARD VERSION R	MATERIAL VERSION RS-RX-RD
1		N.4 NUTS	AISI 304	AISI 304 / AISI 316 / DUPLEX
2		N.4 STUDS	AISI 304	AISI 304 / AISI 316 / DUPLEX
3(*)	1	N.2 SEAL RINGS	NBR	NBR
4		UPPER SUPPORT	CAST IRON	AISI 304 / AISI 316 / DUPLEX
5		N.2 GRAINS FOR LIQUID FILLING	AISI 304	AISI 304 / AISI 316 / DUPLEX
6		GROMMET	NBR	NBR
7(*)	3	N.3 BEARINGS	GRAPHITE	GRAPHITE
8		MOTOR CASING	CAST IRON	AISI 304 / AISI 316 / DUPLEX
9(*)	4	N.4 O-RING	NBR	NBR
10		MOTOR EXTERNAL SLEEVE	AISI 304	AISI 304 / AISI 316 / DUPLEX
11		N.2 COVERS WINDING PROTECTION	POM	POM
12		LOWER SUPPORT	CAST IRON	AISI 304 / AISI 316 / DUPLEX
13		N.3 SCREW	AISI 304	AISI 304 / AISI 316 / DUPLEX
14(*)	2	N.2 DISKS CONTROSUSPENTION	TEFLON	TEFLON
15		N.2 SCREWS FOR CONTROSUSPENTION	AISI 304	AISI 304
16		BASE MOTOR	CAST IRON	AISI 304 / AISI 316 / DUPLEX
17(*)	1	DIAPHRAM	NBR	NBR
18		COVER DIAPHRAM	AISI 304	AISI 304 / AISI 316 / DUPLEX
19		N.4 SCREW FOR COVER DIAPHRAM	AISI 304	AISI 304 / AISI 316 / DUPLEX
20		NUT	AISI 304	AISI 304
21		SCREW	AISI 304	AISI 304
22		SEEGER	AISI 304	AISI 304
23(*)	1	TRUST BEARING	AISI + GRAPHITE	AISI + GRAPHITE
24		KEY	AISI 304	AISI 304
25		N.2 GRAINS FOR STABILIZER	AISI 304	AISI 304
26		COMPLETE ROTOR	AISI	AISI
27		N.2 STABILIZERS	AISI	AISI
28(*)	1	DEFLECTOR	NBR	NBR
29		CABLE	H07 RNF	H07 RNF

*Reccomended spare parts




OPERATING CONDITIONS AT DIFFERENT WATER TEMPERATURE

All 6" - 8" - 10" standard motors with PPC windings can operate at liquid temperatures up to 30 °C without derating factor. From 31 °C till 43 °C the motors have to be derated according to the factor shown in the following graph.

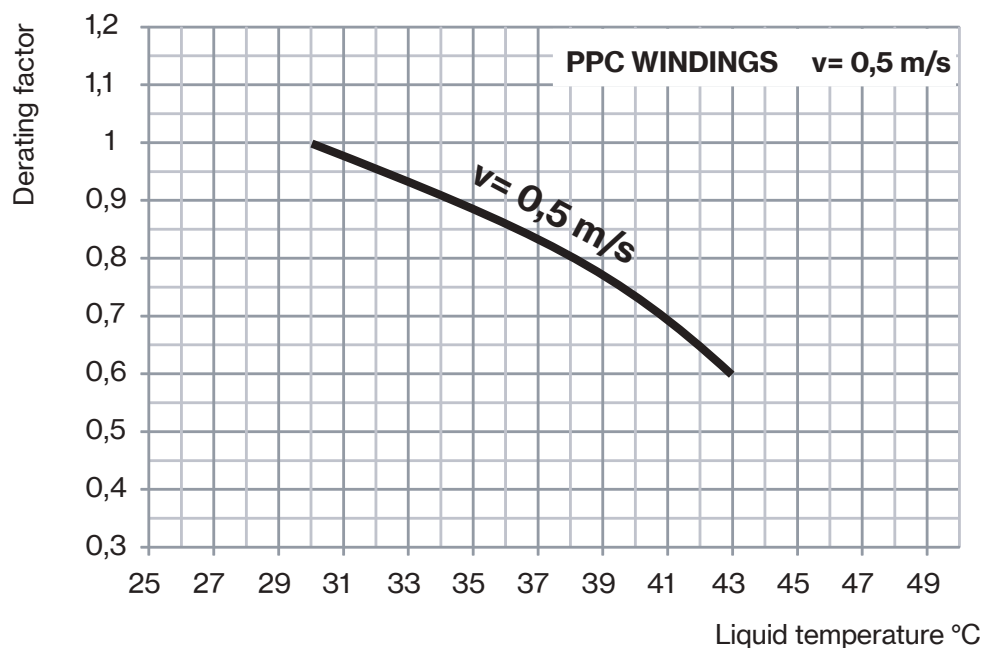

All 6" - 8" - 10" motors with PE2+PA / LPE windings can operate at liquid temperatures up to 50 °C without derating factor. From 51 °C till 64 °C the motors have to be derated according to the factor shown in the following graph.

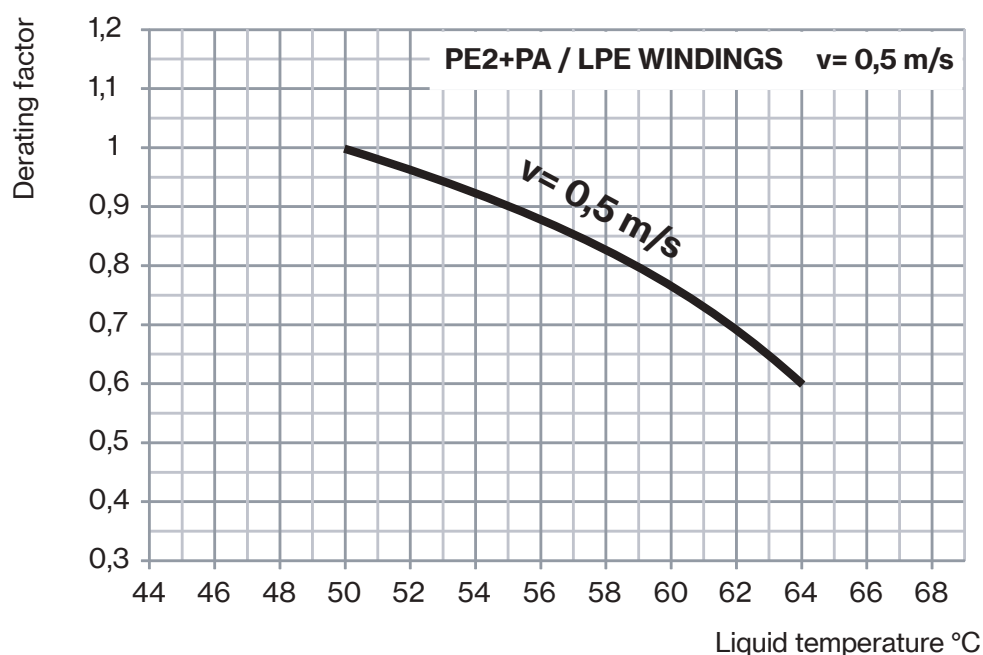

Motor size	Max motor starts per hour	Winding max temperature (°C)			Liquid max temperature (°C)		
		PPC	LPE	PE2+PA	PPC	LPE	PE2+PA
6"	15	70	80	80	30	50	50
8"	10	70	80	80	30	50	50
10"	10	70	80	80	30	50	50

PPC = Y insulation class

LPE = F insulation class

PE2+PA = / F insulation class

Minimum liquid velocity for motor 6" - 8" - 10": 0,5 m/s



PTR12/PTR14

Deepwell Motors

12" - 14" submersible rewindable water-filled motors. Power from 185 kW up to 400 kW. Standard PE2+PA winding insulation class for temperature up to 30°C.




Construction features

Upper and bottom support	GG25 or stainless steel AISI 316
Stator sleeve	stainless steel AISI 316
Shaft end	stainless steel
Mechanical seal	SIC / SIC / NBR
Bearings	steel / NBR
Voltage	3- 380-400V - 50Hz
Cooling flow	min 0,5 m/s
Insulation class	F
Insulation	PE2 + PA
Protection degree	IP68
Available on demand	<ul style="list-style-type: none"> - Full motor in AISI 316 - Full motor in AISI 904 - PT 100 - Star/Delta starting - Cooling Sleeve - Clockwise rotation




PTR 12 - 220kW-400V - T

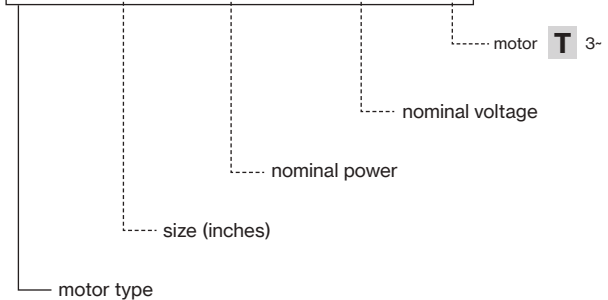


TYPE 3- 400V	V	P ₂		I _N A	I _s /I _N	P ₁ kW	rpm	Efficiency %	Cos φ	CABLE	
		HP	kW							Lenght m	Size mm ²
		PTR12 - 220kW	400	300	220	424	6,1	250	2920	88	0,85
PTR12 - 250kW	400	340	250	481	5,9	284	2920	88	0,85	3×70+1×50	
PTR14 - 294kW	380	400	300	551	5,8	327	2900	90	0,9	8	3×95+1×50
PTR14 - 330kW	380	450	330	620	6	367	2900	90	0,9		3×95+1×50
PTR14 - 367kW	380	500	370	693	6,4	406	2900	90,5	0,89		3×95+1×50
PTR14 - 404kW	380	550	400	798	6,8	446	2900	90,5	0,85		3×95+1×50

TYPE	DIMENSIONS				Kg
	Power		Axial load N	L mm	
	HP	kW			
PTR12 - 220kW	300	220	70000	2110	700
PTR12 - 250kW	340	250		2280	775
PTR14 - 294kW	400	300	70000	2020	845
PTR14 - 330kW	450	330		2160	906
PTR14 - 367kW	500	370		2320	1010
PTR14 - 404kW	550	400		2460	1105

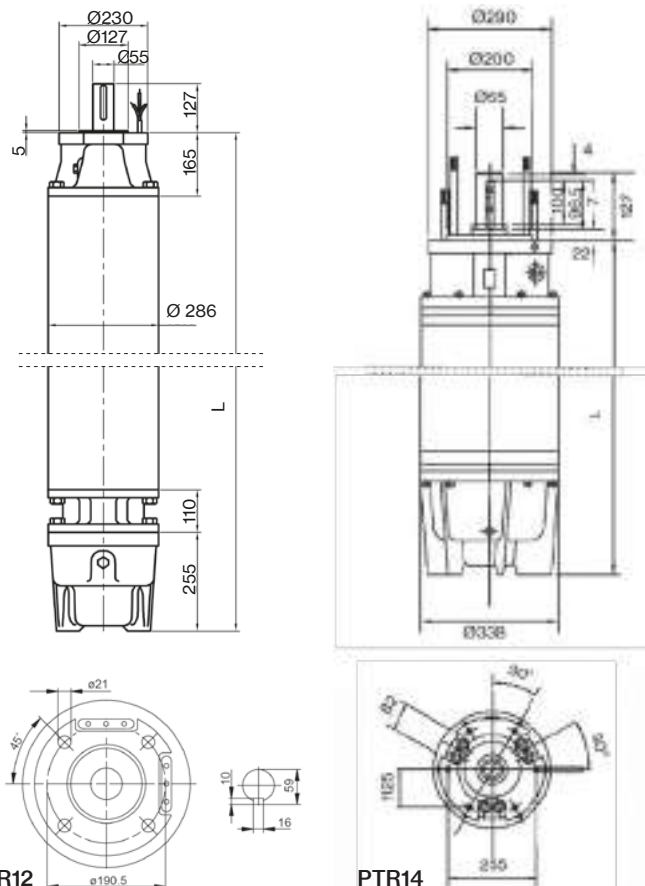


POWER DERATING AT DIFFERENT LIQUID TEMPERATURE

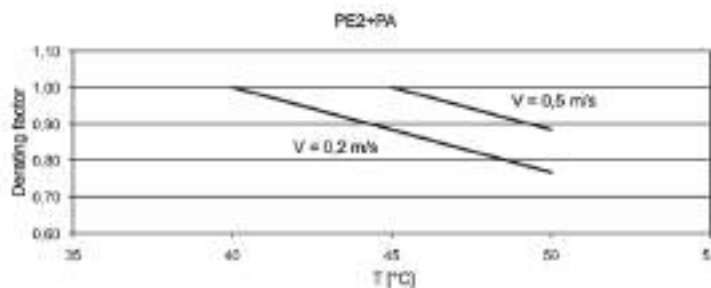

The graph above does not include the PTR12 220kW, 250kW and 300kW models. The maximum temperature is 10° C for models PTR12 220kW and 250kW, 25° C for PTR12 300kW.



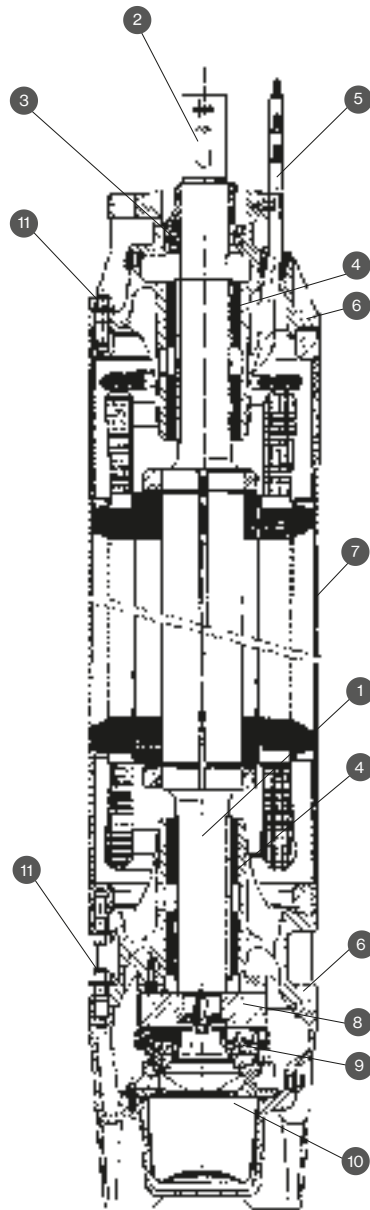

N.	PARTS	STD VERSION	VERSION 316 SS	VERSION 904 SS
1	SHAFT	stainless steel	stainless steel	stainless steel
2	SHAFT TERMINAL	AISI 316 stainless steel	AISI 316 stainless steel	AISI 904 stainless steel
3	MECHANICAL SEAL	ceramic/carbon	SIC/SIC	SIC/SIC
4	BUSHES	steel/NBR	steel/NBR	steel/NBR
5	CABLE	EPDM	EPDM	EPDM
6	STRUCTURAL PARTS	cast iron	AISI 316 stainless steel	AISI 904 stainless steel
7	JACKET	AISI 316 stainless steel	AISI 316 stainless steel	AISI 904 stainless steel
8	THRUST PLATE	steel	steel	steel
9	THRUST BEARING	steel/NBR	steel/NBR	steel/NBR
10	DIAPHRAGM	EPDM	EPDM	EPDM
11	SCREWS	AISI 304 stainless steel	AISI 316 stainless steel	AISI 904 stainless steel





SWIMMING POOL



Self priming pumps for pools with a large built-in pre-filter, which, together with the excellent hydraulic performance of the pump, generates a very high filtration capacity. The transparent polycarbonate lid easily allows inspection of the pre-filter sieve. Pump body, seal housing and diffuser reinforced with glass fibre polypropylene are resistant to chemical products used for pools and guarantee excellent duration.

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate

Motor


	3~ 230/400V - 50Hz
2 poles induction motor	1~ 230V - 50Hz
Insulation class	F
Protection degree	IP55



POOL1

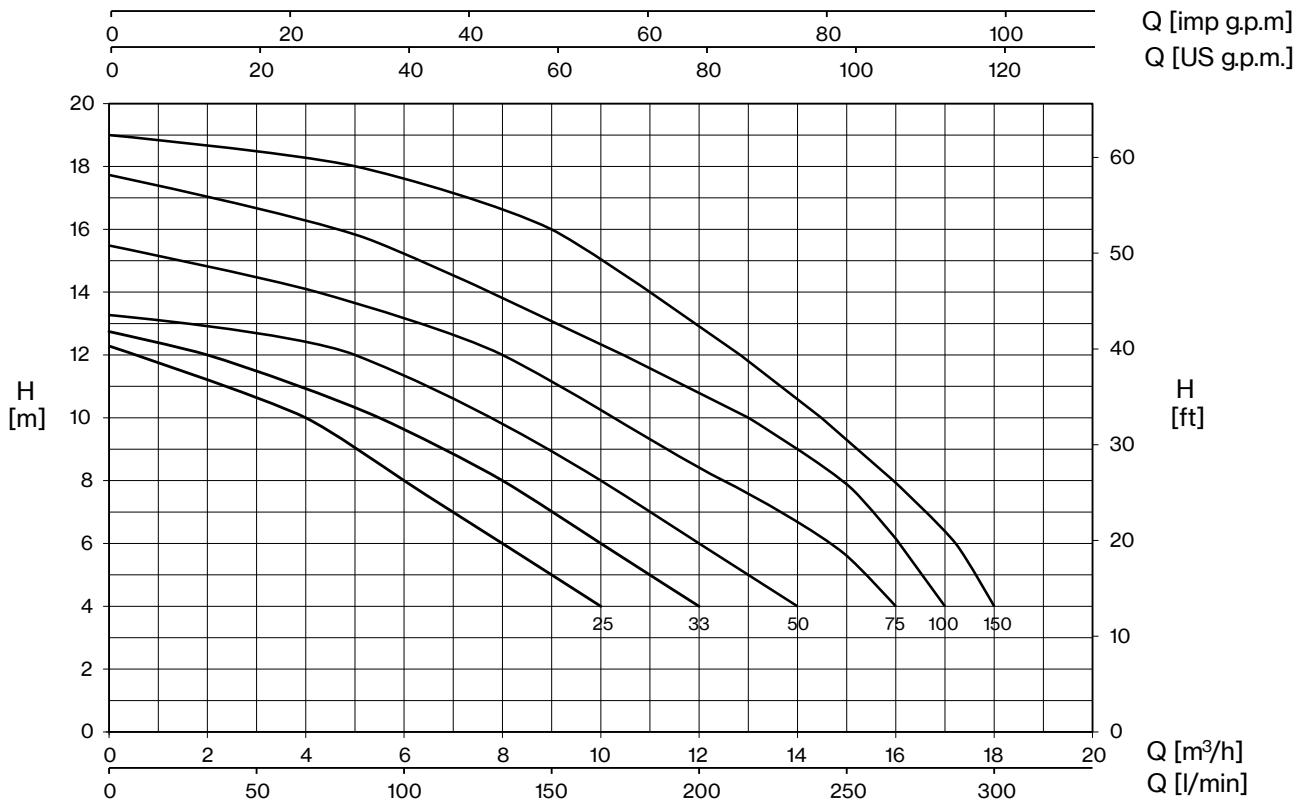

TYPE		P2		μF	AMPERE			H (m)									
1~	3~	HP	kW		1~ 230V	3~ 230V	3~ 400V	4	6	8	10	12	14	16	18		
				Q (m³/h)													
POOL1 25M	POOL1 25T	0,25	0,16	10	2,6	1,3	0,8	10,0	8,0	6,0	4,0	0,5					
POOL1 33M	POOL1 33T	0,33	0,25	10	2,9	1,9	1,1	12,0	10,0	8,0	5,5	2,0					
POOL1 50M	POOL1 50T	0,5	0,37	18	3,3	2,5	1,4	14,0	12,0	10,0	7,0	5,0					
POOL1 75M	POOL1 75T	0,75	0,55	12	3,8	3,0	1,7	16,0	15,0	12,5	10,0	8,0	4,2				
POOL1 100M	POOL1 100T	1	0,75	20	4,2	3,4	2,0	17,0	16,0	15,3	13,0	10,5	7,6	5,5			
POOL1 150M	POOL1 150T	1,5	1,1	20	7,3	5,0	2,9	18,0	17,3	15,9	14,5	12,8	11,0	9,0	5,0		

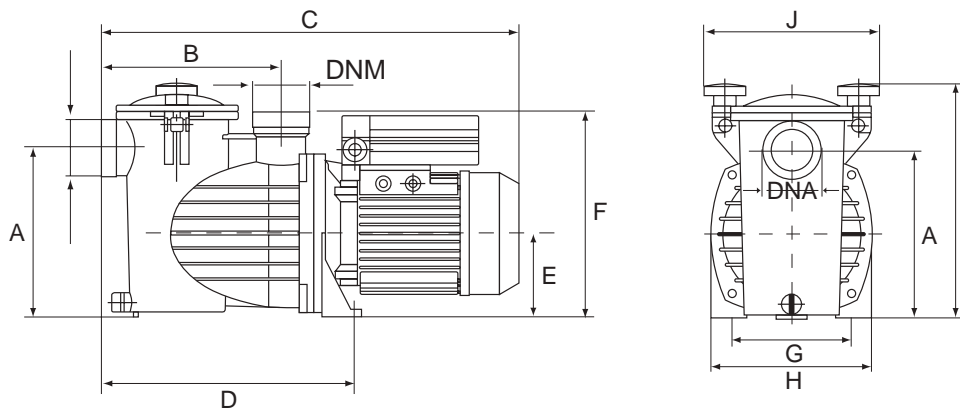

TYPE		DIMENSIONS (mm)												 H1 A1 L1			 Kg	
1~	3~	A	B	C	D	E	F	G	H	I	J	DNA	DNM	L1	A1	H1	1~	3~
POOL1 25M	POOL1 25T	191	205	470	285	95	233	140	180	265	197	1" 1/2 Ø 50 PVC		630	230	360	9,5	10,8
POOL1 33M	POOL1 33T	191	205	470	285	95	233	140	180	265	197			630	230	360	9,5	10,8
POOL1 50M	POOL1 50T	191	205	470	285	95	233	140	180	265	197			630	230	360	9,5	10,8
POOL1 75M	POOL1 75T	191	205	470	285	95	233	140	180	265	197			630	230	360	10,9	10,8
POOL1 100M	POOL1 100T	191	205	470	285	95	233	140	180	265	197			630	230	360	10,9	10,8
POOL1 150M	POOL1 150T	191	205	470	285	95	233	140	180	265	197			630	230	360	11,6	11,8



POOL1 EASY

Swimming Pool



POOL1 pumps with electronic EASY control panel for an intuitive setting of the pool. It includes dry running and overload protection, security for people, filtration timers and input / outputs for the management of the lighting system, salt chlorinator, heat pump, temperature probe.



EASY control panel

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate

Motor


2 poles induction motor	1~ 230V - 50Hz
Insulation class	F
Protection degree	IP55



POOL1 EASY

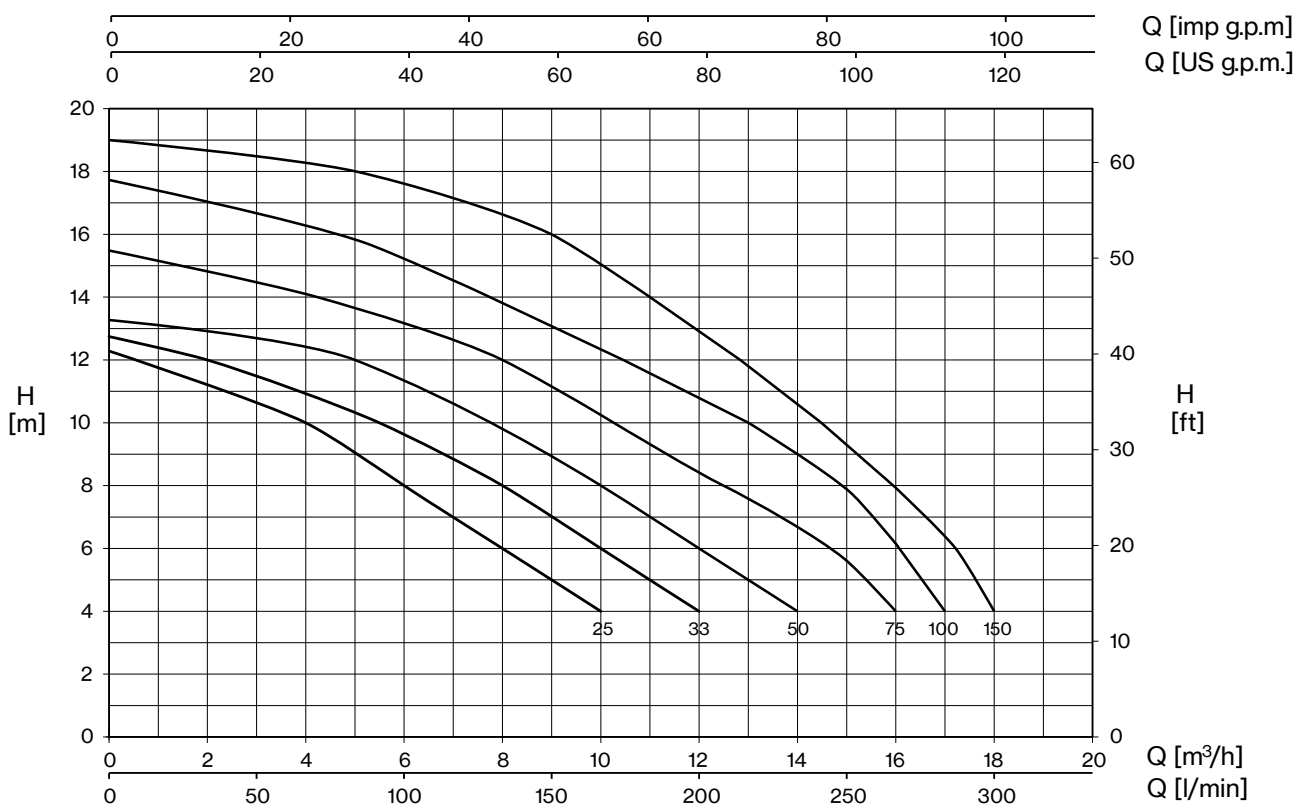

TYPE	P2		μF	AMPERE		H (m)								
				1-	230V	4	6	8	10	12	14	16	18	
	HP	kW		Q (m³/h)										
POOL1 EASY 25M	0,25	0,16	10	2,6	10,0	8,0	6,0	4,0	0,5					
POOL1 EASY 33M	0,33	0,25	10	2,9	12,0	10,0	8,0	5,5	2,0					
POOL1 EASY 50M	0,5	0,37	18	3,3	14,0	12,0	10,0	7,0	5,0					
POOL1 EASY 75M	0,75	0,55	12	3,8	16,0	15,0	12,5	10,0	8,0	4,2				
POOL1 EASY 100M	1	0,75	20	4,2	17,0	16,0	15,3	13,0	10,5	7,6	5,5			
POOL1 EASY 150M	1,5	1,1	20	7,3	18,0	17,3	15,9	14,5	12,8	11,0	9,0	5,0		

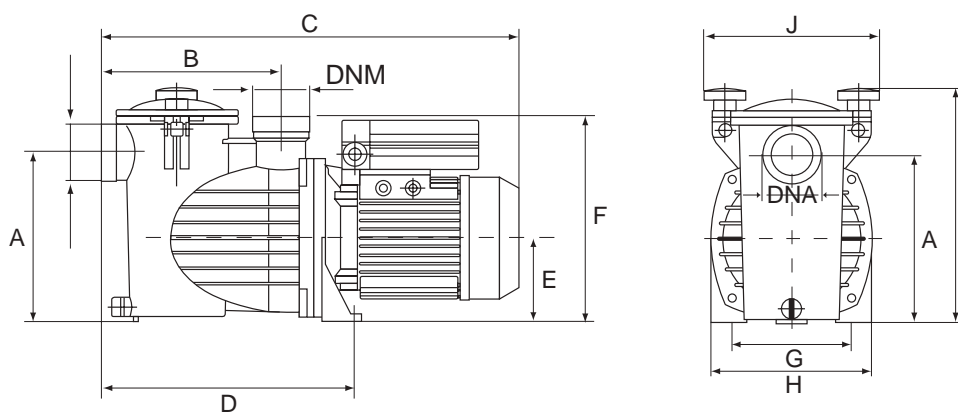

TYPE	DIMENSIONS (mm)														Kg		
	A	B	C	D	E	F	G	H	I	J	DNA	DNM	L1	A1		H1	
POOL1 EASY 25M	191	205	470	285	95	233	140	180	265	197	1" ½ Ø 50 PVC		630	230	360	9,5	
POOL1 EASY 33M	191	205	470	285	95	233	140	180	265	197				630	230	360	9,5
POOL1 EASY 50M	191	205	470	285	95	233	140	180	265	197				630	230	360	9,5
POOL1 EASY 75M	191	205	470	285	95	233	140	180	265	197				630	230	360	10,9
POOL1 EASY 100M	191	205	470	285	95	233	140	180	265	197				630	230	360	10,9
POOL1 EASY 150M	191	205	470	285	95	233	140	180	265	197				630	230	360	11,6






Self-priming pumps for pools with a large built-in pre-filter, which, together with the excellent hydraulic performance of the pump, generates a very high filtration capacity. Includes a transparent polycarbonate pre-filter lid with opening key for effortless opening and easy inspection of the sieve. Pump body, seal housing and diffuser reinforced with glass fibre polypropylene are resistant to chemical products used for pools and guarantee excellent duration.

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Opening key for pre-filter lid	polypropylene

Motor


2 poles induction motor	1~ 230V - 50Hz
	3~ 230/400V - 50Hz
Insulation class	F
Protection degree	IP55



POOL2

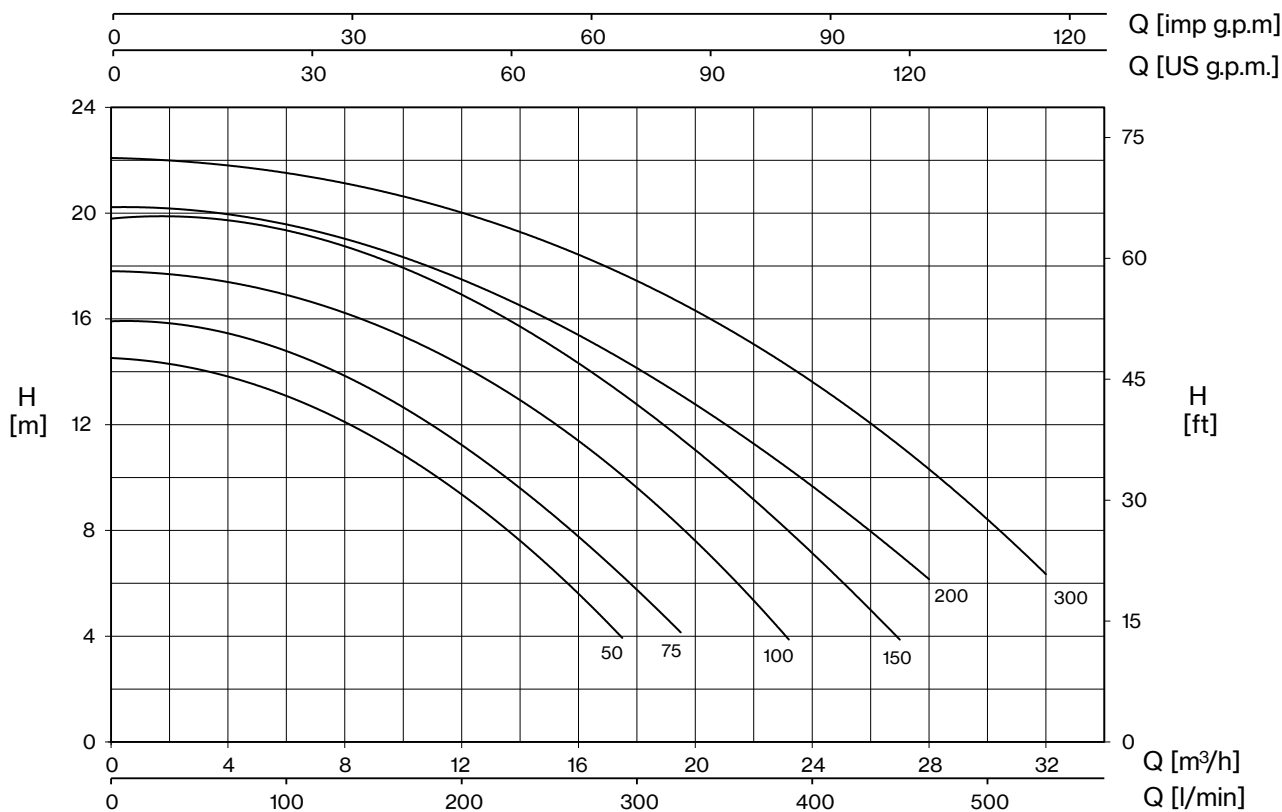

TYPE		P2		μF	AMPERE			H (m)								
1~	3~	HP	kW		1~ 230V	3~ 230V	3~ 400V	4	6	8	10	12	14	16	18	21
POOL2 50M	POOL2 50T	0,5	0,37	20	4,4	2,4	1,4	17,5	15,6	13,5	11,1	8,4				
POOL2 75M	POOL2 75T	0,75	0,55	20	4,75	3,1	1,8	19,5	18,0	15,7	13,5	10,8	7,9			
POOL2 100M	POOL2 100T	1	0,75	25	5,5	3,8	2,2	23,2	21,1	19,7	18,0	15,0	12,3	8,7		
POOL2 150M	POOL2 150T	1,5	1,1	30	7,3	5,0	2,9	27,0	25,0	23,0	21,0	19,0	17,0	13,0	10,0	
POOL2 200M	POOL2 200T	2	1,5	40	9,2	6,0	3,5		28,0	26,0	24,0	21,0	18,0	14,0	12,0	
POOL2 300M	POOL2 300T	3	2,2	40	12,2	8,6	5,0		32,0	30,0	29,0	27,0	23,0	20,0	15,0	12,0

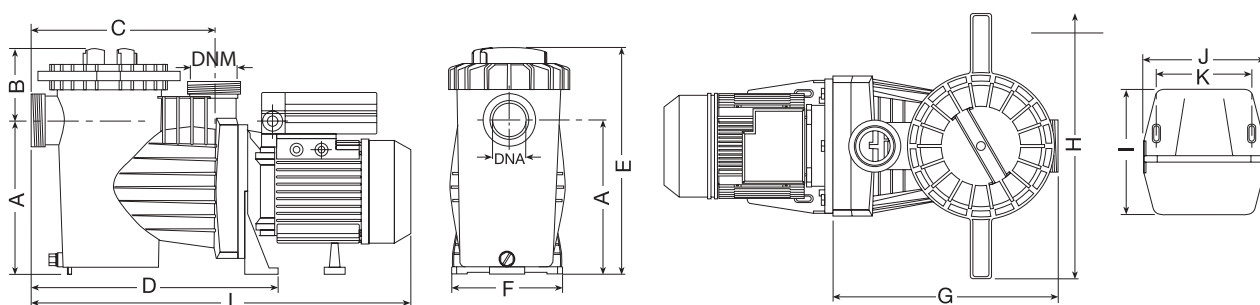

TYPE		DIMENSIONS (mm)																	Kg	
1~	3~	A	B	C	D	E	F	G	H	I	J	K	L	DNA	DNM	L1	A1	H1	1~	3~
POOL2 50M	POOL2 50T	216	109	265	370	325	206	325	400	220	205	160	550	2" Ø 63 PVC		630	230	360	12,7	12,7
POOL2 75M	POOL2 75T	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	12,9	12,5
POOL2 100M	POOL2 100T	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	14,1	13,9
POOL2 150M	POOL2 150T	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	16,5	14,9
POOL2 200M	POOL2 200T	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	18,1	15,9
POOL2 300M	POOL2 300T	216	109	265	370	325	206	325	400	220	205	160	630			705	230	360	22	18,4



POOL2 EASY

Swimming Pool



POOL2 pumps with electronic EASY control panel for an intuitive setting of the pool. It includes dry running and overload protection, security for people, filtration timers and input / outputs for the management of the lighting system, salt chlorinator, heat pump, temperature probe.


EASY control panel

Construction features	
Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Opening key for pre-filter lid	polypropylene


Motor	
2 poles induction motor	1~ 230V - 50Hz
Insulation class	F
Protection degree	IP55



POOL2 EASY

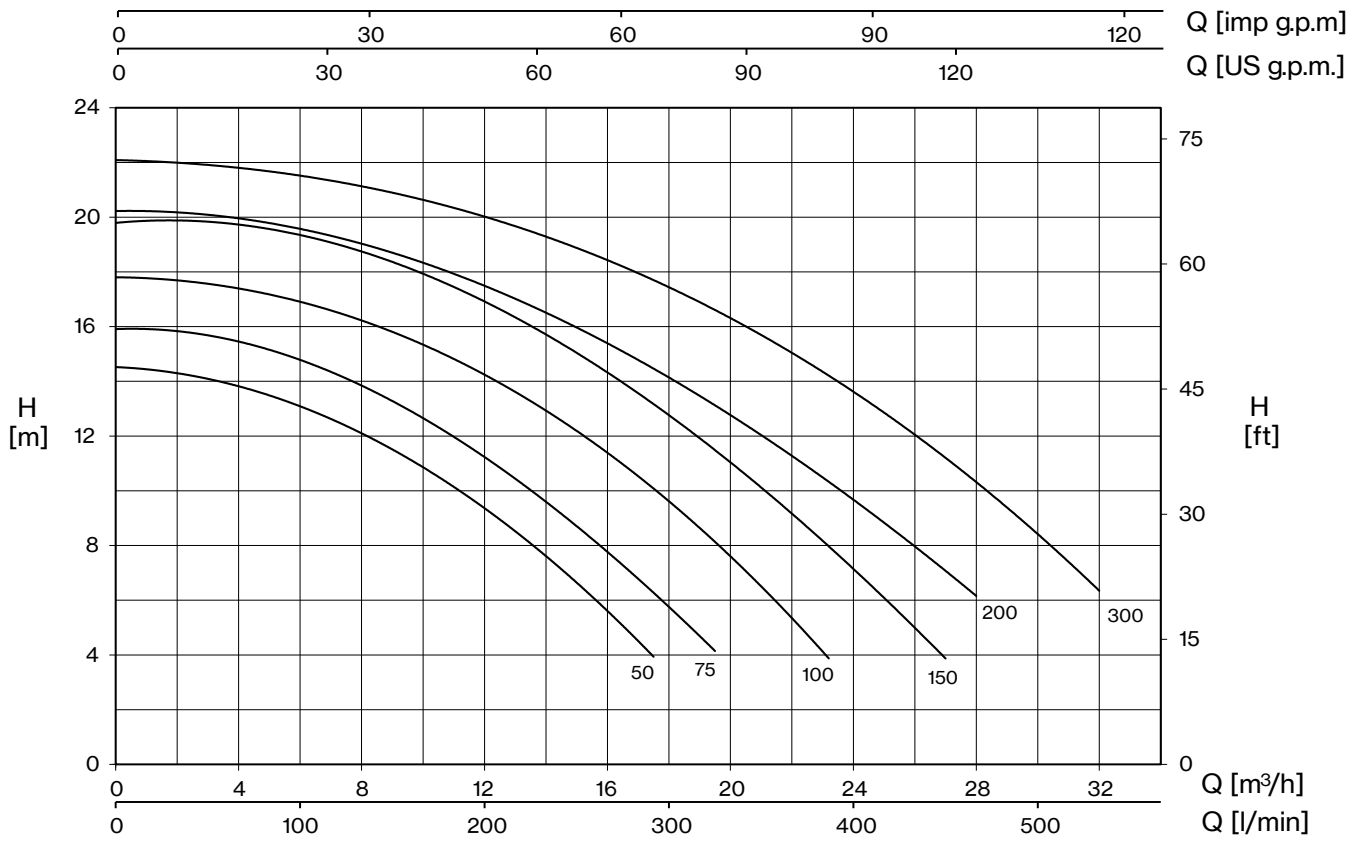

TYPE	P2		μF	AMPERE		H (m)										
				1-	4	6	8	10	12	14	16	18	21			
	HP	kW		230V	Q (m³/h)											
POOL2 EASY 50M	0,5	0,37	20	4,4	17,5	15,6	13,5	11,1	8,4							
POOL2 EASY 75M	0,75	0,55	20	4,75	19,5	18,0	15,7	13,5	10,8	7,9						
POOL2 EASY 100M	1	0,75	25	5,5	23,2	21,	19,77	18,0	15,0	12,3	8,7,0					
POOL2 EASY 150M	1,5	1,1	30	7,3	27,0	25,0	23,0	21,0	19,0	17,0	13,0	10,0				
POOL2 EASY 200M	2	1,5	40	9,2		28,0	26,0	24,0	21,0	18,0	14,0	12,0				
POOL2 EASY 300M	3	2,2	40	12,2		32,0	30,0	29,0	27,0	23,0	20,0	15,0	12,0			

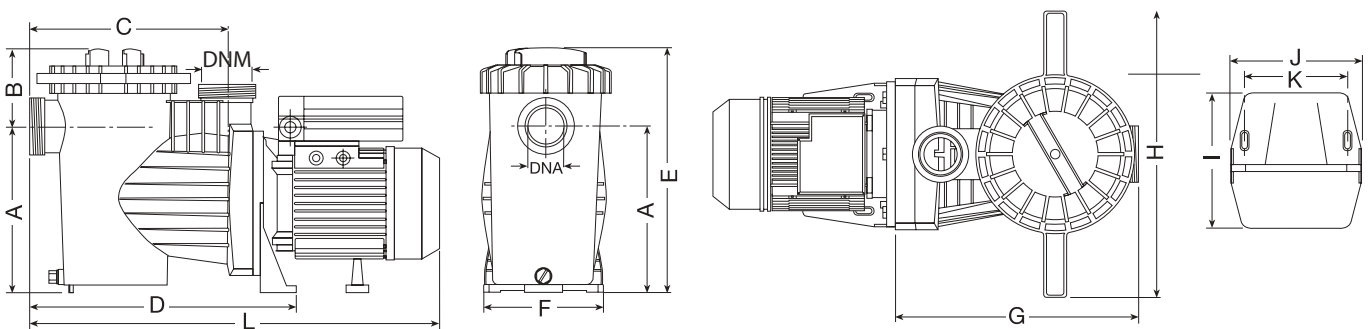

TYPE	DIMENSIONS (mm)																	
	A	B	C	D	E	F	G	H	I	J	K	L	DNA	DNM	L1	A1	H1	
POOL2 EASY 50M	216	109	265	370	325	206	325	400	220	205	160	550	2" Ø 63 PVC		630	230	360	12,7
POOL2 EASY 75M	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	12,9
POOL2 EASY 100M	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	14,1
POOL2 EASY 150M	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	16,5
POOL2 EASY 200M	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	18,1
POOL2 EASY 300M	216	109	265	370	325	206	325	400	220	205	160	630			705	230	360	22



POOL2-I

Swimming Pool



The pumps include a variable speed drive with 3 configurable speeds for greater comfort and minimized energy costs. In addition: 4 configurable daily filtration cycles, filter cleaning program, pool lighting control, function for water surface cleaning, 2 outputs for activating saline chlorinator and pump status, protection for over voltage, against dry running and pipe breakage.




Variable speed drive

Construction features	
Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Opening key for pre-filter lid	polypropylene


VSD	
Power supply	1~ 230V - 50Hz

Motor	
2 poles induction motor	3~ 230V - 50Hz
Insulation class	F
Protection degree	IP55


UP TO
65%
ENERGY SAVING

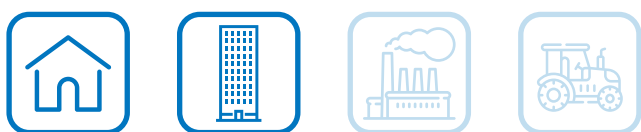

POOL2-I

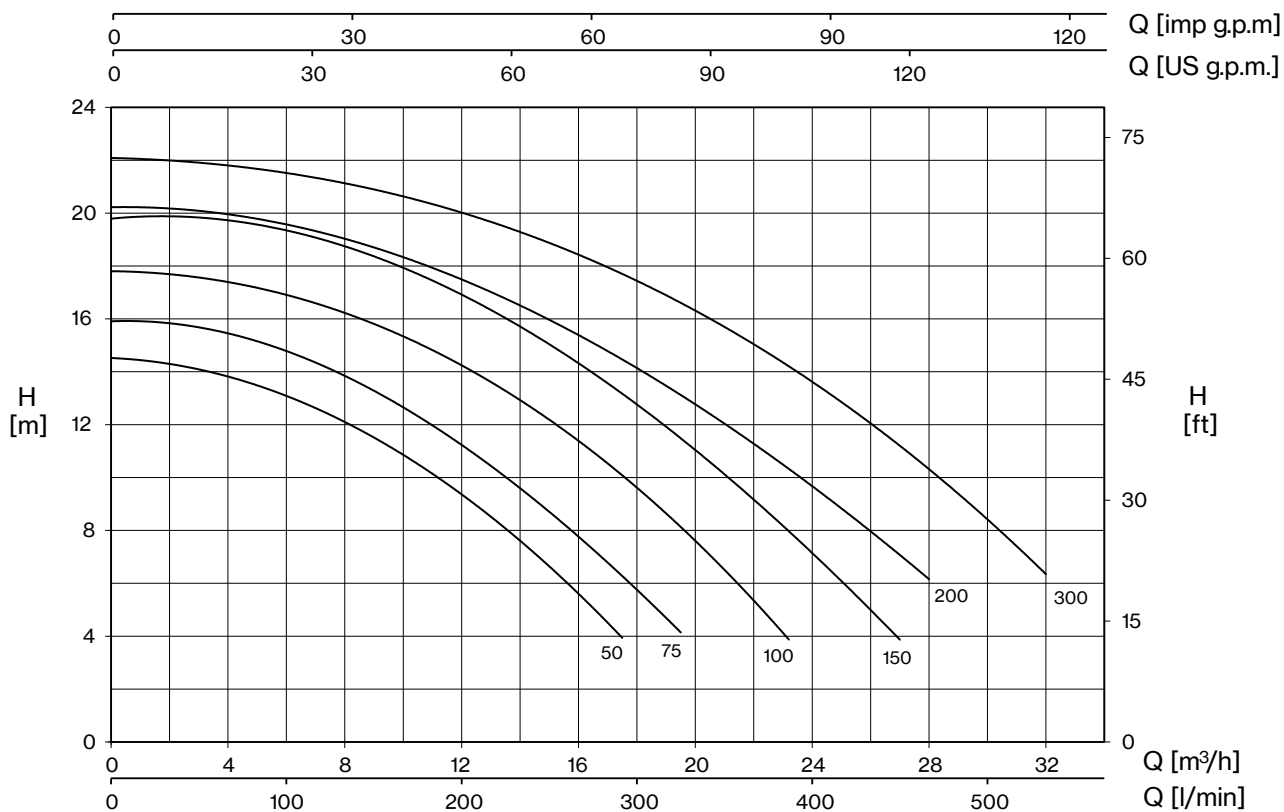

TYPE	P2		AMPERE	H (m)										
				3~	4	6	8	10	12	14	16	18	21	
1~	HP	kW	230V	Q (m³/h)										
POOL2-I 50M	0,5	0,37	2,4	17,5	15,6	13,5	11,1	8,4						
POOL2-I 75M	0,75	0,55	3,1	19,5	18,0	15,7	13,5	10,8	7,9					
POOL2-I 100M	1	0,75	3,8	23,2	21,1	19,7	18,0	15,0	12,3	8,7				
POOL2-I 150M	1,5	1,1	5,0	27,0	25,0	23,0	21,0	19,0	17,0	13,0	10,0			
POOL2-I 200M	2	1,5	6,0	28,0	26,0	24,0	21,0	19,0	18,0	14,0	12,0			
POOL2-I 300M	3	2,2	8,6	32,0	30,0	29,0	27,0	23,0	20,0	15,0	12,0			

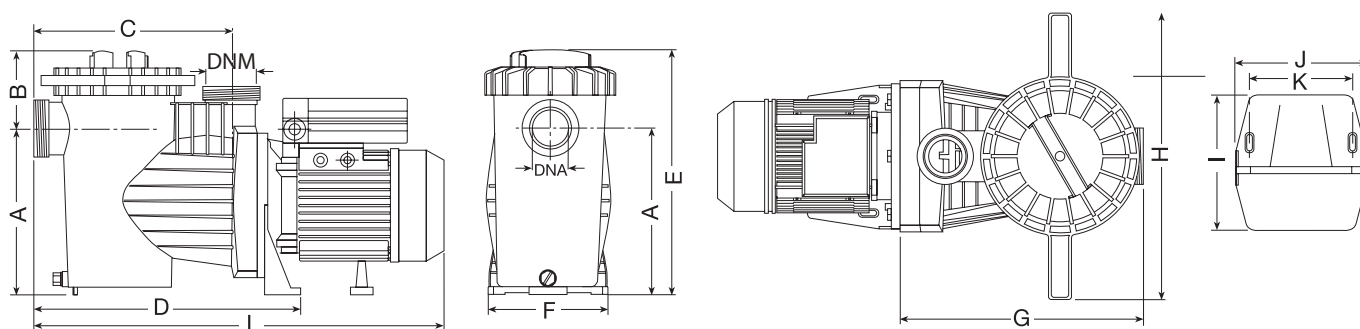

TYPE	DIMENSIONS (mm)																Kg	
	A	B	C	D	E	F	G	H	I	J	K	L	DNA	DNM	L1	A1		H1
POOL2-I 50M	216	109	265	370	325	206	325	400	220	205	160	550	2" Ø 63 PVC		630	230	360	12,7
POOL2-I 75M	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	12,9
POOL2-I 100M	216	109	265	370	325	206	325	400	220	205	160	550			630	230	360	14,1
POOL2-I 150M	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	16,5
POOL2-I 200M	216	109	265	370	325	206	325	400	220	205	160	580			630	230	360	18,1
POOL2-I 300M	216	109	265	370	325	206	325	400	220	205	160	630			705	230	360	22



POOL2-IM

Swimming Pool



POOL2 300M pump with permanent magnets synchronous motor and variable speed drive. The combination of these two innovative technologies, assure IE5 efficiency and energy savings up to 80%. The system allows the programming of 4 daily filtration cycles with different operating speed for each cycle. In installations with several pumps they automatically communicate and alternate to work the same amount of hours.



Variable speed drive

Construction features

Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Opening key for pre-filter lid	polypropylene

VSD

Power supply 1~ 230V - 50Hz

Motor

2 poles induction motor 3~ 230V - 50Hz

Insulation class F

Protection degree IP55

Construction permanent magnets


UP TO
80%
ENERGY SAVING

efficiency class


IE5



POOL2-IM

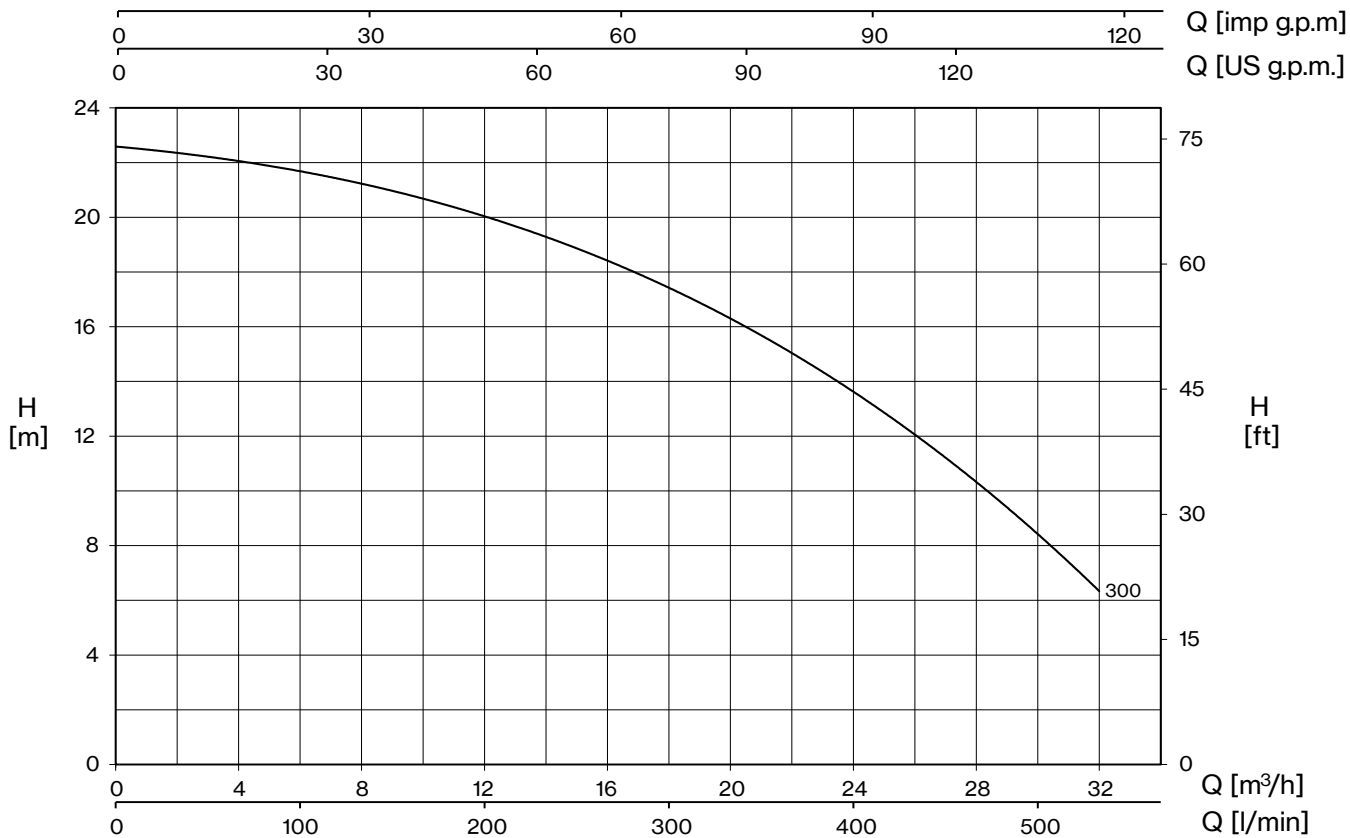

TYPE	P2		AMPERE	H (m)							
				6	8	10	12	14	16	18	21
1~	HP	kW	230V	Q (m³/h)							
POOL2-IM 300M	3	2,2	8,6	32,0	30,0	29,0	27,0	23,0	20,0	15,0	12,0

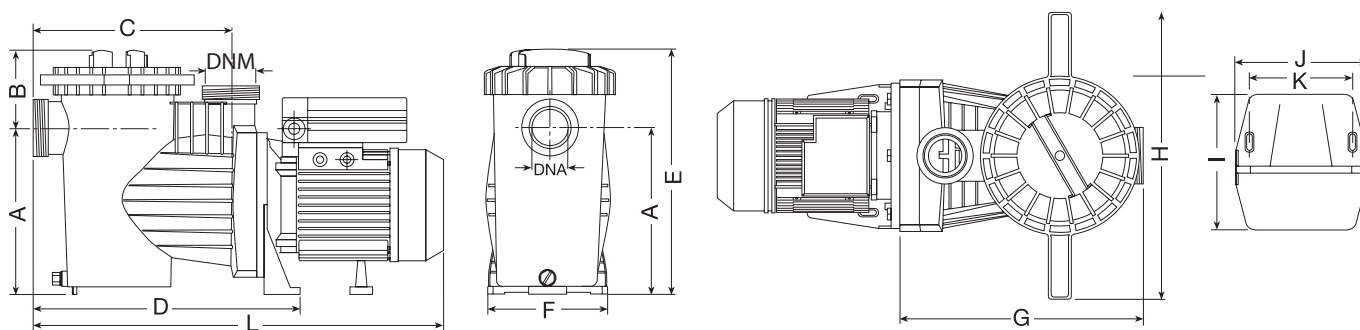

TYPE	DIMENSIONS (mm)																	Kg
	A	B	C	D	E	F	G	H	I	J	K	L	DNA	DNM	L1	A1	H1	
POOL2-IM 300M	216	109	265	370	325	206	325	400	220	205	160	630	2"	Ø 63 PVC	705	230	360	22






Self-priming pumps with high filtration capacity. The pump body in polypropylene with fiberglass and the screws in AISI316 steel give a remarkable resistance to corrosion.

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate

Motor


	1~ 230V - 50Hz
2 poles induction motor	3~ 230/400V - 50Hz
Insulation class	F
Protection degree	IP55



POOL3

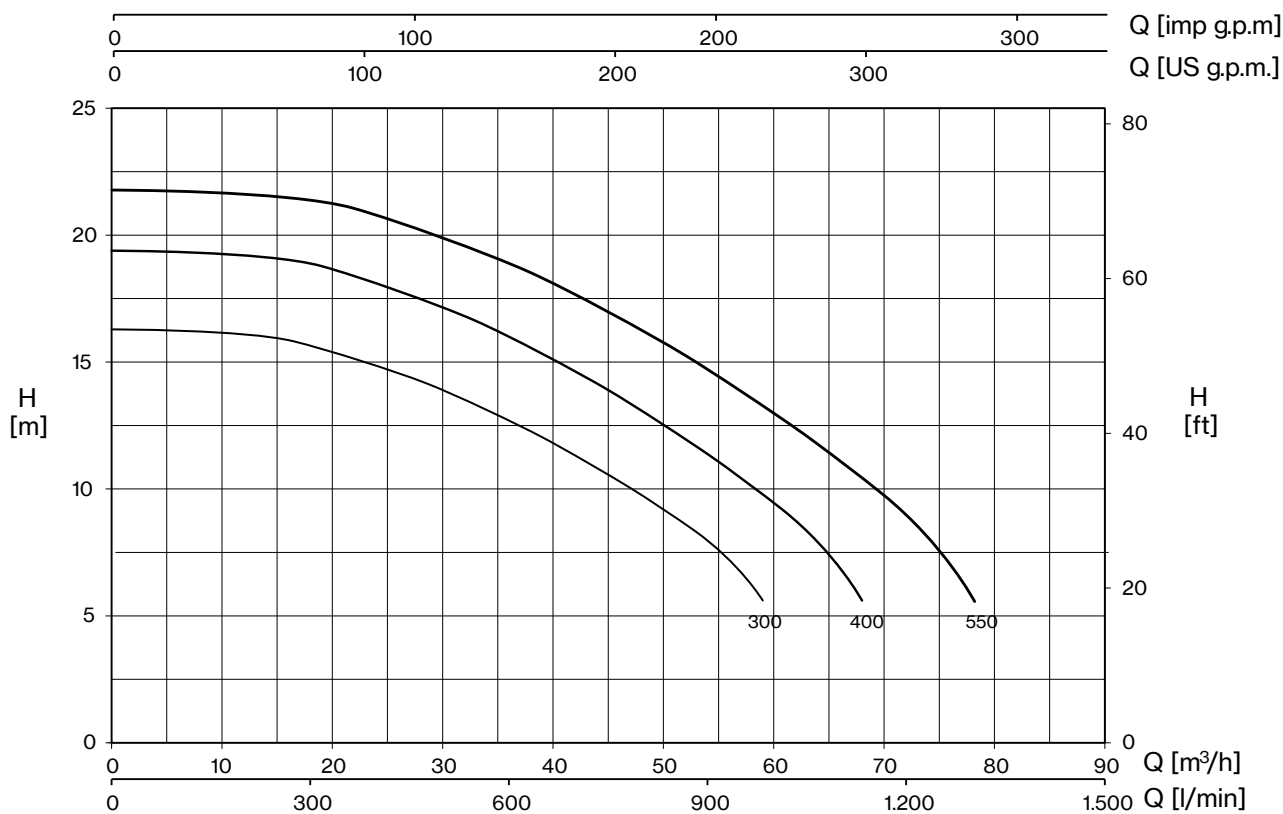

TYPE		P2		AMPERE			H (m)						
1~	3~	HP	kW	1~ 230V	3~ 230V	3~ 400V	6	8	10	12	14	16	18
		Q (m³/h)											
POOL3 300M	POOL3 300T	3	2,2	16	9,4	5,3	59,0	54,0	47,0	39,0	28,0	16,0	
-	POOL3 400T	4	3	-	12,5	6,9	68,0	63,0	58,0	52,0	45,0	36,0	23,0
-	POOL3 550T	5,5	4	-	-	8,8	78,0	74,0	70,0	65,0	59,0	50,0	39,0

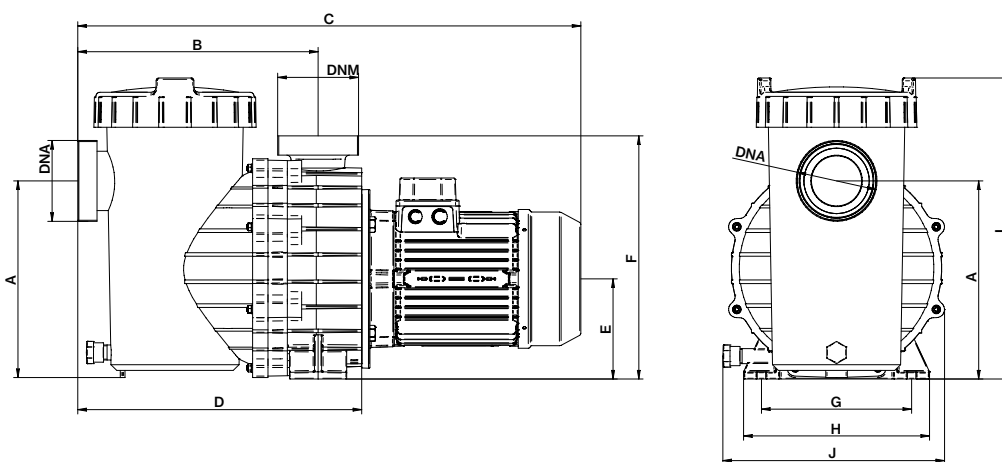

TYPE		DIMENSIONS (mm)											Kg		
1~	3~	A	B	C	D	E	F	G	H	I	J	DNa	DNM	1~	3~
POOL3 300M	POOL3 300T	277	336	704	397	140	340	210	260	420	310	3" Ø 90 PVC		28	28
-	POOL3 400T	277	336	704	397	140	340	210	260	420	310			-	30
-	POOL3 550T	277	336	704	397	140	340	210	260	420	310			-	40





High-flow self-priming pool pumps at 4 poles up to 10 HP ideal for quiet operation and larger filtration. Cataphoresis painting, screws in AISI316 and pump body in polypropylene with glass fiber give a remarkable resistance to corrosion. In addition, a large support base make the whole system particularly robust.



Bronze impeller on request

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®, marine bronze on request
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Support base	Noryl®

Motor


4 or 2 poles induction motor	3~ 230V/400V - 50Hz 3~ 400V/690V - 50Hz
Insulation class	F
Protection degree	IP55



POOL4

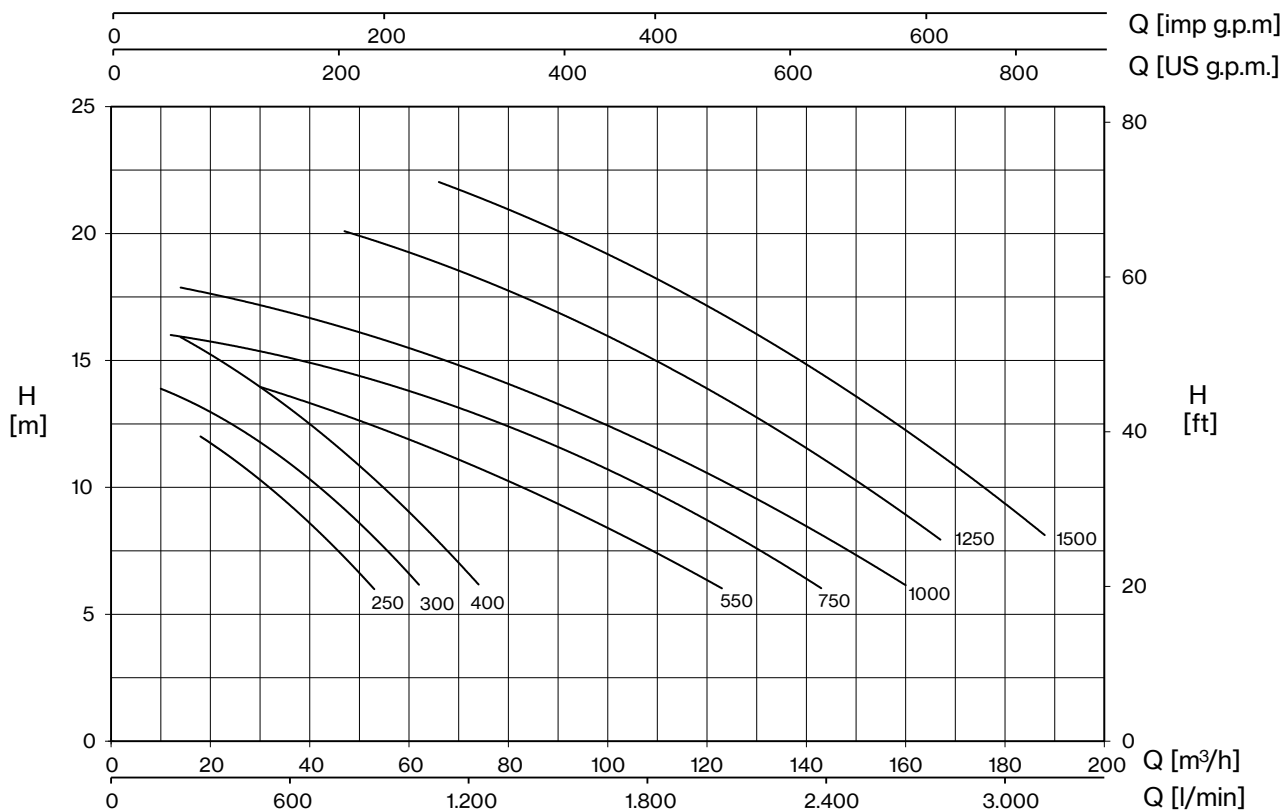

TYPE	P2		AMPERE		rpm	H (m)										Minimum size of suction pipe		
			3~	3~		6	8	10	12	14	16	18	20	22				
	HP	kW	230V	400V		Q (m³/h)												
POOL4 4-250	2,5	1,8	8,5	4,9	1450	53	43	32	18									110
POOL4 4-300	3	2,2	9,4	5,3	1450	62	54	43	26	10								125
POOL4 4-400	4	3	12,5	6,9	1450	74	66	56	42	29	14							140
POOL4 4-550	5,5	4	15,3	8,8	1450	123	104	84	57	30								160
POOL4 4-750	7,5	5,5	-	12	1450	143	127	107	85	57	12							180
POOL4 4-1000	10	7,5	-	15,8	1450	160	145	126	107	80	48	14						180
POOL4 2-1250	12,5	9,2	-	18,5	2850		167	152	136	118	99	80	47					180
POOL4 2-1500	15	11	-	20,9	2850		188	177	162	146	130	112	92	66				200

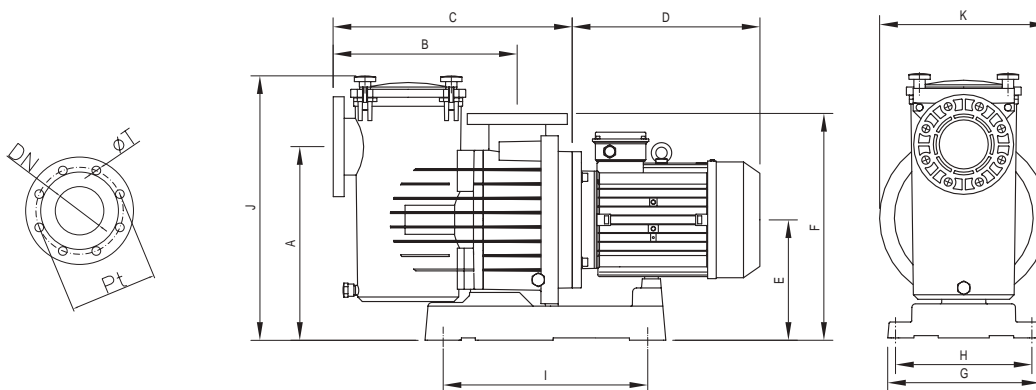

TYPE	DIMENSIONS (mm)																Kg			
	3~	A	B	C	D	E	F	G	H	I	J	K	DNA	DNM	ØT	Pt		A1	H1	L1
POOL4 4-250	420	405	530	310	265	495	335	300	450	590	370						385	595	840	42
POOL4 4-300	420	405	530	310	265	495	335	300	450	590	370						385	595	840	42,5
POOL4 4-400	420	405	530	310	265	495	335	300	450	590	370						385	595	840	44,5
POOL4 4-550	420	405	530	335	265	495	335	300	450	590	370						385	715	1170	53,4
POOL4 4-750	420	405	508	380	265	495	335	300	450	590	370	110				180	385	715	1170	66
POOL4 4-1000	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	76
POOL4 2-1250	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	84,5
POOL4 2-1500	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	85,5





High-flow self-priming vertical pool pumps at 4 poles up to 10 HP ideal for quiet operation and larger filtration. Cataphoresis painting, pre-filter in AISI316 and pump body in polypropylene with glass fiber give a remarkable resistance to corrosion. In addition, a large support base make the whole system particularly robust.




Bronze impeller on request

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®, marine bronze on request
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter	stainless steel AISI 316L

Motor


4 or 2 poles induction motor	3~ 230V/400V - 50Hz 3~ 400V/690V - 50Hz
Insulation class	F
Protection degree	IP55



V-POOL4

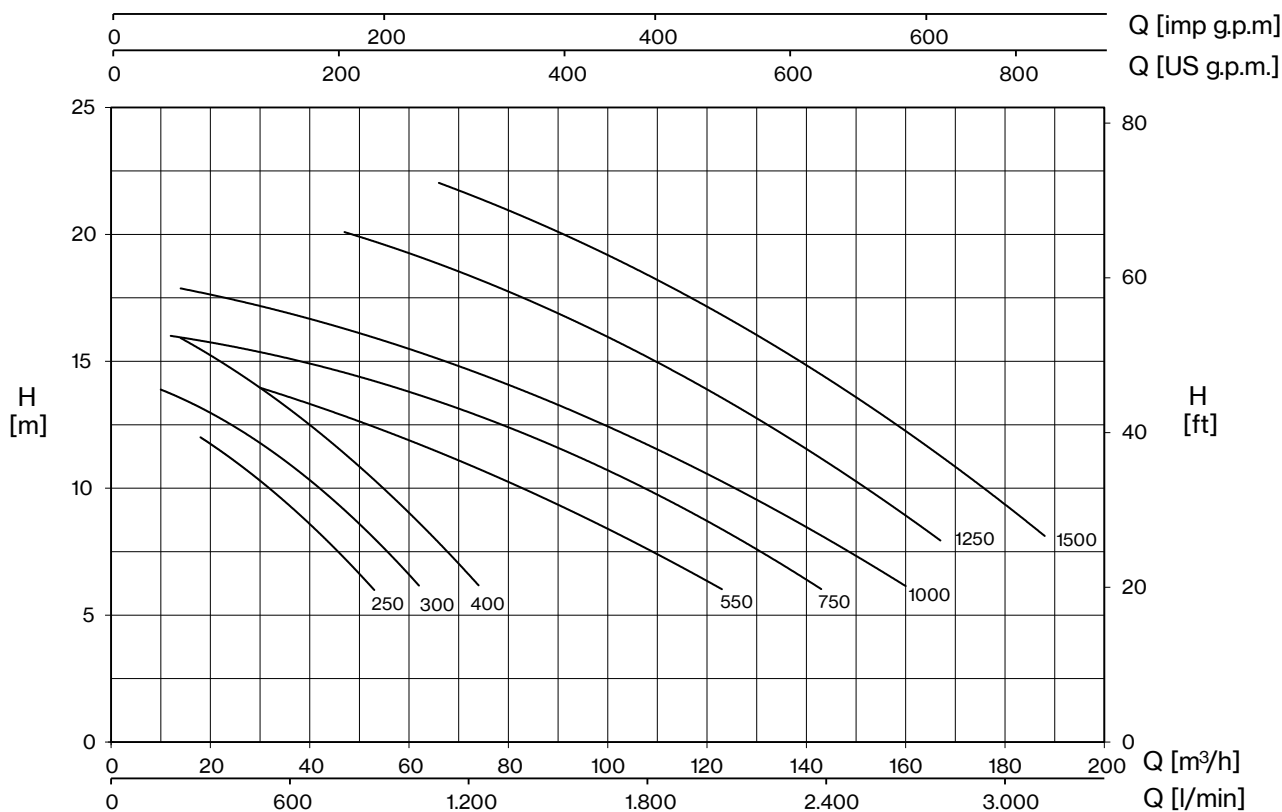

TYPE	P2		AMPERE		rpm	H (m)												Minimum size of suction pipe
			3~	3~		6	8	10	12	14	16	18	20	22				
	HP	kW	230V	400V		Q (m³/h)												
V-POOL4 4-250	2,5	1,8	8,5	4,9	1450	53	43	32	18									110
V-POOL4 4-300	3	2,2	9,4	5,3	1450	62	54	43	26	10								125
V-POOL4 4-400	4	3	12,5	6,9	1450	74	66	56	42	29	14							140
V-POOL4 4-550	5,5	4	15,3	8,8	1450	123	104	84	57	30								160
V-POOL4 4-750	7,5	5,5	-	12	1450	143	127	107	85	57	12							180
V-POOL4 4-1000	10	7,5	-	15,8	1450	160	145	126	107	80	48	14						180
V-POOL4 2-1250	12,5	9,2	-	18,5	2850		167	152	136	118	99	80	47					180
V-POOL4 2-1500	15	11	-	20,9	2850		188	177	162	146	130	112	92	66				200

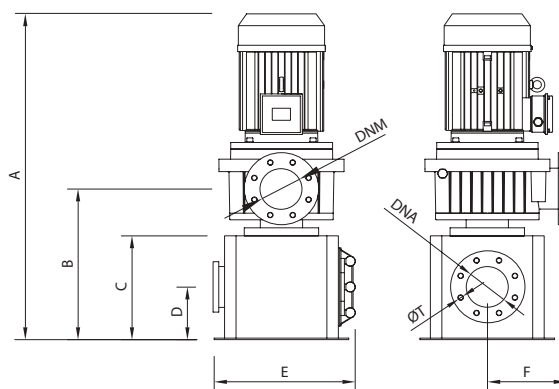

TYPE	DIMENSIONS (mm)												Kg
	A	B	C	D	E	F	DNA	DNM	ØT	A1	H1	L1	
V-POOL4 4-250	903	503	338	169	410	325	125	100	16	700	923	840	85
V-POOL4 4-300	903	503	338	169	410	325				700	923	840	85,5
V-POOL4 4-400	903	503	338	169	410	325				700	923	840	87,5
V-POOL4 4-550	923	503	338	169	410	325				700	943	1170	96,5
V-POOL4 4-750	923	503	338	169	410	325				700	943	1170	109
V-POOL4 4-1000	923	503	338	169	410	325				700	943	1170	119
V-POOL4 2-1250	923	503	338	169	410	325				700	943	1170	127,5
V-POOL4 2-1500	923	503	338	169	410	325				700	943	1170	128,5



POOL4-I

Swimming Pool



POOL4-I commercial pool pumps integrate a variable speed drive with 3 configurable speeds for a greater comfort and minimized energy costs. The system allows the programming of 4 daily filtration cycles with different operating speed for each cycle. In installations with several POOL4-I the pumps automatically communicate and alternate to work the same amount of hours. Capable to work more than one pump at the same time.



Variable speed drive

Construction features

Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®, marine bronze on request
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Support base	Noryl®

VSD

Power supply 3~ 400V - 50Hz

Motor

4 or 2 poles induction motor 3~ 230V/400V - 50Hz
3~ 400V/690V - 50Hz


Insulation class F

Protection degree IP55


UP TO
65%
ENERGY SAVING



POOL4-I

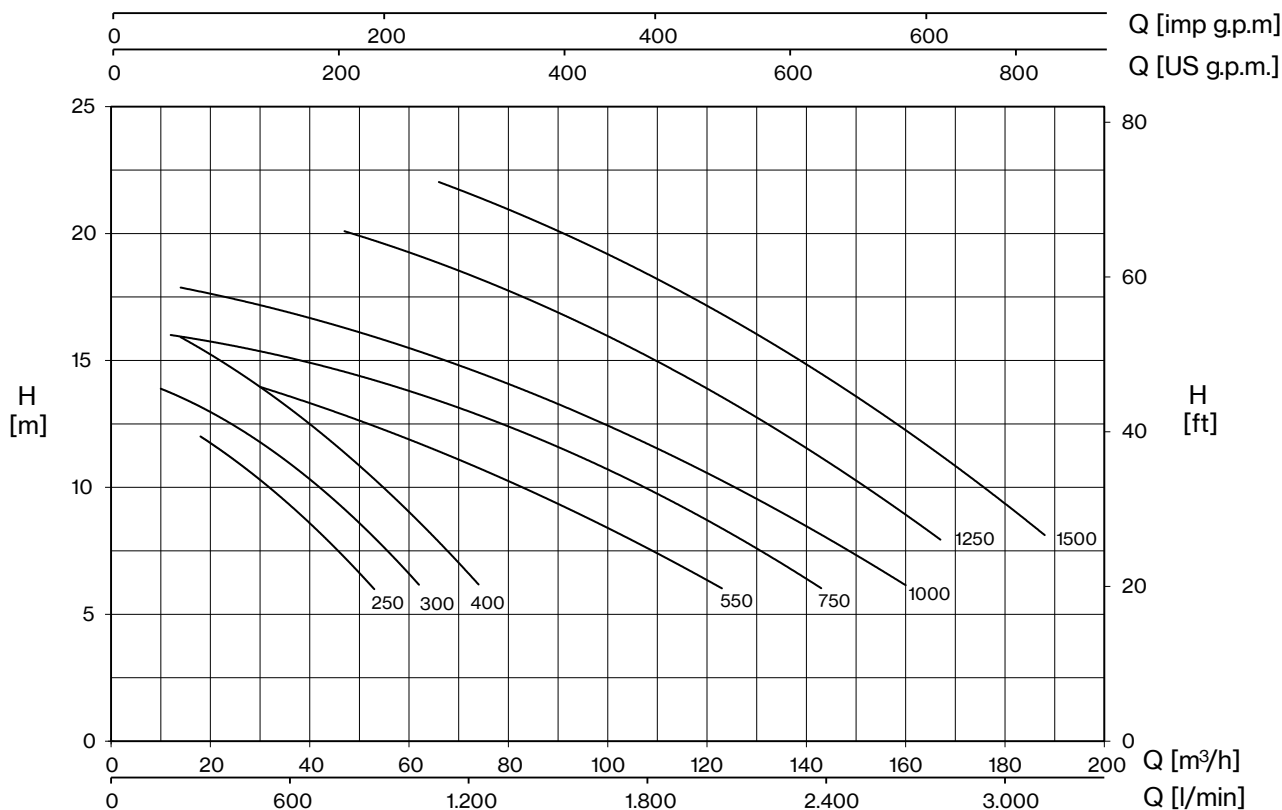

TYPE	P2		AMPERE	rpm	H (m)											Minimum size of suction pipe	
					Q (m³/h)												
	3~	HP	kW		400V	6	8	10	12	14	16	18	20	22			
POOL4-I 4-250	2,5	1,8	4,9	1450	53	43	32	18									110
POOL4-I 4-300	3	2,2	5,3	1450	62	54	43	26	10								125
POOL4-I 4-400	4	3	6,9	1450	74	66	56	42	29	14							140
POOL4-I 4-550	5,5	4	8,8	1450	123	104	84	57	30								160
POOL4-I 4-750	7,5	5,5	12	1450	143	127	107	85	57	12							180
POOL4-I 4-1000	10	7,5	15,8	1450	160	145	126	107	80	48	14						180
POOL4-I 2-1250	12,5	9,2	18,5	2850		167	152	136	118	99	80	47					180
POOL4-I 2-1500	15	11	20,9	2850		188	177	162	146	130	112	92	66				200

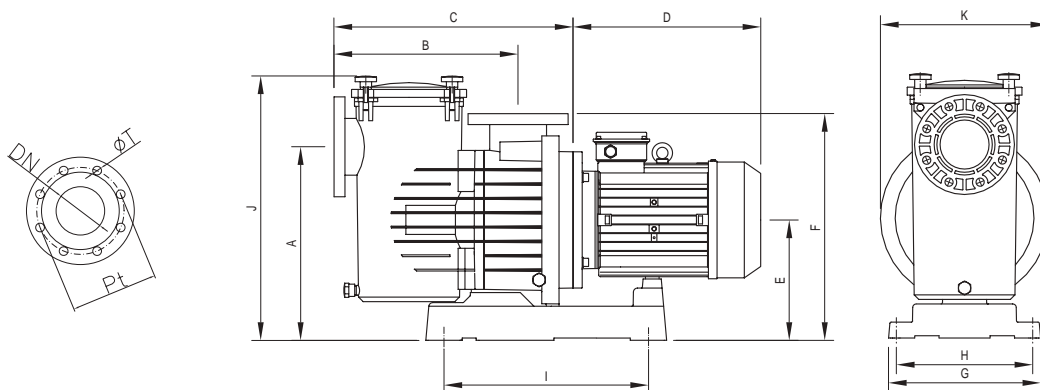

TYPE	DIMENSIONS (mm)																		Kg	
	3~	A	B	C	D	E	F	G	H	I	J	K	DNA	DNM	ØT	Pt	A1	H1		L1
POOL4-I 4-250	420	405	530	310	265	495	335	300	450	590	370						385	595	840	42
POOL4-I 4-300	420	405	530	310	265	495	335	300	450	590	370						385	595	840	42,5
POOL4-I 4-400	420	405	530	310	265	495	335	300	450	590	370						385	595	840	44,5
POOL4-I 4-550	420	405	530	335	265	495	335	300	450	590	370						385	715	1170	53,4
POOL4-I 4-750	420	405	508	380	265	495	335	300	450	590	370	110				180	385	715	1170	66
POOL4-I 4-1000	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	76
POOL4-I 2-1250	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	84,5
POOL4-I 2-1500	420	405	508	380	265	495	335	300	450	590	370						385	715	1170	85,5



POOL4-IM

Swimming Pool



POOL4 4-550 pump with permanent magnets synchronous motor and variable speed drive. The combination of these two innovative technologies, assure IE5 efficiency and energy savings up to 80%. The system allows the programming of 4 daily filtration cycles with different operating speed for each cycle. In installations with several pumps they automatically communicate and alternate to work the same amount of hours.



Variable speed drive

Construction features

Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C
Pre-filter cover	polycarbonate
Support base	Noryl®

VSD

Power supply 3~ 400V - 50Hz

Motor


4 poles induction motor 3~ 230V/400V - 50Hz

Insulation class F


Protection degree IP55




efficiency class
IE5



POOL4-IM

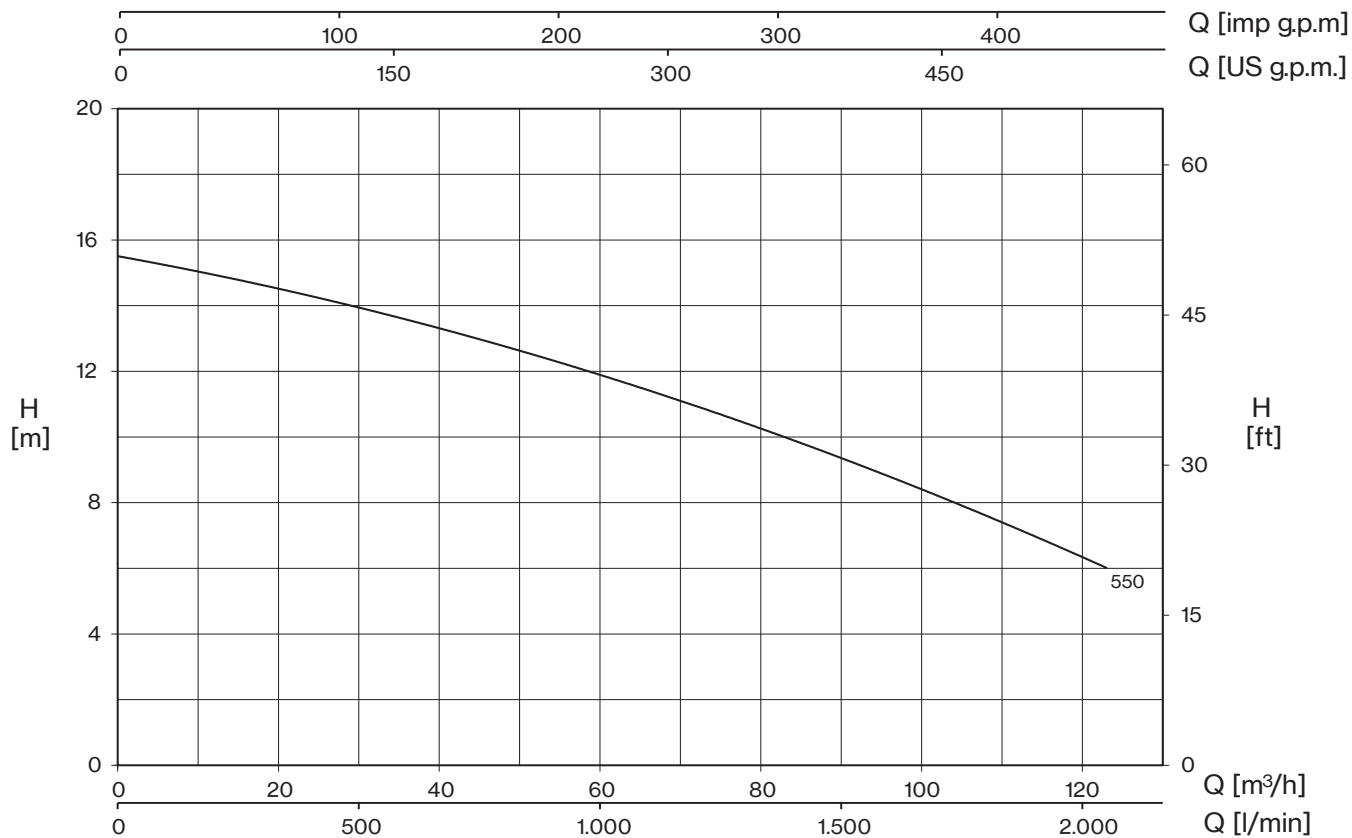

TYPE	P2		rpm	H (m)					Minimum size of suction pipe
	HP	kW		6	8	10	12	14	
3~	Q (m³/h)								
POOL4-IM 4-550	5,5	4	1450	123	104	84	57	30	160

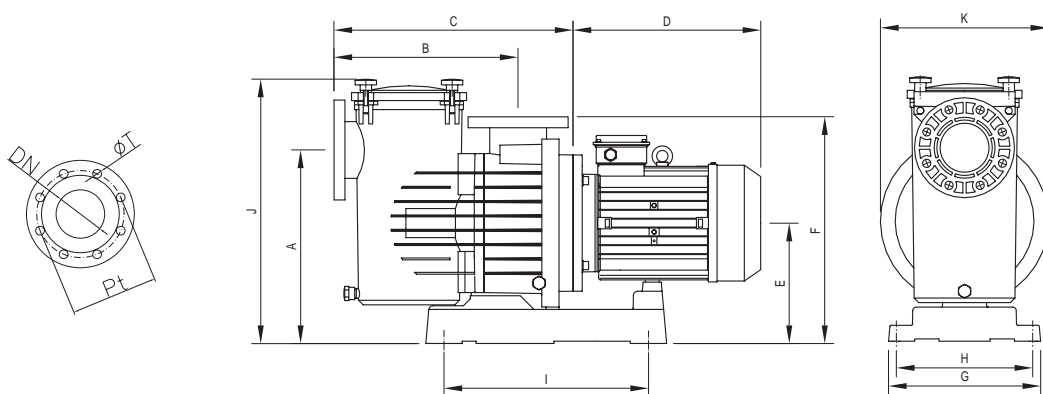

TYPE	DIMENSIONS (mm)																		Kg
	A	B	C	D	E	F	G	H	I	J	K	DNA	DNM	ØT	Pt	A1	H1	L1	
POOL4-IM 4-550	420	405	530	335	265	495	335	300	450	590	370	110	16	180	385	715	1170	53,4	





Pumps ideal for counter-current swimming, water parks, fountains, waterfalls, etc. The pump body in polypropylene reinforced with glass fiber allows to resist the chemicals of the pools and guarantee excellent durability.

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®, marine bronze on request
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C

Motor


2 poles induction motor	1~ 230V - 50Hz 3~ 230/400V - 50Hz
Insulation class	F
Protection degree	IP55



POOL5

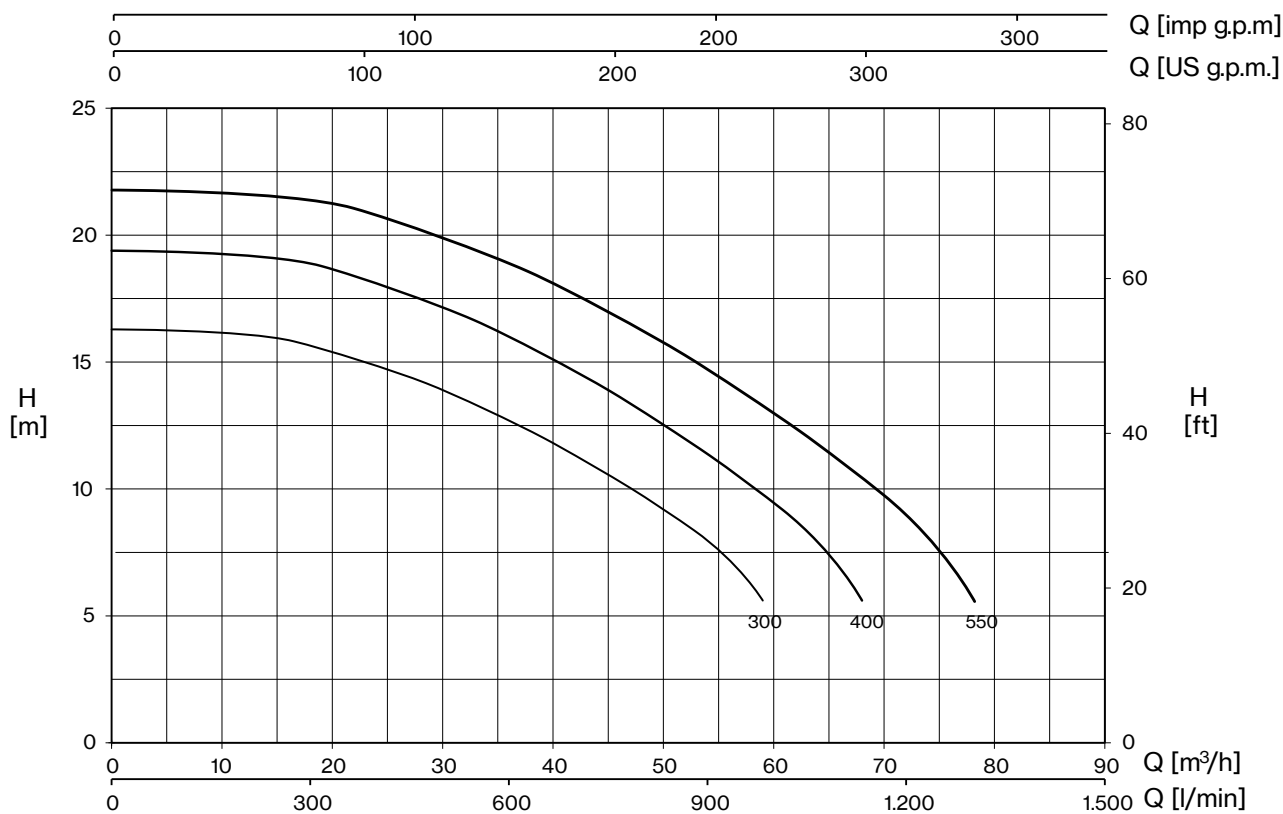

TYPE		P2		AMPERE			H (m)						
1~	3~	HP	kW	1~	3~	3~	6	8	10	12	14	16	18
				230V	230V	400V	Q (m³/h)						
POOL5 300M	POOL5 300T	3	2,2	16	9,4	5,3	59,0	54,0	47,0	39,0	28,0	16,0	
-	POOL5 400T	4	3	-	12,5	6,9	68,0	63,0	58,0	52,0	45,0	36,0	23,0
-	POOL5 550T	5,5	4	-	-	8,8	78,0	74,0	70,0	65,0	59,0	50,0	39,0

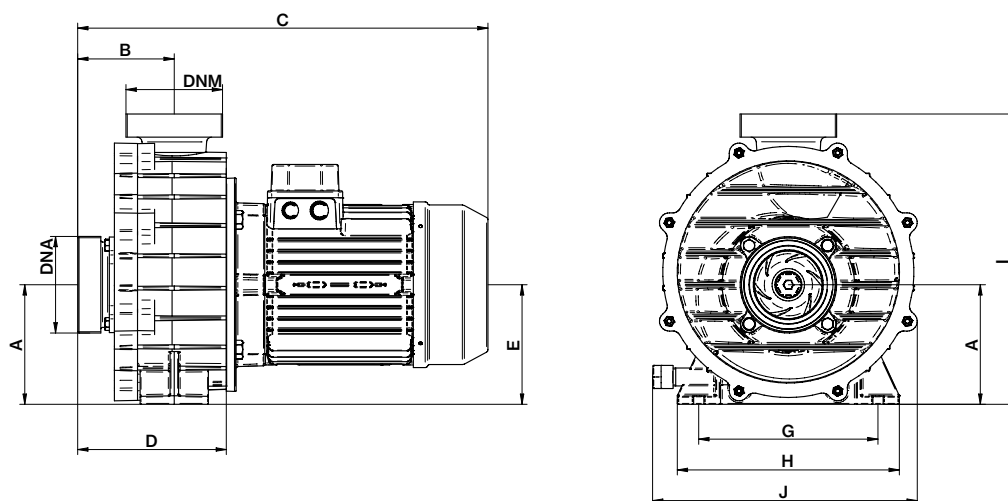

TYPE		DIMENSIONS (mm)										DNA	DNM	Kg
1~	3~	A	B	C	D	E	G	H	I	J				
POOL5 300M	POOL5 300T	140	113	480	174	140	210	260	420	310	3" Ø 90 PVC	23		
-	POOL5 400T	140	113	480	174	140	210	260	420	310		28		
-	POOL5 550T	140	113	480	174	140	210	260	420	310		37		





Pumps ideal for counter-current swimming, water parks, fountains, waterfalls, etc. The pump body in polypropylene reinforced with glass fiber allows it to resist the chemicals of the pools and guarantee excellent durability.



Bronze impeller on request

Construction features


Painting	cataphoresis
Pump body, seal housing, diffuser	polypropylene + fiberglass
Motor bracket	aluminum
Impeller	Noryl®, marine bronze on request
Mechanical seal	ceramic-graphite-AISI 316
Motor shaft	stainless steel AISI 316
Liquid temperature	max 40 °C

Motor


4 or 2 poles induction motor	3~ 230/400V - 50Hz 3~ 400/690V - 50Hz
Insulation class	F
Protection degree	IP55



POOL6

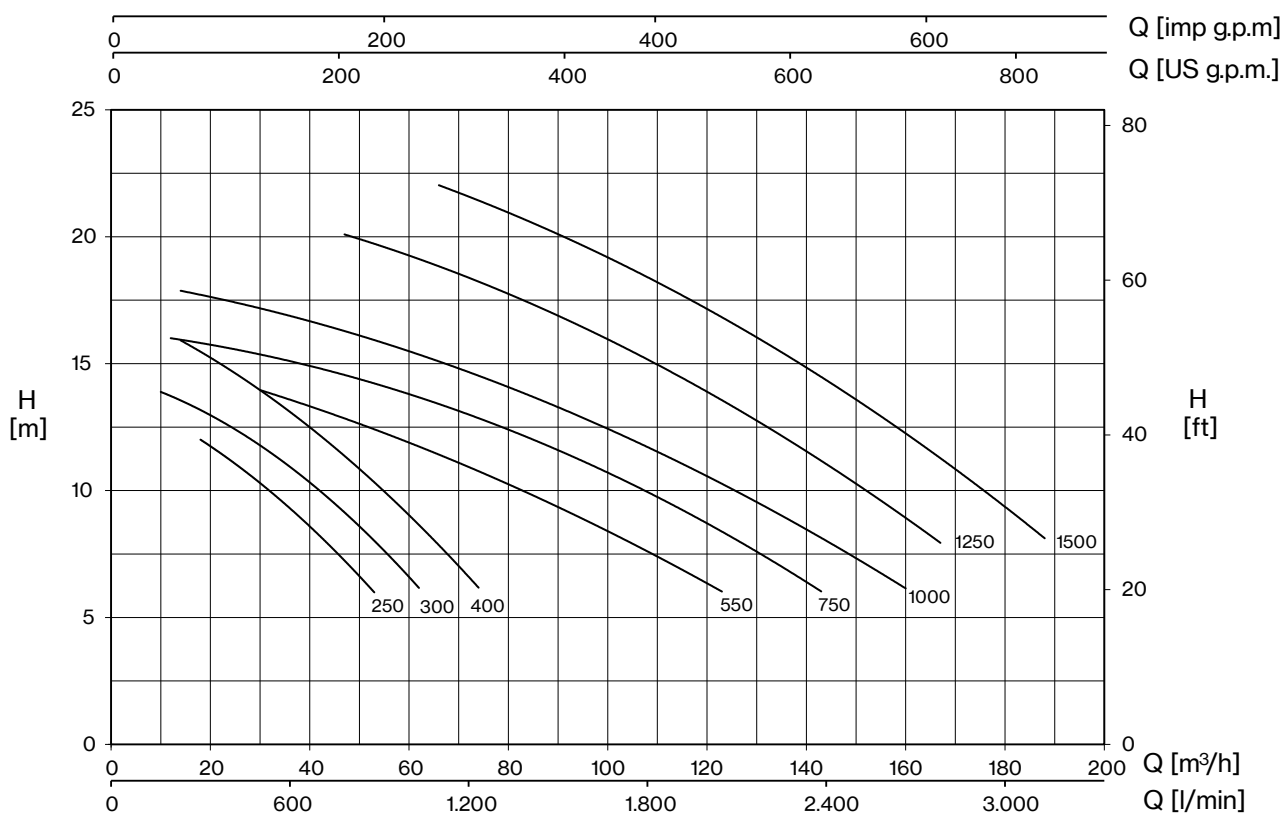

TYPE	P2		AMPERE		rpm	H (m)												Minimum size of suction pipe
			3~	3~		6	8	10	12	14	16	18	20	22				
	HP	kW	230V	400V		Q (m ³ /h)												
POOL6 4-250	2,5	1,8	8,5	4,9	1450	53	43	32	18									110
POOL6 4-300	3	2,2	9,4	5,3	1450	62	54	43	26	10								125
POOL6 4-400	4	3	12,5	6,9	1450	74	66	56	42	29	14							140
POOL6 4-550	5,5	4	15,3	8,8	1450	123	104	84	57	30								160
POOL6 4-750	7,5	5,5	-	12	1450	143	127	107	85	57	12							180
POOL6 4-1000	10	7,5	-	15,8	1450	160	145	126	107	80	48	14						180
POOL6 2-1250	12,5	9,2	-	18,5	2850		167	152	136	118	99	80	47					180
POOL6 2-1500	15	11	-	20,9	2850		188	177	162	146	130	112	92	66				200

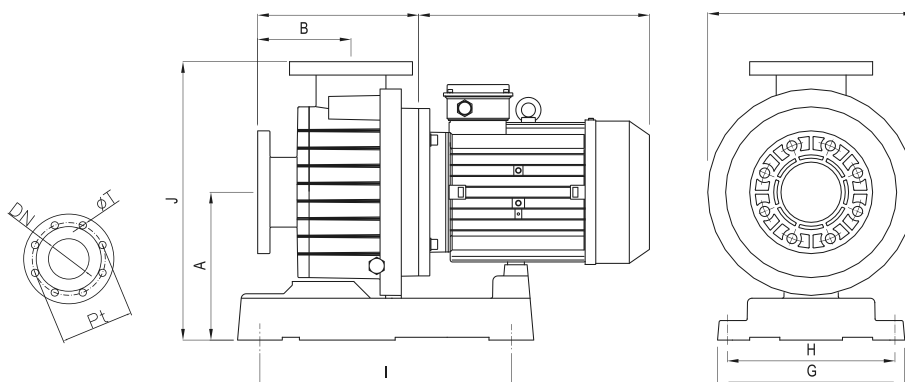

TYPE	DIMENSIONS (mm)																		
	A	B	C	D	E	F	G	H	I	J	K	DNA	DNM	ØT	Pt	A1	H1		L1
POOL6 4-250	265	165	255	310	335	300	450	495	370	385	370	110		16	180	385	595	840	37
POOL6 4-300	265	165	255	310	335	300	450	495	370	385	370					385	595	840	37,5
POOL6 4-400	265	165	255	310	335	300	450	495	370	385	370					385	595	840	39,5
POOL6 4-550	265	165	255	330	335	300	450	495	370	385	370					385	595	840	48,5
POOL6 4-750	265	165	255	380	335	300	450	495	370	385	370					385	595	840	61
POOL6 4-1000	265	165	255	380	335	300	450	495	370	385	370					385	595	840	71
POOL6 2-1250	265	165	255	380	335	300	450	495	370	385	370					385	595	840	79,5
POOL6 2-1500	265	165	255	380	335	300	450	495	370	385	370					595	715	840	80,5



DOMESTIC FILTER

Swimming Pool



Laminated polyester filters with manual side mounted valve, indicated for private and commercial pools, including multiport 6 way valve (filtration, backwash, rinse, recycle, drain and closed), manometer and airbleased system.



Transparent screw cover
(on request)

MODEL	Ø mm	Connection	Filtering surface m ²	Flow V=50 m ³ /h	Sand Kg	Weight Kg
PFIL 400	400	1,5"	0,13	6,5	50	12
PFIL 510	510	1,5"	0,20	10,2	100	18
PFIL 620	620	1,5"	0,30	15,1	150	23,5
PFIL 680	680	2"	0,36	18,14	175	27
PFIL 750	750	2"	0,44	22	225	33
PFIL 900	900	2"	0,64	31,8	325	42

FILTRATION KIT


Swimming Pool




Filtration kit including a laminated filter with 6 way valve + swimming pool pump POOL1, ideal for private pool, all mounted on a common base.

MODEL	Ø mm	Connection	Filtering surface m ²	Flow V=50 m ³ /h	Pump HP	Sand Kg	Weight Kg
PFIL EASY KIT 25	400	1,5"	0,13	6,5	0,25	50	19
PFIL EASY KIT 33	400	1,5"	0,13	7,5	0,33	50	19
PFIL EASY KIT 50	510	1,5"	0,20	8,5	0,50	100	26
PFIL EASY KIT 75	510	1,5"	0,20	10,2	0,75	100	26
PFIL EASY KIT 100	620	1,5"	0,30	15,1	0,95	150	29



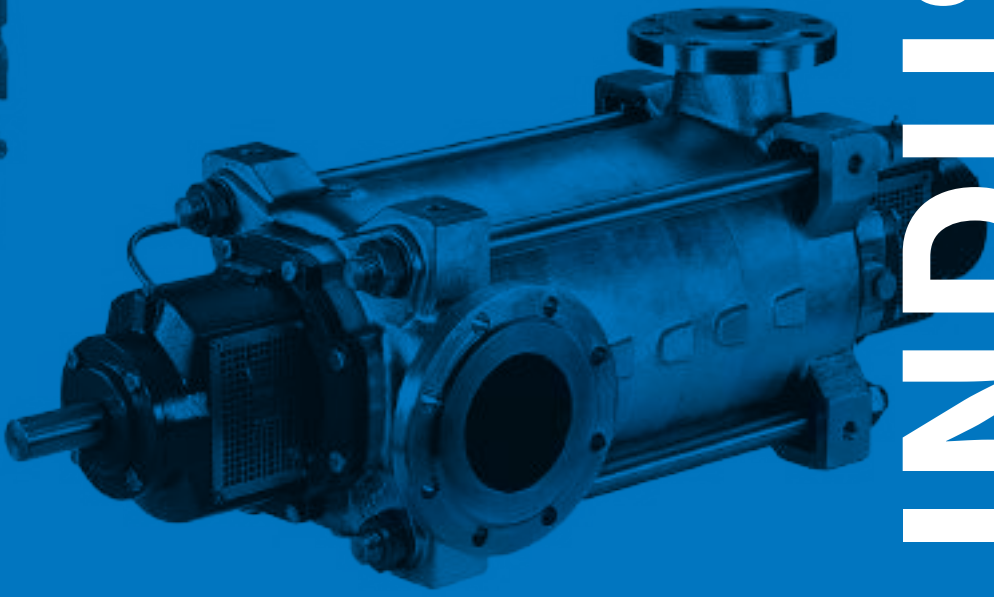

INDUSTRIAL LINE

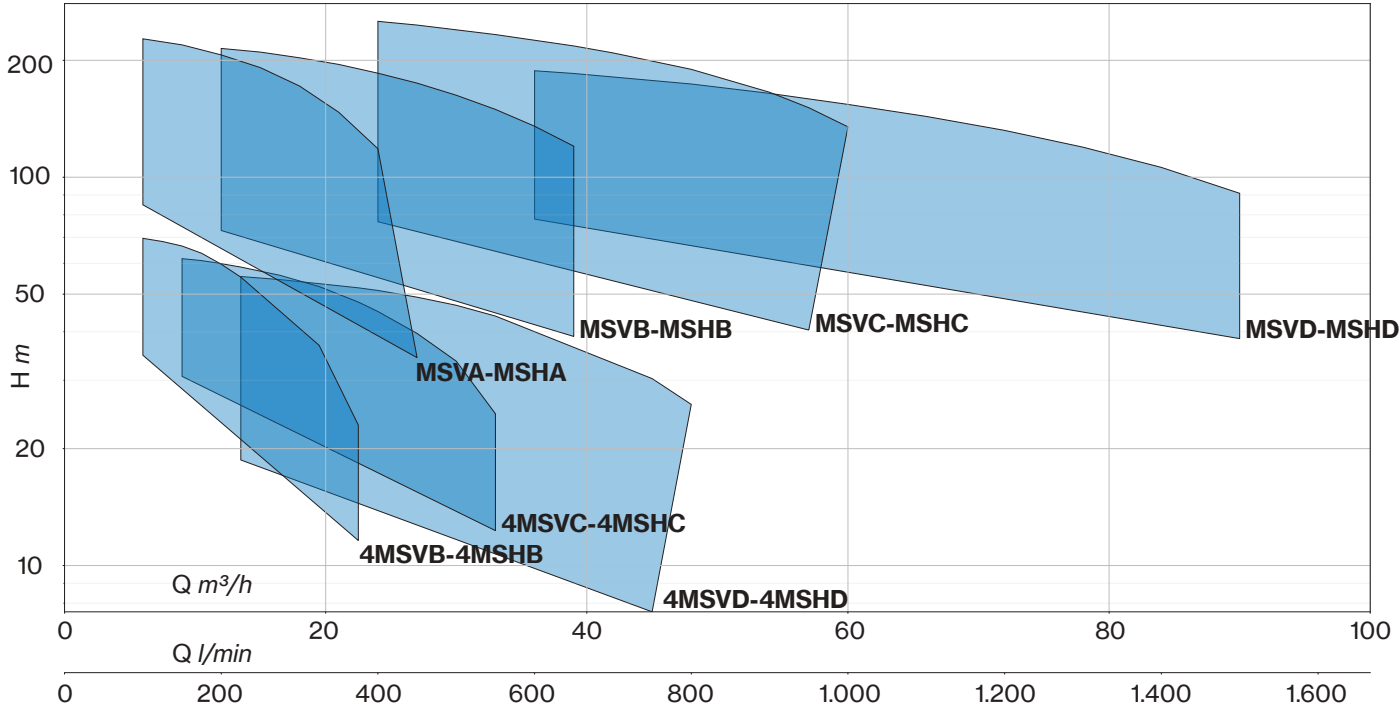

Multi-stage centrifugal pumps that guarantee high pressure. Particularly suitable for civil and industrial applications, in particular pressurisation, fire fighting and washing systems.




Construction features

Pump body	cast iron
Motor bracket	cast iron
Impeller	brass
Mechanical seal	ceramic-graphite-NBR
Shaft	stainless steel AISI 304
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 30 bar

Motor

2 and 4 poles induction motor	3~ 230/400V - 50Hz P ≤ 4kW 3~ 400/690V - 50Hz P > 4kW
Insulation class	F
Protection degree	IPX5

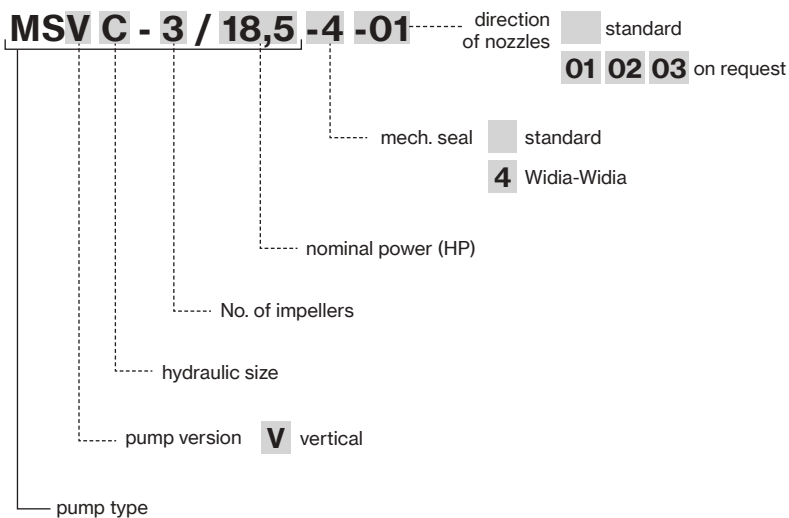

MSV ~2900 rpm

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)							
		HP	kW			0	6	9	12	15	18	21	24
							100	150	200	250	300	350	400
						H (m)							
MSVA	-3/5,5	7,5	5,5	6,0	10,1	88,2	86,3	83,7	78,6	71,2	62,6	53,4	43,2
	-4/7,5	10	7,5	7,8	13,0	118,0	116,7	113,0	106,5	96,8	85,2	73,1	59,7
	-5/9,2	12,5	9,2	9,8	16,4	148,2	145,9	138,8	130,0	119,8	105,2	90,7	73,8
	-6/11	15	11	11,8	19,6	177,5	174,2	168,9	158,9	144,2	126,7	107,9	88,0
	-8/15	20	15	15,5	26,3	237,8	233,4	227,0	213,8	194,8	171,4	146,0	119,5





TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)										
		HP	kW			0	12	15	18	21	24	27	30	33	36	39
							200	250	300	350	400	450	500	550	600	650
						H (m)										
MSVB	-2/7,5	10	7,5	8,2	13,4	74,5	72,7	71,1	68,7	66,1	62,4	58,3	53,8	49,0	43,9	38,6
	-3R/9,2	12,5	9,2	10,0	16,7	101,8	98,9	96,2	91,4	87,4	81,0	74,3	66,5	58,8	50,8	42,4
	-3/11	15	11	11,8	19,6	112,7	109,2	106,9	102,9	99,6	94,1	88,1	81,3	74,5	67,2	59,3
	-4/15	20	15	15,9	26,5	149,7	146,5	143,4	138,2	133,4	125,4	117,1	107,4	97,8	87,7	76,2
	-5/18,5	25	18,5	19,8	33,0	187,7	182,9	179,2	172,3	166,7	157,2	146,7	134,9	122,7	109,9	96,2
	-6/22	30	22	23,6	38,8	225,9	220,4	216,3	207,1	201,1	189,6	176,6	162,5	147,5	131,7	115,1

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)								
		HP	kW			0	18	24	30	36	42	48	54	57
							300	400	500	600	700	800	900	950
						H (m)								
MSVC	-2R1/11	15	11	13,0	21,4	78,4	79,5	76,3	72,3	67,6	61,8	55,2	46,9	41,8
	-3R/15	20	15	17,4	28,9	110,4	111,9	107,2	101,5	94,5	85,8	75,3	61,5	53,0
	-3/18,5	25	18,5	20,5	34,0	127,6	128,8	124,7	118,8	111,9	104,0	95,1	85,3	79,2
	-4R1/22	30	22	25,3	41,5	159,5	159,0	153,6	145,7	136,3	125,0	112,2	98,1	88,3
	-5/30	40	30	34,6	59,4	214,7	215,7	208,6	198,9	187,2	173,9	158,5	141,2	130,9
	-6/37	50	37	41,2	72,8	256,5	257,1	249,2	238,2	224,6	209,0	191,3	170,7	158,9

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)										
		HP	kW			0	30	36	42	48	54	60	66	72	78	84
							500	600	700	800	900	1000	1100	1200	1300	1400
						H (m)										
MSVD	-2/15	20	15	16,6	27,6	75,9	75,9	73,8	71,0	67,8	64,3	60,4	56,1	51,5	46,4	41,0
	-3R/18,5	25	18,5	20,3	33,7	99,6	99,6	96,0	91,7	87,5	82,7	77,1	70,8	64,0	56,6	48,5
	-3/22	30	22	23,7	39,3	113,1	113,9	110,8	106,7	102,0	96,9	91,4	85,4	78,8	71,2	63,0
	-4/30	40	30	33,0	57,2	152,0	152,5	148,9	144,1	138,7	132,4	125,1	117,0	108,1	98,8	89,0
	-5/37	50	37	40,6	71,9	189,6	191,4	186,4	179,9	173,3	165,7	157,0	147,0	136,0	124,5	112,3



MSV ~2900 rpm

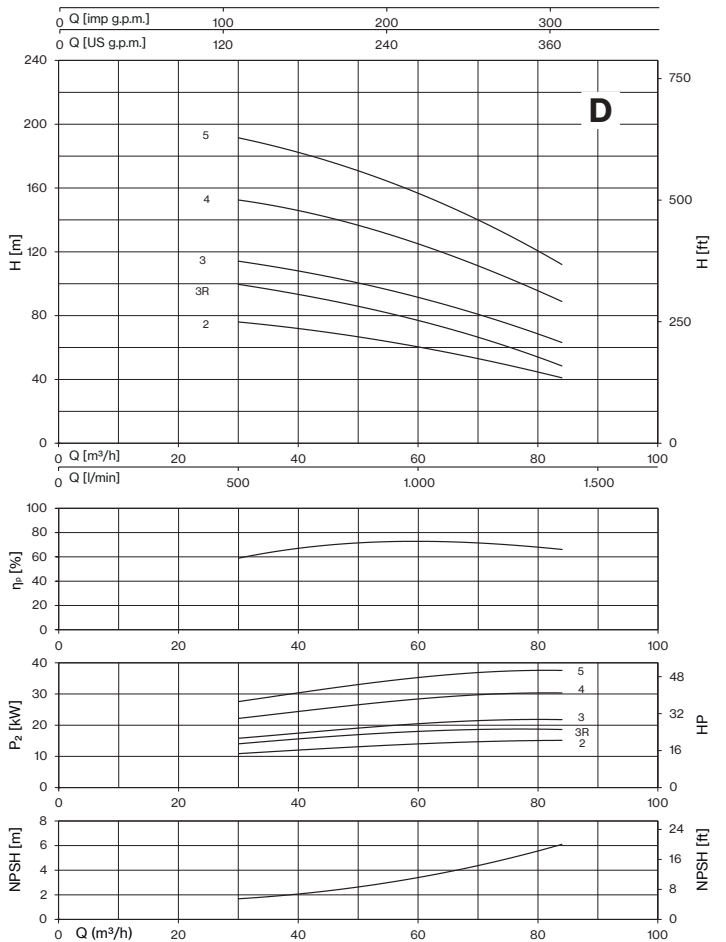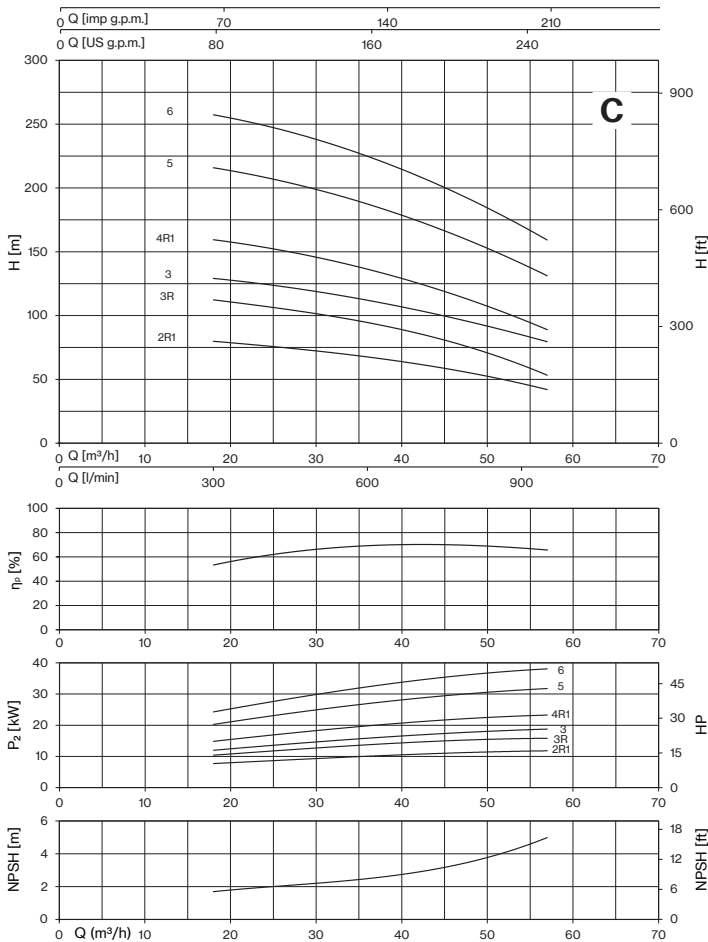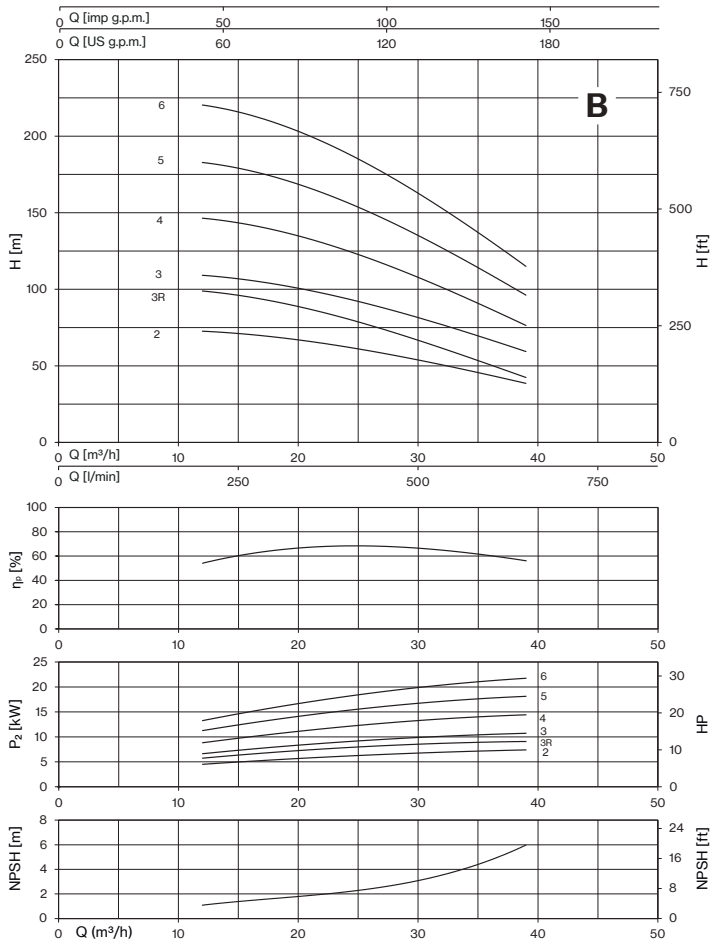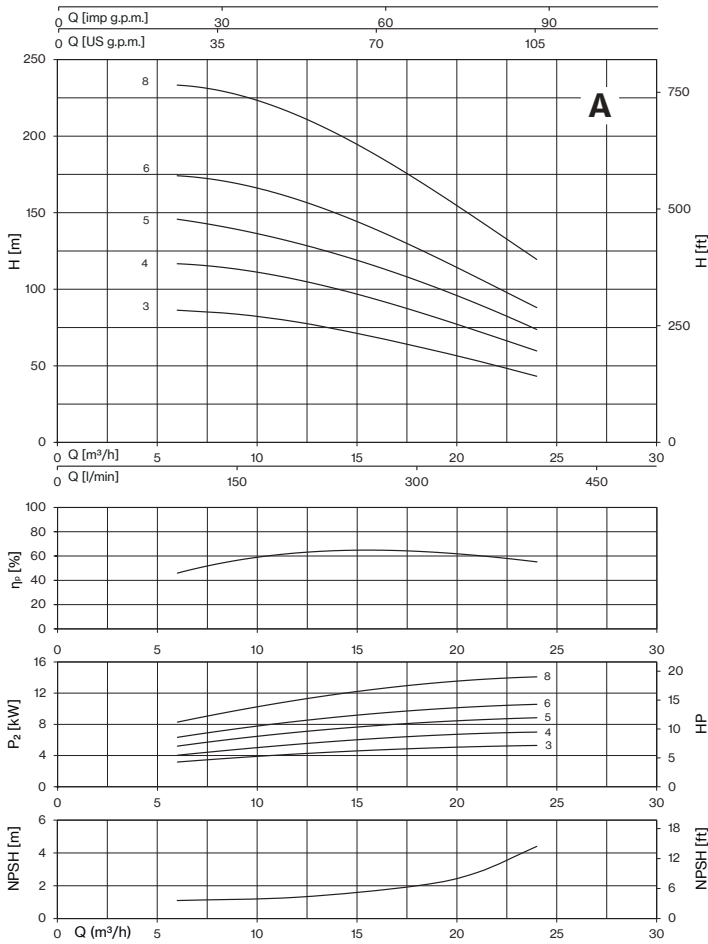

4MSV ~1450 rpm

TYPE		P2		Q (m³/h - l/min - l/s)								
				0	3	4,5	6	7,5	9	10,5	12	13,5
		HP	kW		50	75	100	125	150	175	200	225
				0,83	1,25	1,67	2,08	2,50	2,92	3,33	3,75	
				H (m)								
4MSVA	-8/2,2	3	2,2	56,0	55,7	54,2	51,3	46,3	40,2	33,4	25,7	16,2









TYPE		P2		Q (m³/h - l/min - l/s)									
				0	6	7,5	9	10,5	12	13,5	16,5	19,5	22,5
		HP	kW		100	125	150	175	200	225	275	325	375
				1,67	2,08	2,50	2,92	3,33	3,75	4,58	5,42	6,25	
				H (m)									
4MSVB	-4/2,2	3	2,2	35,4	34,8	34,0	32,8	31,2	29,3	27,0	22,0	16,9	11,6
	-5/2,2	3	2,2	44,3	43,5	42,5	41,0	39,0	36,6	33,8	27,5	21,1	14,6
	-6/3	4	3	53,2	52,2	51,3	49,9	47,8	44,7	41,5	34,4	27,7	17,2
	-8/4	5,5	4	70,9	69,6	68,3	66,5	63,7	59,7	55,3	45,9	36,9	23,0

TYPE		P2		Q (m³/h - l/min - l/s)											
				0	9	10,5	12	13,5	16,5	19,5	22,5	24	27	30	33
		HP	kW		150	175	200	225	275	325	375	400	450	500	550
				2,50	2,92	3,33	3,75	4,58	5,42	6,25	6,67	7,50	8,33	9,17	
				H (m)											
4MSVC	-3/2,2	3	2,2	30,2	30,7	30,5	30,0	29,4	27,9	26,2	24,0	22,8	20,0	16,7	12,3
	-4/3	4	3	40,1	41,0	40,6	39,9	39,1	37,3	35,0	32,0	30,3	26,9	23,1	16,4
	-5/4	5,5	4	50,1	51,3	50,8	49,9	48,8	46,6	43,8	40,0	37,8	33,0	27,8	21,0
	-6/5,5	7,5	5,5	60,3	61,7	61,0	59,9	58,7	55,9	52,3	47,7	45,1	39,6	33,6	24,6


TYPE		P2		Q (m³/h - l/min - l/s)											
				0	13,5	16,5	19,5	22,5	24	27	30	33	39	45	48
		HP	kW		225	275	325	375	400	450	500	550	650	750	800
				3,75	4,58	5,42	6,25	6,67	7,50	8,33	9,17	10,83	12,50	13,33	
				H (m)											
4MSVD	-2/2,2	3	2,2	18,3	18,7	18,4	18,0	17,5	17,2	16,5	15,7	14,7	12,3	7,6	
	-3/3	4	3	27,1	27,7	27,3	26,7	26,0	25,6	24,6	23,5	22,0	18,4	14,2	
	-4/4	5,5	4	36,2	36,8	36,1	35,2	34,1	33,6	32,3	30,6	28,7	24,2	19,2	
	-5/5,5	7,5	5,5	45,2	46,3	45,4	44,4	43,2	42,6	41,0	39,0	36,6	30,9	25,3	22,0
	-6/7,5	10	7,5	54,2	55,5	54,5	53,2	51,9	51,1	49,1	46,8	43,9	37,0	30,3	26,0



4MSV ~1450 rpm

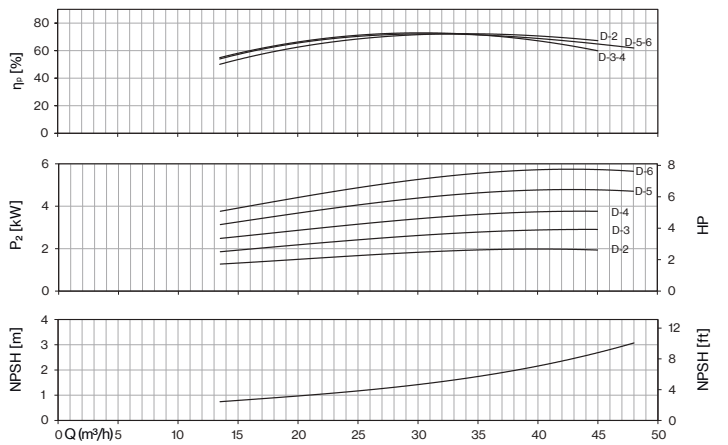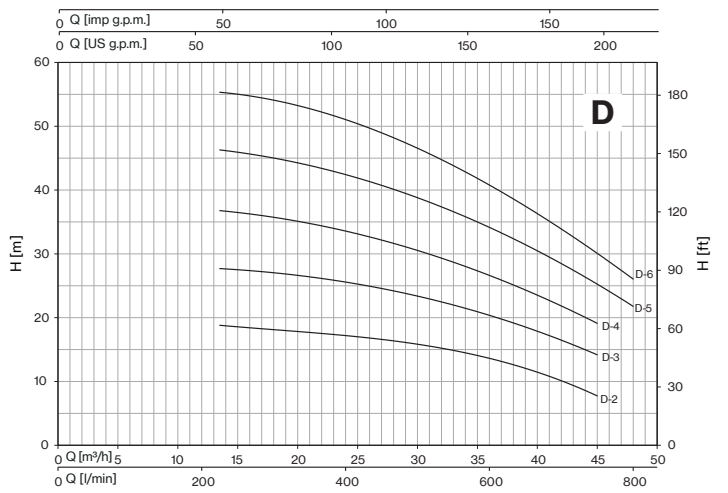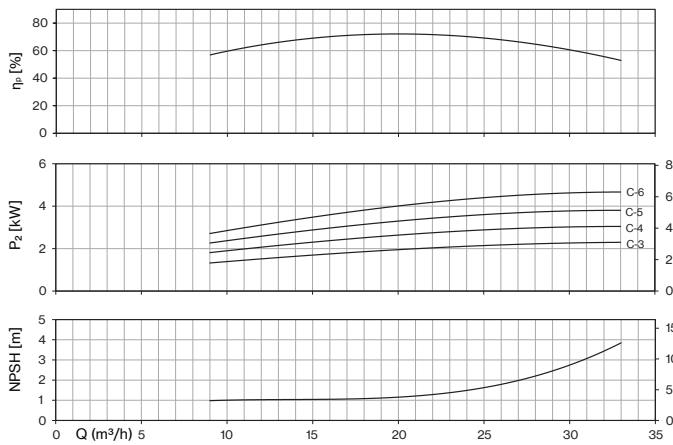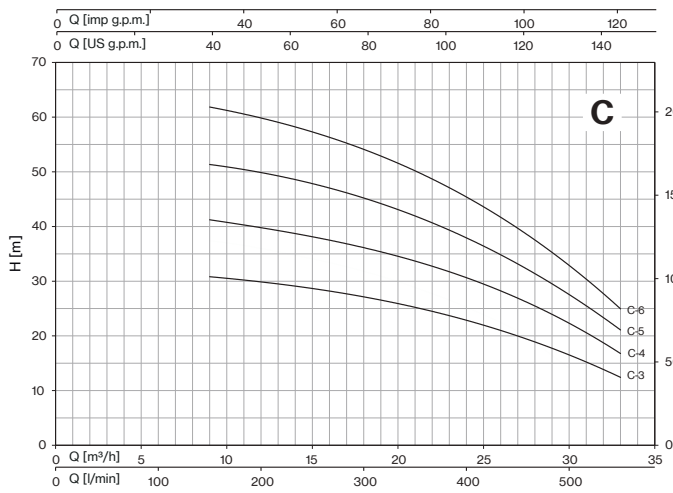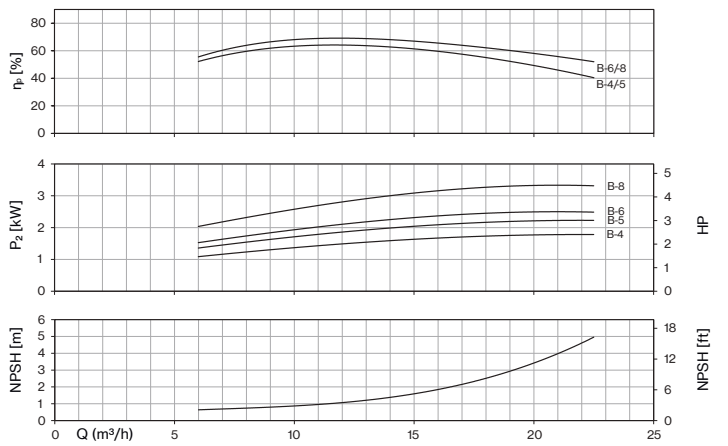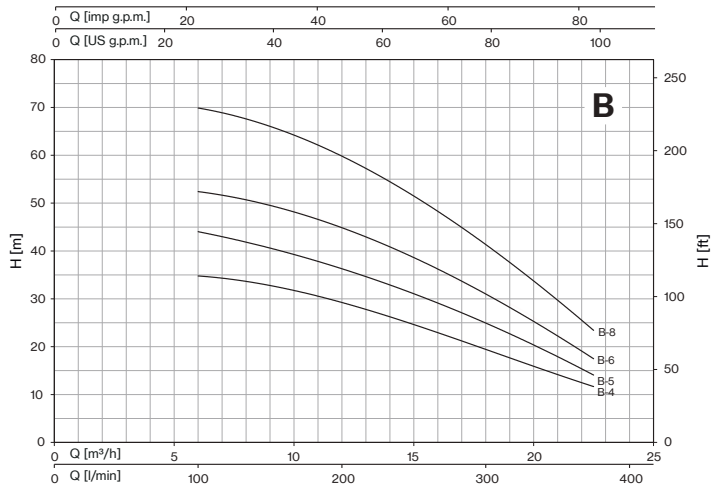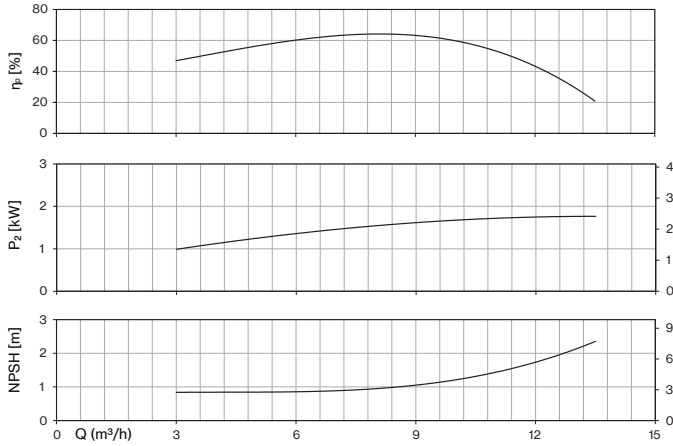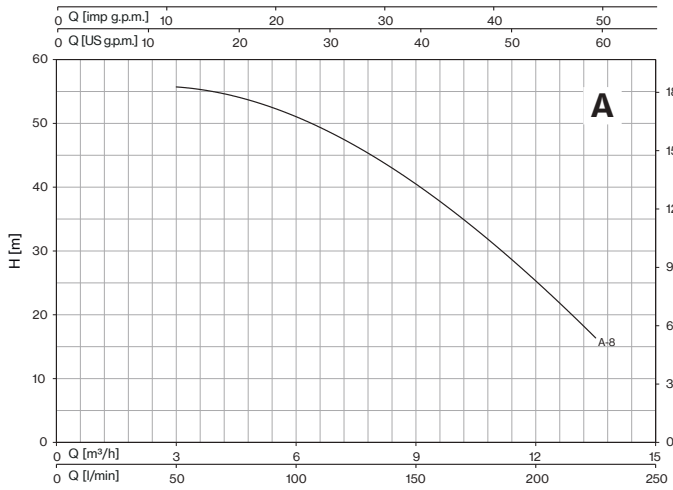


MSV-4MSV

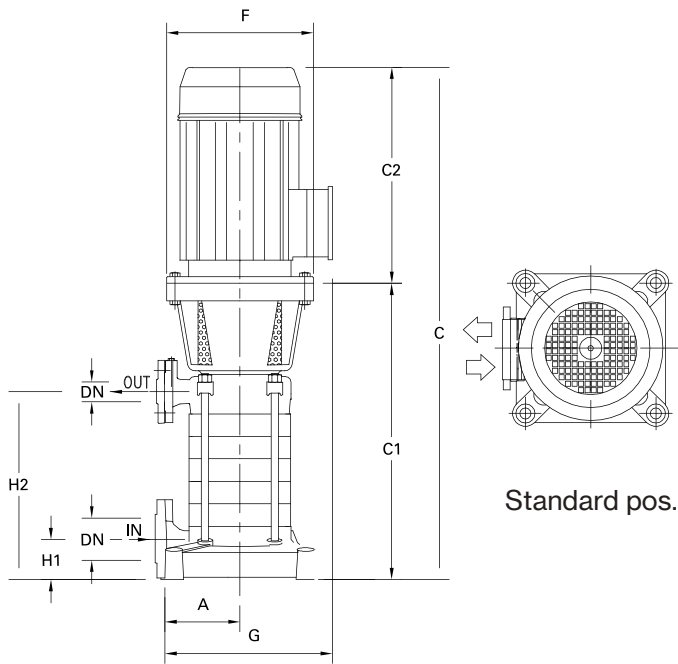

Standard pos.

STANDARD

Not available for pump type: MSVB 2/7.5, MSVC-2R1/11, MSVD-2/15, 4MSVD-2/2.2

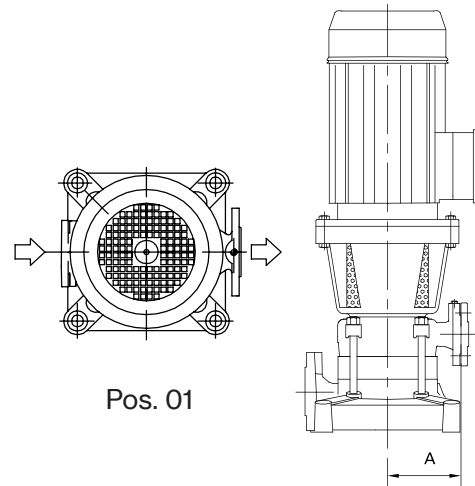


Pos. 01

STANDARD FOR:

- MSVB-2/7.5
- MSVC-2R1/11
- MSVD-2/15
- 4MSVD-2/2.2

Direction of nozzles

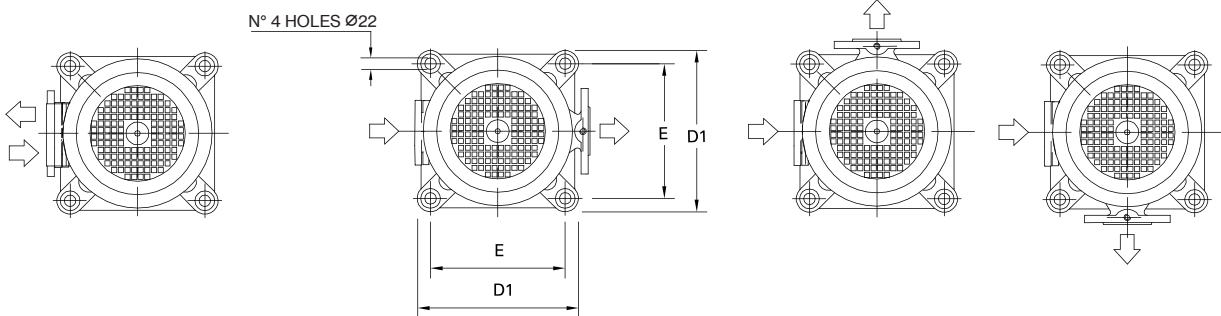

Standard pos.


Not available for pump type: MSVB 2/7.5, MSVC-2R1/11, MSVD-2/15, 4MSVD-2/2.2

Pos. 01



Pos. 02

Pos. 03


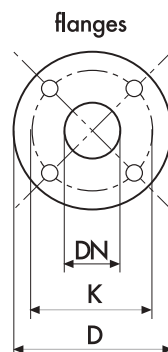
DIMENSIONS (mm)				
DN	D	K	holes	
			n°	∅
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18



MSV ~2900 rpm


TYPE	DN IN	DN OUT	N. STAGE	DIMENSIONS (mm)													
				A	C	C1	C2	D1	E	F	G	H1	H2	I	L		M
MSVA -3/5,5	(UNI PN 16) 50	(UNI PN 40) 40	3	175	921,5	544,5	377	306	256	300	355	82	255,5	1100	400	500	139,5
MSVA -4/7,5			4		972,5	595,5	377			300	355		306,5	1100	400	500	156
MSVA -5/9,2			5		1062,5	646,5	416			300	355		357,5	1100	400	500	173
MSVA -6/11			6		1113,5	697,5	416			300	355		408,5	1100	400	500	192
MSVA -8/15			8		1297,5	799,5	498			350	410		510,5	1400	500	500	259
MSVB -2/7,5	(UNI PN 16) 50	(UNI PN 40) 40	2	175	870,5	493,5	377	306	256	300	355	82	204,5	1100	400	500	136,5
MSVB -3R/9,2			3		931	515	416			300	335		255,5	1100	400	500	153,5
MSVB -3/11			3		931	515	416			300	355		255,5	1100	400	500	157,5
MSVB -4/15			4		1013	515	498			350	410		306,5	1400	500	500	220,5
MSVB -5/18,5			5		1056	515	541			350	410		357,5	1400	500	500	245
MSVB -6/22			6		1056	515	541			350	410		408,5	1400	500	500	265
MSVC -2R1/11	(UNI PN 16) 65	(UNI PN 40) 50	2	200	944	528	416	332	282	300	380	95	233	1100	400	500	167
MSVC -3R/15			3		1086	588	498			350	435		293	1100	400	500	234
MSVC -3/18,5			3		1129	588	541			350	435		293	1400	500	500	249
MSVC -4R1/22			4		1189	648	541			350	435		353	1400	500	500	273
MSVC -5/30			5		1276	708	568			350	450		413	1400	500	500	321,5
MSVC -6/37			6		1376	768	608			350	450		473	1400	500	500	360,5
MSVD -2/15	(UNI PN 16) 65	(UNI PN 40) 50	2	200	1026	528	498	332	282	350	435	95	233	1400	400	500	219
MSVD -3R/18,5			3		1129	588	541			350	435		293	1400	500	500	247
MSVD -3/22			3		1129	588	541			350	435		293	1400	500	500	257,5
MSVD -4/30			4		1216	648	568			350	450		353	1400	500	500	305
MSVD -5/37			5		1316	708	608			350	450		413	1400	500	500	342,5


4MSV ~1450 rpm

TYPE	DN IN	DN OUT	N. STAGE	DIMENSIONS (mm)													
				A	C	C1	C2	D1	E	F	G	H1	H2	I	L		M
4MSVA -8/2,2	(UNI PN 16) 50	(UNI PN 40) 40	8	175	1078	762,5	315	306	256	250	345	82	510,5	1100	400	500	183
4MSVB -4/2,2	(UNI PN 16) 50	(UNI PN 40) 40	4	175	874	558,5	315	306	256	250	345	82	306,5	1100	400	500	136
4MSVB -5/2,2			5		925	609,5	315			250	345		357,5	1400	500	500	140
4MSVB -6/3			6		976	660,5	315			250	345		408,5	1400	500	500	171
4MSVB -8/4			8		1103	762,5	340			250	368		511	1400	500	500	200
4MSVC -3/2,2	(UNI PN 16) 65	(UNI PN 40) 50	3	200	866	551	315	332	282	250	370	95	293	1100	400	500	192
4MSVC -4/3			4		926	611	315			250	370		353	1100	400	500	194
4MSVC -5/4			5		1011	671	340			250	393		413	1100	400	500	202
4MSVC -6/5,5			6		1116	731	385			300	423		473	1400	500	500	206
4MSVD -2/2,2	(UNI PN 16) 65	(UNI PN 40) 50	2	200	806	491	315	332	282	250	370	95	233	1100	400	500	135
4MSVD -3/3			3		866	551	315			250	370		293	1100	400	500	167
4MSVD -4/4			4		951	611	340			250	393		353	1100	400	500	189
4MSVD -5/5,5			5		1056	671	385			300	423		413	1100	400	500	194
4MSVD -6/7,5			6		1156	731	425			300	423		473	1400	500	500	218



MSV-4MSV Serie-Mechanical seal and bearings


MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL
					4
	MSVA-3/5,5-132S MSVB-2/7,5-132S 4MSVA-8/2,2 4MSVB-4/2,2 4MSVB-5/2,2 4MSVB-6/3 4MSVB-8/4	25mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Widia Widia NBR
	MSVC-2R1/11-132M MSVD-2/15-160M 4MSVC-3/2,2 4MSVC-4/3 4MSVC-5/4 4MSVC-6/5,5-132S 4MSVD-2/2,2 4MSVD-3/3 4MSVD-4/4 4MSVD-5/5,5-132S 4MSVD-6/7,5-132St	35mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Widia Widia NBR
	MSVA-4/7,5-132S MSVA-5/9,2-132M MSVA-6/11-132M MSVA-8/15-160M MSVB-3R/9,2-132M MSVB-3/11-132M MSVB-4/15-160M MSVB-5/18,5-160L MSVB-6/22-160L	25mm / Balanced seal	Rotating face Stationary face Elastomer	Widia Graphite NBR	Widia Widia NBR
	MSVC-3R/15-160M MSVC-3/18,5-160L MSVC-4R1/22-160L MSVC-5/30-180M MSVC-6/37-180L MSVD-3R/18,5-160L MSVD-3/22-160L MSVD-4/30-180M MSVD-5/37-180L	35mm / Balanced seal	Rotating face Stationary face Elastomer	Widia Graphite NBR	Widia Widia NBR

BEARINGS	PUMP MODEL	TYPE	
	4MSVA-8/2,2 4MSVB-4/2,2 4MSVB-5/2,2 4MSVC-3/2,2 4MSVD-2/2,2	6205-ZZ C3	6205-ZZ C3
	4MSVB-6/3 4MSVB-8/4 4MSVC-4/3 4MSVC-5/4 4MSVD-3/3 4MSVD-4/4	6206-ZZ C3	6206-ZZ C3
	MSVA-3/5,5-132S MSVA-4/7,5-132S MSVA-5/9,2-132M MSVA-6/11-132M MSVB-2/7,5-132S MSVB-3R/9,2-132M MSVB-3/11-132M MSVC-2R1/11-132M	6206-ZZ C3	6308-ZZ C3
	4MSVC-6/5,5-132S 4MSVD-5/5,5-132S 4MSVD-6/7,5-132S	6208-ZZ C3	6208-ZZ C3
	MSVA-8/15-160M MSVB-4/15-160M MSVB-5/18,5-160L MSVB-6/22-160L MSVC-3R/15-160M MSVC-3/18,5-160L MSVC-4R1/22-160L MSVD-2/15-160M MSVD-3R/18,5-160L MSVD-3/22-160L	6308-ZZ C3	6309-ZZ C3
	MSVC-5/30-180M MSVC-6/37-180L MSVD-4/30-180M MSVD-5/37-180L	6309-ZZ C3	3310-ZZ C3



MSH-4MSH



Industrial Line

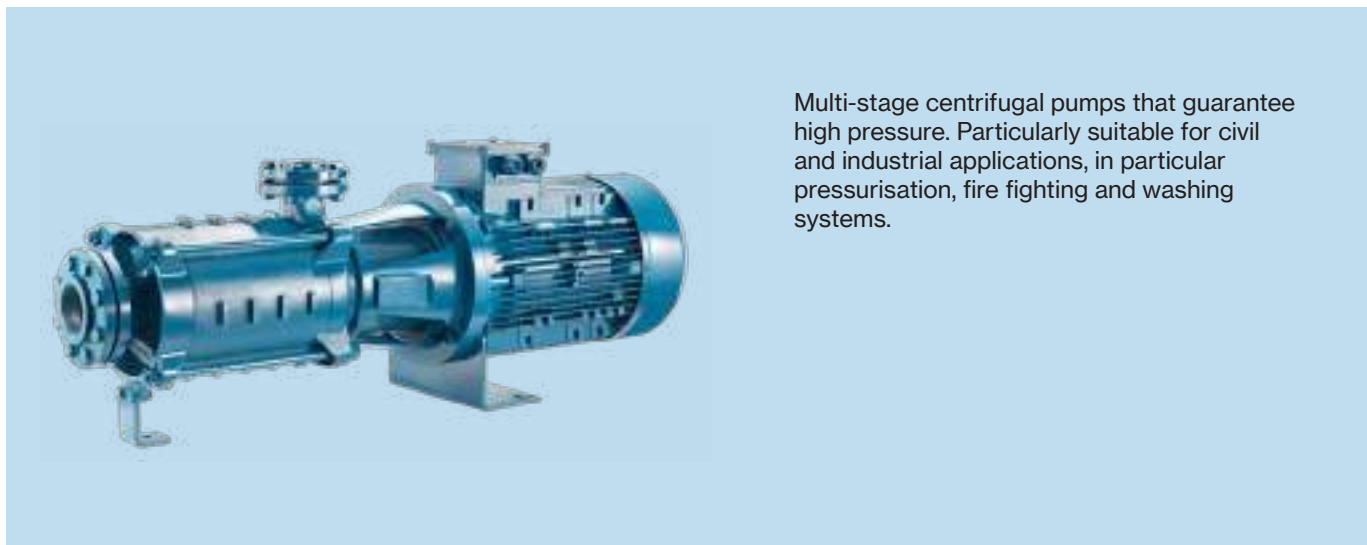

Multi-stage centrifugal pumps that guarantee high pressure. Particularly suitable for civil and industrial applications, in particular pressurisation, fire fighting and washing systems.

Construction features	
Pump body	cast iron
Motor bracket	cast iron
Impeller	brass
Mechanical seal	ceramic-graphite-NBR
Shaft	stainless steel AISI 304
Liquid temperature	-10 ÷ +90 °C
Operating pressure	max 30 bar

Motor	
2 and 4 poles induction motor	3~ 230/400V - 50Hz P ≤ 4kW 3~ 400/690V - 50Hz P > 4kW
Insulation class	F
Protection degree	IPX5

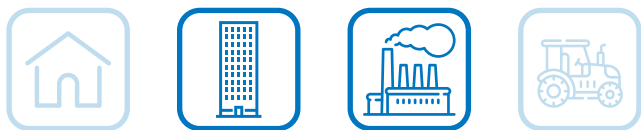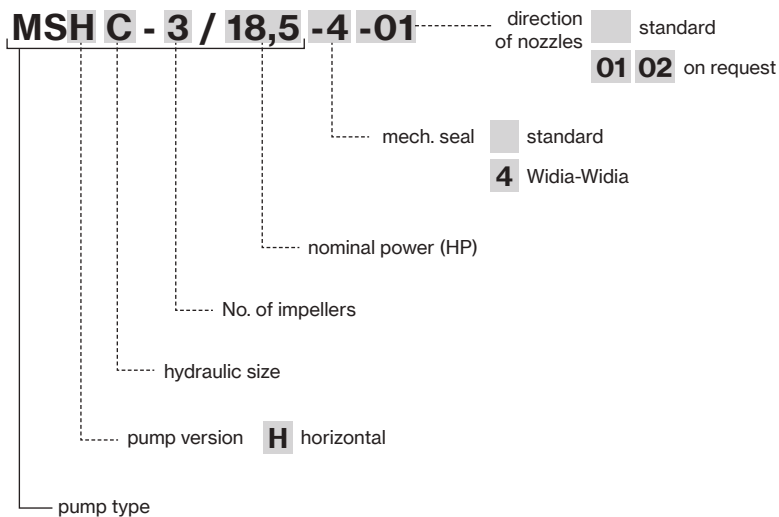

MSH ~2900 rpm

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)							
						0	6	9	12	15	18	21	24
		HP	kW				100	150	200	250	300	350	400
						H (m)							
MSHA	-3/5,5	7,5	5,5	6,0	10,1	88,2	86,3	83,7	78,6	71,2	62,6	53,4	43,2
	-4/7,5	10	7,5	7,8	13,0	118,0	116,7	113,0	106,5	96,8	85,2	73,1	59,7
	-5/9,2	12,5	9,2	9,8	16,4	148,2	145,9	138,8	130,0	119,8	105,2	90,7	73,8
	-6/11	15	11	11,8	19,6	177,5	174,2	168,9	158,9	144,2	126,7	107,9	88,0
	-8/15	20	15	15,5	26,3	237,8	233,4	227,0	213,8	194,8	171,4	146,0	119,5





TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)										
						0	12	15	18	21	24	27	30	33	36	39
		HP	kW				200	250	300	350	400	450	500	550	600	650
						H (m)										
MSHB	-2/7,5	10	7,5	8,2	13,4	74,5	72,7	71,1	68,7	66,1	62,4	58,3	53,8	49,0	43,9	38,6
	-3R/9,2	12,5	9,2	10,0	16,7	101,8	98,9	96,2	91,4	87,4	81,0	74,3	66,5	58,8	50,8	42,4
	-3/11	15	11	11,8	19,6	112,7	109,2	106,9	102,9	99,6	94,1	88,1	81,3	74,5	67,2	59,3
	-4/15	20	15	15,9	26,5	149,7	146,5	143,4	138,2	133,4	125,4	117,1	107,4	97,8	87,7	76,2
	-5/18,5	25	18,5	19,8	33,0	187,7	182,9	179,2	172,3	166,7	157,2	146,7	134,9	122,7	109,9	96,2
	-6/22	30	22	23,6	38,8	225,9	220,4	216,3	207,1	201,1	189,6	176,6	162,5	147,5	131,7	115,1

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)								
						0	18	24	30	36	42	48	54	57
		HP	kW				300	400	500	600	700	800	900	950
						H (m)								
MSHC	-2R1/11	15	11	13,0	21,4	78,4	79,5	76,3	72,3	67,6	61,8	55,2	46,9	41,8
	-3R/15	20	15	17,4	28,9	110,4	111,9	107,2	101,5	94,5	85,8	75,3	61,5	53,0
	-3/18,5	25	18,5	20,5	34,0	127,6	128,8	124,7	118,8	111,9	104,0	95,1	85,3	79,2
	-4R1/22	30	22	25,3	41,5	159,5	159,0	153,6	145,7	136,3	125,0	112,2	98,1	88,3
	-5/30	40	30	34,6	59,4	214,7	215,7	208,6	198,9	187,2	173,9	158,5	141,2	130,9
	-6/37	50	37	41,2	72,8	256,5	257,1	249,2	238,2	224,6	209,0	191,3	170,7	158,9

TYPE		P2		P1 kW	I(A) 3- 400V	Q (m³/h - l/min - l/s)										
						0	30	36	42	48	54	60	66	72	78	84
		HP	kW				500	600	700	800	900	1000	1100	1200	1300	1400
						H (m)										
MSHD	-2/15	20	15	16,6	27,6	75,9	75,9	73,8	71,0	67,8	64,3	60,4	56,1	51,5	46,4	41,0
	-3R/18,5	25	18,5	20,3	33,7	99,6	99,6	96,0	91,7	87,5	82,7	77,1	70,8	64,0	56,6	48,5
	-3/22	30	22	23,7	39,3	113,1	113,9	110,8	106,7	102,0	96,9	91,4	85,4	78,8	71,2	63,0
	-4/30	40	30	33,0	57,2	152,0	152,5	148,9	144,1	138,7	132,4	125,1	117,0	108,1	98,8	89,0
	-5/37	50	37	40,6	71,9	189,6	191,4	186,4	179,9	173,3	165,7	157,0	147,0	136,0	124,5	112,3



MSH ~2900 rpm

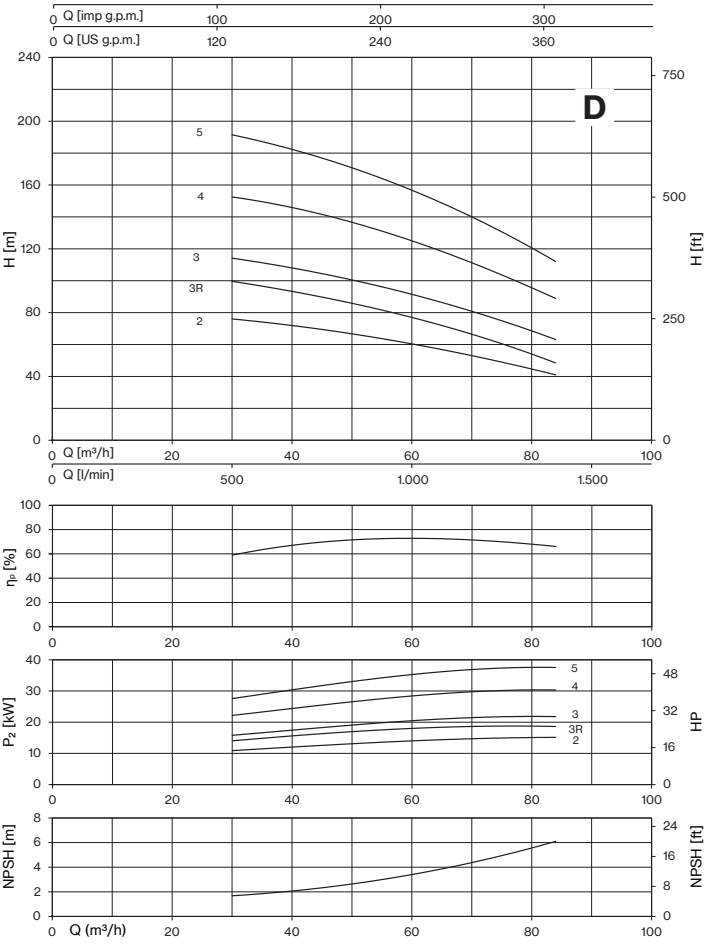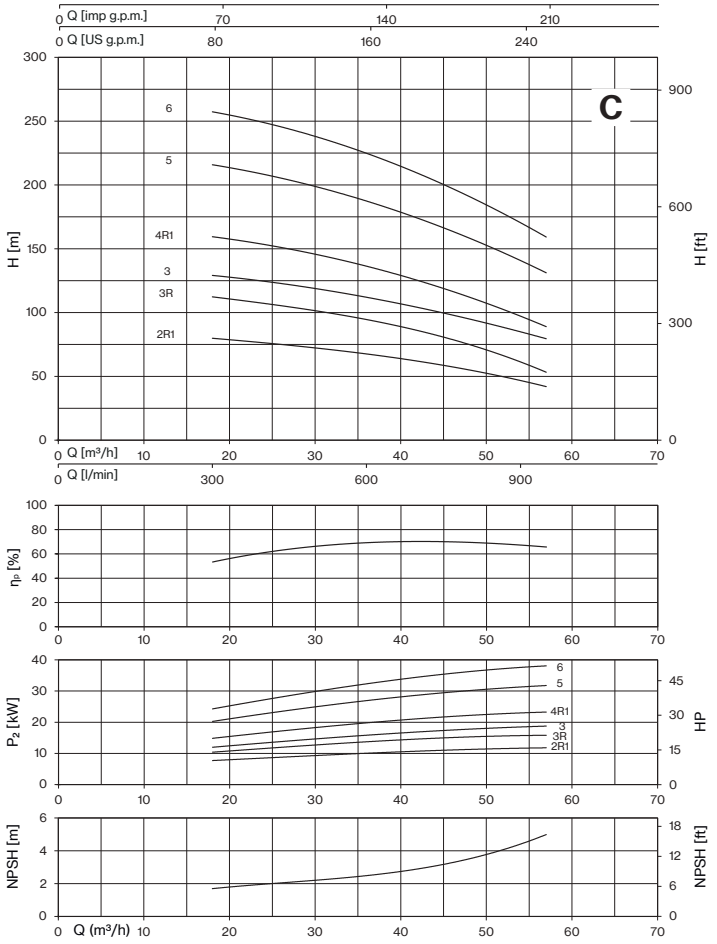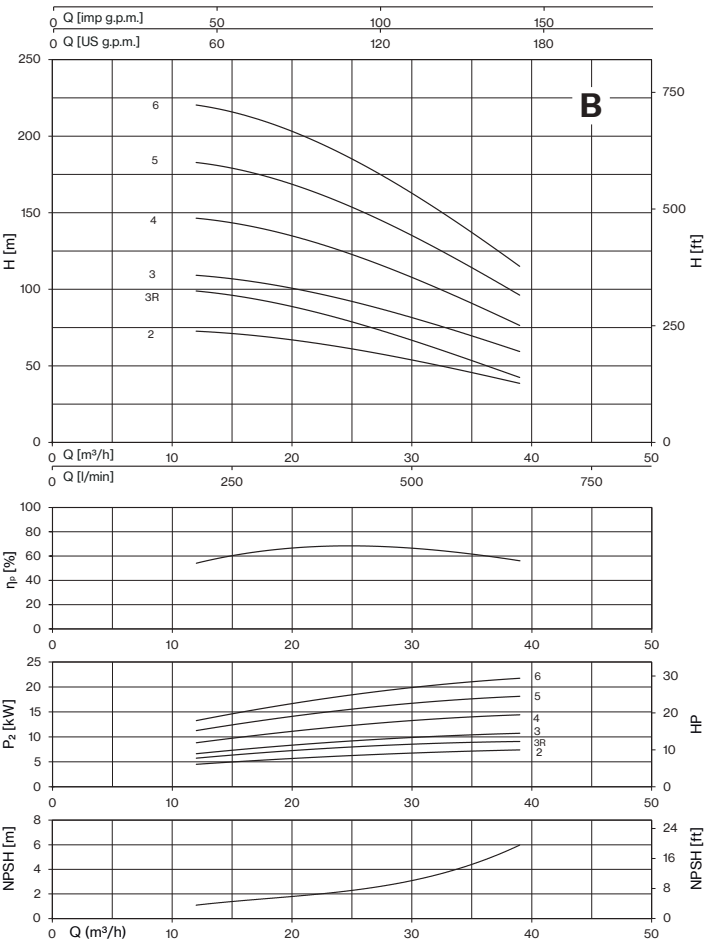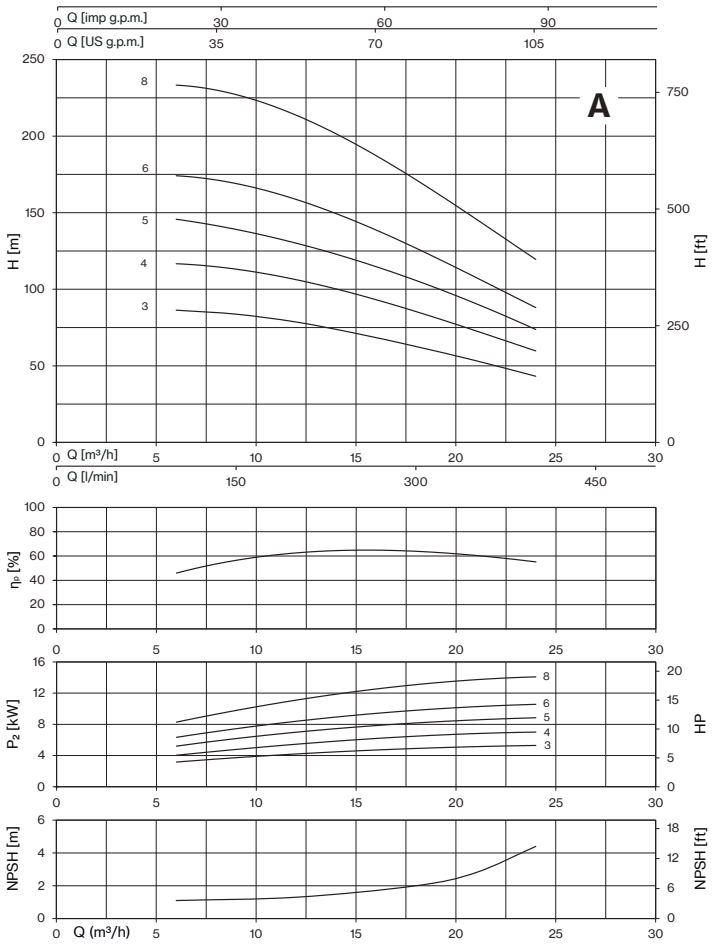

4MSH ~1450 rpm

TYPE		P2		Q (m³/h - l/min - l/s)									
				0	3	4,5	6	7,5	9	10,5	12	13,5	
		HP	kW		50	75	100	125	150	175	200	225	
				0,83	1,25	1,67	2,08	2,50	2,92	3,33	3,75	H (m)	
4MSHA	-8/2,2	3	2,2	56,0	55,7	54,2	51,3	46,3	40,2	33,4	25,7	16,2	









TYPE		P2		Q (m³/h - l/min - l/s)										
				0	6	7,5	9	10,5	12	13,5	16,5	19,5	22,5	
		HP	kW		100	125	150	175	200	225	275	325	375	
				1,67	2,08	2,50	2,92	3,33	3,75	4,58	5,42	6,25	H (m)	
4MSHB	-4/2,2	3	2,2	35,4	34,8	34,0	32,8	31,2	29,3	27,0	22,0	16,9	11,6	
	-5/2,2	3	2,2	44,3	43,5	42,5	41,0	39,0	36,6	33,8	27,5	21,1	14,6	
	-6/3	4	3	53,2	52,2	51,3	49,9	47,8	44,7	41,5	34,4	27,7	17,2	
	-8/4	5,5	4	70,9	69,6	68,3	66,5	63,7	59,7	55,3	45,9	36,9	23,0	

TYPE		P2		Q (m³/h - l/min - l/s)												
				0	9	10,5	12	13,5	16,5	19,5	22,5	24	27	30	33	
		HP	kW		150	175	200	225	275	325	375	400	450	500	550	
				2,50	2,92	3,33	3,75	4,58	5,42	6,25	6,67	7,50	8,33	9,17	H (m)	
4MSHC	-3/2,2	3	2,2	30,2	30,7	30,5	30,0	29,4	27,9	26,2	24,0	22,8	20,0	16,7	12,3	
	-4/3	4	3	40,1	41,0	40,6	39,9	39,1	37,3	35,0	32,0	30,3	26,9	23,1	16,4	
	-5/4	5,5	4	50,1	51,3	50,8	49,9	48,8	46,6	43,8	40,0	37,8	33,0	27,8	21,0	
	-6/5,5	7,5	5,5	60,3	61,7	61,0	59,9	58,7	55,9	52,3	47,7	45,1	39,6	33,6	24,6	


TYPE		P2		Q (m³/h - l/min - l/s)												
				0	13,5	16,5	19,5	22,5	24	27	30	33	39	45	48	
		HP	kW		225	275	325	375	400	450	500	550	650	750	800	
				3,75	4,58	5,42	6,25	6,67	7,50	8,33	9,17	10,83	12,50	13,33	H (m)	
4MSHD	-2/2,2	3	2,2	18,3	18,7	18,4	18,0	17,5	17,2	16,5	15,7	14,7	12,3	7,6		
	-3/3	4	3	27,1	27,7	27,3	26,7	26,0	25,6	24,6	23,5	22,0	18,4	14,2		
	-4/4	5,5	4	36,2	36,8	36,1	35,2	34,1	33,6	32,3	30,6	28,7	24,2	19,2		
	-5/5,5	7,5	5,5	45,2	46,3	45,4	44,4	43,2	42,6	41,0	39,0	36,6	30,9	25,3	22,0	
	-6/7,5	10	7,5	54,2	55,5	54,5	53,2	51,9	51,1	49,1	46,8	43,9	37,0	30,3	26,0	




4MSH ~1450 rpm

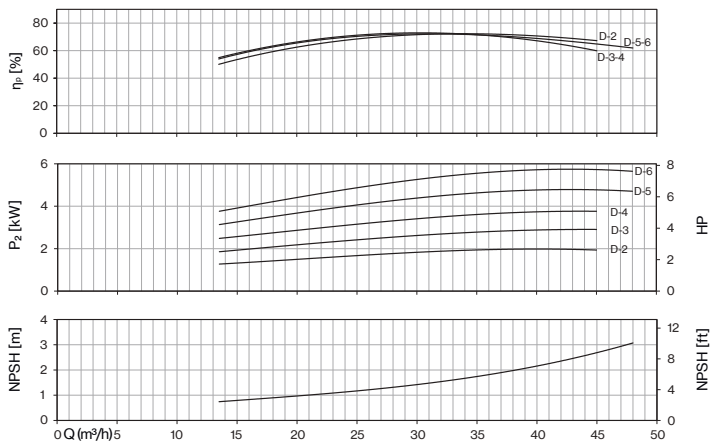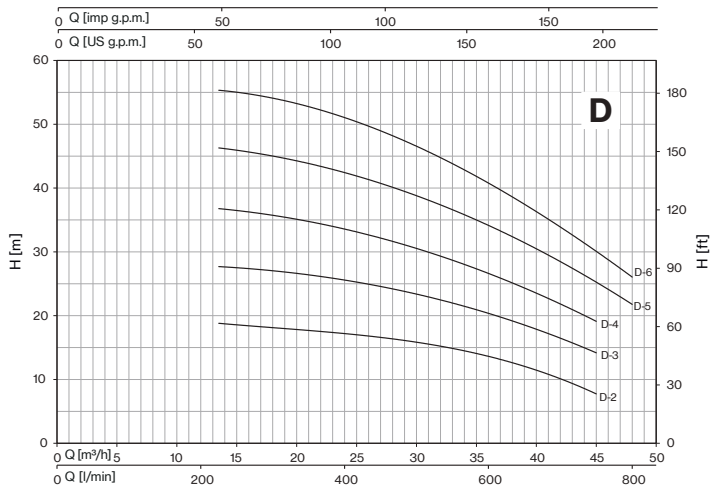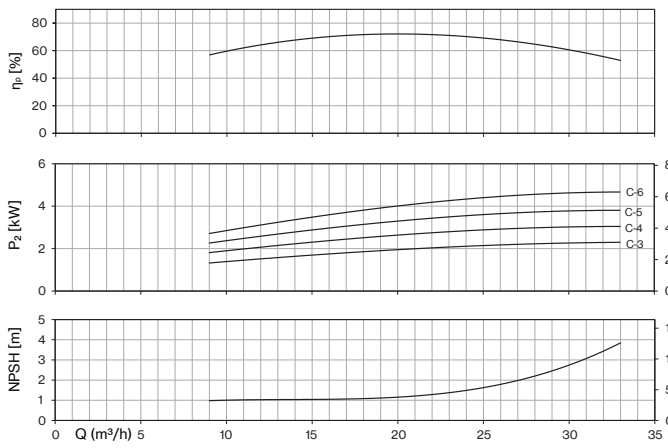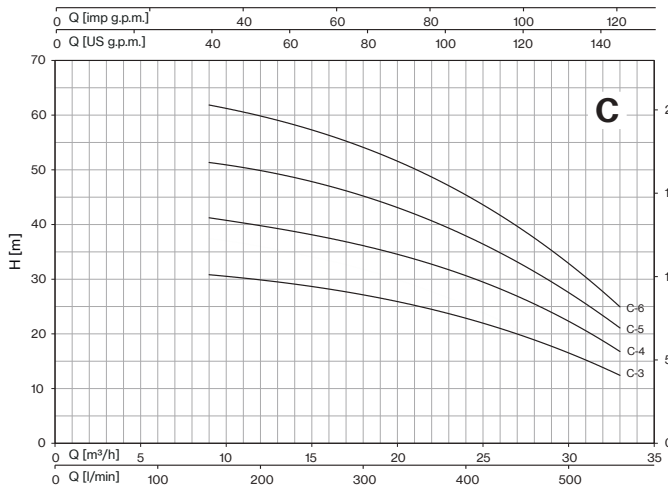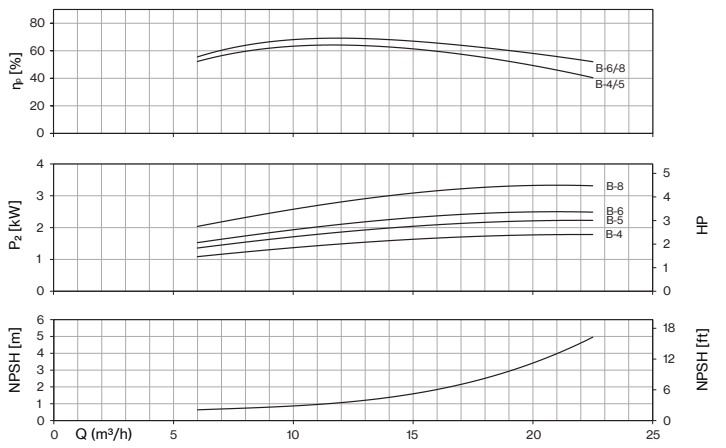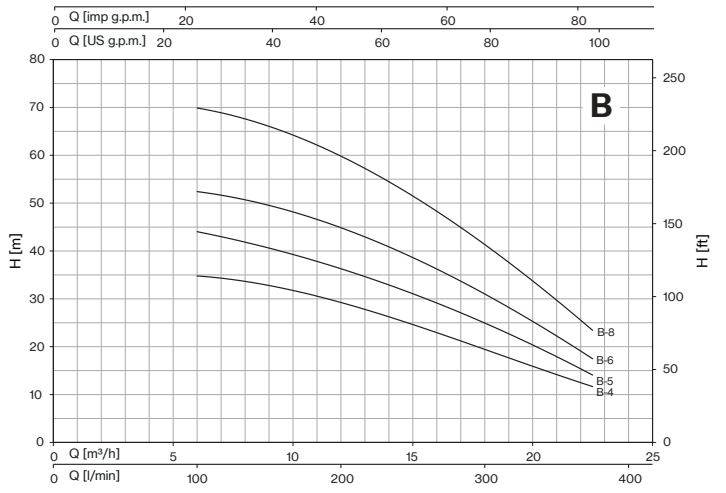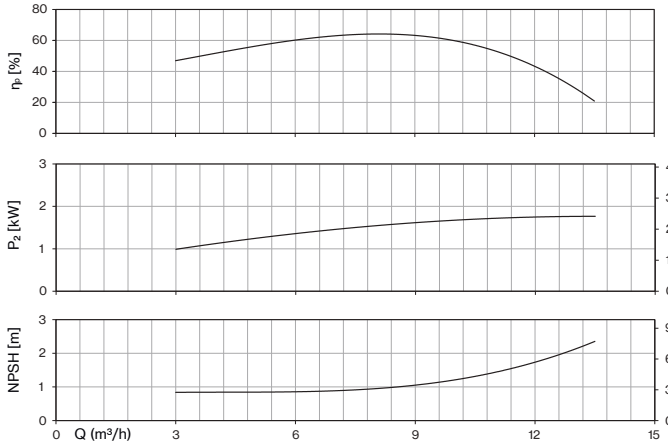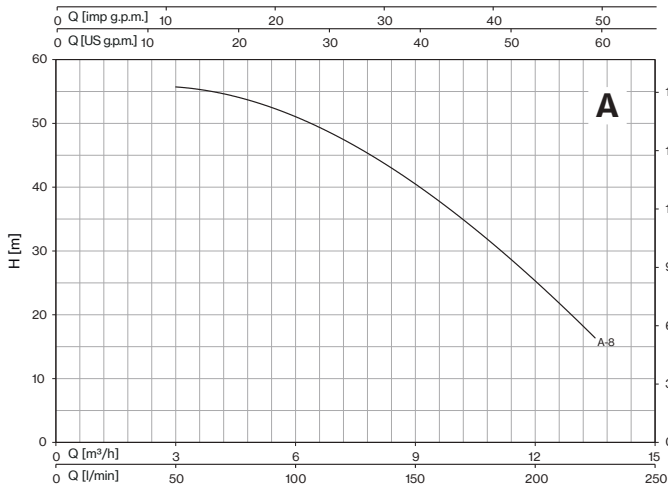


MSH-4MSH

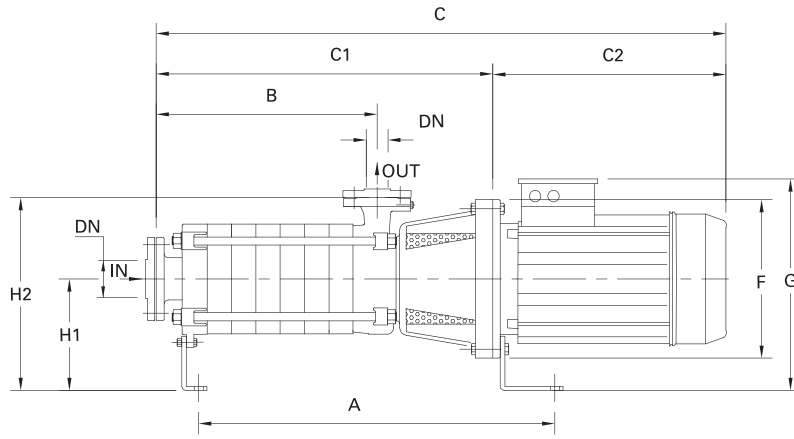

STANDARD

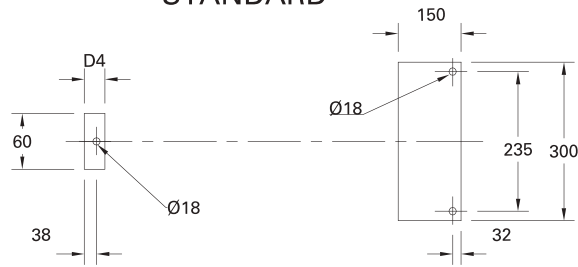

Direction of nozzles

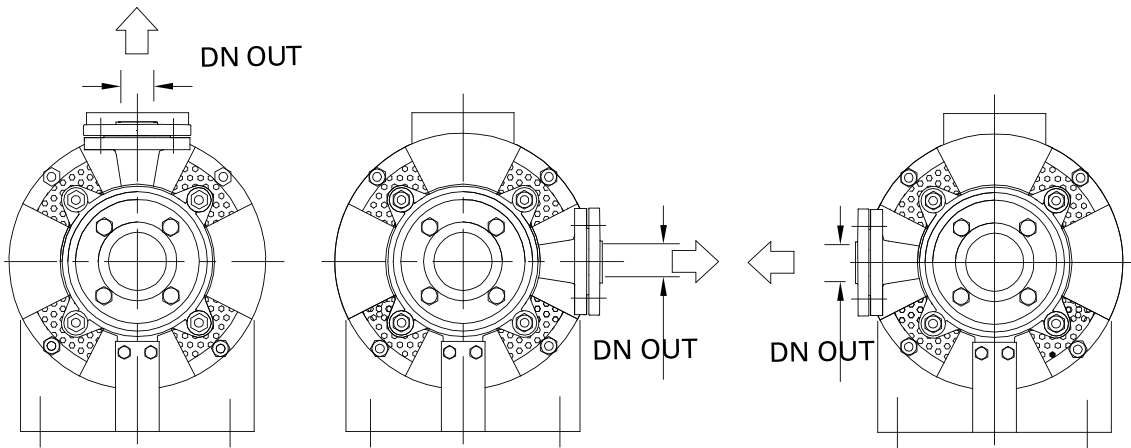


STANDARD


Pos. 01

Pos. 02


DIMENSIONS (mm)				
DN	D	K	holes	
			n°	ø
40	150	110	4	18
50	165	125	4	18
65	185	145	4	18
80	200	160	8	18

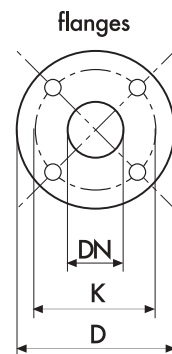

MSH ~2900 rpm


TYPE	DN IN	DN OUT	N. STAGE	DIMENSIONS (mm)												Kg	
				A	B	C	C1	C2	F	G	H1	H2	D4	I	L		M
MSHA -3/5,5	(UNI PN 16) 65	(UNI PN 40) 40	3	604	256,5	922,5	545,5	377	300	425	245	420	70	1100	400	500	140,5
MSHA -4/7,5			4	655	307,5	973,5	596,5	377	300	425				1100	400	500	157
MSHA -5/9,2			5	706	358,5	1063,5	647,5	416	300	425				1100	400	500	173,5
MSHA -6/11			6	757	409,5	1114,5	698,5	416	300	425				1100	400	500	192,5
MSHA -8/15			8	859	511,5	1298,5	800,5	498	350	480				1400	500	500	259,5
MSHB -2/7,5	(UNI PN 16) 65	(UNI PN 40) 40	2	553	205,5	531,5	494,5	37	300	425	245	420	70	1100	400	500	137
MSHB -3R/9,2			3	604	256,5	961,5	545,5	416	300	425				1100	400	500	154
MSHB -3/11			3	604	256,5	961,5	545,5	416	300	425				1100	400	500	158
MSHB -4/15			4	655	307,5	1094,5	596,5	498	350	480				1400	500	500	220,5
MSHB -5/18,5			5	706	358,5	1188,5	647,5	541	350	480				1400	500	500	245
MSHB -6/22			6	757	409,5	1239,5	698,5	541	350	480				1400	500	500	265
MSHC -2R1/11	(UNI PN 16) 80	(UNI PN 40) 50	2	596	243	954	538	416	300	425	245	445	60	1100	400	500	165
MSHC -3R/15			3	656	303	1096	598	498	350	480				1100	400	500	231,5
MSHC -3/18,5			3	656	303	1139	598	541	350	480				1400	500	500	246,5
MSHC -4R1/22			4	716	363	1199	658	541	350	480				1400	500	500	270,5
MSHC -5/30			5	776	423	1286	718	568	350	495				1400	500	500	319
MSHC -6/37			6	836	483	1386	778	608	350	495				1400	500	500	358
MSHD -2/15	(UNI PN 10) 80	(UNI PN 40) 50	2	596	243	1036	538	498	350	480	245	445	60	1400	400	500	217
MSHD -3R/18,5			3	656	303	1139	598	541	350	480				1400	500	500	245
MSHD -3/22			3	656	303	1139	598	541	350	480				1400	500	500	255,5
MSHD -4/30			4	716	363	1226	658	568	350	495				1400	500	500	303
MSHD -5/37			5	776	423	1326	718	608	350	495				1400	500	500	340,5


4MSH ~1450 rpm

TYPE	DN IN	DN OUT	N. STAGE	DIMENSIONS (mm)												Kg	
				A	B	C	C1	C2	F	G	H1	H2	D4	I	L		M
4MSHA -8/2,2	(UNI PN 16) 65	(UNI PN 40) 40	8	822	511,5	1079	763,5	315	250	415	245	420	70	1100	400	500	183
4MSHB -4/2,2	(UNI PN 16) 65	(UNI PN 40) 40	4	618	511,5	875	559,5	315	250	415	245	420	70	1100	400	500	136
4MSHB -5/2,2			5	670	307,5	926	610,5	315	250	415				1400	500	500	140
4MSHB -6/3			6	720	358,5	977	661,5	315	250	415				1400	500	500	171
4MSHB -8/4			8	720	409,5	1104	763,5	340	250	438				1400	500	500	200
4MSHC -3/2,2	(UNI PN 16) 80	(UNI PN 40) 50	3	620	303	876	561	315	250	415	245	445	60	1100	400	500	192
4MSHC -4/3			4	680	363	936	621	315	250	415				1100	400	500	194
4MSHC -5/4			5	740	423	1021	681	340	250	438				1100	400	500	202
4MSHC -6/5,5			6	800	483	1126	741	385	300	468				1400	500	500	206
4MSHD -2/2,2	(UNI PN 10) 80	(UNI PN 40) 50	2	560	243	816	501	315	250	415	245	445	60	1100	400	500	135
4MSHD -3/3			3	620	303	876	561	315	250	415				1100	400	500	167
4MSHD -4/4			4	680	363	961	621	340	250	438				1100	400	500	189
4MSHD -5/5,5			5	740	423	1066	681	385	300	468				1100	400	500	194
4MSHD -6/7,5			6	887	483	1166	741	425	300	468				1400	500	500	218




MSH-4MSH Serie-Mechanical seal and bearings

MECHANICAL SEAL	PUMP MODEL	SHAFT Ø		STANDARD MATERIAL	OPTIONAL
					4
	MSHA-3/5,5-132S MS HB-2/7,5-132S 4MSHA-8/2,2 4MSHB-4/2,2 4MSHB-5/2,2 4MSHB-6/3 4MSHB-8/4	25mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Widia Widia NBR
	MSHC-2R1/11-132M MS HD-2/15-160M 4MSHC-3/2,2 4MSHC-4/3 4MSHC-5/4 4MSHC-6/5,5-132S 4MSHD-2/2,2 4MSHD-3/3 4MSHD-4/4 4MSHD-5/5,5-132S 4MSHD-6/7,5-132St	35mm	Rotating face Stationary face Elastomer	Ceramic Graphite NBR	Widia Widia NBR
	MSHA-4/7,5-132S MSHA-5/9,2-132M MSHA-6/11-132M MSHA-8/15-160M MS HB-3R/9,2-132M MS HB-3/11-132M MS HB-4/15-160M MS HB-5/18,5-160L MS HB-6/22-160L	25mm / Balanced seal	Rotating face Stationary face Elastomer	Widia Graphite NBR	Widia Widia NBR
	MSHC-3R/15-160M MS HC-3/18,5-160L MS HC-4R1/22-160L MS HC-5/30-180M MS HC-6/37-180L MS HD-3R/18,5-160L MS HD-3/22-160L MS HD-4/30-180M MS HD-5/37-180L	35mm / Balanced seal	Rotating face Stationary face Elastomer	Widia Graphite NBR	Widia Widia NBR

BEARINGS	PUMP MODEL	TYPE	
	4MSHA-8/2,2 4MSHB-4/2,2 4MSHB-5/2,2 4MSHC-3/2,2 4MSHD-2/2,2	6205-ZZ C3	6205-ZZ C3
	4MSHB-6/3 4MSHB-8/4 4MSHC-4/3 4MSHC-5/4 4MSHD-3/3 4MSHD-4/4	6206-ZZ C3	6206-ZZ C3
	MSHA-3/5,5-132S MSHA-4/7,5-132S MSHA-5/9,2-132M MSHA-6/11-132M MS HB-2/7,5-132S MS HB-3R/9,2-132M MS HB-3/11-132M MS HC-2R1/11-132M	6206-ZZ C3	6308-ZZ C3
	4MSHC-6/5,5-132S 4MSHD-5/5,5-132S 4MSHD-6/7,5-132S	6208-ZZ C3	6208-ZZ C3
	MSHA-8/15-160M MS HB-4/15-160M MS HB-5/18,5-160L MS HB-6/22-160L MS HC-3R/15-160M MS HC-3/18,5-160L MS HC-4R1/22-160L MS HD-2/15-160M MS HD-3R/18,5-160L MS HD-3/22-160L	6308-ZZ C3	6309-ZZ C3
	MSHC-5/30-180M MS HC-6/37-180L MS HD-4/30-180M MS HD-5/37-180L	6309-ZZ C3	3310-ZZ C3



HP SERIES

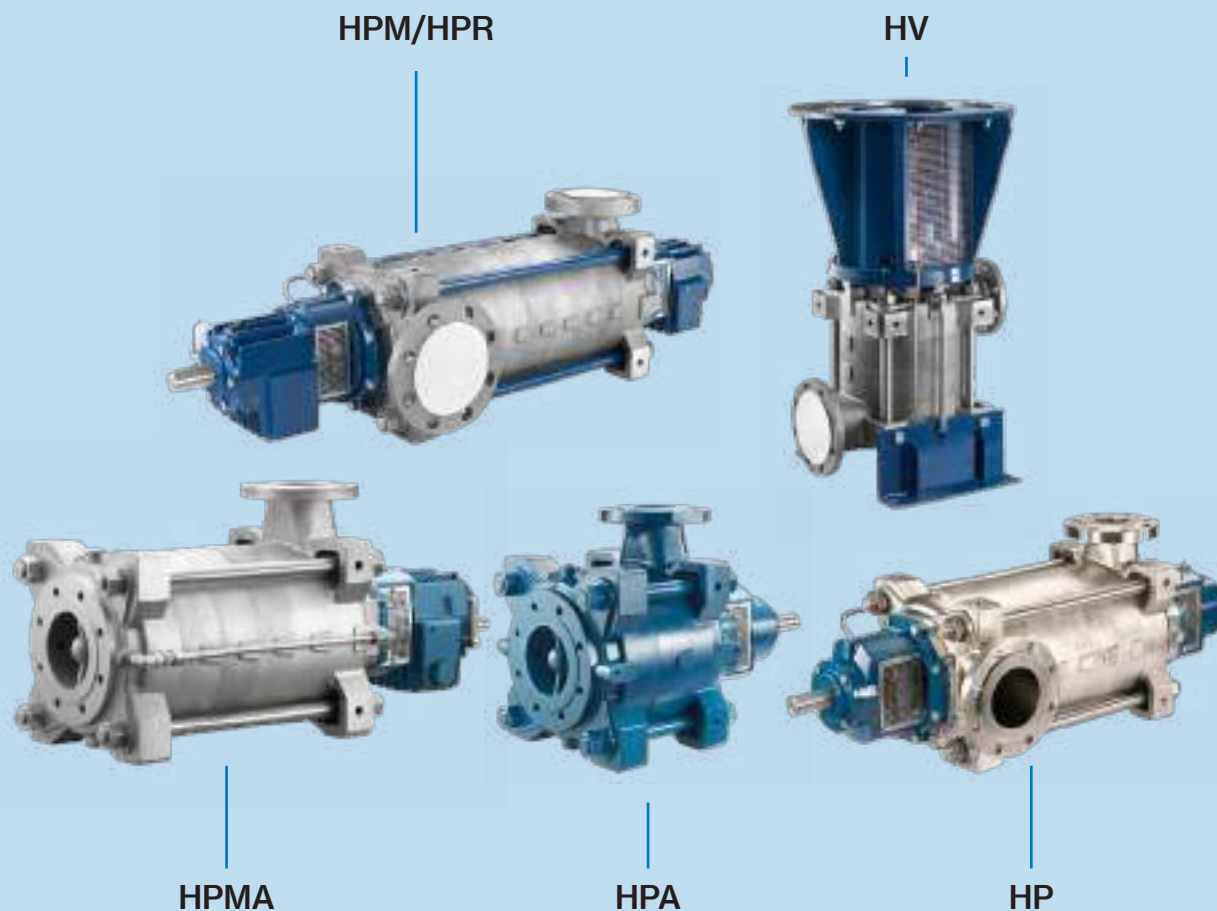



The multistage centrifugal pumps belonging to the HP series have a radial cross section, allowing an horizontal or vertical installation. The flanges of the suction and discharge ports are according to the EN or ANSI standards, these ports can operate radially and can be rotated 90°, in the HP, HPM and HPR models, or have an axial suction port for the HPA and HPMA models. This family of pumps is designed to operate in heavy duty conditions and with very high pressures (up to 100 Bar for the HPR versions) and with temperatures up to 180°C. The great choice of materials, the different kinds of sealing on the shaft and the various lubrication solutions for the pump's bearings, make this line very versatile and ideal for many uses in the industrial, energy and water processing fields.


Applications:

- Boiler feeding
- Water desalination by Reverse Osmosis
- Geothermal plants
- Service installations in the petrochemical sector

HP SERIES

PERFORMANCE RANGE

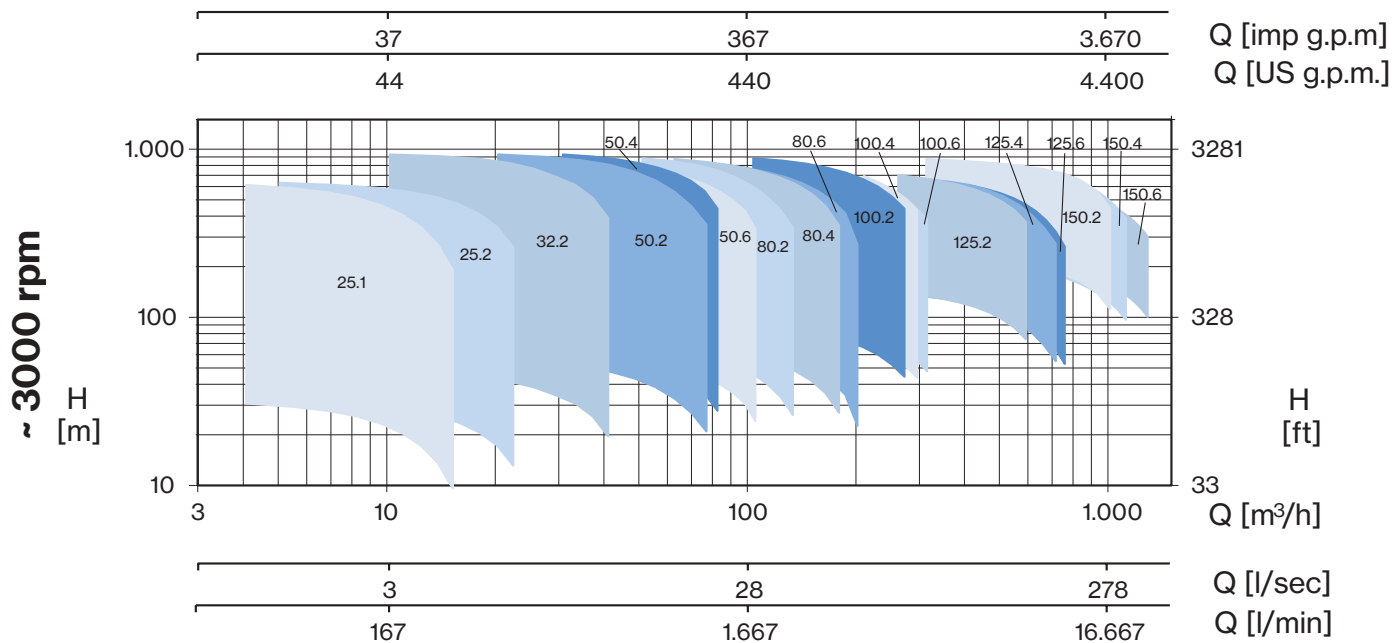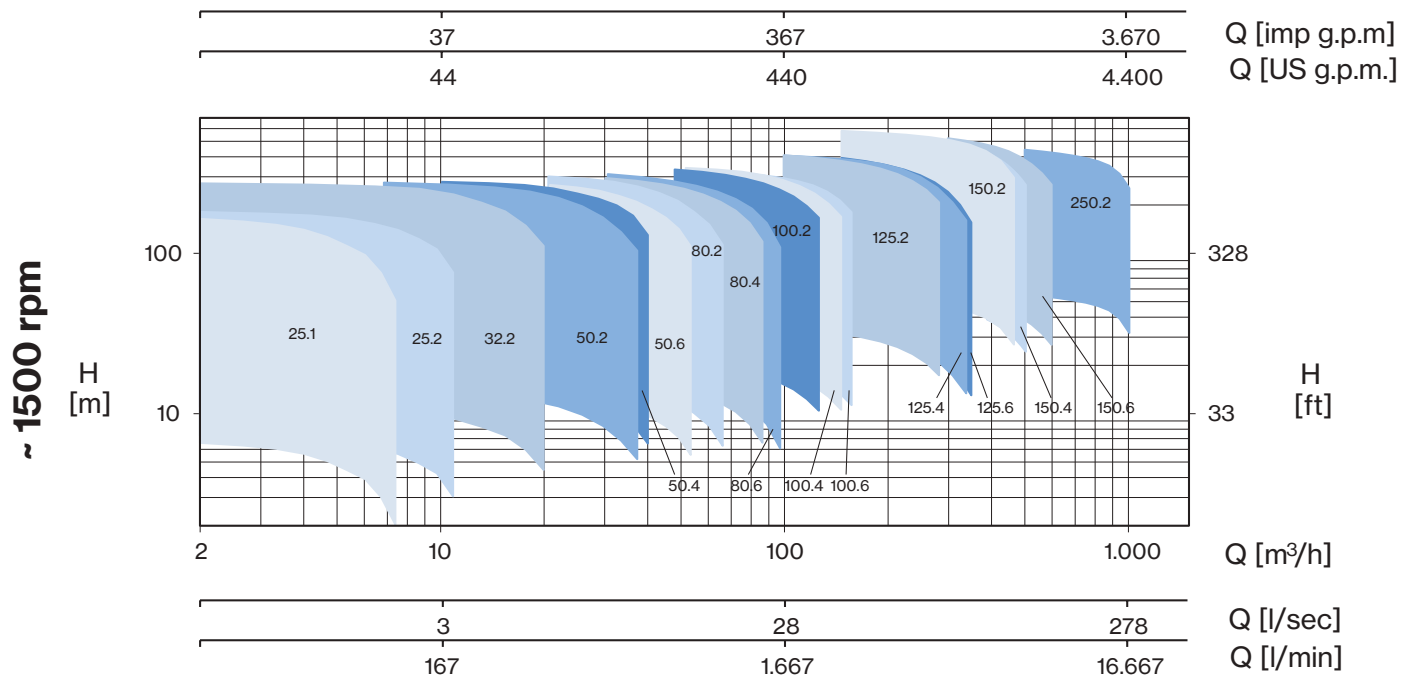

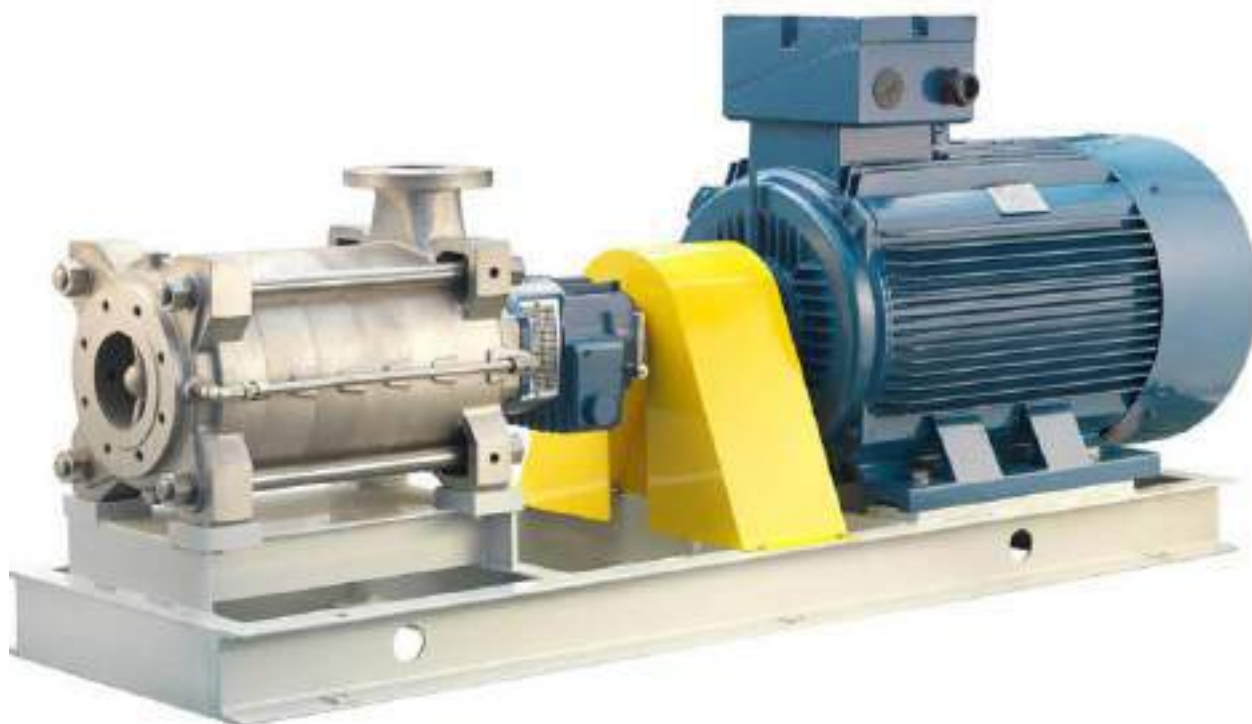

Main characteristics

- Flow rates up to 1200 m³/h
- Pressure up to 1000 m
- High hydraulic efficiency, up to 80%
- Balancing drum, placed on the discharge casing, which effectively compensates the axial thrust produced by the impellers
- Versatile sealing system: which is available as packing, single Mechanical or Balanced Mechanical, other special types upon request
- The pumps' bearings are available with grease or oil lubrication in order to assure a long operating life
- Wear rings: they are available both fixed as well as rotating, in various materials, with hardening treatments

General function data


- Pressure up to 100 bar
- Temperatures from -20°C to +180°C
- Rotational speed up to 3600 rpm.
- Standard flanges: UNI/EN
- Suction port: DN 40-300 - PN 16-25
- Discharge port: DN 25-250 - PN 64-100
- Performance tolerances: ISO9906-3B





Horizontal axial split case single stage centrifugal pumps with in-line inlet and outlet. The double suction impeller design provides hydraulic balance to enhance bearing life span.


Construction features

Flow rate	up to 4000 m ³ /h
Pressure	up to 180 m
Temperature	from -10 °C to +110 °C
Rotation	1450 - 2900 rpm
Standard flanges	conform to EN 1092-2/ PN 16 or PN 25
Discharge port	DN65-350 PN 16-25
Bearing lubrication	grease
Sealing	gland packing; also available with mechanical seal
Impeller, casing and wear rings	cast iron, also available in bronze or stainless steel
Performance tolerance	ISO 9906-3B

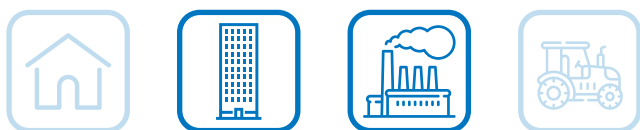

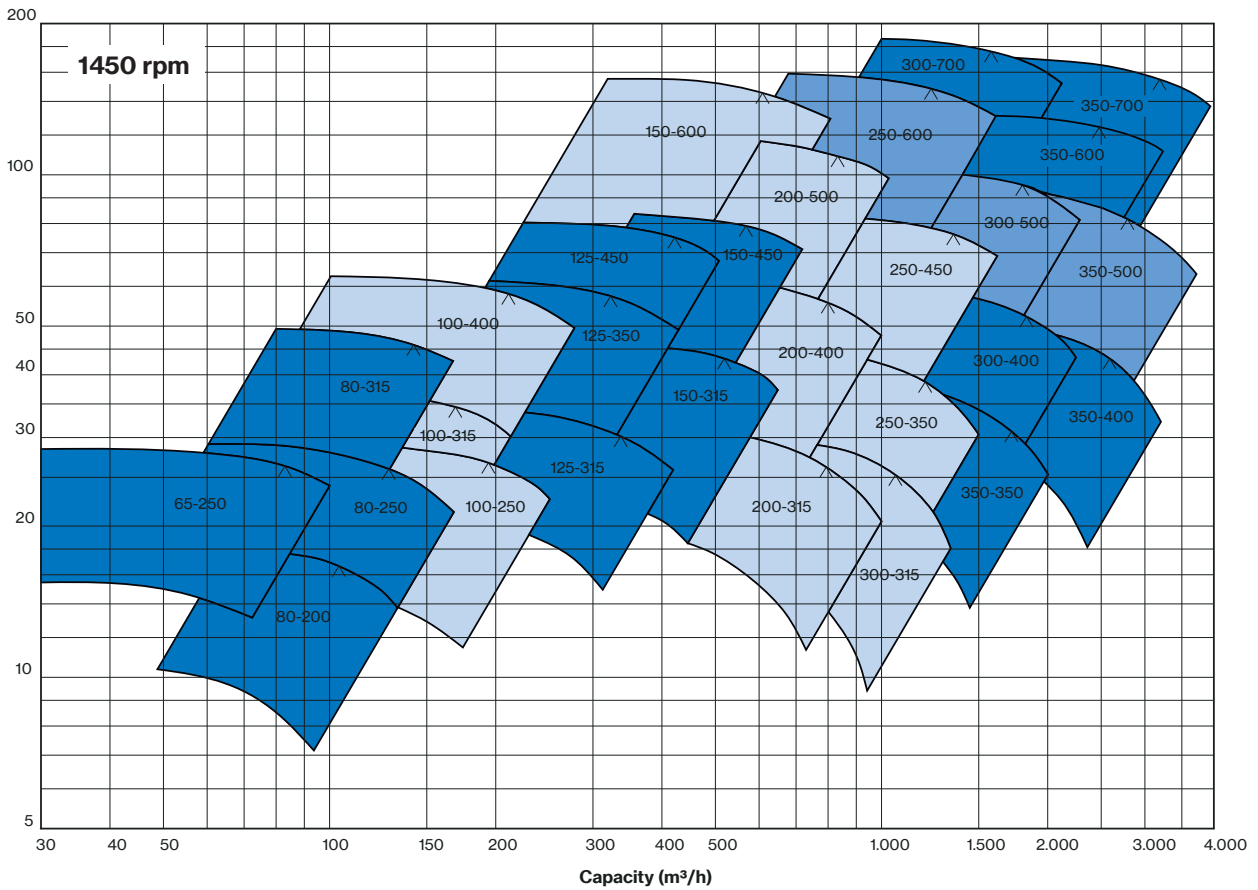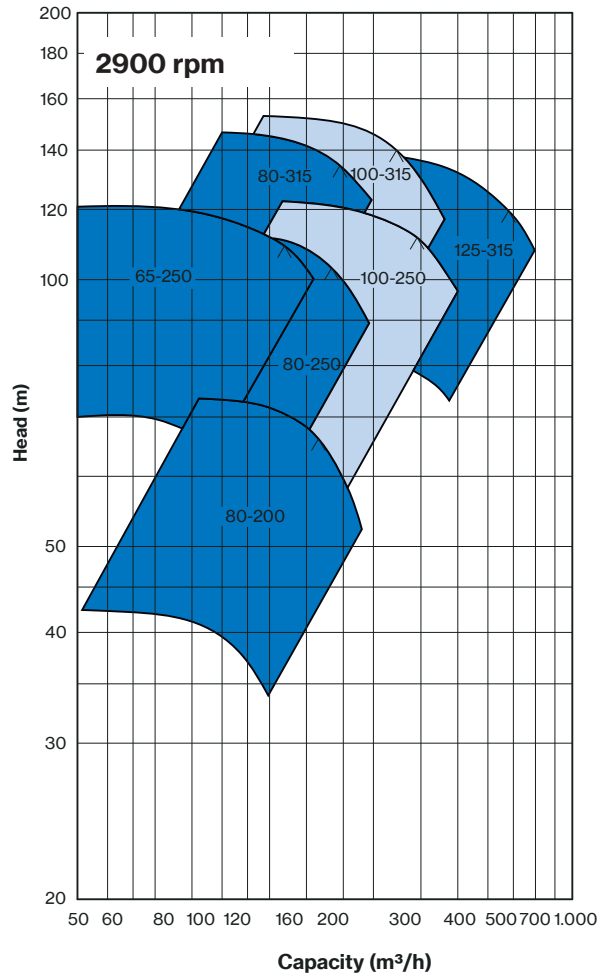

PSC

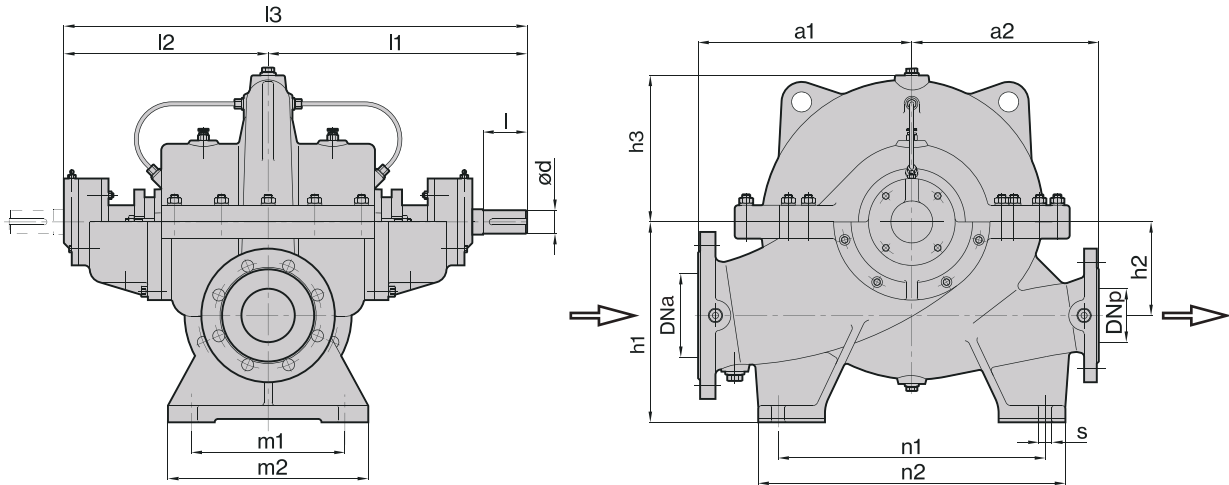

TYPE	DIMENSIONS (mm)																			Kg
	PNa	PNp	DNa	DNp	ød	l	l1	l2	l3	a1	a2	h1	h2	h3	n1	n2	m1	m2	s	
65-250	16	16	100	65	35	80	400	310	710	320	280	300	140	200	400	460	230	300	20	165
80-200	16	16	125	80	35	80	400	310	710	320	280	300	140	200	400	460	230	300	20	165
80-250	16	16	125	80	35	80	400	310	710	320	280	300	140	200	400	460	230	300	20	175
80-315	16	16	125	80	35	80	400	310	710	360	300	300	140	260	400	460	230	300	20	197
100-250	16	16	150	100	42	90	450	350	800	360	310	355	170	235	400	480	280	340	20	220
100-315	16	16	150	100	42	90	450	350	800	360	310	355	170	250	400	480	280	340	20	230
100-400	16	16	150	100	42	90	450	350	800	420	370	355	170	300	460	540	280	340	20	290
125-315	16	16	200	125	55	120	555	420	975	420	370	400	200	280	460	540	320	380	22	330
125-350	16	16	200	125	55	120	555	420	975	470	450	400	200	300	540	660	320	380	22	380
125-450	16	16	200	125	55	120	555	420	975	500	450	400	200	350	540	640	320	380	22	410
150-315	16	16	200	150	55	120	555	420	975	470	400	400	200	310	540	640	320	380	22	395
150-450	16	16	200	150	55	120	555	420	975	500	450	400	200	365	540	640	320	380	22	430
150-600	25	25	250	150	65	130	645	500	1145	550	500	560	300	445	540	640	360	420	22	800
200-315	16	16	250	200	65	130	645	500	1145	500	450	500	240	315	540	640	360	420	22	570
200-400	16	16	250	200	65	130	645	500	1145	500	450	500	240	360	540	640	360	420	22	575
200-500	16	16	250	200	65	130	645	500	1145	550	500	560	300	380	620	720	360	420	22	700
250-350	16	16	300	250	65	130	645	500	1145	600	500	600	300	390	620	720	360	420	22	682
250-450	16	16	300	250	65	130	645	500	1145	600	500	600	300	415	620	720	360	420	22	780
250-600	25	25	300	250	80	170	720	540	1260	650	550	600	300	430	620	710	415	485	26	1190
300-315	16	16	350	300	65	130	645	500	1145	600	500	630	300	400	620	700	360	420	22	700
300-400	16	16	400	300	75	140	770	615	1385	700	550	710	350	450	720	800	420	520	26	1125
300-500	16	16	400	300	85	170	755	585	1340	700	750	710	350	425	700	800	420	520	26	1500
300-700	25	25	400	300	100	180	865	675	1540	750	800	710	350	470	720	880	420	520	26	1650
350-350	16	16	400	350	75	140	770	615	1385	700	550	670	350	450	720	800	420	520	26	1100
350-400	16	16	500	350	75	140	770	615	1385	800	600	800	380	500	800	960	500	600	26	1400
350-500	16	16	500	350	80	170	755	585	1340	800	600	800	400	435	740	900	500	600	26	1435
350-600	25	25	500	350	80	170	825	650	1475	800	600	800	400	510	800	900	500	600	26	1435
350-700	25	25	500	350	100	180	865	675	1540	850	750	850	450	525	720	880	500	600	26	2000



VP SERIES

VP





Vertical lineshaft pumps with submerged pump bowl specifically developed for the industrial sectors, irrigation, waterworks and fire-fighting systems. Extremely versatile for the use in areas not served by electricity, as emergency or back-up units. Available in different materials and versions with drive head and electric motor or gear box for diesel engine.

Applications:

- Pumping units for fire-fighting systems
- Aqueducts
- Condensate extraction in power plants
- Geothermal plants
- Water treatment on Reverse Osmosis plants

VP SERIES

PERFORMANCE RANGE

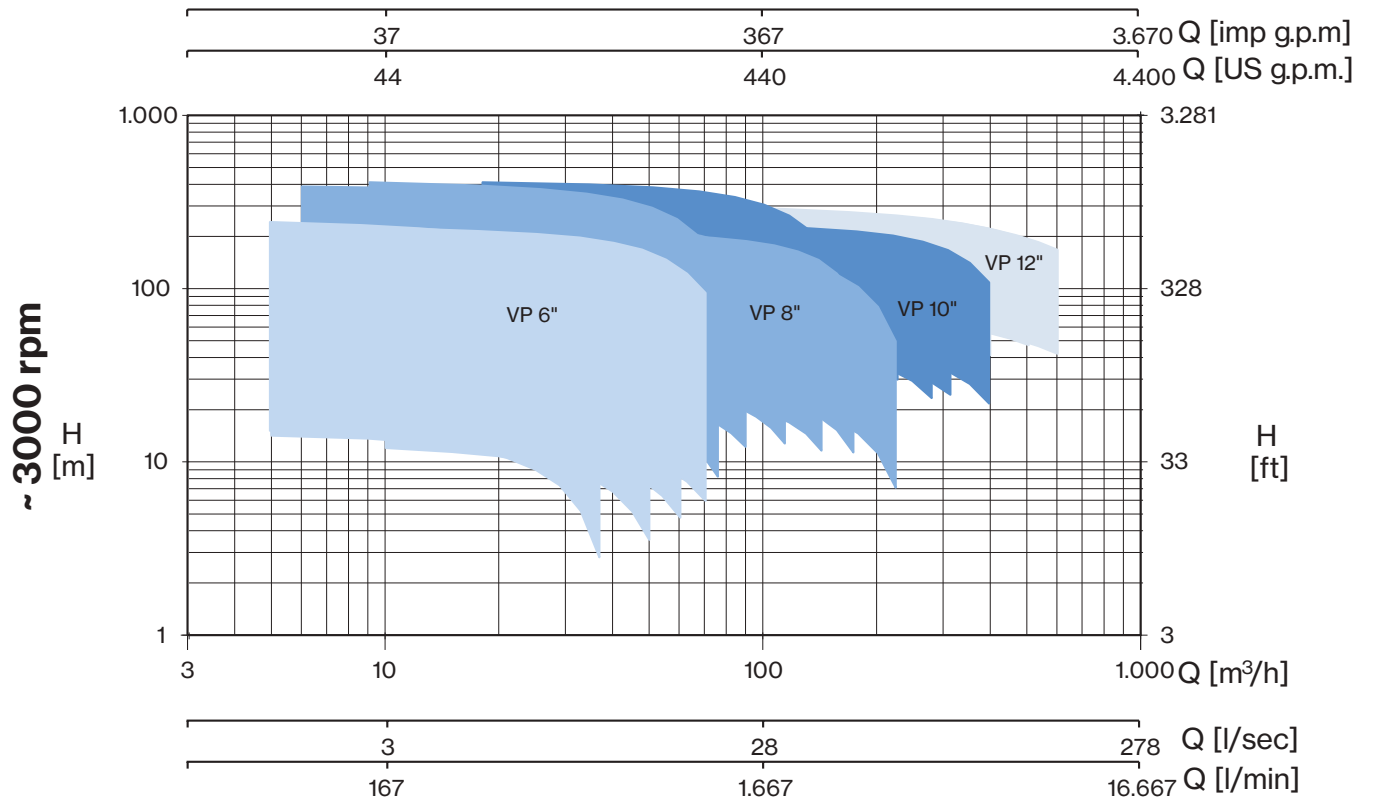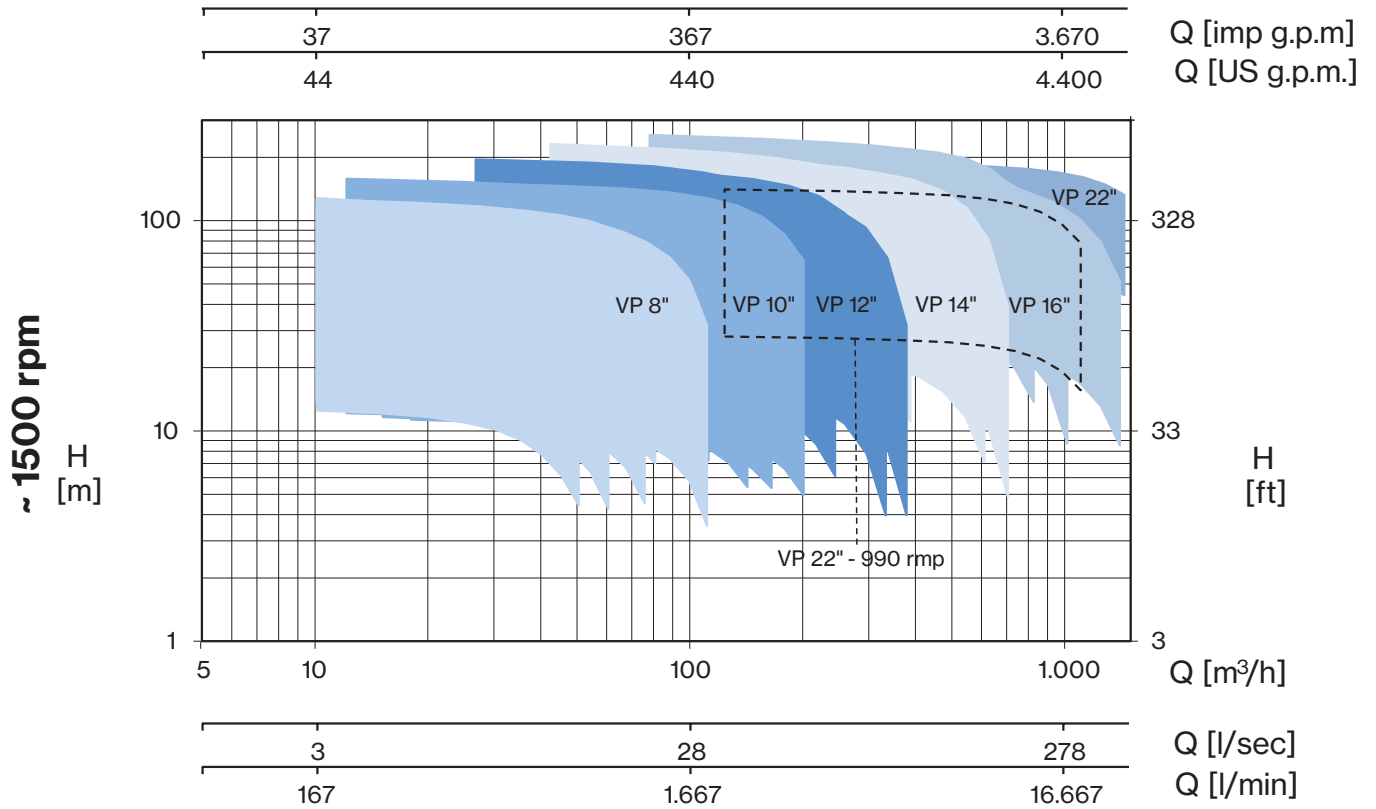

Main characteristics

- Capacity up to 1.600 m³/h
- Pressure up to 400 m
- High hydraulic efficiency, up to 82%
- Thrust bearing (grease or oil with optional external cooling) for use of standard motors
- Axis lines with tapered joints for reliable and durable connection of the shaft
- Special bushings resistant to the wear of abrasive liquids and temperatures up to 140°C
- Control unit for electric motor, transmission angle on request
- AISI 420 stainless steel shaft for standard versions
- The pump part of VPL models is produced in the standard execution in AISI 304 stainless steel
- The pump part of VP models is produced in the standard execution in cast iron



Technical operational specifics for standard versions

- All the hydraulic performance values below are guaranteed in accordance with standard ISO 9906-Grade 3B
- The allowable content of solids in the pumped liquid is 100 g/m³
- All the components wetted with liquid are available in various types of steel and bronze alloy





ACCESSORIES

ELECTRONIC FLOW CONTROL



HIDROMATIC H2

- Complete replacement of the traditional water system set consisting on pressure switch and pressure tank
- Control the starting of the electric pump after a pressure decrease (taps opening) and stopping when the fluid flow interrupt at the maximum pressure level of the electric pumps (taps closing)
- Protection against dry running
- Starting pressure adjustable during the installation
- Standard 1" M hydraulic connections
- Installation in any position - both vertical and horizontal according to the flow direction
- Easily replaceable electronic printed circuit board
- No need of maintenance

TECHNICAL DATA	
Power supply	110-230V ac \pm 10% 50/60Hz
Max rated current	12 A
Starting pressure range	1 - 3,5 bar
Max pressure	10 bar
Protection degree	IP65
Max fluid temperature	55 °C
Max ambient temperature	55 °C



HIDROTANK H2

- Automatic start and stop operations of single-phases electric pumps up to 2 HP
- Replacement of the traditional water system set consisting on pressure switch and pressure tank.
- Control the starting of the electric pump after a pressure decrease (taps opening) and stopping when the fluid flow interrupt at the maximum pressure level of the electric pumps (taps closing)
- Protection against dry running
- Starting pressure adjustable during the installation
- Standard 1" M hydraulic connections
- Installation in any position-both vertical and horizontal - according to the flow direction
- Easily replaceable electronic printed circuit board
- No need of maintenance
- Thanks to the 0,4 lt. tank it protects from the frequent start-stop required by small request of water and from any losses into the system
- Protection of the electronic board thanks to the new watertight compartment
- Protection from water-hammer
- New design and new concept
- Built in 0,4 lt. tank
- Built in pressure gauge
- Watertight electronic part

TECHNICAL DATA	
Power supply	230Vac \pm 15% 50/60Hz
Max rated current	12 A (2HP) - 1500 W
Starting pressure range	1 \div 3,5 bar (1,5 bar factory setting)
Max pressure	10 bar
Protection degree	IP65
Fluid temperature	5°C \div 35 °C
Ambient temperature	5°C \div 45°C
Hydraulic connection	1" M



VARIABLE SPEED DRIVE




EPIC is a single-phase variable speed drive for horizontal and vertical three-phase pumps, designed to maintain the set pressure and protect a pumping system against dry running, over/under voltage and overcurrent.

It is possible to realize a booster set up to 2 pumps in parallel, using 2 EPIC connected together.

- Constant pressure control
- Easy initial configuration
- Installed directly on motor terminal box of horizontal or vertical pumps
- Soft start and soft stop
- Alternance for uniform pump wearing when connected to another EPIC
- Protection against dry running (adjustable power factor $\cos\phi$), overload, overcurrent
- Automatic restart in case of stop for dry running
- Fuse for input protection of the device
- Led indicator for standby, run and alarm conditions
- Compatibility for residential environment thanks to an integrated electronic power factor corrector in compliance to EN61000-3-2
- 2 digital inputs (N.O. or N.C.) for motor run/stop
- 2 analog inputs: 4-20 mA and 0-10 VDC
- 1 digital output (N.O. or N.C.) for alarm signal

Input rated voltage	Output rated voltage	Output rated current	Max electric pump current	Weight
1 × 230 V	3 × 230 V	7,5 A	6,8 A	2,5 Kg

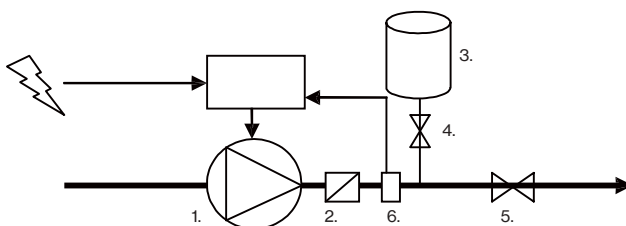

1. Pump
2. Non return valve
3. Pressure tank (*Volume suggested: 10% of the pump flow rate*)
4. Valve-Tap
5. Valve
6. Pressure sensor

VSD	3~ PUMP TYPE	max nominal power P2	
		HP	kW
EPIC (1- V-in 3- V-out)	MPX	1,2	0,88
	INOX, CH, U 3, U 3S	1,5	1,1
	U 18S, U 18V, U 18SV, U 18L, U 18SL	1,8	1,3
	CAM, CAB, CM, MB, CB, CS 2", U 5, U 5S, U 9, U 9S, U 9V, U 9SV, U 9L, U 9SL, U 18S	2	1,5
	U 3V, U 3SV, U 3L, U 3SL, U 5V, U 5SV, U 5L, U 5SL, U7, U7 S, U 7V, U 7SV, U 7L, U 7SL	2,5	1,85


VARIABLE SPEED DRIVE




EPIC-A (Advanced) is a three-phase variable speed drive for horizontal and vertical three-phase pumps designed to maintain the set pressure and protect pumping systems up to 8 pumps connected in parallel.

- Constant pressure control
- Easy initial configuration
- Simplified installation on motor terminal box of horizontal or vertical pumps
- Soft start and soft stop
- Alternance for uniform pump wearing when connected to others EPIC-A
- Built-in protections against overvoltage and undervoltage, overcurrent and no load, dry running, overtemperature
- Led indicator for standby, run and alarm conditions
- Compatibility for residential environment thanks to an integrated electronic power factor corrector in compliance to EN61000-3-2
- Integrated input filter for category C2 (EN61800-3), class A (EN55011)
- 4 digital inputs (N.O. or N.C.) for motor run/stop
- 4 analog inputs: two 4-20 mA and two 0-10 VDC
- 2 digital outputs (N.O. or N.C.) for alarm signal

EPIC-A	304	306	309	314	318	325	330	338	344
Input rated voltage	3 × 400 V ± 15%								
Output rated voltage	3 × 400 V								
Output rated current	4 A	6 A	9 A	14 A	18 A	25 A	30 A	38 A	44 A
Max electric pump current	3,6 A	5,4 A	8,1 A	12,6 A	16,2 A	22,5 A	27 A	34,2 A	39,6 A

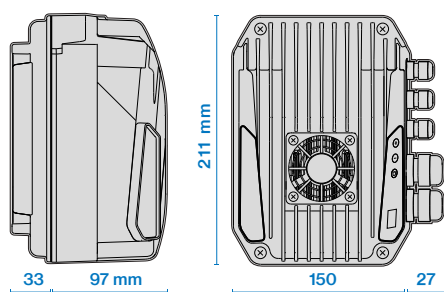

EPIC-A 304 - 306 - 309
max weight 2,5 kg

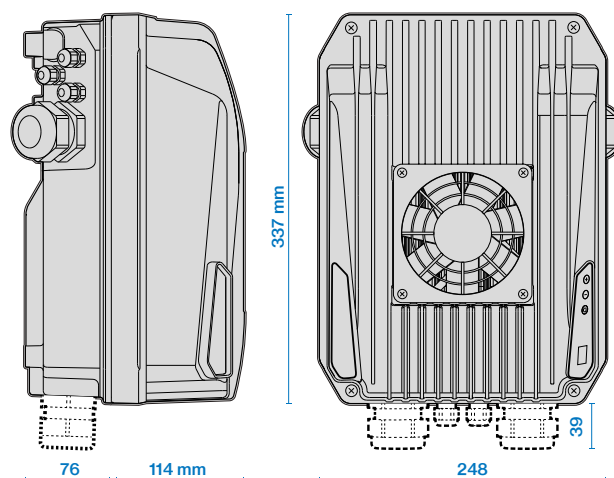

EPIC-A 314 - 318 - 325 - 330 - 338 - 344
max weight 10 kg

VARIABLE SPEED DRIVE



IPFC is a variable speed drive for vertical pumps designed to control and protect pumping systems up to 8 pumps connected in parallel.

IPFC maintains the set pressure ensuring energy savings and extended lifespan of the system.

- Constant pressure control
- Energy and cost saving
- Protection against overload and dry running
- Greater reliability and longevity of pumping system
- Installed directly on the motor fan cover of vertical pumps
- Indication of input current and supply voltage
- Soft start and soft stop
- Recording running hours and loggings errors and alarms reported by the system
- Connect to other devices to get combined operation with cascade control and pump alteration
- OLED display
- Settable digital outputs, N.O. or N.C.
- Protection and analog/digital inputs

IPFC	109	114	306	309	311	314	318	325	330	338	348	365	375	385
Input rated voltage (V)	1 × 230 ± 15%		3 × 400 ± 15%											
Output rated voltage (V)	1 × 230 3 × 230		3 × 400											
Output rated current (A)	(1-) 9 (3-) 7	(1-) 9 (3-) 11	(3-) 6	(3-) 9	(3-) 11	(3-) 14	(3-) 18	(3-) 25	(3-) 30	(3-) 38	(3-) 48	(3-) 65	(3-) 75	(3-) 85
Output rated power (kW)	(1-) 1,1 (3-) 1,5	(1-) 1,1 (3-) 3	(3-) 2,2	(3-) 4	(3-) 4	(3-) 5,5	(3-) 7,5	(3-) 11	(3-) 15	(3-) 18,5	(3-) 22	(3-) 30	(3-) 37	(3-) 45
Max electric pump current (A)	(1-) 7,2 (3-) 6,3	(1-) 7,2 (3-) 9,9	(3-) 5,4	(3-) 8,1	(3-) 9,9	(3-) 12,6	(3-) 16,2	(3-) 22,5	(3-) 27	(3-) 34,2	(3-) 43,2	(3-) 58,5	(3-) 67,5	(3-) 76,5
Input frequency (Hz)	50 - 60													
PWM frequency (kHz)	2,5 - 4 - 6 - 8 - 10 - 12													
Control panel	backlight LCD with 2 x 16 characters and buzzer / Bluetooth® SMART 4,0													
Input analogical signals (mA)	no.4 4-20													
Input digital signals	no.2													
Communication	RS485 / Bluetooth SMART 4,0													
2 DOL auxiliary pump contacts	clean, N.O., 230 V, I _{max} , 6 A													
Cooling	auxiliar built-in cooling fan /mot fan													
Protection degree	IP55 (IP54 for IPFC 338 < > IPFC 385)													
Assembly	on motor fan cover with kit / hanged on wall with kit										on motor feet / hanged on wall with kit			
Max ambient temperature (C)	40° C													
Max ambient altitude	1000 m slm / de-rate 2% each 100 m													
Input / Output feeding cable	2 × PG 13,5 + 3 × PG 9													
Dimension (mm)	205 × 205 × h180					260 × 260 × h180					410 × 260 × h680			



SPD pressure transducer

TYPE	Output signal	Input voltage	Working pressure	Maximum pressure
SPD	4... 20 mA	9... 28 V	0 - 16 bar 0 - 25 bar	32 bar



Dedicated APP for control and programming of Aquadomus and variable speed drives EPIC-A and IPFC

APP FUNCTIONALITY

- **Monitor:** monitoring several operative parameters. Obtaining energy consumption statistics and check alarm history

- **Program:** create programs, save them in the archive, copy them to other devices and share them among multiple users

- **Archive:** create reports with the ability to insert notes, images and send them by e-mail or keep them in the digital archive

- **Remote:** remotely control an Aquadomus via wi-fi or GSM by using a nearby smartphone as a modem

- **Manuals:** access manuals and supplementary technical documentation

- **Guide:** receive online assistance on parameters and alarms



PROTECTION/CONTROL PANEL

Legend

SERIES	ELECTRICITY SUPPLY		N. PUMPS			PUMP TYPE			POWER P2	SPEED		MOTOR STARTER			FEATURE			
	1~	3~	1	2	3	Borehole	Submersible	Surface	Kw	Fixed	Variable	DOL	Y/Δ	Soft start	Impedance start	Switch with overload protection	Electromechanical control panel	Electronic control panel
PML	■	-	■	-	-	■	-	■	0,37 ÷ 2,2	■	-	■	-	-	-	■	-	-
PMC	■	-	■	-	-	■	-	■	1,1 ÷ 1,5	■	-	■	-	-	-	■	-	-
PMLD	■	-	■	-	-	-	-	-	1,1 ÷ 1,5	■	-	■	-	-	-	■	-	-
PT	-	■	■	-	-	■	-	■	0,37 ÷ 15	■	-	■	-	-	-	■	-	-
EQSM	■	-	■	-	-	■	■	■	0,37 ÷ 2,2	■	-	■	-	-	-	-	-	■
EQSMT	-	■	■	-	-	■	■	■	0,55 ÷ 15	■	-	■	-	-	-	-	-	■
QST	-	■	■	-	-	■	■	■	4,5 ÷ 220	■	-	-	■	-	-	-	■	-
QSS	-	■	■	-	-	■	-	■	7,5 ÷ 220	■	-	-	-	■	-	-	■	-
QRS	-	■	■	-	-	■	-	■	4,5 ÷ 220	■	-	-	-	-	■	-	■	-
EQ2SM	■	-	-	■	-	■	■	■	0,37 ÷ 15	■	-	■	-	-	-	-	-	■
EQ2SMT	-	■	-	■	-	■	■	■	0,55 ÷ 15	■	-	■	-	-	-	-	-	■
Q2ST	-	■	-	■	-	■	■	■	4,5 ÷ 220	■	-	-	■	-	-	-	■	-
EQ3SM	■	-	-	-	■	■	■	■	0,37 ÷ 2,2	■	-	■	-	-	-	-	-	■
EQ3SMT	-	■	-	-	■	■	■	■	0,55 ÷ 15	■	-	■	-	-	-	-	-	■

Overload protection unit for 1 single-phase pump with run capacitor



- Power supply 1x230V-50/60Hz
- Electrical switch
- Run capacitor
- Externally resettable thermal relay
- Illuminated 0-1 main switch
- IP55 rated thermoplastic enclosure
- Outputs with cable gland

TYPE	A	RUN CAPACITOR (μF)	POWER	
			HP	kW
PML 5/16-4	4	16	0,5	0,37
PML 5/20-4	4	20	0,5	0,37
PML 7/20-6	6	20	0,75	0,55
PML 7/25-6	6	25	0,75	0,55
PML 10/30-7	7	30	1	0,75
PML 10/35-7	7	35	1	0,75
PML 15/40-10	10	40	1,5	1,1
PML 20/50-13	13	50	2	1,5
PML 20/60-13	13	60	2	1,5
PML 30/75-18	18	75	3	2,2
PML 30/80-18	18	80	3	2,2
PMC 15/35-15	15	35	1,5	1,1
PMC 20/50-18	18	50	2	1,5

PROTECTION/CONTROL PANEL

Overload protection unit for 1 single-phase pump with run capacitor + start capacitor with disjuncter



- Power supply 1x230V-50/60Hz
- ON/OFF switch
- Electrical switch
- Run + start capacitor with disjuncter
- Externally resettable thermal relay
- Green illuminated main switch
- IP55 rated thermoplastic enclosure
- Outputs with cable gland

TYPE	A	RUN CAPACITOR (μF)	START CAPACITOR (μF)	POWER	
				HP	kW
PMLD 15-35-13	13	35	80	1,5	1,1
PMLD 20/50-15	15	50	80	2	1,5

Overload protection unit for 1 three-phase pump



- Power supply 3x400V-50/60Hz
- ON/OFF switch
- Protective device with thermal relay for motor overload or phase failure
- Thermoplastic enclosure
- IP55 protection level

TYPE	A	POWER	
		HP	kW
PT 5/0,9-1,3	0,9-1,3	0,5	0,37
PT 7/1,3-2,1	1,3-2,1	0,75	0,55
PT 10/1,9-3	1,9-3	1	0,75
PT 15-20/2,9-4,5	2,9-4,5	1,5-2	1,1-1,5
PT 20-30-40/4,3-6,8	4,3-6,8	2-3-4	2,2-3
PT 40-50/5,7-9,1	5,7-9,1	4-5,5	3-4
PT 55-75/8,6-13,5	8,6-13,5	5,5-7,5	4-5,5
PT 100/12,5-16,5	12,5-16,5	10	7,5
PT 125-150-16-21	16-21	12,5-15	9,2-11
PT 200/22-29	22-29	20	15

Electronic control panel for 1-2-3 pumps with direct start-up



- Single-phase version 100-240Vac 50/60Hz
- Three-phase version 310-450Vac 50/60Hz
- LCD display for voltage, current, power factor, hours of operation, number of starts, motor status, alarms, analogue signal and thresholds
- AUTOMATIC - 0 - MANUAL operation buttons
- Voltage and current minimum and maximum electronic control, failure or incorrect phase sequence control on power supply input
- Programmable anti-seize autotest
- Dry running protection through level probes/ floats/ pressure switches and minimum current
- Up to 6 control inputs: floats/pressure switches
- Input for 4-20 mA or 0-10V analogue signal
- Analogue signal cm - m - bar
- Emergency start and stop inputs with analogue signal
- Clickson thermal pad inputs with automatic reset
- Inversion of inputs (from normally open to normally closed)
- Activation delay from mains return
- Manual button operation (fixed or pulse)
- Programmable alarms for voltage, levels, motor overload, minimum motor current, clicson, output contacts, starts/hour
- Automatic reset for minimum current alarm with 4 programmable times
- Auxiliary and motor protection fuses, isolator protection, duty standby protection
- ABS box IP55. Metallic box IP55 for EQ3SMT
- Duty-standby and motor changeover in the case of a fault for two-pump and three-pump control panels
- Predisposition for capacitors for single-phase versions (capacitors are available separately)

TYPE	VERSION	PUMPS N.	A	POWER		WEIGHT (Kg)
				HP	kW	
EQSM	1-	1	0-18	0,5-3	0,37-2,2	1,5
EQSMT 10	3-	1	0-18	0,75-10	0,55-7,5	2,3
EQSMT 15	3-	1	16-25	10-15	7,5-11	2,5
EQSMT 20	3-	1	16-32	15-20	11-15	3
EQ2SM	1-	2	0-18	0,5-3	0,37-2,2	1,5
EQ2SMT 10	3-	2	0-18	0,75-10	0,55-7,5	2,5
EQ2SMT 15	3-	2	16-25	10-15	7,5-11	3
EQ2SMT 20	3-	2	16-32	15-20	11-15	3,5
EQ3SM	1-	3	0-18	0,5-3	0,37-2,2	5
EQ3SMT 10	3-	3	0-18	0,75-10	0,55-7,5	15
EQ3SMT 15	3-	3	16-25	10-15	7,5-11	15
EQ3SMT 20	3-	3	16-32	15-20	11-15	15



RUN CAPACITOR	POWER
	HP
20µF	0,5
25µF	0,75
35µF	1-1,5
40µF	1,5
50µF	2
80µF	3

RUN CAPACITOR + START CAPACITOR WITH DISJUNCTOR	POWER
	HP
35µF + 80µF	1,5
50µF + 80µF	2

PROTECTION/CONTROL PANEL


Star/delta control panel for 1 three-phase pump



- Power supply 3x400V-50/60Hz
- 24V transformer for auxiliary circuit
- Low voltage inputs and circuits
- Blue mains supply LED
- Green motor running LED
- Red motor overload alarm LED
- Star/delta line contactors in AC3
- Auxiliary and motor protective devices with fuses
- Main door interlock switch disconnecter
- ABS box up to 11kW, metal box from 15kW

TYPE	A	POWER	
		HP	kW
QST 5	13	5,5	4
QST 7	15	7,5	5,5
QST 10	17	10	7,5
QST 15	24	15	11
QST 20	31	20	15
QST 25	38	25	18,5
QST 30	50	30	22
QST 40	60	40	30
QST 50	75	50	37
QST 60	100	60	45
QST 75	124	75	55
QST 100	135	100	75
QST 125	155	125	92
QST 150	200	150	110
QST 180	241	180	132
QST 220	300	220	162
QST 300	410	300	220

Star/delta control panel for 2 three-phase pumps

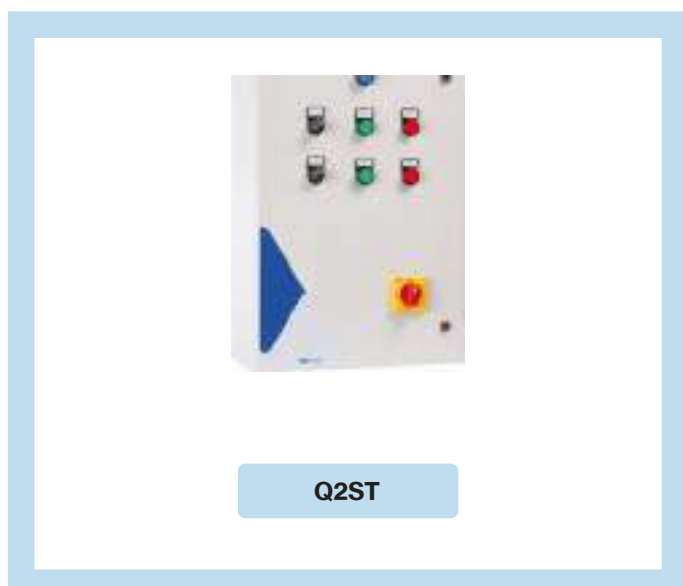

- Power supply 3x400V-50/60Hz
- 24V transformer for auxiliary circuit
- Low voltage inputs and circuits
- Blue mains supply LED
- Green motor running LED
- Red motor overload alarm LED
- Star/delta line contactors in AC3
- Auxiliary and motor protective devices with fuses
- Main door interlock switch disconnecter
- Metal box (whole range)

TYPE	A	POWER	
		HP	kW
Q2ST 3	8,5	3	2,2
Q2ST 5	13	5,5	4
Q2ST 7	15	7,5	5,5
Q2ST 10	17	10	7,5
Q2ST 15	24	15	11
Q2ST 20	31	20	15
Q2ST 25	38	25	18,5
Q2ST 30	50	30	22
Q2ST 40	60	40	30
Q2ST 50	75	50	37
Q2ST 60	100	60	45
Q2ST 75	124	75	55
Q2ST 100	135	100	75
Q2ST 125	155	125	92
Q2ST 150	200	150	110
Q2ST 180	241	180	132
Q2ST 220	300	220	162
Q2ST 300	410	300	220

PROTECTION/CONTROL PANEL

Soft start control panel for 1 three-phase pump



- Power supply 3x400V-50/60Hz
- Blue mains supply LED
- Green motor running LED
- Red motor overload alarm LED
- NA input for start control
- Auxiliary motor protective devices with fuse
- Main door interlock switch disconnecter
- Forced ventilation kit
- IP54 rated metal box
- Ambient temperature $-5 \div +40^{\circ}\text{C}$

TYPE	A	POWER	
		HP	kW
QSS 10	18	10	7,5
QSS 15	25	15	11
QSS 20	30	20	15
QSS 25	37	25	18,5
QSS 30	45	30	22
QSS 40	60	40	30
QSS 50	72	50	37
QSS 60	85	60	45
QSS 75	105	75	55
QSS 80	125	80	59
QSS 100	142	100	75
QSS 125	170	125	92
QSS 150	210	150	110
QSS 180	250	180	132
QSS 220	300	220	162
QSS 300	370	300	220

Control panel with impedance start for 1 three-phase pump



- Power supply 3x400V-50/60Hz
- Blue mains supply LED
- Green motor running LED
- Red motor overload alarm LED
- NA input for start control
- Stator reactance with 4 starts/hour, 2 of which are consecutive
- Adjustable reactance timer
- Line and impedance starter contactors in AC3
- Main door interlock switch disconnecter
- Ambient temperature $-5 \div +40^{\circ}\text{C}$

TYPE	A	POWER	
		HP	kW
QRS 5	13	5,5	4
QRS 7	16	7,5	5,5
QRS 10	20	10	7,5
QRS 15	29	15	11
QRS 20	35	20	15
QRS 25	52	25	18,5
QRS 30	63	30	22
QRS 40	80	40	30
QRS 50	90	50	37
QRS 60	110	60	45
QRS 75	135	75	55
QRS 90	150	90	66
QRS 100	175	100	75
QRS 125	200	125	92
QRS 150	235	150	110
QRS 180	310	180	132
QRS 220	360	220	162
QRS 300	410	300	220

TANKS



UTILIZATION

Interchangeable membrane expansion tanks; the pre-charge pressure in the tank guarantees a water reserve but also reduces the number of startups of the connected pump; the membranes are certified for use with foodstuffs; they may be in EPDM or butyl depending on the model.

CONSTRUCTION CHARACTERISTICS

Flanges in galvanised steel or AISI 304 stainless steel. Tanks in carbon steel coated with powder paint or in AISI 304 stainless steel.

Pre-charge valve with protective cover.

TYPE	DESCRIPTION
AS 24	24 lt. Spherical tank
ACV 24	24 lt. Horizontal tank
ACZ 24	24 lt. Horizontal tank
ACA 24 SS	24 lt. Stainless steel tank
AC 50	50 lt. Horizontal tank
AC 60	60 lt. Horizontal tank
AC 80	80 lt. Horizontal tank
AC 100	100 lt. Horizontal tank
AC 200	200 lt. Horizontal tank
AC 300	300 lt. Horizontal tank
AV 50	50 lt. Vertical tank
AV 60	60 lt. Vertical tank
AV 80	80 lt. Vertical tank
AV 100	100 lt. Vertical tank
AV 200	200 lt. Vertical tank
AV 300	300 lt. Vertical tank
AV 500	500 lt. Vertical tank
AV 750	750 lt. Vertical tank
AV 1000	1000 lt. Vertical tank

MEMBRANES



TYPE	DESCRIPTION
MZ 24	EPDM membrane for ACZ 24 lt.
M 24	membrane for AS 24 - ACV 24
M 50	membrane for AC 50 - AV 50
M 100	membrane for AC 100 - AV 100
M 200	membrane for AC 200 - AV 200
M 300	membrane for AC 300 - AV 300
M 500	membrane for AV 500
M 750 - 2000	membrane for AV 750 - AV 2000



PRESSURE SWITCHES



TYPE	DESCRIPTION	RANGE AT RISING PRESSURE (bar)
PP5	1- / 3-	1-5
PP12	1- / 3-	3-12

PRESSURE GAUGES



TYPE	PHASE
PR 6	0-6 bar rear connection
PR 6 R	0-6 bar radial connection
PR 12	0-12 bar rear connection
PR 10 G	0-10 bar glycerine
PR 12 G	0-12 bar glycerine

FLEXIBLE HOSES



TYPE	DESCRIPTION
FL 530	Flexible hose with bend 1"x530x1"
FL 600	Flexible hose with bend 1"x600x1"
FL 700	Flexible hose with bend 1"x700x1"
FL 850	Flexible hose with bend 1"x850x1"

CONNECTORS



TYPE	DESCRIPTION
R3	3 way 1" brass connector
R5	5 way 1" brass connector



TYPE	DESCRIPTION
R5X 1"	5 way 1" Aisi 304 connector with built-in no return valve
R5X 1"1/4	5 way 1" 1/4 Aisi 304 connector with built-in no return valve
R5X 1"1/2	5 way 1" 1/2 Aisi 304 connector with built-in no return valve

VALVES



TYPE	DESCRIPTION
VF 1"	foot valve 1"
VF 1" 1/4	foot valve 1" 1/4
VF 1"1/2	foot valve 1" 1/2
VF 2"	foot valve 1" 1/2
VR1"	check valve 1"
VR 1"1/4	check valve 1" 1/4
VR 1"1/2	check valve 1" 1/2
VR 2"	check valve 1"

FLOAT SWITCHES



TYPE	DESCRIPTION
GK 2	Key 2 mt. cable length
GK 3	Key 3 mt. cable length
GK 5	Key 5 mt. cable length
GK 10	Key 10 mt. cable length

CABLES JOINTS



Kit GC series

Junction cable kit with heat - shrinkable tubing.

For a professionally made junction it is recommended to use the "Kit GC", it has excellent requirements in terms of electric, mechanical and water resistance. This kit is composed of: crimp wire connectors in tinplated copper, thin wall heat-shrinkable tubing to cover the conductor of the cable, a strip of Scotch 2547, one of Scotchfil and medium wall heat-shrinkable tubing to cover the junction. It is recommended to seal the two end points of the sheath with a PVC textured insulating tape.

TYPE	Cables section mm ²	Cable number
Kit GC 4/2,5	1/2,5	4
Kit GC 4/6	4/6	4
Kit GC 4/10	10	4
Kit GC 4/16	16	4
Kit GC 4/25	25	4
Kit GC 4/35	35	4
Kit GC 4/50	50	4
Kit GC 1/50	50	1
Kit GC 1/70	70	1
Kit GC 1/95	95	1
Kit GC 1/120	120	1
Kit GC 1/150	150	1

LEVEL PROBES



Kit K3SL series

Level Probes Kit consist of 3 electrodes model K3SL. Single pole probe used for level control in wells or storage tanks.

It made of an AISI 303 stainless steel electrode, a plastic (PPOX) holder and a cable gland.


A seal ring and the tightening of the cable gland PG7 prevent water from entering the cable terminal connector and causing its oxidation.

Cable connection: screw.

The external cable diameter must be 2.5 to 6mm/Ø0.1 to 0.24" to warrant perfect sealing.

Maximum connection cable section: 2.5mm².

Maximum operating temperature: +60°C.

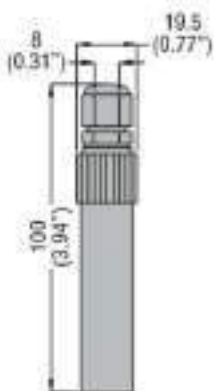



GENERAL SALES CONDITIONS

1) ORDERS: Any order sent to us, whether by our representatives or by letter, telephone or fax, will be considered definite only after our regular acceptance in writing. 2) DELIVERY: The terms indicated for delivery are not binding but subject to manufacturing factors and unforeseeable circumstances (trade unions unrest, breakdown of machinery, late delivery by our suppliers, general unavailability of raw materials, fire, flood or other forces majeures). Any delay which might occur will not give rise on the part of the purchaser of the right to annul the order or to claim damages. 3) TRANSPORT: Goods travel at the customer's risk even if the price is stated as carriage free. The vendor will not be liable for the underweight goods or damage caused during transit as the carrier is exclusively liable in such cases and it is to him that the receiving party must promptly address a right informative notice in writing to this to the dealer. After 8 days have passed from receipt of the goods, no claims are in any case ammissible. 4) PRICES: The prices are to be understood as net of tax duties and may be changed without notice. 5) RIGHT OF PROPERTY: The goods property belongs to the manufacturer and it is not acquired by the customer until the complete payment is made for the goods, and for any interest and costs involved. In case of payment not honoured, goods will, on the manufacturer's express request, be promptly sent back to the stores in free port indicated by the manufacturer. In any case the manufacturer reserves the right to charge the customer with the cost of restoration and renewal of returned goods. 6) PAYMENTS: Payments must be effected at due dates and in the terms agreed at our Headquarters. Payments made to agents, representatives or others are not recognized even by bills unless there is an express written authority by the manufacturer. In case of payment by instalments the failure to pay even one instalment allows the manufacturer to require the balance immediately plus the interest accrued at the average rate in force for the period. 7) BLOCKAGE OF CLAIMS: The customer may not, for any reason, delay or suspend payments owed on any account even if claims or disputes have arisen, nor may he start or take legal action of any kind if he has not first paid by the terms and in the terms agreed. 8) TECHNICAL CHARACTERISTICS: The technical data and characteristics stated in all the manufacturer's official publications refer to indicative nominal values. For specific needs and on explicit demand, the manufacturer can provide detailed technical sheets from which the internal acceptance criteria of the product can be deduced. The manufacturer reserves the right to make any modification without prior notice. Therefore weights, dimensions, performances and any other stated issues are indicative only and not binding. 9) GUARANTEE: The manufacturer gives the guarantees provided by the Law. The guarantee covers every manufacturing defect only for the components/parts produced by the manufacturer: the Company also limits itself to the repair or replacement of the electric pump, or of the part recognized as being faulty, at the manufacturer's premises or other authorized premises. In no case however does the guarantee imply the possibility of claiming an indemnity and any liability is denied for damage to things or to the person caused by the manufacturer machines, whether directly or indirectly. The guarantee does not apply: - If the machine has been repaired, dismantled or tampered by persons not authorized by the manufacturer. - If the breakdown has been caused by errors in connecting the electrical or hydraulic systems, or by the failure to provide protection or the provision of inadequate protection. - If the setting up of the machine or its electrical or hydraulic systems has not been correctly carried out. - If the machine has been subject to loads exceeding the ones within the label specifications. - If materials have been damaged due to contact with abrasive or corrosive liquids or which are in any way incompatible with the materials used in the manufacture of the pumps. - If the materials have deteriorated due to natural wear. The defective machine must be taken to the manufacturer's premises in free port. The manufacturer reserves the indisputable right to impute the cause of the defect and to ascertain whether it falls within the warrant cases at his full expences. When the machine has been repaired it will be returned to the customer. 10) COMPETENT COURT: In case of any dispute the competent Court will be the one of Verona even if the payment is by Bill of Exchange. 11) RECOURSE TO OTHER NORMS: As regard to other matters not expressly stated in the above points, the laws, norms and commercial customs in force at the place, where the manufacturer has its premises, will be applied.

The manufacturer assumes no responsibility for errors and omissions and reserves the right of changes without notice.



COMPANY WITH QUALITY, ENVIRONMENT, HEALTH
AND SAFETY MANAGEMENT CERTIFIED SYSTEMS
UNI EN ISO 9001: Certificate No. 50 100 3634
UNI EN ISO 14001: Certificate No. 50 100 12552
UNI ISO 45001: Certificate No. 50 100 14960

50Hz

Where there's **water** there's **Pentax**

PENTAX s.p.a.

Viale dell'Industria, 1

37040 Veronella (VR) - Italia

Tel. +39 0442 489500 - Fax +39 0442 489510

www.pentax-pumps.it

com@pentax-pumps.it

